
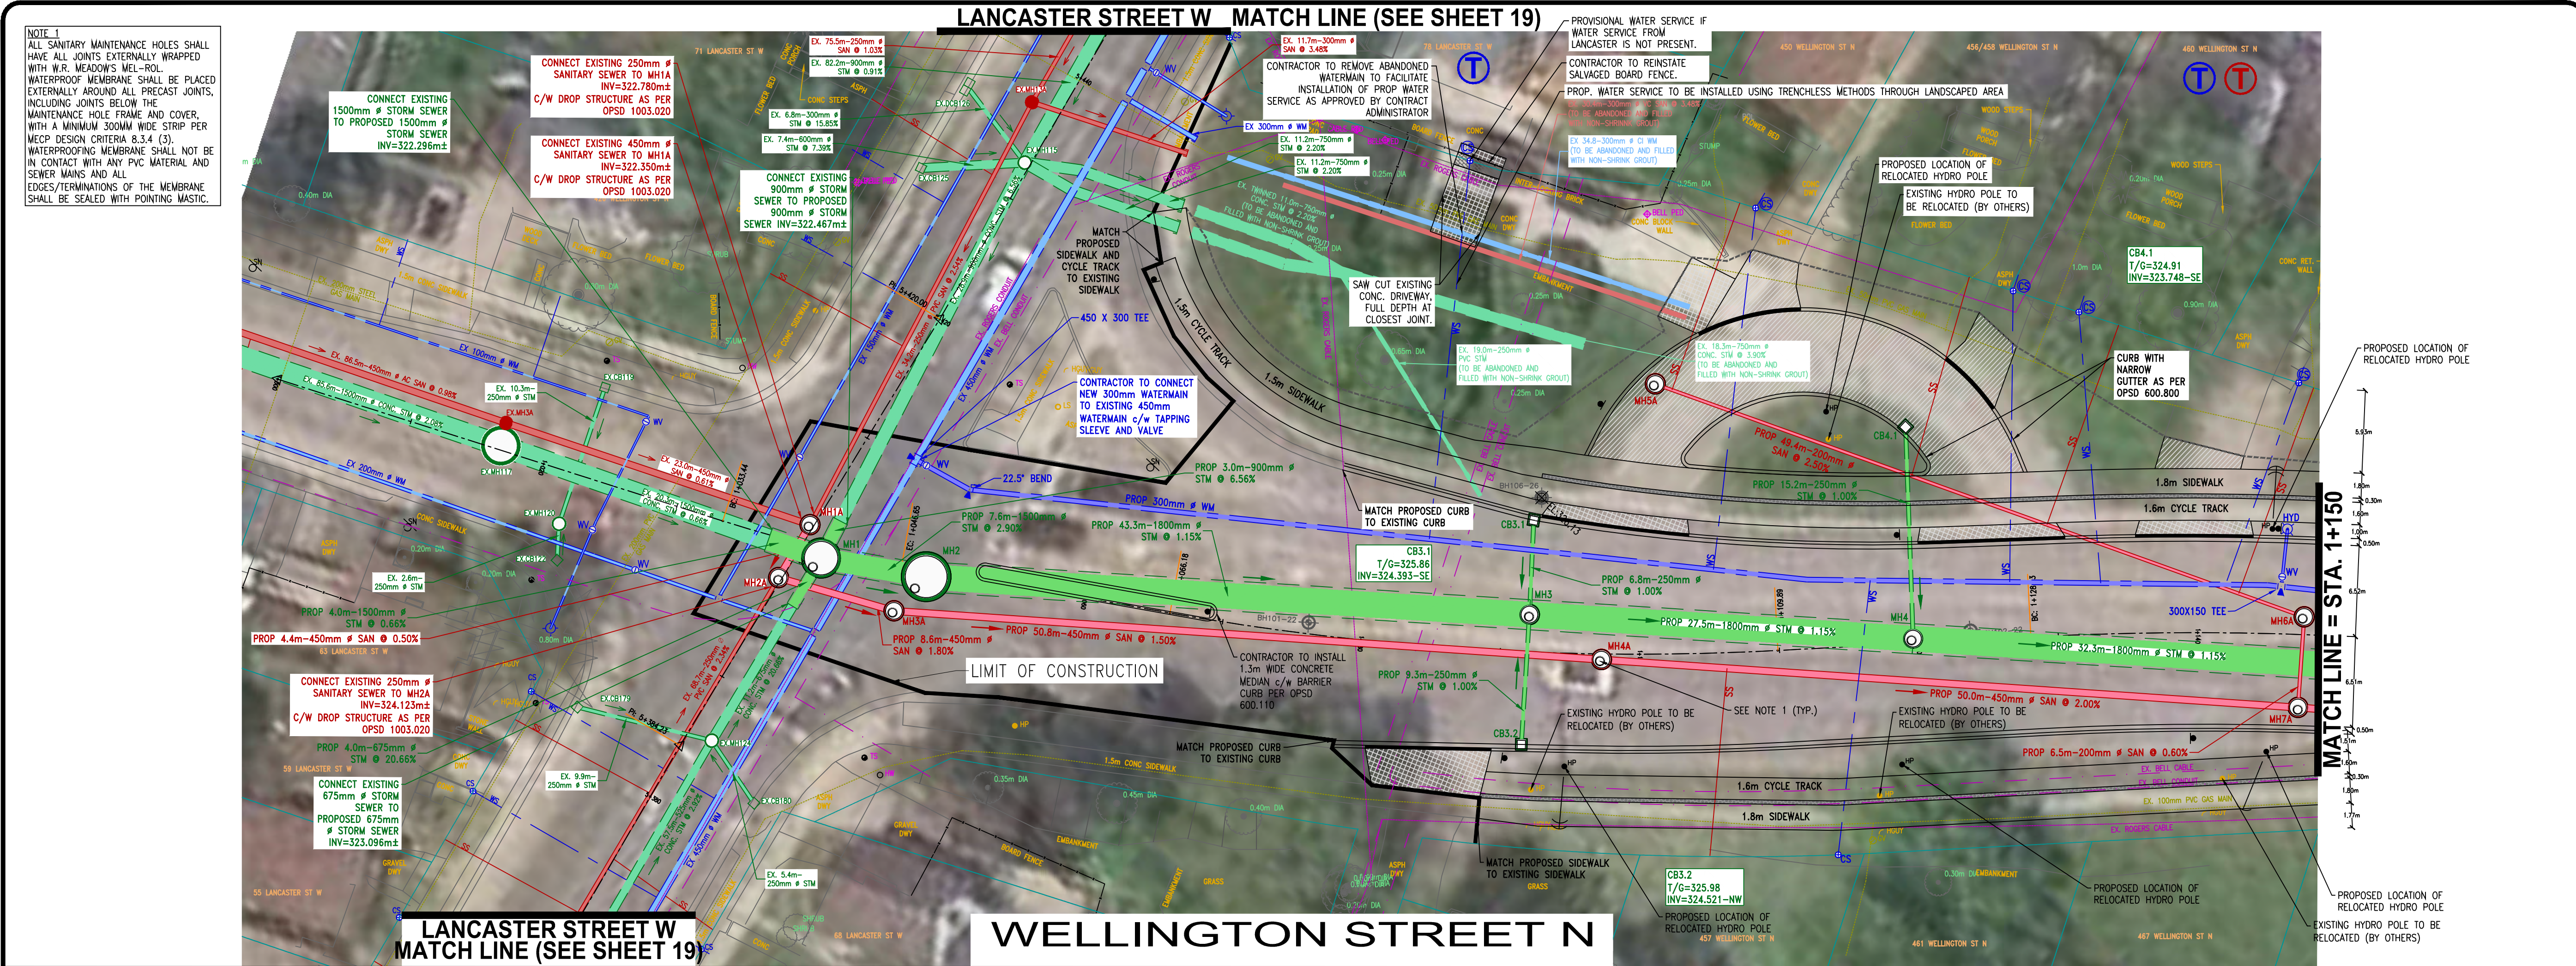


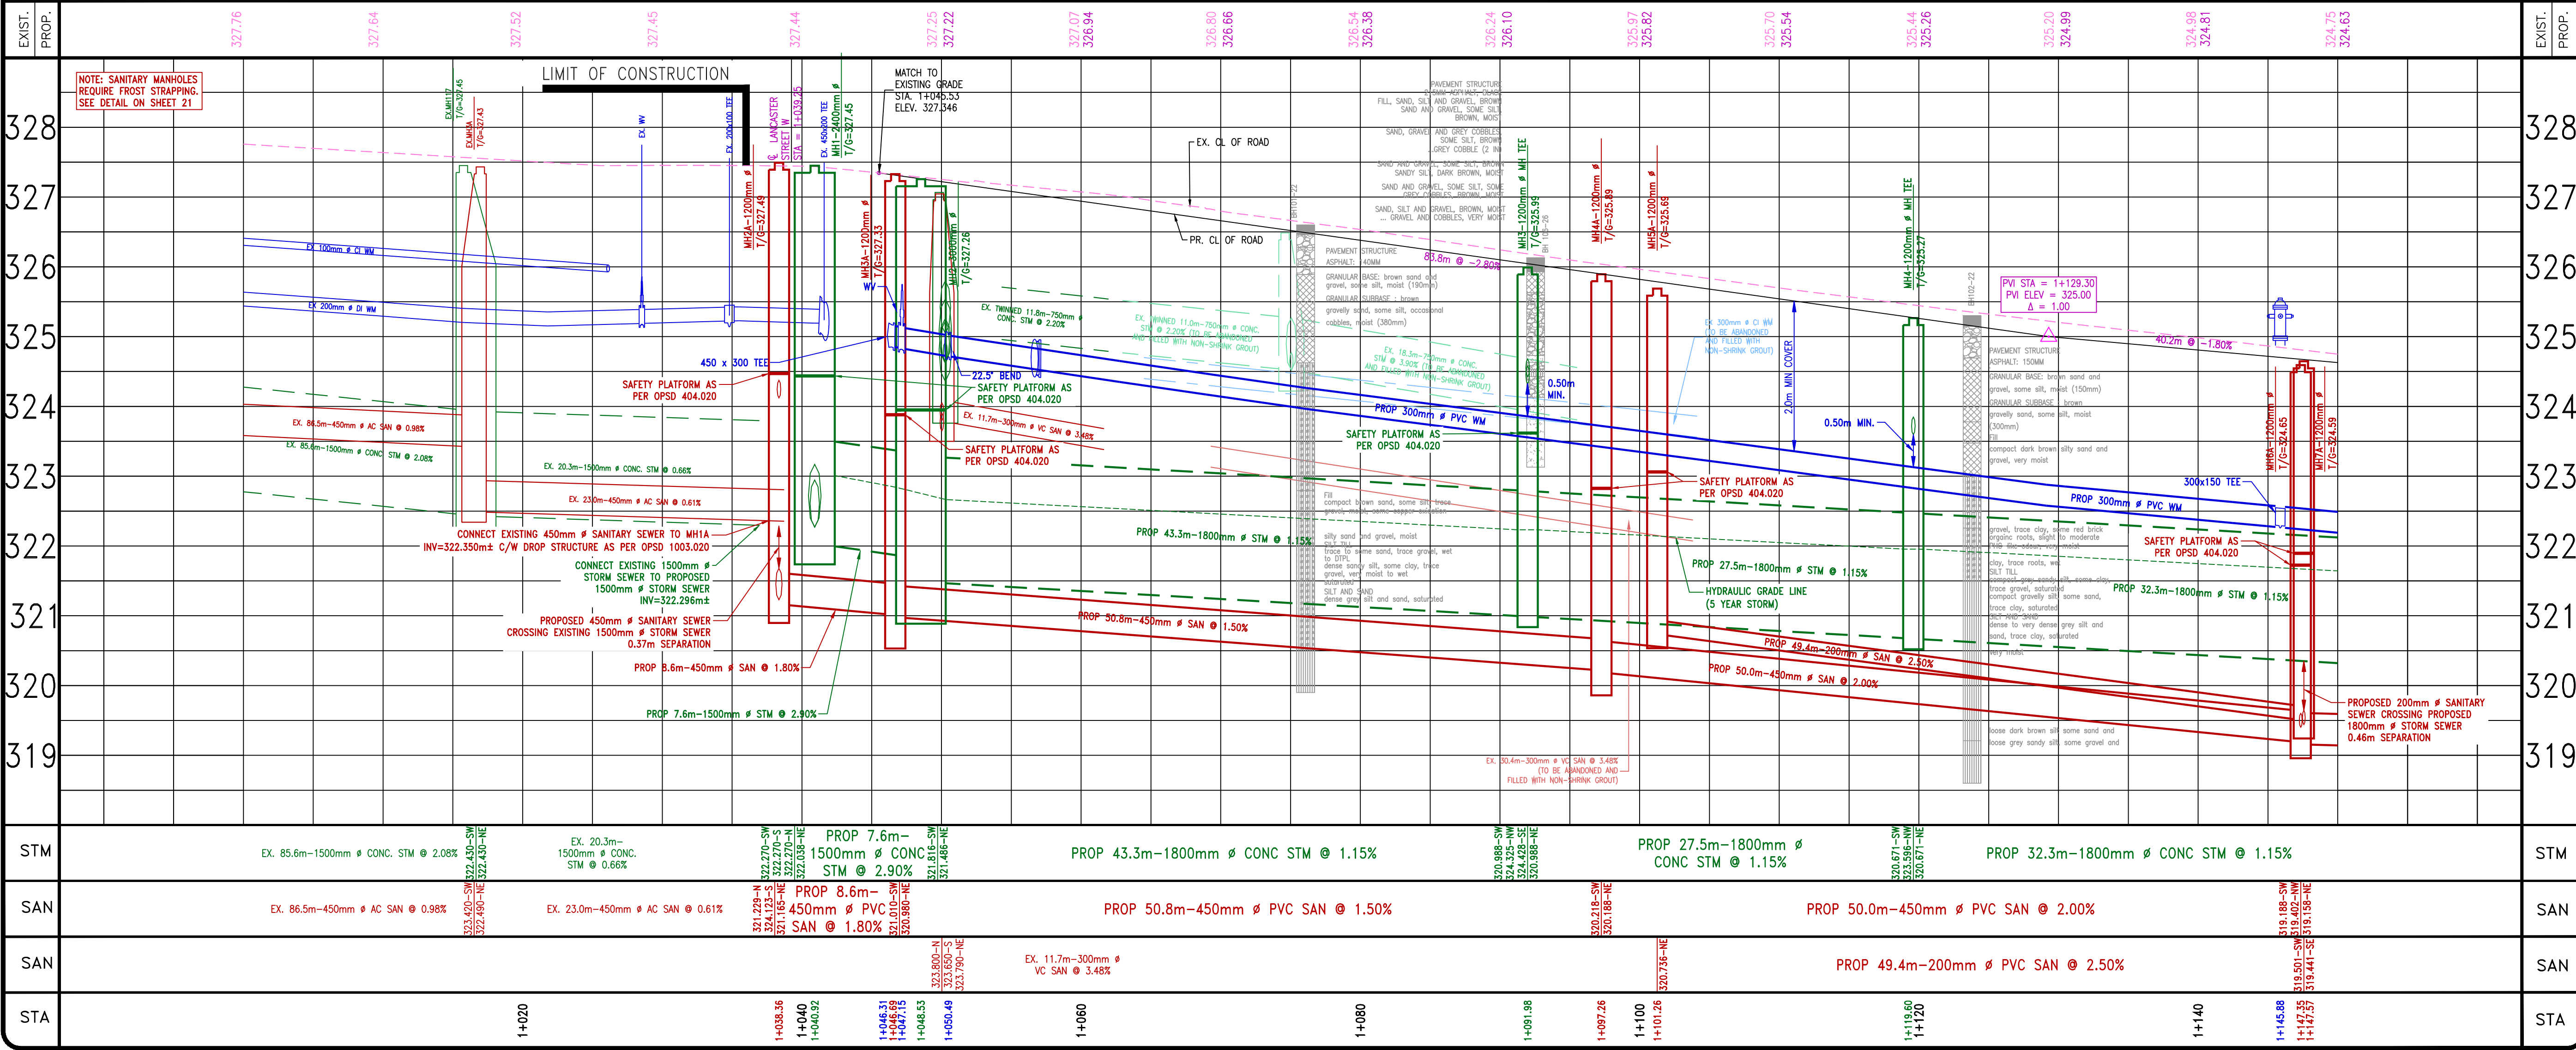

constructionNORTH

trueNORTH

THE POSITION OF THE POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UTILITIES AND STRUCTURES ARE N O T NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK

THE CONTRACTOR SHALL CONFIRM THE POSITION AND EXACT LOCATION OF ALL SUCH UTILITIES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM MADE DURING THE COURSE OF THE CONTRACT WORK.

NOTES:

SERVICE CONNECTIONS

SERVICE CONNECTION INFORMATION MAY BE INCOMPLETE, OR ONLY GENERALLY ACCURATE. SOME SANITARY SERVICES MAY ALSO HAVE SEPARATE CELLAR DRAIN PIPES.

★ IDENTIFIES LOTS APPEARING TO HAVE MULTIPLE SANITARY SERVICES.

Ⓣ -PROPOSED SANITARY AND/OR WATER SERVICES TO BE TUNNELLED TO AVOID CONFLICTS WITH TREES, PLANTING BEDS, ETC.

Ⓢ -CURB STOP AND WATER SERVICE IN ASSUMED LOCATION. CONTRACTOR TO VERIFY ACTUAL LOCATION OF EXISTING WATER SERVICE PRIOR TO INSTALLATION OF PROPOSED CURB STOP ON PROPERTY LINE AND WATER SERVICE.

FOR PARALLEL INSTALLATION OF WATERMAIN AND A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD), PROVIDE MINIMUM 2.5m CLEAR HORIZONTAL SEPARATION DISTANCE FROM PIPE EDGE TO PIPE EDGE. FOR CROSSING OF A WATERMAIN BELOW OR ABOVE A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD) PROVIDE A 0.5m CLEAR VERTICAL SEPARATION DISTANCE BETWEEN CROWN WATERMAIN AND INVERT OF SEWER.

SANITARY SERVICES ARE 100mm # OR 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

STORM SERVICES ARE 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

ALL WATER SERVICE CONNECTIONS ARE 25mm # P.E. PIPE WITH SERVICE BOXES SET ON PROPERTY LINE, UNLESS OTHERWISE NOTED

BOREHOLES

REFER TO REPORTS BY MTE:
S1340-111,
S1340-106
DATED JANUARY 25, 2023

PAVEMENT STRUCTURE

WELLINGTON STREET NORTH

HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-115mm
GRANULAR "A" BASE-200mm
GRANULAR "B" BASE-520mm

JOHNSTON STREET AND PATRICK STREET

HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-80mm
GRANULAR "A" BASE-210mm
GRANULAR "B" BASE-400mm

OTHER UTILITIES

TEMPORARY SUPPORT OF EXISTING UTILITY POLES MUST BE APPROVED BY ENOVA POWER. ALL ASSOCIATED COSTS WILL BE THE RESPONSIBILITY OF CONTRACTOR.

SURVEY

CONDITION SURVEY BY CITY OF KITCHENER JAN. 2009
FIELDBOOK # 00-000

BENCHMARK

CITY OF KITCHENER BM # 1323
LIQUOR CONTROL BOARD BUILDING ON THE SOUTH SIDE OF VICTORIA ST N (R17) NEAR CORNER OF EDNA ST. TABLET IS SET HORIZONTALLY IN THE SOUTH FACE OF CONCRETE FOUNDATION, BEING 12.4 FEET EAST OF THE SOUTH WEST CORNER AND 0.3 FEET BELOW THE FIRST COURSE OF BRICKWORK

ELEV. = 329.154m

NO.	REVISION	BY	MM/DD/YY
7.			
6.			
5.			
4.			
3.			
2.			
1.			

The Corporation Of The
CITY OF KITCHENER

Development Services
Engineering Division

WALTERFEDY


PROPOSED CONDITIONS
WELLINGTON STREET N
FROM STA. 1+000 TO STA. 1+150

DESIGNED BY:	APPROVED BY:	DRAWN BY:
DNM	MC	DNM



CHECKED BY:	SCALE:	DATE:
PR/MC	HOR: 1:250 VERT: 1:50	(MM/DD/YY) 10.24.25

CONSULTANT DWG. No.	SHEET No.	DWG. No.
XX	PIC-1	XXXX

NOTE 1
ALL SANITARY MAINTENANCE HOLES SHALL HAVE ALL JOINTS EXTERNALLY WRAPPED WITH W.R. MEADOWS' WEL-ROL. WATERPROOF MEMBRANE SHALL BE PLACED EXTERNALLY AROUND ALL PRECAST JOINTS, INCLUDING JOINTS BELOW THE MAINTENANCE HOLE FRAME AND COVER, WITH A MINIMUM 300MM WIDE STRIP PER MECP DESIGN CRITERIA 8.3.4 (3). WATERPROOFING MEMBRANE SHALL NOT BE IN CONTACT WITH ANY PVC MATERIAL AND SEWER MAINS AND ALL EDGES/TERMINATIONS OF THE MEMBRANE SHALL BE SEALED WITH POINTING MASTIC.

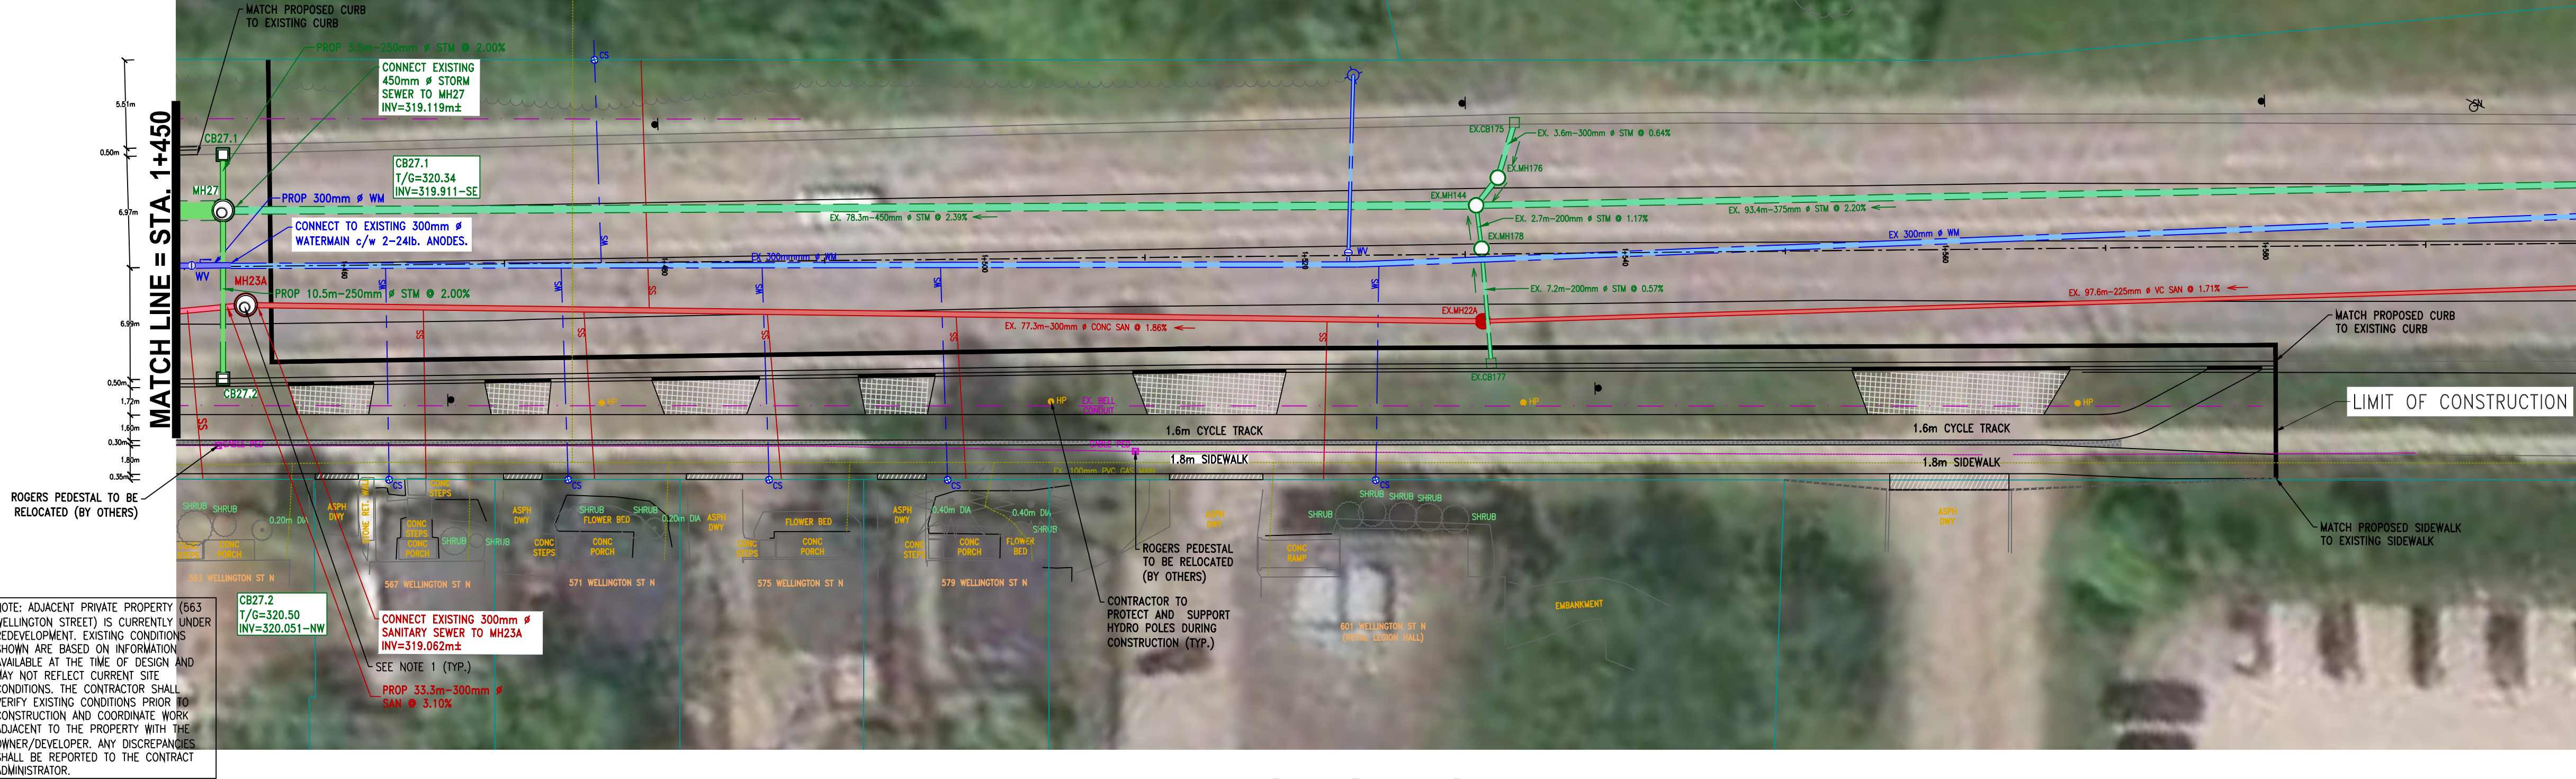

WELLINGTON STREET N

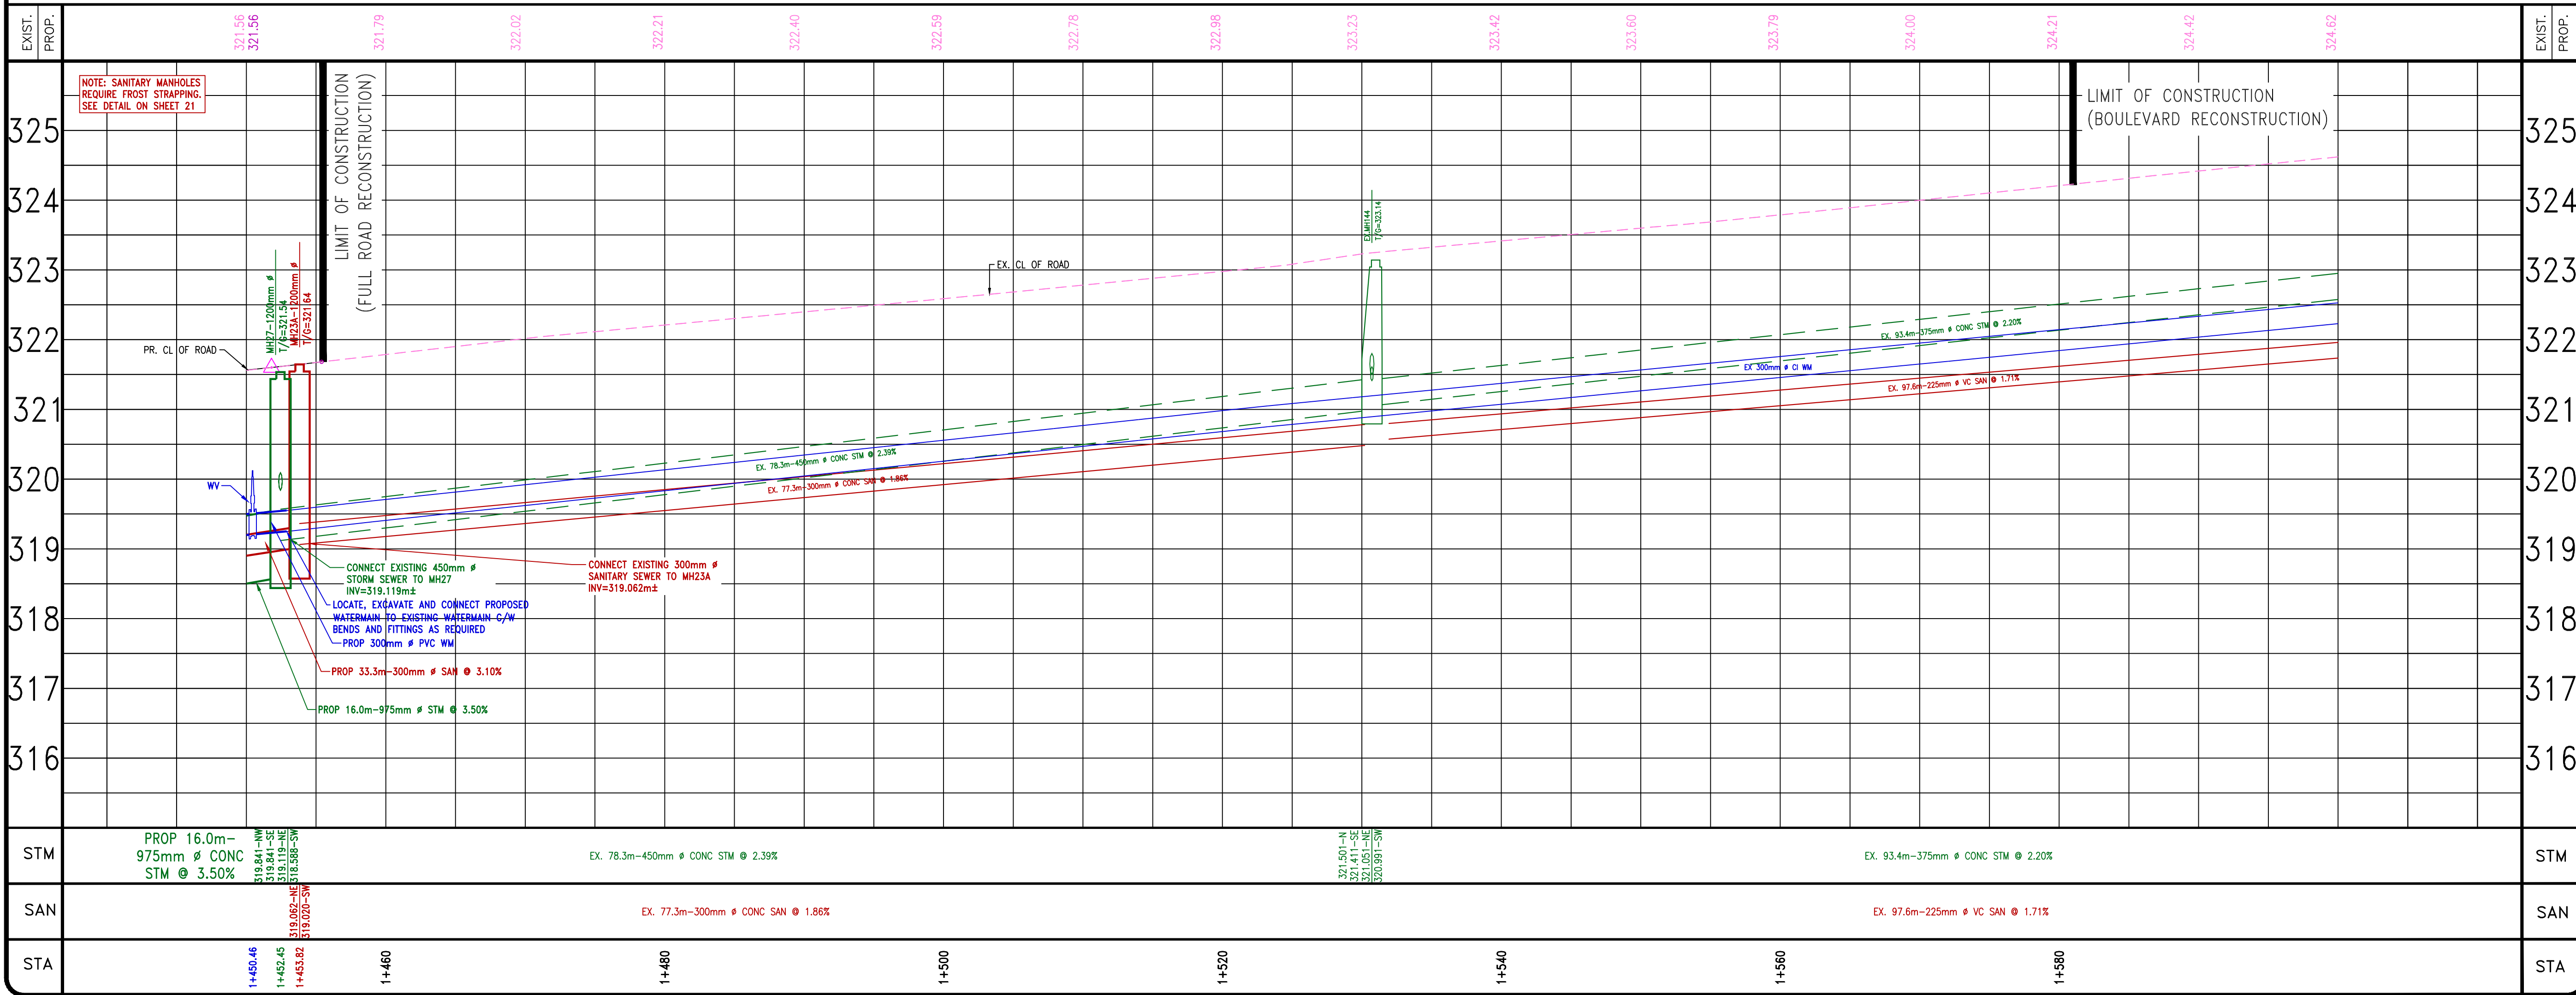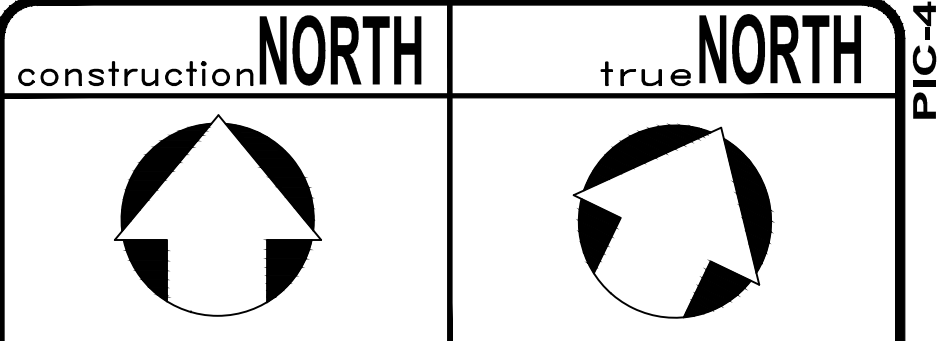

THE POSITION OF THE POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UTILITIES AND STRUCTURES ARE N O T NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK
THE CONTRACTOR SHALL CONFIRM THE POSITION AND EXACT LOCATION OF ALL SUCH UTILITIES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM MADE DURING THE COURSE OF THE CONTRACT WORK.

NOTES:
SERVICE CONNECTIONS
SERVICE CONNECTION INFORMATION MAY BE INCOMPLETE, OR ONLY GENERALLY ACCURATE. SOME SANITARY SERVICES MAY ALSO HAVE SEPARATE CELLAR DRAIN PIPES.

★ IDENTIFIES LOTS APPEARING TO HAVE MULTIPLE SANITARY SERVICES.

Ⓣ -PROPOSED SANITARY AND/OR WATER SERVICES TO BE TUNNELLED TO AVOID CONFLICTS WITH TREES, PLANTING BEDS, ETC.

Ⓢ -CURB STOP AND WATER SERVICE IN ASSUMED LOCATION. CONTRACTOR TO VERIFY ACTUAL LOCATION OF EXISTING WATER SERVICE PRIOR TO INSTALLATION OF PROPOSED CURB STOP ON PROPERTY LINE AND WATER SERVICE.

FOR PARALLEL INSTALLATION OF WATERMAIN AND A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD), PROVIDE MINIMUM 2.5m CLEAR HORIZONTAL SEPARATION DISTANCE FROM PIPE EDGE TO PIPE EDGE. FOR CROSSING OF A WATERMAIN BELOW OR ABOVE A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD) PROVIDE A 0.5m CLEAR VERTICAL SEPARATION DISTANCE BETWEEN CROWN WATERMAIN AND INVERT OF SEWER.

SANITARY SERVICES ARE 100mm # OR 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

STORM SERVICES ARE 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

ALL WATER SERVICE CONNECTIONS ARE 25mm # P.E. PIPE WITH SERVICE BOXES SET ON PROPERTY LINE, UNLESS OTHERWISE NOTED

BOREHOLES
REFER TO REPORTS BY MTE: S1340-111, S1340-106 DATED JANUARY 25, 2023

PAVEMENT STRUCTURE
WELLINGTON STREET NORTH
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-115mm
GRANULAR "A" BASE-200mm
GRANULAR "B" BASE-520mm
JOHNSTON STREET AND PATRICK STREET
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-80mm
GRANULAR "A" BASE-210mm
GRANULAR "B" BASE-400mm

OTHER UTILITIES
TEMPORARY SUPPORT OF EXISTING UTILITY POLES MUST BE APPROVED BY ENOVA POWER. ALL ASSOCIATED COSTS WILL BE THE RESPONSIBILITY OF CONTRACTOR.

SURVEY
CONDITION SURVEY BY CITY OF KITCHENER JAN. 2009
FIELDBOOK # 00-000

BENCHMARK
CITY OF KITCHENER BM # 1323
LIQUOR CONTROL BOARD BUILDING ON THE SOUTH SIDE OF VICTORIA ST N (R17) NEAR CORNER OF EDNA ST. TABLET IS SET HORIZONTALLY IN THE SOUTH FACE OF CONCRETE FOUNDATION, BEING 12.4 FEET EAST OF THE SOUTH WEST CORNER AND 0.3 FEET BELOW THE FIRST COURSE OF BRICKWORK

ELEV. = 329.154m		
7.		
6.		
5.		
4.		
3.		
2.		
1.		

NO. REVISION BY MM/DD/YY




WALTERFEDY

PROPOSED CONDITIONS
WELLINGTON STREET N
FROM STA. 1+450 TO STA. 1+600

DESIGNED BY: DNM	APPROVED BY: MC	DRAWN BY: DNM
CHECKED BY: PR/MC	SCALE: HQR-1:250 VERT. 1:50	DATE: (MM/DD/YY) 10.24.25
CONSULTANT DWG. No. XX	SHEET No. PIC-4	DWG. No. XXXX

MATCH LINE (SEE SHEET 14)
WELLINGTON STREET N


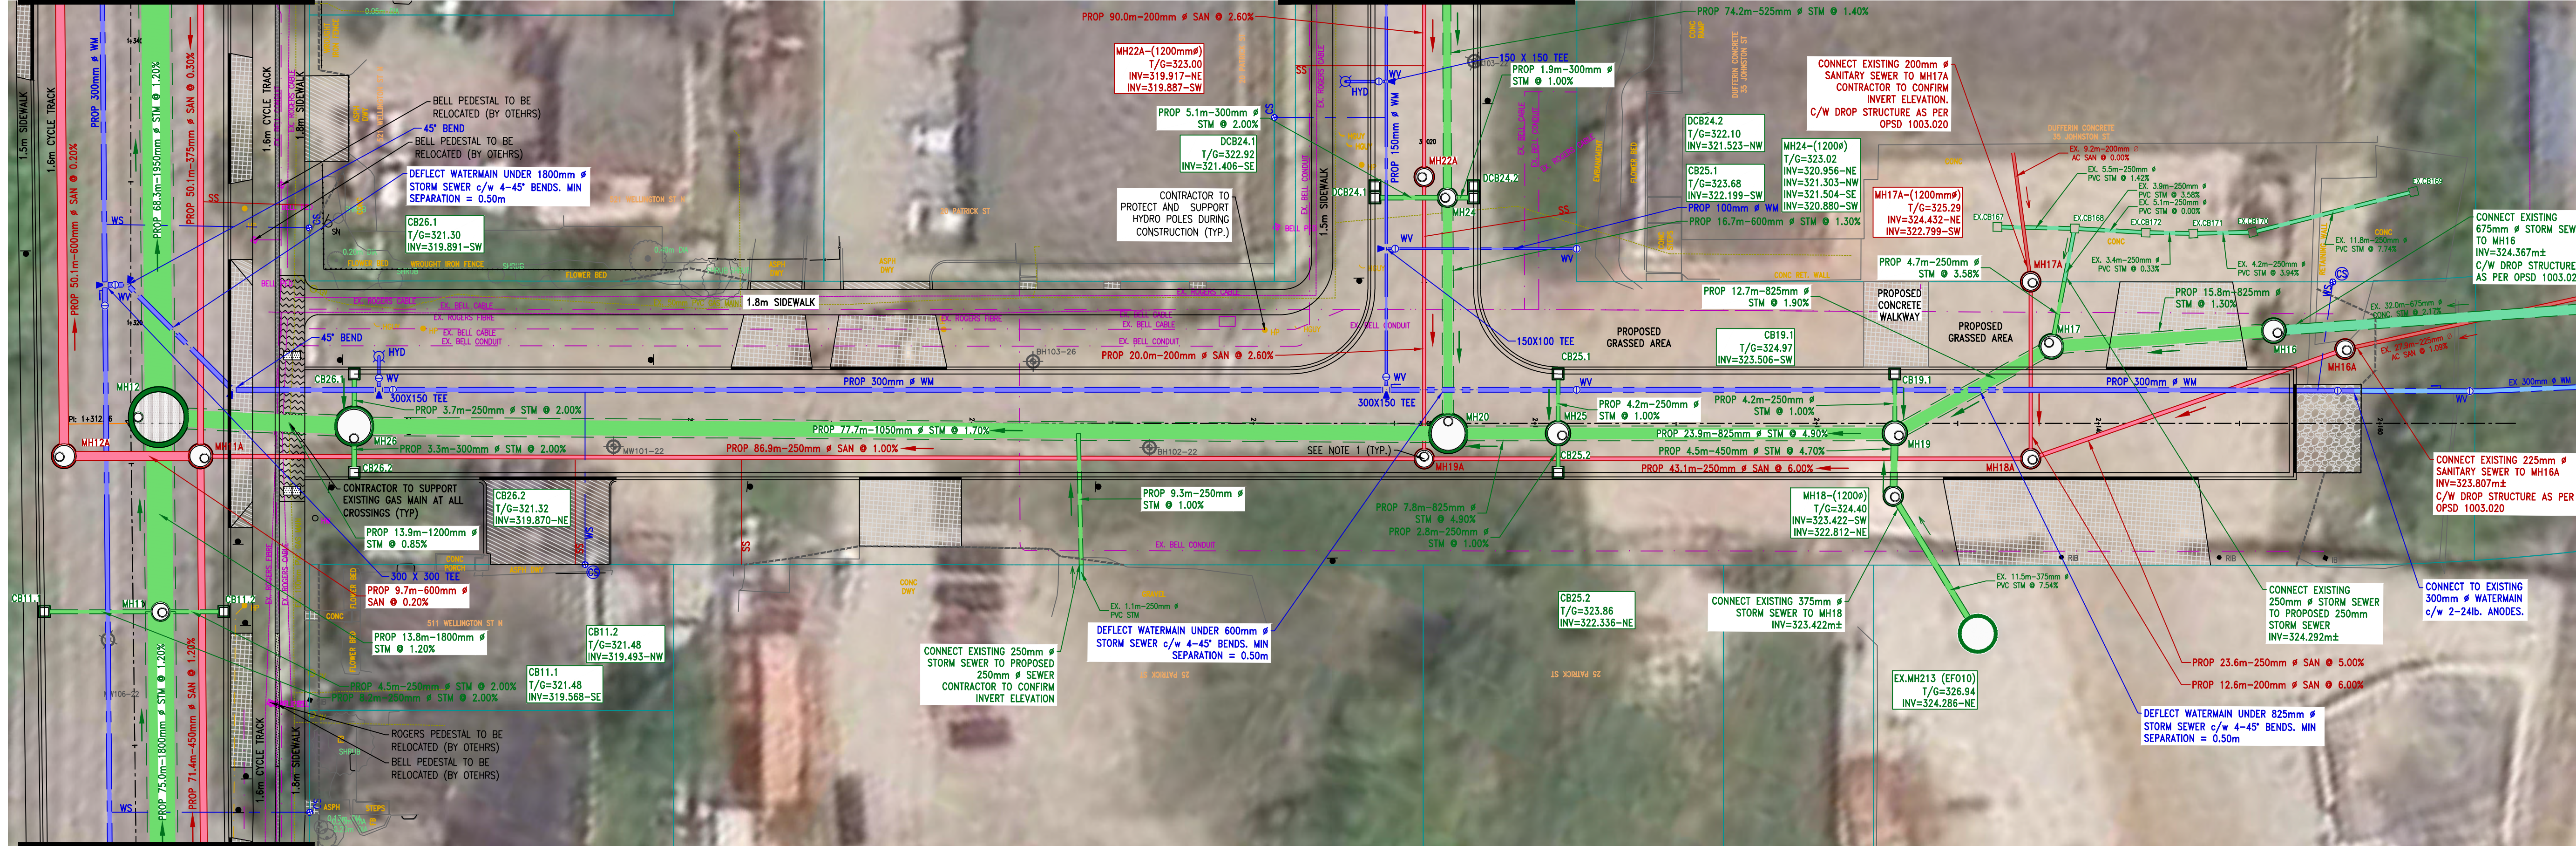


WELLINGTON STREET N
MATCH LINE (SEE SHEET 13)

MATCH LINE (SEE SHEET 17)
JOHNSTON STREET

PATRICK STREET

NOTE 1
ALL SANITARY MAINTENANCE HOLES SHALL HAVE ALL JOINTS EXTERNALLY WRAPPED WITH W.R. MEADOWS MEL-ROL. WATERPROOF MEMBRANE SHALL BE PLACED EXTERNALLY AROUND ALL PRECAST JOINTS, INCLUDING JOINTS BELOW THE MAINTENANCE HOLE FRAME AND COVER, WITH A MINIMUM 300MM WIDE STRIP PER MECP DESIGN CRITERIA 8.3.4 (3). WATERPROOFING MEMBRANE SHALL NOT BE IN CONTACT WITH ANY PVC MATERIAL AND SEWER MAINS AND ALL EDGES/TERMINATIONS OF THE MEMBRANE SHALL BE SEALED WITH POINTING MASTIC.

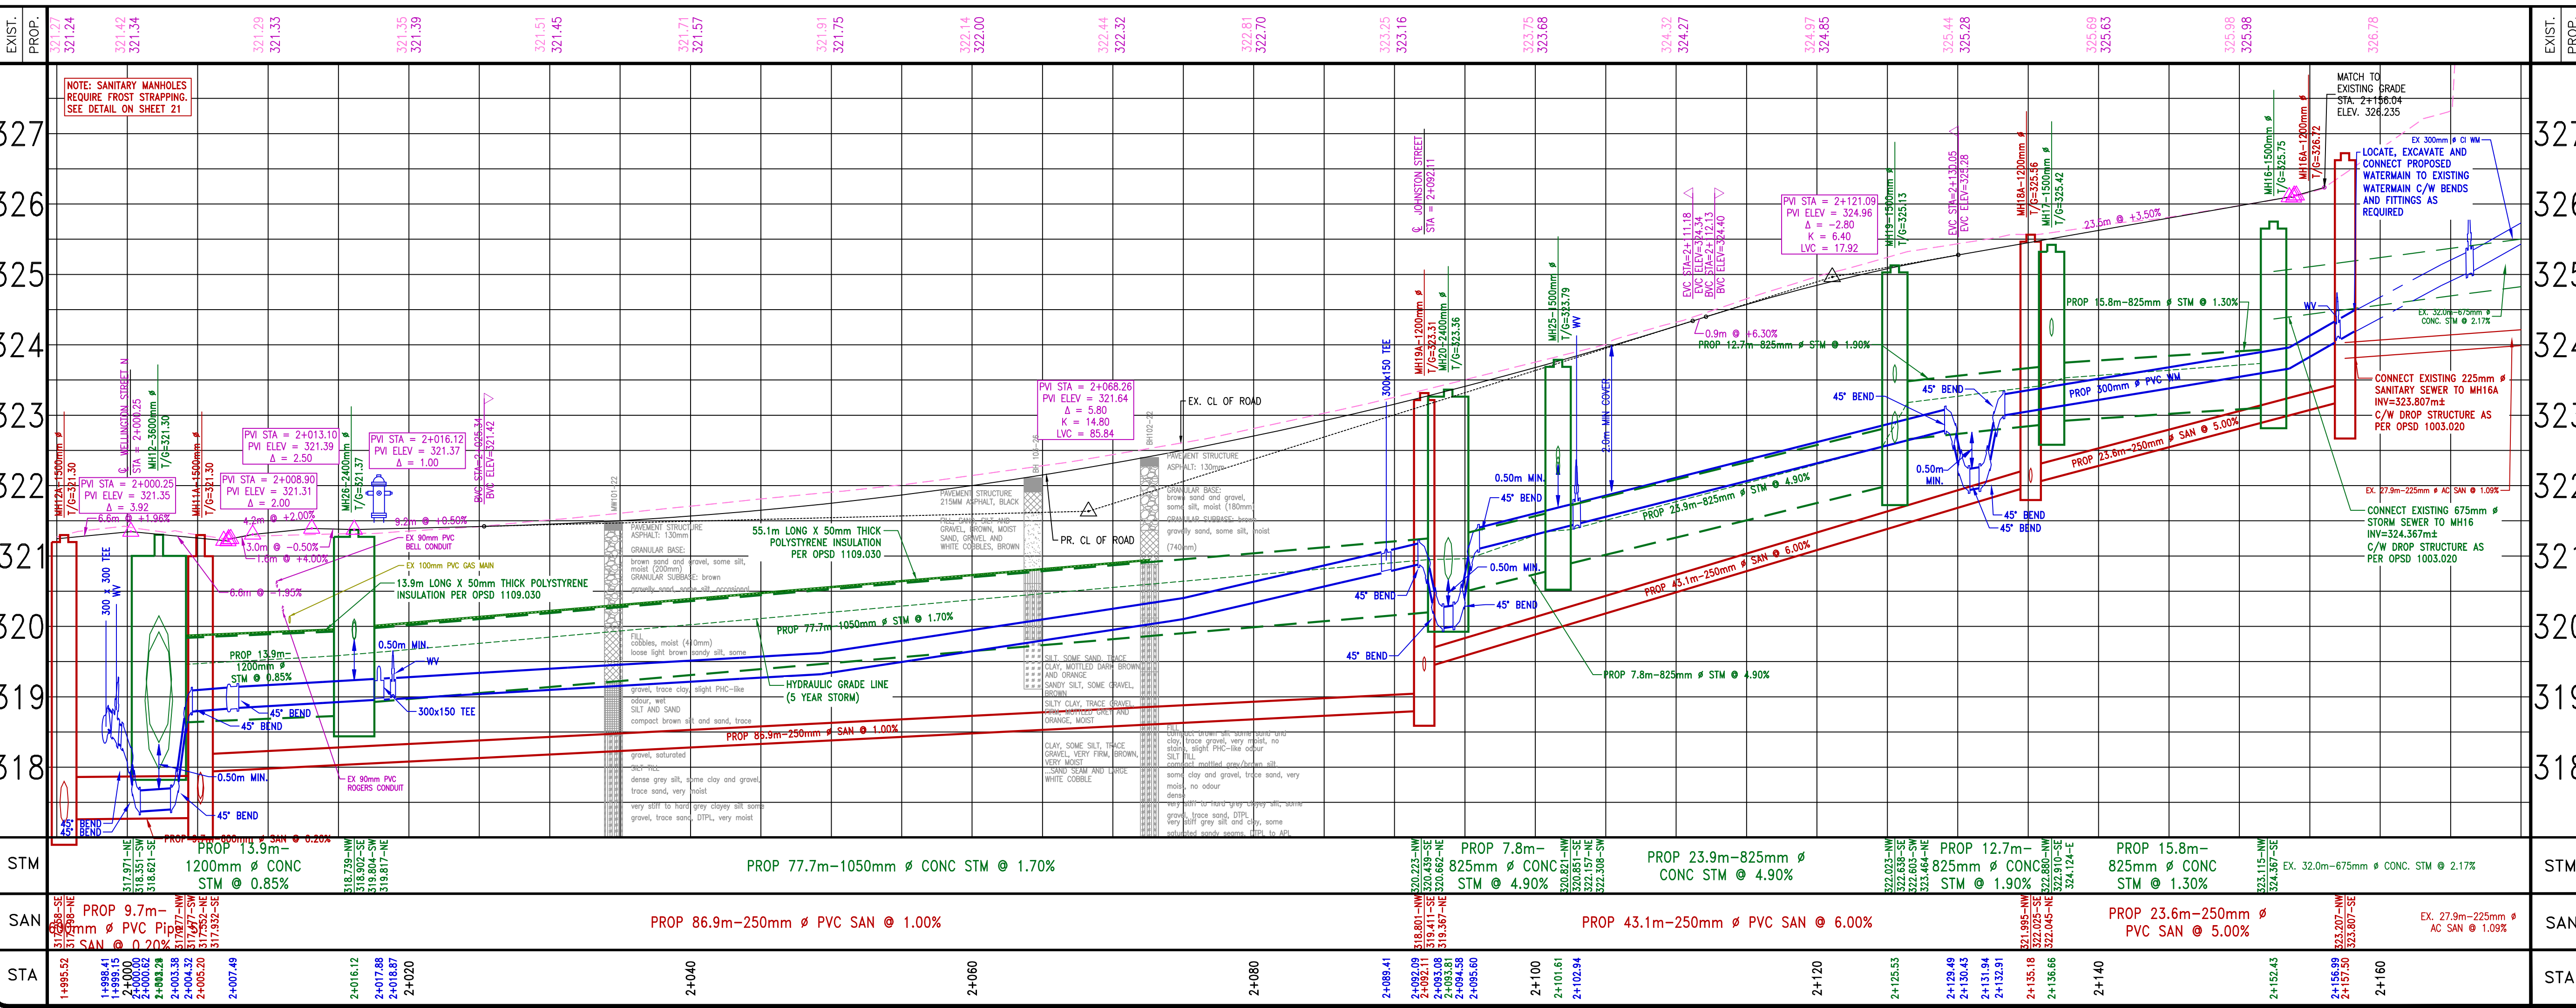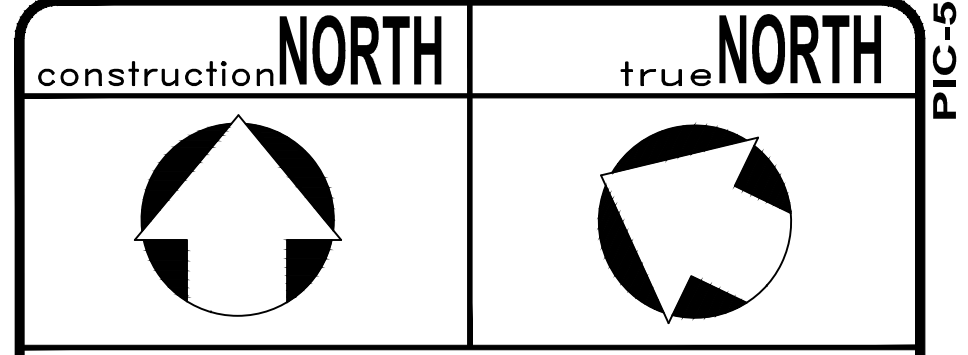

THE POSITION OF THE POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UTILITIES AND STRUCTURES ARE NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK
THE CONTRACTOR SHALL CONFIRM THE POSITION AND EXACT LOCATION OF ALL SUCH UTILITIES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM MADE DURING THE COURSE OF THE CONTRACT WORK.

SERVICE CONNECTIONS
CONTRACTOR TO VERIFY ACTUAL LOCATION OF EXISTING WATER SERVICE PRIOR TO INSTALLATION OF PROPOSED CURB STOP ON PROPERTY LINE AND WATER SERVICE.

IDENTIFIES LOTS APPEARING TO HAVE MULTIPLE SANITARY SERVICES.
PROPOSED SANITARY AND/OR WATER SERVICES TO BE TUNNELLED TO AVOID CONFLICTS WITH TREES, PLANTING BEDS, ETC.

CURB STOP AND WATER SERVICE IN ASSUMED LOCATION.
FOR PARALLEL INSTALLATION OF WATERMAIN AND A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD), PROVIDE MINIMUM 2.5m CLEAR HORIZONTAL SEPARATION DISTANCE FROM PIPE EDGE TO PIPE EDGE. FOR CROSSING OF A WATERMAIN BELOW OR ABOVE A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD) PROVIDE A 0.5m CLEAR VERTICAL SEPARATION DISTANCE BETWEEN CROWN WATERMAIN AND INVERT OF SEWER.

SANITARY SERVICES ARE 100mm # OR 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

STORM SERVICES ARE 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

ALL WATER SERVICE CONNECTIONS ARE 25mm # P.E. PIPE WITH SERVICE BOXES SET ON PROPERTY LINE, UNLESS OTHERWISE NOTED.

BOREHOLES
REFER TO REPORTS BY MTE: S1340-111, S1340-106 DATED JANUARY 25, 2023

PAVEMENT STRUCTURE
WELLINGTON STREET NORTH
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-115mm
GRANULAR "A" BASE-200mm
GRANULAR "B" BASE-520mm

JOHNSTON STREET AND PATRICK STREET
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-80mm
GRANULAR "A" BASE-210mm
GRANULAR "B" BASE-400mm

OTHER UTILITIES
TEMPORARY SUPPORT OF EXISTING UTILITY POLES MUST BE APPROVED BY ENOVA POWER. ALL ASSOCIATED COSTS WILL BE THE RESPONSIBILITY OF CONTRACTOR.

SURVEY
CONDITION SURVEY BY CITY OF KITCHENER JAN. 2009
FIELDBOOK # 00-000

BENCHMARK
CITY OF KITCHENER BM # 1323
LIQUOR CONTROL BOARD BUILDING ON THE SOUTH SIDE OF VICTORIA ST N (R17) NEAR CORNER OF EDNA ST. TABLET IS SET HORIZONTALLY IN THE SOUTH FACE OF CONCRETE FOUNDATION, BEING 12.4 FEET EAST OF THE SOUTH WEST CORNER AND 0.3 FEET BELOW THE FIRST COURSE OF BRICKWORK.

ELEV. = 329.154m		
7.		
6.		
5.		
4.		
3.		
2.		
1.		
NO.	REVISION	BY MM/DD/YY



Development Services
Engineering Division

WALTERFEDY


PROPOSED CONDITIONS
PATRICK STREET
FROM STA. 2+000 TO STA. 2+170

DESIGNED BY: DNM	APPROVED BY: MC	DRAWN BY: DNM
CHECKED BY: PR/MC	SCALE: HORIZ: 1:250 VERT: 1:50	DATE: (MM/DD/YY) 10/24/25
CONSULTANT DWG. No. XX	SHEET No. PIC-5	DWG. No. XXXX



NOTE 1
ALL SANITARY MAINTENANCE HOLES SHALL HAVE ALL JOINTS EXTERNALLY WRAPPED WITH W.R. MEADOWS' MEL-ROL. WATERPROOF MEMBRANE SHALL BE PLACED EXTERNALLY AROUND ALL PRECAST JOINTS, INCLUDING JOINTS BELOW THE MAINTENANCE HOLE FRAME AND COVER, WITH A MINIMUM 300MM WIDE STRIP PER MECP DESIGN CRITERIA 8.3.4 (3). WATERPROOFING MEMBRANE SHALL NOT BE IN CONTACT WITH ANY PVC MATERIAL AND SEWER MAINS AND ALL EDGES/TERMINATIONS OF THE MEMBRANE SHALL BE SEALED WITH POINTING MASTIC.

CONTRACTOR TO PROTECT AND SUPPORT HYDRO POLES DURING CONSTRUCTION (TYP.)

MATCH LINE = STA. 3+130

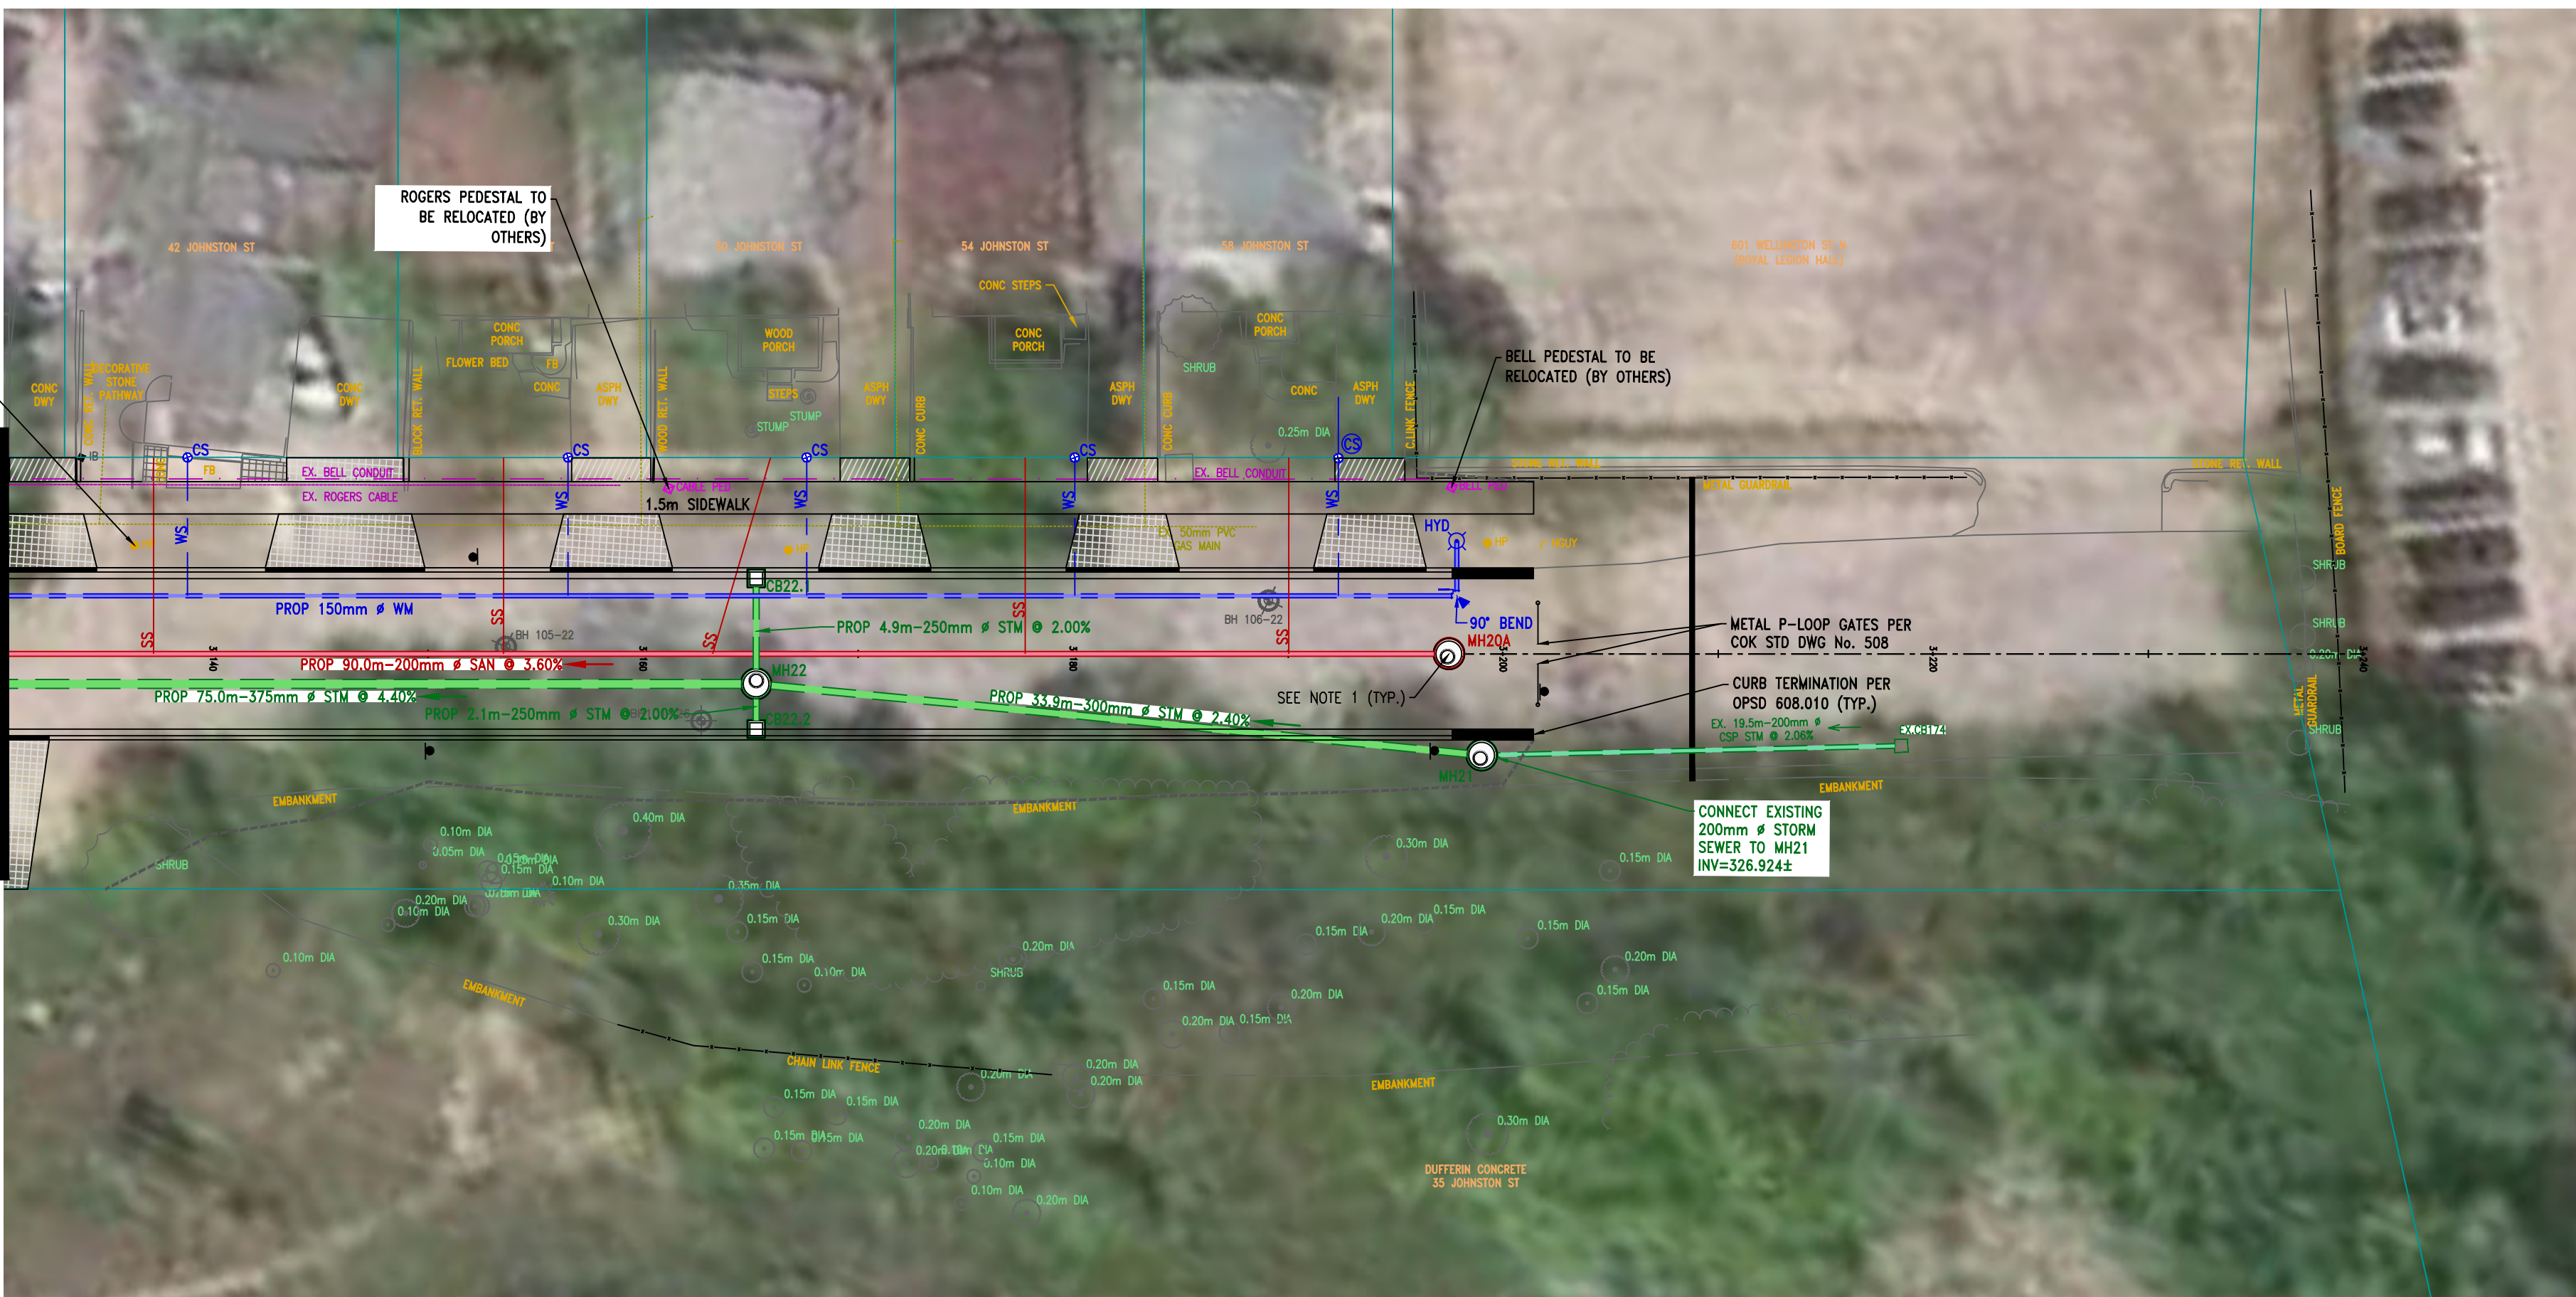

JOHNSTON STREET

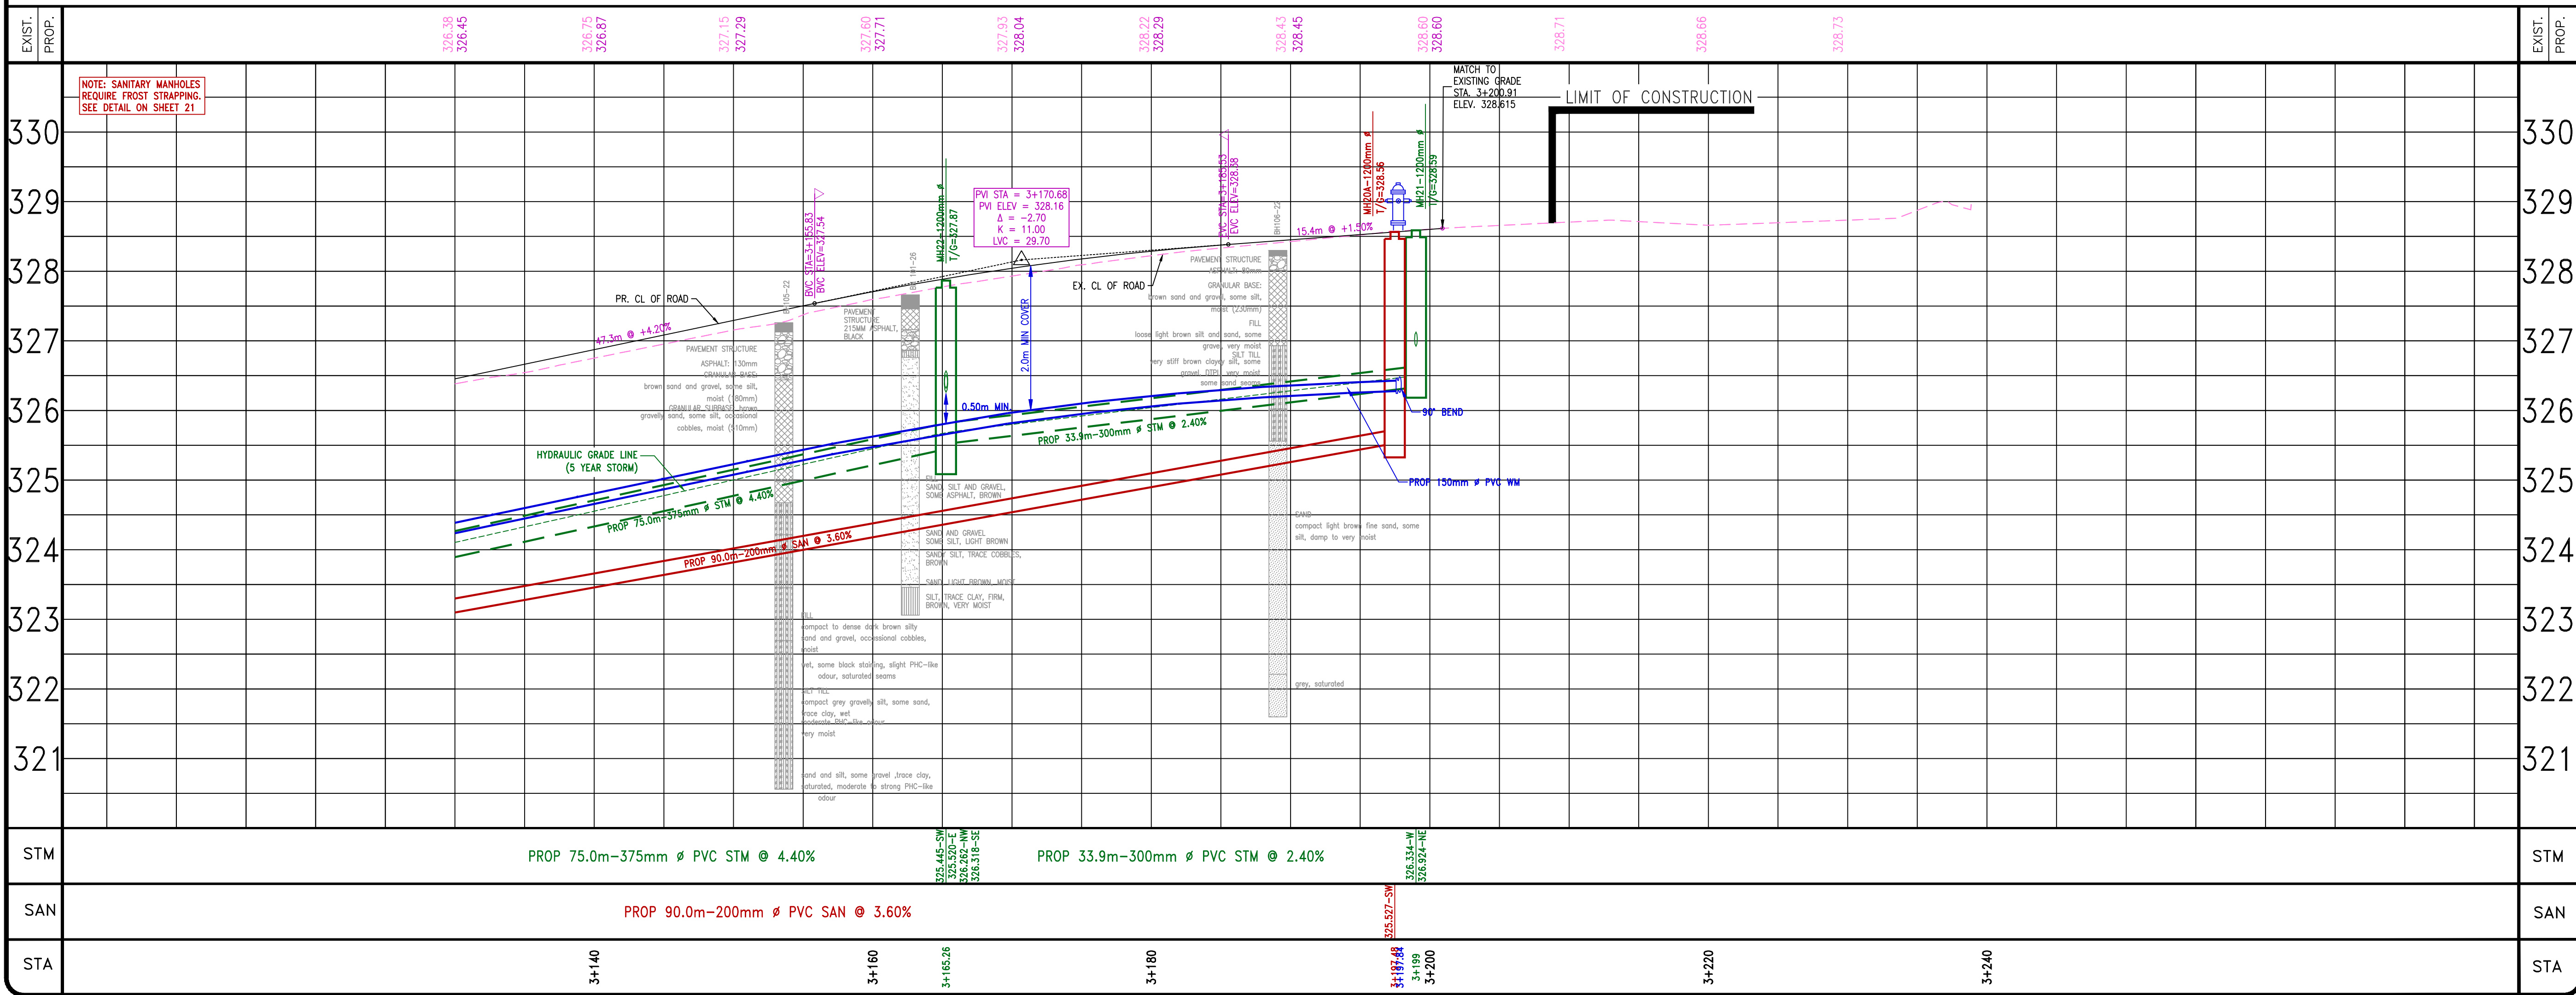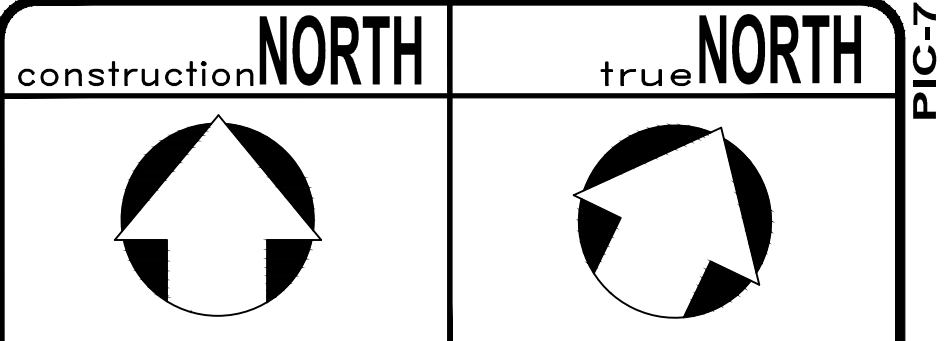

THE POSITION OF THE POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UTILITIES AND STRUCTURES ARE N O T NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK
THE CONTRACTOR SHALL CONFIRM THE POSITION AND EXACT LOCATION OF ALL SUCH UTILITIES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM MADE DURING THE COURSE OF THE CONTRACT WORK.

NOTES:
SERVICE CONNECTIONS
SERVICE CONNECTION INFORMATION MAY BE INCOMPLETE, OR ONLY GENERALLY ACCURATE. SOME SANITARY SERVICES MAY ALSO HAVE SEPARATE CELLAR DRAIN PIPES.

★ IDENTIFIES LOTS APPEARING TO HAVE MULTIPLE SANITARY SERVICES.

Ⓣ -PROPOSED SANITARY AND/OR WATER SERVICES TO BE TUNNELLED TO AVOID CONFLICTS WITH TREES, PLANTING BEDS, ETC.

Ⓢ -CURB STOP AND WATER SERVICE IN ASSUMED LOCATION. CONTRACTOR TO VERIFY ACTUAL LOCATION OF EXISTING WATER SERVICE PRIOR TO INSTALLATION OF PROPOSED CURB STOP ON PROPERTY LINE AND WATER SERVICE.

FOR PARALLEL INSTALLATION OF WATERMAIN AND A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD), PROVIDE MINIMUM 2.5m CLEAR HORIZONTAL SEPARATION DISTANCE FROM PIPE EDGE TO PIPE EDGE. FOR CROSSING OF A WATERMAIN BELOW OR ABOVE A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD) PROVIDE A 0.5m CLEAR VERTICAL SEPARATION DISTANCE BETWEEN CROWN WATERMAIN AND INVERT OF SEWER.

SANITARY SERVICES ARE 100mm # OR 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

STORM SERVICES ARE 150mm # PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

ALL WATER SERVICE CONNECTIONS ARE 25mm # P.E. PIPE WITH SERVICE BOXES SET ON PROPERTY LINE, UNLESS OTHERWISE NOTED

BOREHOLES
REFER TO REPORTS BY MTE:
S1340-1111,
S1340-106
DATED JANUARY 25, 2023

PAVEMENT STRUCTURE
WELLINGTON STREET NORTH
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-115mm
GRANULAR "A" BASE-200mm
GRANULAR "B" BASE-520mm

JOHNSTON STREET AND PATRICK STREET
HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-80mm
GRANULAR "A" BASE-210mm
GRANULAR "B" BASE-400mm

OTHER UTILITIES
TEMPORARY SUPPORT OF EXISTING UTILITY POLES MUST BE APPROVED BY ENOVA POWER. ALL ASSOCIATED COSTS WILL BE THE RESPONSIBILITY OF CONTRACTOR.

SURVEY
CONDITION SURVEY BY CITY OF KITCHENER JAN. 2009
FIELDBOOK # 00-000

BENCHMARK
CITY OF KITCHENER BM # 1323
LIQUOR CONTROL BOARD BUILDING ON THE SOUTH SIDE OF VICTORIA ST N (R17) NEAR CORNER OF EDNA ST. TABLET IS SET HORIZONTALLY IN THE SOUTH FACE OF CONCRETE FOUNDATION, BEING 12.4 FEET EAST OF THE SOUTH WEST CORNER AND 0.3 FEET BELOW THE FIRST COURSE OF BRICKWORK

ELEV. = 329.154m		
7.		
6.		
5.		
4.		
3.		
2.		
1.		

NO.	REVISION	BY	MM/DD/YY
-----	----------	----	----------




Development Services
Engineering Division

WALTERFEDY

PROPOSED CONDITIONS
JOHNSTON STREET
FROM STA. 3+130 TO STA. 3+250

DESIGNED BY: DNM	APPROVED BY: MC	DRAWN BY: DNM
CHECKED BY: PR/MC		CHECKED BY: PR/MC
SCALE: HOR: 1:250 VERT: 1:50		DATE: (MM/DD/YY) 10.24.25
CONSULTANT DWG. No. XX	SHEET No. PIC-7	DWG. No. XXXX

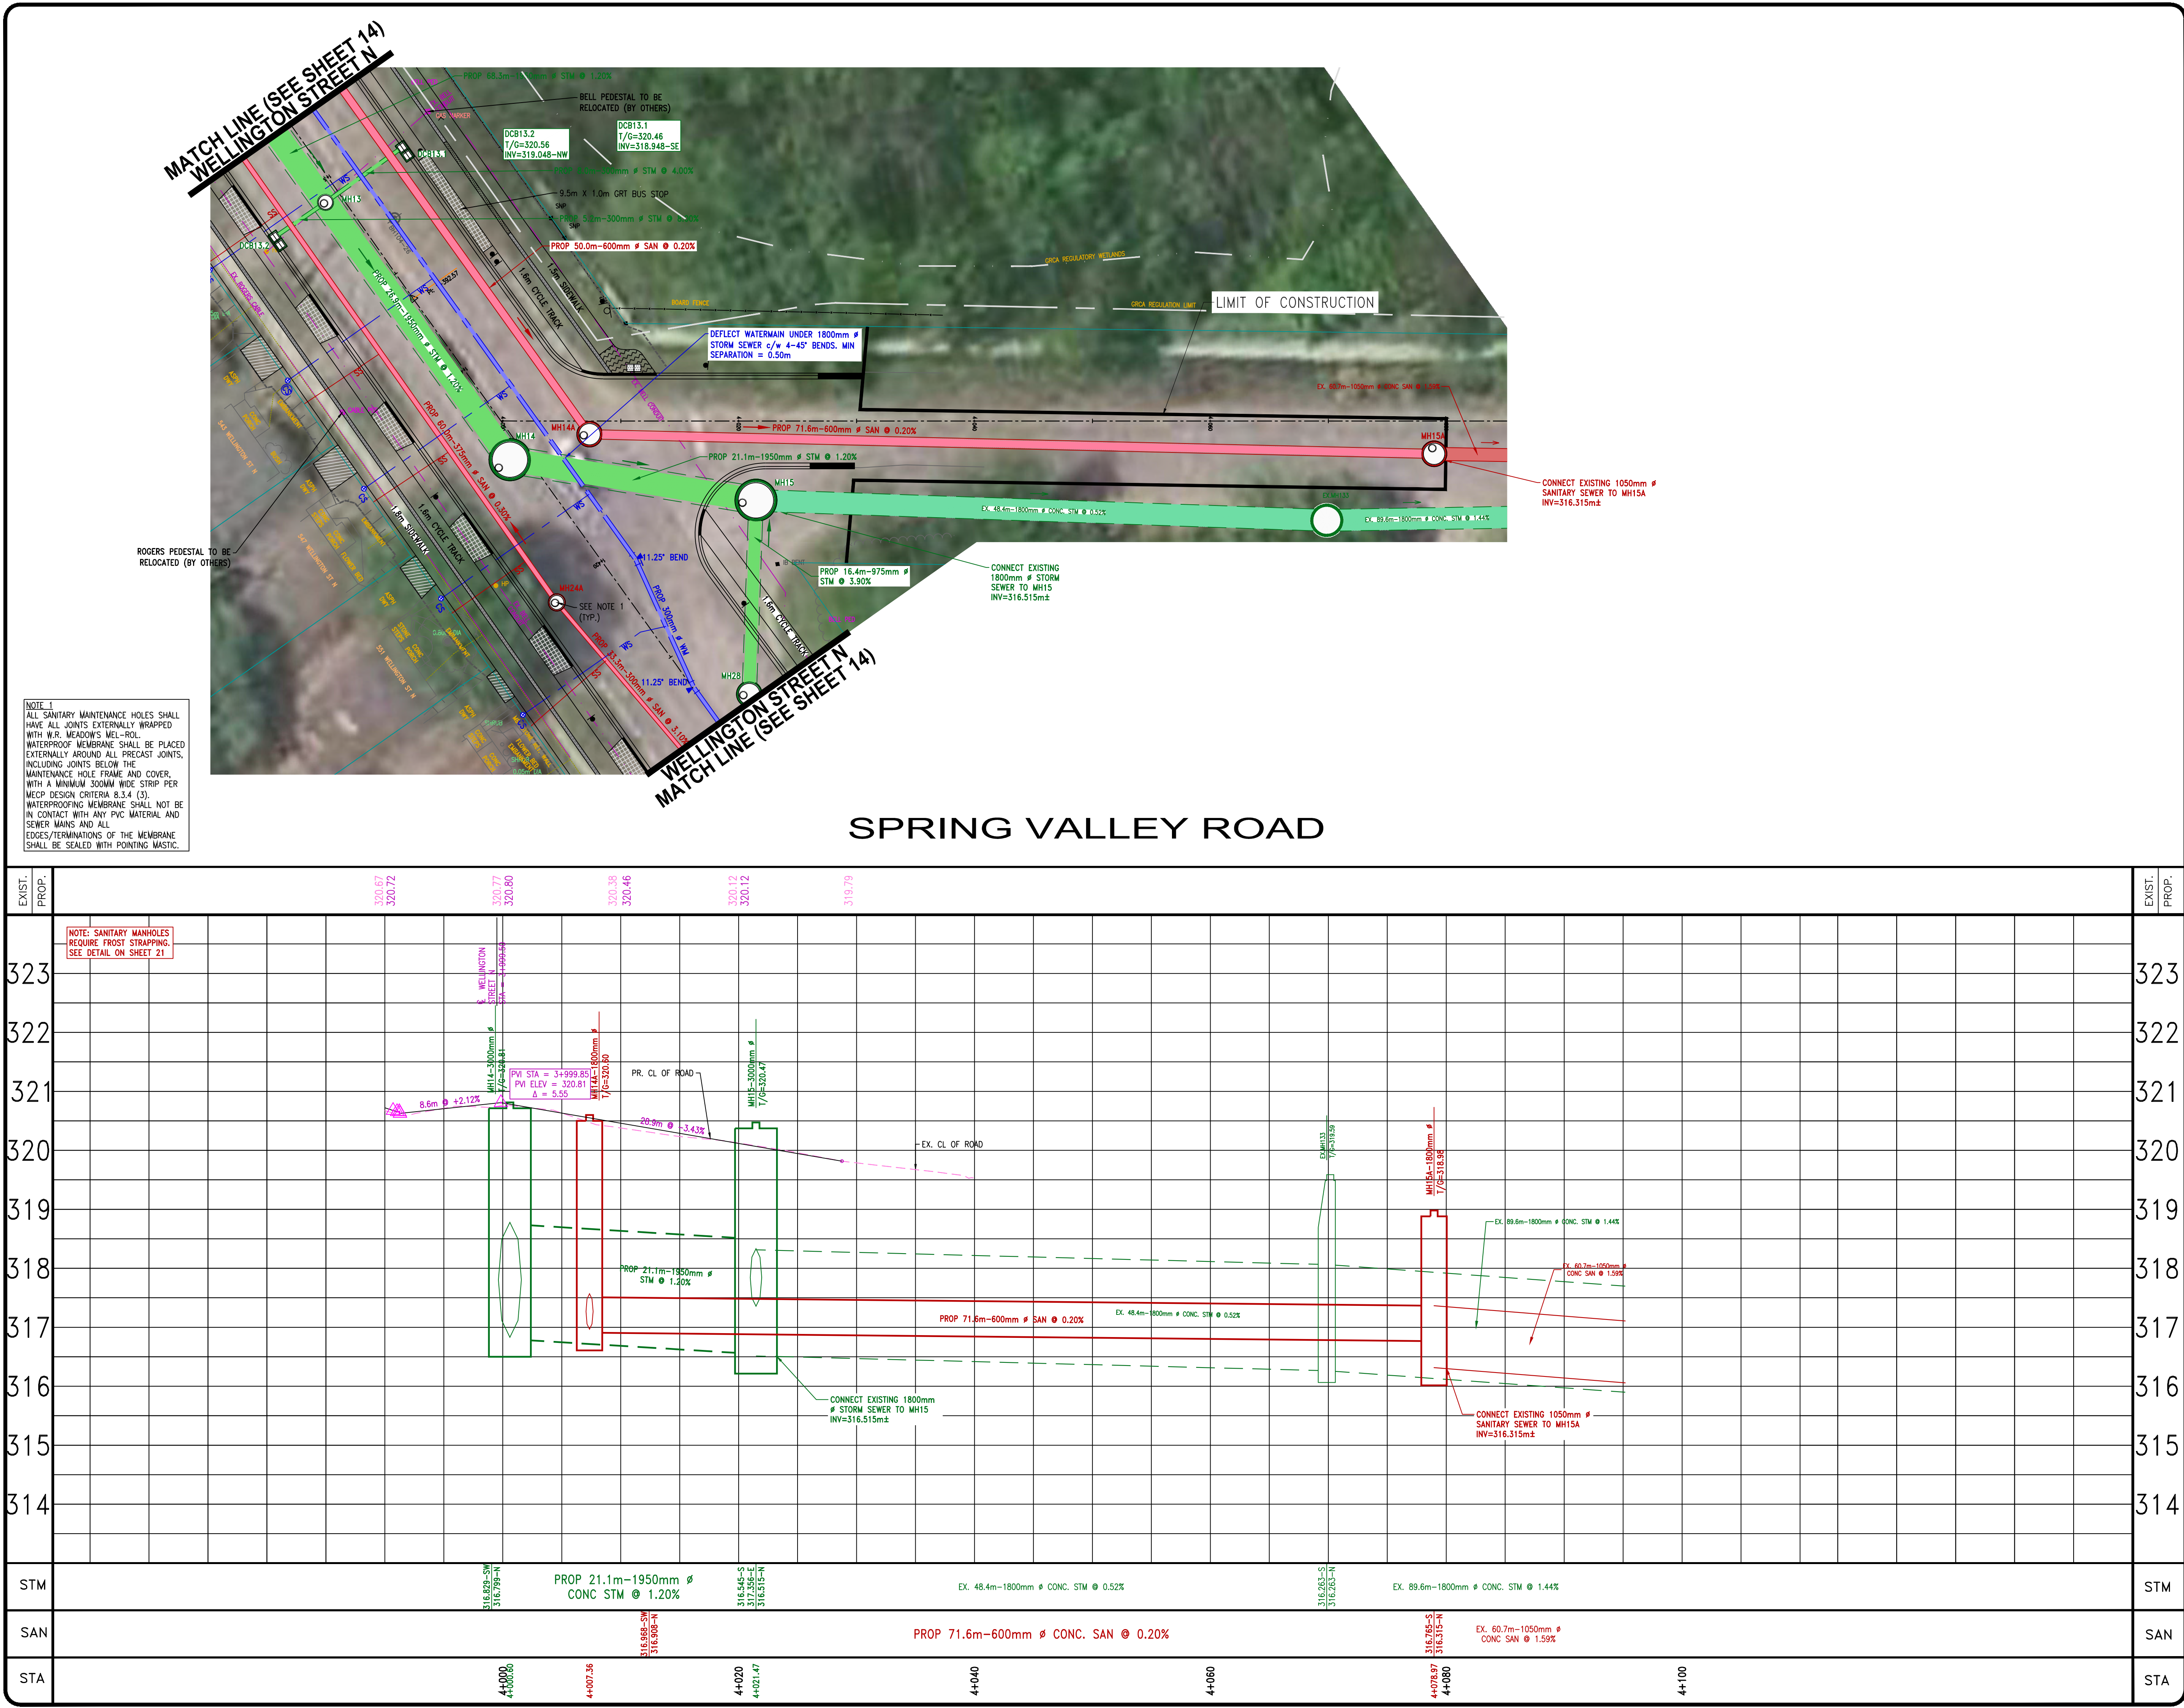

construction NORTH true NORTH

THE POSITION OF THE POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UTILITIES AND STRUCTURES ARE N O T NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED.

BEFORE STARTING WORK

THE CONTRACTOR SHALL CONFIRM THE POSITION AND EXACT LOCATION OF ALL SUCH UTILITIES, AND SHALL ASSUME ALL LIABILITY FOR ANY DAMAGE TO THEM MADE DURING THE COURSE OF THE CONTRACT WORK.

NOTES:

SERVICE CONNECTIONS

SERVICE CONNECTION INFORMATION MAY BE INCOMPLETE, OR ONLY GENERALLY ACCURATE. SOME SANITARY SERVICES MAY ALSO HAVE SEPARATE CELLAR DRAIN PIPES.

★ IDENTIFIES LOTS APPEARING TO HAVE MULTIPLE SANITARY SERVICES.

T PROPOSED SANITARY AND/OR WATER SERVICES TO BE TUNNELLED TO AVOID CONFLICTS WITH TREES, PLANTING BEDS, ETC.

CS CURB STOP AND WATER SERVICE IN ASSUMED LOCATION. CONTRACTOR TO VERIFY ACTUAL LOCATION OF EXISTING WATER SERVICE PRIOR TO INSTALLATION OF PROPOSED CURB STOP ON PROPERTY LINE AND WATER SERVICE.

FOR PARALLEL INSTALLATION OF WATERMAIN AND A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD), PROVIDE MINIMUM 2.5m CLEAR HORIZONTAL SEPARATION DISTANCE FROM PIPE EDGE TO PIPE EDGE. FOR CROSSING OF A WATERMAIN BELOW OR ABOVE A SANITARY/STORM SEWER (INCLUDING A CATCHBASIN LEAD) PROVIDE A 0.5m CLEAR VERTICAL SEPARATION DISTANCE BETWEEN CROWN WATERMAIN AND INVERT OF SEWER.

SANITARY SERVICES ARE 100mm Ø OR 150mm Ø PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

STORM SERVICES ARE 150mm Ø PVC DR 28, AND CONNECTION TO EXISTING WILL BE AT PROPERTY LINE, UNLESS OTHERWISE DIRECTED.

ALL WATER SERVICE CONNECTIONS ARE 25mm Ø P.E. PIPE WITH SERVICE BOXES SET ON PROPERTY LINE, UNLESS OTHERWISE NOTED

BOREHOLES

REFER TO REPORTS BY MTE:
51340-111,
51340-106
DATED JANUARY 25, 2023

PAVEMENT STRUCTURE

WELLINGTON STREET NORTH

HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-115mm
GRANULAR "A" BASE-200mm
GRANULAR "B" BASE-520mm

JOHNSTON STREET AND PATRICK STREET

HL3 SURFACE ASPHALT-40mm
HL4 BINDER ASPHALT-80mm
GRANULAR "A" BASE-210mm
GRANULAR "B" BASE-400mm

OTHER UTILITIES

TEMPORARY SUPPORT OF EXISTING UTILITY POLES MUST BE APPROVED BY ENOVA POWER. ALL ASSOCIATED COSTS WILL BE THE RESPONSIBILITY OF CONTRACTOR.

SURVEY

CONDITION SURVEY BY CITY OF KITCHENER JAN. 2009
FIELDBOOK # 00-000

BENCHMARK

CITY OF KITCHENER BM # 1323
LIQUOR CONTROL BOARD BUILDING ON THE SOUTH SIDE OF VICTORIA ST N (R17) NEAR CORNER OF EDNA ST. TABLET IS SET HORIZONTALLY IN THE SOUTH FACE OF CONCRETE FOUNDATION, BEING 12.4 FEET EAST OF THE SOUTH WEST CORNER AND 0.3 FEET BELOW THE FIRST COURSE OF BRICKWORK

ELEV. = 329.154m

7.
6.
5.
4.
3.
2.
1.

NO. REVISION BY MM/DD/YY

The Corporation Of The
CITY OF
KITCHENER

Development Services
Engineering Division

WALTERFEDY

PROPOSED CONDITIONS
SPRING VALLEY ROAD
FROM STA. 4+000 TO STA. 4+100

DESIGNED BY:
DNM

APPROVED BY:
MC

DRAWN BY:
DNM

CHECKED BY:
PR/MC

SCALE: HQR: 1:250
VERT: 1:50

DATE: (MM/DD/YY)
10.24.25

CONSULTANT DWG. No.
XX

SHEET No.
PIC-8

DWG. No.
XXXX