Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

130 King Street West, Suite 2350, Toronto, ON M5X 2A1

Prepared by:

SLR Consulting (Canada) Ltd.

100 Stone Road West, Suite 201, Guelph, ON N1G 5L3

SLR Project No.: 241.030968.00001

March 14, 2024

Revision: 0

Revision Record

Revision	Date	Prepared by	Checked by	Authorized by
0	March 14, 2024	Keni Mallinen	Scott Penton	Scott Penton

Statement of Limitations

This report has been prepared by SLR Consulting (Canada) Ltd. (SLR) for Forgestone Capital Management L.P. (Client) in accordance with the scope of work and all other terms and conditions of the agreement between such parties. SLR acknowledges and agrees that the Client may provide this report to government agencies, interest holders, and/or Indigenous communities as part of project planning or regulatory approval processes. Copying or distribution of this report, in whole or in part, for any other purpose other than as aforementioned is not permitted without the prior written consent of SLR.

Any findings, conclusions, recommendations, or designs provided in this report are based on conditions and criteria that existed at the time work was completed and the assumptions and qualifications set forth herein.

This report may contain data or information provided by third party sources on which SLR is entitled to rely without verification and SLR does not warranty the accuracy of any such data or information.

Nothing in this report constitutes a legal opinion nor does SLR make any representation as to compliance with any laws, rules, regulations, or policies established by federal, provincial territorial, or local government bodies, other than as specifically set forth in this report. Revisions to legislative or regulatory standards referred to in this report may be expected over time and, as a result, modifications to the findings, conclusions, or recommendations may be necessary.



Table of Contents

1.0 Introduction 1
1.1 Focus of Report 1
1.2 Nature of the Subject Lands 1
1.3 Nature of the Surroundings 2
2.0 Transportation Noise Assessment 3
2.1 Transportation Noise Sources 3
2.2 Surface Transportation Noise Criteria 3
2.2.1 Ministry of Environment Publication NPC-300 3
2.2.2 RMOW Noise Policy Implementation Guideline 5
2.2.3 City of Waterloo – Terms of Reference 6
2.3 Traffic Data and Future Projections 6
2.3.1 Roadway Traffic Data 6
2.3.2 Rail Traffic Data 7
2.4 Predicted Sound Levels 8
2.4.1 Façade Sound Levels 9
2.4.2 Outdoor Living Area Sound Levels 12
2.5 Noise Control Measures 13
2.5.1 Façade Assessment 13
2.5.2 Outdoor Living Area Assessment 15
3.0 Environmental Vibration Assessment 15
3.1 Transportation Vibration 15
3.1.1 Transportation Vibration Sources 15
3.1.2 Transportation Vibration Assessment Guidelines 15
3.1.3 Vibration Measurement Program 16
3.1.4 Transportation Vibration Assessment 16
3.2 Industrial Vibration 17
4.0 Stationary Source Noise Assessment 17
4.1 Stationary Source Noise Guidelines 17
4.1.1 Minimum Exclusionary Limits 17
4.1.2 Ambient Sound Levels from Road Traffic 18
4.2 Site Visits and Stationary Source Inventory 19
4.3 Modelled Stationary Sources 20
4.4 Stationary Source Modelling 22

4.5 Predicted Stationary Source Sound Levels 23
4.5.1 Office Building – 565 Kumpf Drive 23
4.5.2 Teledyne DALSA – 575 Kumpf Drive 23
4.5.3 Office/Commercial Building – 101-139 Northfield Drive West 24
4.5.4 Waterloo Nissan – 141 Northfield Drive West 24
4.5.5 Heffner Cabinetry & Woodworking – 145 Northfield Drive West 25
4.5.6 Greystone Club – 155 Northfield Drive West 26
4.5.7 Shoppers Drug Mart – 190 Northfield Drive West 27
4.5.8 Sobeys – 640 Parkside Drive 27
4.5.9 Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive 28
4.5.10 Waterloo Fire Station 3 29
4.5.11 All Stationary Sources 30
4.6 Proposed Mitigation Measures 31
4.6.1 Heffner Cabinetry & Woodworking – 145 Northfield Drive West 31
4.6.2 Sobeys – 640 Parkside Drive 33
4.6.3 Warning Clauses Recommendations 34
5.0 Stationary Source Noise from the Development on Itself 34
5.1 Residential and Mixed Uses 34
5.2 Proposed Flex Commercial and Industrial Condominium Uses 34
6.0 Stationary Source Noise from the Development on the Surroundings 35
6.1 Residential and Mixed Uses 35
6.2 Proposed Flex Commercial and Industrial Condominium Uses 36
7.0 Conclusions and Recommendations 36
8.0 Closure 38
9.0 References 39

Tables in Text

Table 1: NPC-300 Sound Level Criteria for Road and Rail Noise 4
Table 2: NPC-300 OLA Sound Level Criteria for Road and Rail Noise 4
Table 3: NPC-300 Ventilation and Warning Clause Recommendations 5
Table 4: NPC-300 Building Component Assessment Requirements 5
Table 5: Summary of Road Traffic Data Used in Transportation Analysis 7
Table 6: Summary of Rail Traffic Data Used in Transportation Analysis 8
Table 7: Summary of Data Used to Assess Crossing Bells 8

Table 8: Summary of Predicted Worst-Case Transportation Façade Sound Levels 9
Table 9: Summary of Predicted Transportation Outdoor Living Area Sound Levels 12
Table 10: Summary of Façade Glazing Requirements for Proposed Development 13
Table 11: Measured Vibration Levels at Proposed Development from Rail Pass By Events 17
Table 12: NPC-300 Class 1 Continuous, Steady Source Sound Level Limits 18
Table 13: Summary of Road Traffic Data Used to Determine Minimum 1-hr Ambient Sound Levels 19

Appended Figures

Figure 1: Context Plan
Figure 2: Site Plan Excerpt
Figure 3: Predicted Façade Sound Levels – Road Traffic – Daytime
Figure 4: Predicted Façade Sound Levels – Road Traffic – Night-time
Figure 5: Predicted Façade Sound Levels – Rail Sources – Daytime
Figure 6: Predicted Façade Sound Levels – Rail Sources – Night-time
Figure 7: Predicted Façade Sound Levels – Transportation Sources – Daytime
Figure 8: Predicted Façade Sound Levels – Transportation Sources – Night-time
Figure 9: Predicted Outdoor Living Area Sound Levels – Transportation Sources – Daytime
Figure 10: Vibration Measurement Location and Setback Distances
Figure 11: Surrounding Stationary Source Locations
Figure 12: Predicted Façade Sound Levels – Stationary Sources – Office Building, 565 Kumpf Drive – Daytime/Evening
Figure 13: Predicted Façade Sound Levels – Stationary Sources – Office Building, 565 Kumpf Drive – Night-time
Figure 14: Predicted Façade Sound Level Excesses – Stationary Sources – Office Building, 565 Kumpf Drive – Daytime
Figure 15: Predicted Façade Sound Level Excesses – Stationary Sources – Office Building, 565 Kumpf Drive – Evening
Figure 16: Predicted Façade Sound Level Excesses – Stationary Sources – Office Building, 565 Kumpf Drive – Night-time
Figure 17: Predicted OPOR Sound Levels – Stationary Sources – Office Building, 565 Kumpf Drive – Daytime/Evening
Figure 18: Predicted Façade Sound Levels – Stationary Sources – Teledyne DALSA – 575 Kumpf Drive – Daytime/Evening
Figure 19: Predicted Façade Sound Levels – Stationary Sources – Teledyne DALSA – 575 Kumpf Drive – Night-time

Figure 20: Predicted OPOR Sound Levels – Stationary Sources – Teledyne DAISA, 575 Kumpf Drive – Daytime

Figure 21: Predicted OPOR Sound Levels – Stationary Sources – Teledyne DALSA, 575 Kumpf Drive – Evening

Figure 22: Predicted Façade Sound Levels – Stationary Sources – Office/Commercial Building, 101-139 Northfield Drive West – Daytime/Evening

Figure 23: Predicted Façade Sound Levels – Stationary Sources – Office/Commercial Building, 101-139 Northfield Drive West – Night-time

Figure 24: Predicted OPOR Sound Levels – Stationary Sources – Office/Commercial Building, 101-139 Northfield Drive West – Daytime/Evening

Figure 25: Predicted Façade Sound Levels – Stationary Sources – Waterloo Nissan, 141 Northfield Drive West – Daytime/Evening

Figure 26: Predicted Façade Sound Levels – Stationary Sources – Waterloo Nissan, 141 Northfield Drive West – Night-time

Figure 27: Predicted OPOR Sound Levels – Stationary Sources – Waterloo Nissan, 141 Northfield Drive West – Daytime/Evening

Figure 28: Predicted Façade Sound Levels – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Daytime

Figure 29: Predicted Façade Sound Levels – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Evening

Figure 30: Predicted Façade Sound Levels – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Night-time

Figure 31: Predicted Façade Sound Level Excesses – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Daytime – Unmitigated

Figure 32: Predicted Façade Sound Level Excesses – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Evening – Unmitigated

Figure 33: Predicted Façade Sound Level Excesses – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Night-time – Unmitigated

Figure 34: Predicted OPOR Sound Levels – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Daytime

Figure 35: Predicted OPOR Sound Levels – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Evening

Figure 36: Predicted Façade Sound Levels – Stationary Sources – Greystone Club, 155 Northfield Drive West – Daytime/Evening

Figure 37: Predicted Façade Sound Levels – Stationary Sources – Greystone Club, 155 Northfield Drive West – Night-time

Figure 38: Predicted OPOR Sound Levels – Stationary Sources – Greystone Club, 155 Northfield Drive West – Daytime/Evening

Figure 39: Predicted Façade Sound Levels – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Daytime



Figure 40: Predicted Façade Sound Levels – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Evening

Figure 41: Predicted Façade Sound Levels – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Night-time

Figure 42: Predicted Façade Sound Level Excesses – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Daytime

Figure 43: Predicted Façade Sound Level Excesses – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Evening

Figure 44: Predicted Façade Sound Level Excesses – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Night-time

Figure 45: Predicted OPOR Sound Levels – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Daytime

Figure 46: Predicted OPOR Sound Levels – Stationary Sources – Shoppers Drug Mart, 190 Northfield Drive West – Evening

Figure 47: Predicted Façade Sound Levels – Stationary Sources – Sobeys, 640 Parkside Drive – Daytime

Figure 48: Predicted Façade Sound Levels – Stationary Sources – Sobeys, 640 Parkside Drive – Evening

Figure 49: Predicted Façade Sound Levels – Stationary Sources – Sobeys, 640 Parkside Drive – Night-time

Figure 50a: Predicted Façade Sound Level Excesses – Stationary Sources – Sobeys, 640 Parkside Drive – Daytime

Figure 50b: Predicted Façade Sound Level Excesses – Stationary Sources – Sobeys, 640 Parkside Drive – Daytime – 3D (from Northwest)

Figure 51: Predicted Façade Sound Level Excesses – Stationary Sources – Sobeys, 640 Parkside Drive – Evening

Figure 52a: Predicted Façade Sound Level Excesses – Stationary Sources – Sobeys, 640 Parkside Drive – Night-time

Figure 52b: Predicted Façade Sound Level Excesses – Stationary Sources – Sobeys, 640 Parkside Drive – Night-time – 3d (From Northwest)

Figure 53: Predicted OPOR Sound Levels – Stationary Sources – Sobeys, 640 Parkside Drive – Daytime

Figure 54: Predicted OPOR Sound Levels – Stationary Sources – Sobeys, 640 Parkside Drive – Evening

Figure 55: Predicted Façade Sound Levels – Stationary Sources – Onward Manufacturing, 585 Kumpf Drive – Daytime

Figure 56: Predicted Façade Sound Levels – Stationary Sources – Onward Manufacturing, 585 Kumpf Drive – Evening

Figure 57: Predicted Façade Sound Levels – Stationary Sources – Onward Manufacturing, 585 Kumpf Drive – Night-time

Figure 58: Predicted OPOR Sound Levels – Stationary Sources – Onward Manufacturing, 585 Kumpf Drive – Daytime

Figure 59: Predicted OPOR Sound Levels – Stationary Sources – Onward Manufacturing, 585 Kumpf Drive – Evening

Figure 60: Predicted Façade Sound Levels – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Daytime – Emergency Generator Testing

Figure 61: Predicted Façade Sound Level Excesses – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Daytime – Emergency Generator Testing

Figure 62: Predicted OPOR Sound Levels – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Emergency Generator Testing - Daytime

Figure 63: Predicted Façade Sound Levels – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Daytime/Evening – Continuous Sources

Figure 64: Predicted Façade Sound Levels – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Night-time – Continuous Sources

Figure 65: Predicted Façade Sound Level Excesses – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Daytime – Continuous

Figure 66: Predicted Façade Sound Level Excesses – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Evening – Continuous

Figure 67: Predicted Façade Sound Level Excesses – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Night-time – Continuous

Figure 68: Predicted OPOR Sound Levels – Stationary Sources – Fire Station 3, 150 Northfield Drive West – Continuous – Daytime/Evening

Figure 69: Predicted Façade Sound Levels – Stationary Sources – All Sources – Daytime

Figure 70: Predicted Façade Sound Levels – Stationary Sources – All Sources – Evening

Figure 71: Predicted Façade Sound Levels – Stationary Sources – All Sources – Night-time

Figure 72: Predicted Façade Sound Level Excesses – Stationary Sources – All Sources – Daytime

Figure 73: Predicted Façade Sound Level Excesses – Stationary Sources – All Sources – Evening

Figure 74: Predicted Façade Sound Level Excesses – Stationary Sources – All Sources – Night-time

Figure 75: Predicted OPOR Sound Levels – Stationary Sources – All Sources – Daytime/Evening

Figure 76: Predicted Façade Sound Level Excesses – Stationary Sources – Heffner Cabinetry & Woodworking, 145 Northfield Drive West – Daytime – Mitigation

Appendices

Appendix A **Declaration Statements**
Appendix B **Development Drawings**
Appendix C **Traffic Data and Calculations**
Appendix D **STAMSON Output File**
Appendix E **Ventilation, Warning Clause and Mitigation Summary**
Appendix F **Ambient Road Traffic Sound Levels**
Appendix G **Surrounding Stationary Sources – Facility Review**
Appendix H **Stationary Source Modelling Information**
Appendix I **Stationary Source Assessment Tables**
Appendix J **Stationary Source Sample Calculations**

1.0 Introduction

SLR Consulting (SLR) was retained by Forgestone Capital Management L.P. to conduct an environmental noise and vibration assessment for the proposed development at 170 Northfield Drive West in Waterloo, Ontario ("the Project site"). This report is in support of Official Plan Amendment (OPA) and Zoning Bylaw Amendment (ZBA) applications for the development.

Copies of Regional Municipality of Waterloo (RMOW) Declaration Statements are included in **Appendix A**.

1.1 Focus of Report

In keeping with Regional Municipality of Waterloo (RMOW) and City of Waterloo requirements and Terms of Reference, this report examines the potential for:

- Noise impacts of the environment on the proposed development;
- Vibration impact of the environment on the proposed development;
- Noise impacts of the proposed development on the environment; and
- Noise impacts of the proposed development on itself.

Mechanical systems associated with the development (e.g., cooling and ventilation equipment) have not been sufficiently designed at this stage and should be assessed at a future date. A general discussion has been included in this report to address the impacts of the proposed development on the environment and on itself.

1.2 Nature of the Subject Lands

The Project site is located at 170 Northfield Drive West, Waterloo, near the intersection of Northfield Drive West and Weber Street North. The Project site is currently vacant to the east and northeast of Parkside Drive and contains single-storey commercial/retail/office buildings on the west side of Parkside Drive. These will be demolished in the future to accommodate the proposed development.

The full build-out of the proposed development will include the following mixed-use structures:

- Building A
  - Podium – 6-storey height
  - Tower – 29-storey height
- Building B
  - Podium – 6-storey height
  - Tower B1 – 40-storey height
  - Tower B2 – 40-storey height
- Building C
  - Podium – 6-storey height
  - Tower C1 – 25-storey height
  - Tower C2 – 36-storey height
- Building D
  - Podium – 6-storey height
  - Tower D1 – 35-storey height
  - Tower D2 – 35-storey height
- Building E
  - Podium – 6-storey height
  - Tower E1 – 27-storey height
- Building F
  - Podium – 6-storey height
  - Tower F1– 35-storey height
  - Tower F2– 30-storey height
- Building G
  - Podium – 6-storey height
  - Tower G1 – 28-storey height
  - Tower G2– 25-storey height
- Building H
  - Podium – 6-storey height
  - Tower H1 – 27-storey height

In addition to the mixed-use residential buildings, two single-storey Flex Commercial buildings (Flex Commercial I and Flex Commercial J) are proposed north of Buildings A/B and E/F, and two single-storey Industrial Condominium buildings are proposed at the north extent of the Project site (Industrial Condo K and Industrial Condo L).

Access to the proposed development will be via Parkside Drive. Access to the Industrial Condo buildings will be via a proposed public road extending north from the existing Parkside Drive right of way.

A copy of the site plans, elevations, and preliminary floor plans are included for reference in Appendix B. A site plan is also provided for reference as Figure 2.

1.3 Nature of the Surroundings

The Project site is bounded by the following:

- The Waterloo Central Railway, lands containing employment land uses (e.g., office uses, Teledyne DALSA and Onward Manufacturing Company/Broil King), and Conestoga Parkway/Highway 85 to the east;
- Northfield Drive West and lands containing employment uses (e.g., office uses, vehicle dealerships, Heffner Cabinetry & Woodworking) to the south;
- Existing commercial/retail uses, Weber Street North, and residential dwellings to the west; and
- Employment land uses to the north.

A context plan is shown in Figure 1.

Part 1: Impacts of the Environment on the Development

In assessing potential impacts of the environment on the proposed development, the focus of this report is to assess:

- Transportation (road, rail, light rail transit (LRT)) noise impacts on the proposed development;
- Environmental vibration (particularly transportation rail, LRT) impacts on the proposed development;
- Stationary noise impacts from the surrounding land uses on the proposed development; and
- Stationary noise impacts from the proposed development mechanical equipment onto the development itself, and onto surrounding noise-sensitive receptors.

The nearest airport is located more than 12 km southeast of the proposed development. Therefore, aircraft noise impacts have not been considered further in this study.

2.0 Transportation Noise Assessment

2.1 Transportation Noise Sources

Transportation sources with the potential to produce noise at the proposed development are:

- Roadway noise from Northfield Drive West, Weber Street North, Kumpf Drive, Parkside Drive and Highway 85;
- Rail noise from freight trains along the Waterloo Central Railway Guelph spur line; and
- Rail noise from the Grand River Transit ION LRT.

Transportation noise from these sources has been predicted, and this information has been used to determine façade, ventilation, and warning clause requirements for the proposed development.

2.2 Surface Transportation Noise Criteria

2.2.1 Ministry of Environment Publication NPC-300

Noise-Sensitive Development

Ministry of the Environment, Conservation and Parks (MECP) Publication NPC-300 provides sound level criteria for noise-sensitive developments. The applicable portions of NPC-300 are Part C – Land Use Planning and the associated definitions outlined in Part A – Background. Tables 1 to 4 summarize the applicable surface transportation (road and rail) criteria.

Location-Specific Criteria

Table 1 summarizes criteria in terms of energy equivalent sound exposure levels (L_{eq}) for specific noise-sensitive locations. Both outdoor and indoor locations are identified, with the focus of outdoor areas being amenity spaces. Indoor criteria vary with sensitivity of the space. As a result, Sleeping Quarters have more stringent criteria than Living/Dining Room spaces.

Table 1: NPC-300 Sound Level Criteria for Road and Rail Noise

Type of Space	Time Period	Energy Equivalent Sound Exposure Level L_{eq} [5] (dBA)		Assessment Location
		Road	Rail [1]	
Outdoor Amenity Area	Daytime (0700-2300h)	55	55	Outdoors [2]
Living/Dining Room [3]	Daytime (0700-2300h)	45	40	Indoors [4]
	Night-time (2300-0700h)	45	40	Indoors [4]
Sleeping Quarters	Daytime (0700-2300h)	45	40	Indoors [4]
	Night-time (2300-0700h)	40	35	Indoors [4]

Notes: [1] Whistle noise is excluded for OLA noise assessments and included for Living/Dining Room and Sleeping Quarter assessments, where applicable.

[2] Road and Rail noise impacts are to be combined for assessment of OLA impacts.

[3] Residence area Dens, Hospitals, Nursing Homes, Schools, Daycares are also included. During the nighttime period, Schools and Daycares are excluded.

[4] An assessment of indoor noise levels is required only if the criteria in **Table 4** are exceeded.

[5] L_{eq} – the energy equivalent sound level, integrated over the time period shown.

Outdoor Living Areas

Table 2 summarizes the noise mitigation requirements for outdoor amenity areas (“Outdoor Living Areas” or “OLAs”).

For the assessment of OLA sound levels, total surface transportation noise is determined by combining road and rail traffic sound levels. Whistle noise from trains is not included in the determination of outdoor sound levels.

Table 2: NPC-300 OLA Sound Level Criteria for Road and Rail Noise

Time Period	OLA Energy Equivalent Sound Exposure Level L_{eq} (dBA)	Mitigation/Warning Clause Requirements
Daytime (0700-2300h)	≤ 55	• None
	56 to 60 inc.	• Noise barrier OR Type A warning clause
	> 60	• Noise barrier to reduce noise to 55 dBA OR • Noise barrier to reduce noise to 60 dBA and Type B warning clause

Ventilation and Warning Clauses

Table 3 summarizes requirements for ventilation where windows would potentially have to remain closed as a means of noise control. Despite implementation of ventilation measures where required, if sound levels exceed the guideline limits in Table 1, warning clauses advising future occupants of the potential excesses are also recommended. Warning clauses also apply to OLAs.



Table 3: NPC-300 Ventilation and Warning Clause Recommendations

Assessment Location	Time Period	Energy Equivalent Sound Exposure Level – L_{eq} (dBA)		Ventilation and Warning Clause Requirements [2]
		Road	Rail [1]	
Outdoor Living Area	Daytime (0700-2300h)	56 to 60 incl.		Type A Warning Clause
Plane of Window	Daytime (0700-2300h)	≤ 55		None
		56 to 65 incl.		Forced Air Heating with provision to add air conditioning + Type C warning clause
		> 65		Central Air Conditioning + Type D warning clause
	Night-time (2300-0700h)	51 to 60 incl.		Forced Air Heating with provision to add air conditioning + Type C Warning Clause
		> 60		Central Air Conditioning + Type D Warning Clause

Notes: [1] Whistle noise is excluded from assessment.
[2] Road and Rail noise is combined for determining Ventilation and Warning Clause requirements

Building Component Requirements

Table 4 provides sound level thresholds which, if exceeded, trigger a requirement for the building shell components (i.e., exterior walls, windows) to be designed accordingly to meet the applicable indoor sound criteria.

Table 4: NPC-300 Building Component Assessment Requirements

Assessment Location	Time Period	Energy Equivalent Sound Exposure Level – L_{eq} (dBA)		Component Requirements
		Road	Rail [1]	
Plane of Window	Daytime (0700-2300h)	> 65	> 60	Designed/ Selected to Meet Indoor Requirements [2]
	Night-time (2300-0700h)	> 60	> 55	

Notes: [1] Whistle noise is included in assessment.
[2] Building component requirements are assessed separately for Road and Rail, and then combined for a resultant sound isolation parameter.

2.2.2 RMOW Noise Policy Implementation Guideline

The RMOW has published Noise Policy Implementation Guidelines (last updated October 22, 2019) for assessment of surface transportation (road and rail) sound levels. The applicable portions for new developments are outlined in Part A – New Development Impacted by Noise from Roads and Railways.

The RMOW Noise Policy Implementation Guidelines and associated sound level limits, ventilation requirements and building component requirements generally follow those in MECP Publication NPC-300. The exception is that night-time indoor sound level limits are not prescribed for living/dining room spaces. Therefore, for these indoor spaces, guideline limits from MECP Publication NPC-300 have been conservatively applied.

In the absence of specific warning clause language published by the RMOW, MECP warning clauses have been recommended in this assessment (where warranted).

2.2.3 City of Waterloo – Terms of Reference

The City of Waterloo has published a document entitled Terms of Reference: Noise Study, last updated June 30, 2023. The Terms of Reference indicate that road traffic shall be evaluated under the RMOW Noise Policy Implementation Guideline discussed above.

2.3 Traffic Data and Future Projections

2.3.1 Roadway Traffic Data

Future average annual daily traffic (AADT) volumes and vehicle percentages for Northfield Drive West, Kumpf Drive, Parkside Drive and Weber Street North were provided by the RMOW Transportation Division. Day/night splits were also provided. Parkside Drive and Kumpf Drive are under the jurisdiction of the City of Waterloo, who were contacted to verify the forecasts provided by the RMOW. The City of Waterloo could not verify the forecasts, but provided AADT estimates for these roadways. For Kumpf Drive, the data from RMOW were determined to be more conservative than that from the City, and it was therefore used in the assessment. For Parkside Drive, the higher AADT provided by the City was used in the assessment, along with the medium and heavy truck percentages provided by the RMOW.

Due to topographic variability and roadway width, eastbound and westbound lands of Northfield Drive West were considered separately, with 50% of roadway volumes applied to each direction of traffic.

Highway 85 AADT and average annual daily truck traffic (AADTT) volumes for 2019 were obtained from the Ministry of Transportation (MTO) iCorridor database. Segments north and south of Northfield Drive West were considered individually, as the total traffic volumes varied. The maximum annual growth rate for the segments was calculated to be approximately 1.4% per year from 2009 to 2019, north of Northfield Drive West. This was conservatively applied to all Highway 85 traffic data for the purposes of the assessment. The 2019 AADT volumes were projected to future year 2034 at the 1.4% annual growth rate. Commercial vehicle percentages were based on the Annual Average Daily Truck Traffic (AADTT) relative to the AADT, and a medium/heavy truck ratio of 25%/75% and it was assumed. A day/night split of 85%/15% was assumed.

Copies of all traffic data, correspondence and related calculations are provided for reference in Appendix C. Table 5 summarizes the road traffic volumes and associated details used in the analysis.



Table 5: Summary of Road Traffic Data Used in Transportation Analysis

Roadway	Future Traffic Volumes (AADT)	% Day/Night Volume Split		Commercial Vehicle Breakdown		Vehicle Speed (km/hr)
		Daytime	Night-time	% Medium Trucks	% Heavy Trucks	
Kumpf Drive	2,600	90	10	3.0	6.0	50
Parkside Drive	10,142	90	10	2.0	6.0	50 [1]
Weber Street North	15,500	90	10	2.0	3.0	60
Northfield Drive West	32,700	90	10	1.0	2.0	60
Highway 85 – North of Northfield Drive West	28,333	85	15	3.2	9.7	90
Highway 85 – South of Northfield Drive West	52,355	85	15	1.8	5.3	90

Notes: [1] The current posted speed limit of Parkside Drive north of Northfield Drive West is 20 km/hr. The City of Waterloo has indicated a speed limit of 50 km/hr, which has been used in the assessment.

2.3.2 Rail Traffic Data

2.3.2.1 Train Movements

The Waterloo Central Railway Guelph Spur line is located along the eastern portion of the Project site. SLR has requested rail traffic volume forecasts from CN, which have not been received as of the date of this report.

Based on observations collected during site visits to the Project site/surrounding area, and a review of the Government of Canada Rail-Road Grade Crossings Inventory, existing freight train volumes were estimated. It was observed that two freight trains (one northbound and south southbound) pass by the Project site during night-time hours, between 2300 hours and 0700 hours. A night-time volume of two trains was forecasted to future year 2034 at a 2.5% annual growth rate, which is typical in rail noise assessments.

In the absence of information directly from CN, trains were considered as typical ‘way freight’ trains with up to 4 locomotives and up to 25 rail cars. A travel speed of 24 km/hr was assumed, based on information contained in the Grade Crossings Inventory for the Northfield Drive West crossing, and typical maximum allowable CN travel speeds along spur lines. CN rail traffic data considered in the analysis is summarized in Table 6. Once rail traffic data is provided by CN, the rail traffic noise assessment can be updated as part of future Planning submissions.

In accordance with bylaw restrictions in the City of Waterloo, rail whistles are not permitted until trains travel north of Farmers Market Road, more than 1 km north of the residential buildings in the proposed development. Therefore, whistle noise from freight trains was not considered further in the assessment.

Headway times for Grand River ION LRT trains were obtained from the RMOW Transportation Division. Headway volumes are provided for reference in Appendix C and are based on Baseline Service Plan 2 (2021-2024) of the Rapid Transit’s Project Agreement. Current daytime and night-time volumes were calculated based on the headway times during the operational hours of the LRT, between 0500 hours and 0100 hours the following day.

In the absence of future service plans/headway time estimates for the ION LRT, current total volumes were projected to future year 2034 at a 2.5% annual growth rate, which is typically applied in rail noise assessments. An LRT travel speed of 50 km/hr was used in the assessment. As wheel squeal was occasionally audible for LRT trains turning southbound into Northfield Station or turning eastbound onto Northfield Drive West, a 5 dB tonality penalty was conservatively applied to all ION rail movements.

Rail traffic data used in the assessment is summarized in Table 6, with rail modelling inputs included for reference in Appendix C.

Table 6: Summary of Rail Traffic Data Used in Transportation Analysis

Railway Source	Train Type	Max. Locomotives per Train	Max. Cars per Train	Forecasted Train Volumes		Train Speed (km/hr)
				Daytime	Night-time	
CN	Way Freight	4	25	0	3	24
ION	LRT	0	1	134	22	50

2.3.2.2 ION LRT Crossing Bell

During site visits by SLR staff to the Project site, it was noted that two crossing bells sound on the south side of the Northfield Drive West crossing when LRT trains approach or depart Northfield Station. Crossing arms are lowered to restrict eastbound traffic along Northfield Drive West, and the crossing bells ring from the time the arms begin lowering until they are raised again.

SLR obtained a sound level measurement of the crossing bell during a site visit on February 1, 2024. Based on the measurement, each crossing bell is estimated to have a sound power level of approximately 105 dBA.

To account for noise impacts from the crossing bells, their sound levels at the proposed development were assessed as train whistles would typically be assessed. It was estimated that the crossing bells will ring for 120 seconds (2 minutes) per future LRT train movement. Table 7 presents the estimated total duration of crossing bell operating time assessed during daytime and night-time periods.

Table 7: Summary of Data Used to Assess Crossing Bells

Source	Sound Power Level (dBA)	Forecasted Train Volumes		Modelled Duration of Crossing Bell Noise (minutes)	
		Daytime	Night-Time	Daytime	Night-Time
LRT Crossing Bell	105	134	22	269	43

2.4 Predicted Sound Levels

Future road traffic sound levels at the proposed development were predicted using Cadna/A, a commercially available noise propagation modelling software. Roadways were modelled as line sources of sound, with sound emission rates calculated using the ORNAMENT algorithms, the road traffic noise model of the MECP. These predictions were validated and are equivalent to those made using the MECP's ORNAMENT or STAMSON v5.04 road traffic noise models. A STAMSON validation file is included for reference in Appendix D.

Rail traffic sound levels at the proposed development were predicted using the U.S. Department of Transportation Federal Transit Administration ("FTA") and Federal Railway Administration ("FRA") rail noise modelling algorithms included in Cadna/A software. The FTA/FRA algorithms are the replacement models for the former MECP "STEAM" model and are written into the current draft version of MECP Publication NPC-306, which will replace the current NPC-206 guideline on transportation noise prediction. The FTA/FRA algorithms have been used in numerous Environmental Assessments ("EAs") for CN railway projects, as well as in numerous land use planning projects across the province.

Sound levels were predicted along the facades of the proposed development using the "building evaluation" feature of Cadna/A. This feature allows for noise levels to be predicted across the entire façade of a structure. OLA sound levels were predicted at a height of 1.5 m above the building rooftop, at the centre of the identified terraces.

A 1.1 m high parapet wall (barrier) was considered around the amenity terraces, as shown in the section drawings provided for reference in Appendix B. The parapet should be constructed without gaps or cracks, meeting a minimum surface density requirement of 20 kg/m^2.

2.4.1 Façade Sound Levels

Predicted worst-case façade sound levels are presented in Table 8. The transportation façade sound levels at the proposed development, showing the ranges of predicted daytime and night-time sound levels are shown in Figure 3 (roadway, daytime) Figure 4 (roadway, night-time), Figure 5 (rail, daytime), Figure 6 (rail, night-time), Figure 7 (road and rail total, daytime) and Figure 8 (road and rail total, night-time).

Table 8: Summary of Predicted Worst-Case Transportation Façade Sound Levels

Building	Façade[1]	Predicted Road Traffic Sound Level[2]		Predicted Rail Traffic Sound Level[2]		Predicted Total Transportation Sound Level	
		L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)
Building A Podium	North	63	57	28	30	63	57
	South	63	56	30	27	63	56
	West	67	60	28	25	67	60
Building A Tower	North	61	55	28	33	61	55
	East	55	50	35	34	55	51
	South	60	54	43	38	60	54
	West	63	57	28	25	63	57
Building B1 Tower	North	59	53	29	36	59	53
	East	58	53	42	39	58	53
	South	58	52	46	41	58	53
	West	56	49	31	28	56	49

Building	Façade[1]	Predicted Road Traffic Sound Level[2]		Predicted Rail Traffic Sound Level[2]		Predicted Total Transportation Sound Level	
		L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)
Building B2 Tower	North	59	54	30	39	59	54
	East	63	58	50	47	63	58
	South	61	56	50	46	61	56
	West	53	46	33	30	53	47
Building C1 Tower	North	55	50	31	31	55	50
	East	57	52	49	44	58	53
	South	58	53	51	46	59	54
	West	53	46	32	29	53	46
Building C2 Tower	North	59	54	33	38	59	54
	East	64	59	56	51	65	60
	South	65	59	56	51	66	60
	West	60	54	38	34	60	54
Building D Podium	North	62	56	31	28	62	56
	South	69	63	49	44	69	63
	West	68	61	30	26	68	61
Building D1 Tower	North	59	52	29	29	59	52
	East	63	57	49	44	63	57
	South	67	60	49	44	67	60
	West	65	58	30	27	65	58
Building D2 Tower	North	54	48	34	30	54	48
	East	63	57	53	48	63	58
	South	66	60	53	48	66	60
	West	61	55	33	29	61	55
Building E Podium	North	63	57	27	29	63	57
	East	67	60	29	29	67	60
	South	63	56	31	28	63	56
Building E Tower	North	61	55	28	32	61	55
	East	63	57	38	35	63	57
	South	60	54	35	31	60	54
	West	56	50	26	23	56	50



Building	Façade[1]	Predicted Road Traffic Sound Level[2]		Predicted Rail Traffic Sound Level[2]		Predicted Total Transportation Sound Level	
		L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)	L_{eq} Day (dBA)	L_{eq} Night (dBA)
Building F1 Tower	North	60	54	25	30	60	54
	East	58	52	34	33	58	52
	South	58	51	34	31	58	52
	West	60	53	25	22	60	53
Building F2 Tower	North	56	50	25	27	56	50
	East	55	49	33	30	55	49
	South	59	52	32	29	59	52
	West	60	53	25	22	60	53
Building G Podium	North	53	46	26	23	53	46
	South	70	63	46	41	70	63
	West	63	57	27	23	63	57
Building G1 Tower	North	55	49	26	23	55	49
	East	62	56	39	35	62	56
	South	66	60	44	39	66	60
	West	63	56	26	23	63	56
Building G2 Tower	North	54	48	27	25	54	48
	East	62	56	39	36	62	56
	South	66	60	45	40	66	60
	West	61	55	27	24	61	55
Building H1 Podium	East	69	63	47	43	69	63
	South	70	64	48	43	70	64
Building H1 Tower	North	58	52	28	27	58	52
	East	65	59	47	42	66	59
	South	67	61	47	42	67	61
	West	62	55	28	25	62	55

Notes: [1] Building façade roadway sound levels are shown in Figure 3 through Figure 8 inclusive for the transportation noise assessment.
[2] Sound levels presented are the highest for the identified building facade.

The façade road traffic sound levels are predicted to exceed 65 dBA during the daytime (i.e., the threshold described in Table 4) along portions of Building A, Building D, Building E, Building G and Building H. Therefore, an assessment of building components is required. Refer to Section 2.5.1.

2.4.2 Outdoor Living Area Sound Levels

The proposed development will have common outdoor amenity terraces at Floor 7 for all Buildings, between and adjacent to residential towers. Planned terrace locations are shown in Appendix B development drawings.

The predicted total transportation sound levels at the proposed development OLAs are shown in Figure 9 and summarized in Table 9.

Table 9: Summary of Predicted Transportation Outdoor Living Area Sound Levels

OLA Assessment Location	Assessment Location Description	Predicted Sound Level, L_{eq} Daytime (dBA)
OLA A-1	Building A – East Terrace	51
OLA A-2	Building A – South Terrace	51
OLA A-3	Building A – North Terrace	55
OLA B-1	Building B – West Terrace	50
OLA B-2	Building B – North Terrace	49
OLA B-3	Building B – Central Terrace	52
OLA B-4	Building B – East Terrace	56
OLA C-1	Building C – Central Terrace	50
OLA C-2	Building C – East Terrace	56
OLA C-3	Building C – South Terrace	47
OLA D-1	Building D – West Terrace	50
OLA D-2	Building D – North Terrace	52
OLA D-3	Building D – East Terrace	55
OLA E-1	Building E – West Terrace	50
OLA E-2	Building E – North Terrace	55
OLA E-3	Building E – South Terrace	49
OLA F-1	Building F – West Terrace	49
OLA F-2	Building F – East Terrace	50
OLA G-1	Building G – Terrace	47
OLA H-1	Building H1 – Terrace	48

Predicted daytime transportation sound levels exceed 55 dBA but are below 60 dBA at Building B and Building C OLAs; therefore, warning clauses are required. Refer to Section 2.5.2. At all other locations, predicted sound levels are below 56 dBA, and no warning clauses or mitigation are required.

As the proposed development includes common amenity spaces for all occupants, private terraces/ balconies are not considered to be the only outdoor amenity spaces available. Therefore, an assessment of private terraces and balconies was excluded based on the definitions outlined in MECP Publication NPC-300.

2.5 Noise Control Measures

2.5.1 Façade Assessment

2.5.1.1 Building Components

An assessment of indoor noise levels is required because façade sound levels due to road traffic exceed 65 dBA during the daytime period on the south facades of buildings along Northfield Drive West.

Indoor sound levels and required facade Sound Transmission Classes (STCs) were estimated using the procedures outlined in National Research Council Building Practice Note 56 (BPN-56). Detailed floor plans and elevation drawings were not available at the time of the assessment. The preliminary façade requirements analysis is therefore based on the following assumptions.

- Non-glazing portions of the exterior walls are assumed to have a rating of STC 45 (i.e., representing a spandrel panel construction);
- For living/dining rooms, 70% of the exterior facade is vision glass/patio doors and rooms have intermediate absorption; and
- For bedrooms, 70% of the exterior wall is vision glass and rooms have intermediate absorption.

Upgraded building façade requirements based on the total transportation façade sound levels and assumptions listed above are outlined in **Table 10**.

Table 10: Summary of Façade Glazing Requirements for Proposed Development

Building	Applicable Façade(s)/ Location(s)	Non-Glazing Components [1]	Glazing STC Requirements [1]	
			Living/Dining Room	Bedroom
Building C2 Tower	Southwest Corner	45	OBC	30
Building D Podium	South Façade	45	OBC	30
	Southwest Corner	45	30	33
Building D1 Tower	Southwest Corner	45	OBC	31
Building D2 Tower	Southwest Corner	45	OBC	30
Building E Podium	Northeast/ Southeast Corners	45	OBC	31
Building G Podium	South Façade	45	OBC	31
	Southwest Corner	45	31	34
Building G1 Tower	Southwest/ Southeast Corners	45	OBC	30

Building	Applicable Façade(s)/ Location(s)	Non-Glazing Components [1]	Glazing STC Requirements [1]	
			Living/Dining Room	Bedroom
Building G2 Tower	Southwest/ Southeast Corners	45	OBC	30
Building H Podium	South Façade	45	OBC	31
	Southwest/ Southeast Corners	45	31	34
Building H Tower	Southwest/ Southeast Corners	45	OBC	31
Notes: [1] OBC = meeting the minimum non-acoustical requirements of the Ontario Building Code, with a rating of STC 29 for windows and STC 45 for exterior walls.				

It is predicted that, with a non-glazing component meeting STC 45, windows constructed to the minimum non-acoustical requirements of the OBC will be sufficient to meet the indoor noise guidelines of the MECP at all other locations within the proposed development.

The building façade requirements should be reviewed by an acoustical consultant when detailed suite layouts and elevations are available.

2.5.1.2 Ventilation and Warning Clause Requirements

The requirements for warning clauses are summarized in Table 3. Where required, the warning clauses should be included in agreements registered on Title for the residential units, in all agreements of purchase and sale or lease, and all rental agreements.

Based on the total predicted transportation façade sound levels, forced air heating with provisions for future installation of central air conditioning, and an MECP Type C warning clause, is required for all units with façade sound levels from road and rail traffic that are between 56 and 65 dBA during the daytime, or between 51 and 60 dBA during night-time hours. This applies to residential units in the following buildings:

- Building A Tower;
- Building B1 Tower and Building B2 Tower;
- Building C1 Tower;
- Building E Tower; and
- Building F1 Tower and Building F2 Tower.

Furthermore, central air conditioning and an MECP Type D warning clause is required for units with façade sound levels from road and rail traffic exceeding 65 dBA during the daytime or 60 dBA during the night-time. This applies to the following units:

- Building A Podium;
- Building C2 Tower;
- Building D Podium;
- Building D1 Tower and Building D2 Tower;
- Building E Podium;

- Building G Podium;
- Building G1 Tower and Building G2 Tower; and
- Building H1 Podium and Building H1 Tower.

All ventilation requirements and warning clauses are summarized in Appendix E.

2.5.2 Outdoor Living Area Assessment

Predicted daytime transportation sound levels exceed 55 dBA but are below 60 dBA at some OLA locations in the proposed development. Therefore, an MECP Type A warning clause is required for residential units in the following buildings:

- Building B Podium, Building B1 Tower and Building B2 Tower; and
- Building C Podium, Building C1 Tower and Building C2 Tower;

At all other locations, predicted OLA sound levels are below 55 dBA; warning clauses and physical mitigation measures are not required.

All OLA warning clauses are summarized in Appendix E.

3.0 Environmental Vibration Assessment

3.1 Transportation Vibration

3.1.1 Transportation Vibration Sources

Transportation vibration sources with the potential to produce vibration at the proposed development are the Waterloo Central Railway Guelph Spur rail line and the Grand River ION LRT. Both transportation vibration sources are located within 75 m of the nearest buildings associated with the proposed development.

3.1.2 Transportation Vibration Assessment Guidelines

There are no Ministry of the Environment guidelines with respect to railway vibration for land use approvals. The Railway Association of Canada and Federation of Canadian Municipalities (“RAC/FCM”), in conjunction with CN, have published guidelines and recommend that vibration impact assessments be conducted to evaluate potential for adverse vibration impacts. These guidelines are considered in this assessment.

The following are outlined in the RAC/FCM guidelines:

- Ground-borne vibration transmission is to be evaluated through site testing to determine if dwellings within 75 metres of the railway rights-of-way will be impacted by vertical vibration velocity in excess of 0.14 mm/sec root mean square (RMS) between 4 Hz and 200 Hz.
- The monitoring system should be capable of measuring frequencies between 4 Hz and 200 Hz, +/- 3 dB, with an RMS averaging time constant of 1 second.
- If excesses are predicted, mitigation measures should be recommended to lower vibration levels in sensitive areas to below 0.14 mm/sec RMS on and above the first floor of the dwelling.

3.1.3 Vibration Measurement Program

The Waterloo Central Railway Guelph Spur line runs north-south, perpendicular to Northfield Drive West and immediately east of the proposed development.

The railway tracks are located approximately 22 m from the nearest proposed development building footprints. The Grand River Transit ION LRT westbound/southbound tracks are also located approximately 65 m southeast of the nearest proposed development building footprint.

A site visit was conducted on January 26, 2024 by SLR staff to deploy a vibration monitor and record measurements of rail-induced ground-borne vibration at the Project site. Vibration data were recorded on the existing 170 Northfield Drive West property towards the southeastern portion of the Project site. The measurement location is shown in Figure 10.

Vibration velocity amplitudes were collected using a Sigicom C22 monitoring unit, and a trail camera was used to obtain confirmatory photographs/videos of freight rail movements during the monitoring period. The vibration monitors were set to trigger when the peak vibration levels exceeded 0.10 mm/s (peak particle velocity, PPV). The geophone signals were sampled at 4096 Hz. When the preset trigger levels were exceeded, time histories were recorded between a frequency range of 1 Hz to 500 Hz. The geophone has a calibrated sensitivity within +/- 2%.

The collected vibration data were post-processed in MATLAB to compute the 1-second sliding window RMS amplitudes of vibration velocity in units of mm/s.

3.1.4 Transportation Vibration Assessment

Eight (8) measurements of freight train pass by events were recorded between January 26 and February 1, 2024. During this time the Grand River Transit ION LRT was also operating between the hours of 0500 hours and 0100 hour the following day.

All pass by events of the ION LRT were below the 0.10 mm/s PPV threshold trigger for the unit, below the vibration levels induced by freight rail traffic, and well below the 0.14 mm/s RMS guideline limit. Recorded vibration levels from the freight movements were significantly higher in magnitude compared to the ION LRT movements. Therefore, further detailed assessment of the ION LRT vibration impacts was not completed.

Based on the proposed height of the nearest development buildings, the foundation is expected to be constructed using masonry on piles. Using estimated (screening-level) values provided in the U.S. Federal Transit Administration (“FTA”) Transit Noise and Vibration Impact Assessment Manual (2018), losses from coupling of the building foundation to the surrounding soil were considered. A coupling loss of -10 VdB was applied to the measured vibration levels. The nearest proposed development buildings to the rail tracks are also shown in the development drawings (Appendix B) to contain six storeys of parking, with the vibration-sensitive (residential) units starting on the 8th floor of the towers (i.e., Towers C2 and B2). Floor-to-floor attenuation losses were not considered in the measured vibration levels. Losses associated with floor-to-floor attenuation are expected to result in lower vibration levels than those presented in the following tables; therefore, the assessment is considered conservative.

The vertical vibration velocities near the southeast corner of the proposed development were found to range between approximately 0.08 mm/s RMS to 0.115 mm/s RMS with coupling losses applied. These are below the guideline limit of 0.14 mm/s RMS. Detailed results are provided below in Table 11.

Table 11: Measured Vibration Levels at Proposed Development from Rail Pass By Events

Measurement Location	Description	Approximate Distance to Track (m)	Rail Pass By Time Stamp	RMS Vibration Velocity (mm/s)
Location 1	Near Closest Building Foundation	15	01/26/2024 23:13	0.115
			01/27/2024 01:25	0.080
			01/29/2024 23:14	0.092
			01/30/2024 01:39	0.083
			01/30/2024 23:13	0.110
			01/31/2024 01:26	0.077
			01/31/2024 23:17	0.098
			02/01/2024 01:17	0.102
Guideline Limit				**0.14 mm/s**

All measured vertical vibration levels were found to be well below the 0.14 mm/s RMS FCM/RAC guidelines at the nearest residential setback. Mitigation of rail-induced vibration is not required.

3.2 Industrial Vibration

Based on observations collected during site visits by SLR staff (January 26, 2024 and February 1, 2024) and review of other land uses in the surrounding area, there are no existing or proposed significant industrial vibration sources in proximity to the proposed development. A detailed industrial vibration assessment was therefore not completed, and industrial vibration is not of concern for the proposed development.

4.0 Stationary Source Noise Assessment

4.1 Stationary Source Noise Guidelines

4.1.1 Minimum Exclusionary Limits

MECP noise guidelines for stationary source noise impacting residential developments are given in MECP Publication NPC-300. The applicable portions of NPC-300 are Part C – Land Use Planning and the associated definitions outlined in Part A – Background. The City of Waterloo document Terms of Reference: Noise Study also references Publication NPC-300; these guidelines have been considered in this assessment.

The acoustic environment surrounding the proposed development is generally dominated by roadway noise from Northfield Drive West, Weber Street North, Highway 85, Parkside Drive and Kumpf Drive during all periods of the day. Therefore, the proposed development is considered to be located in a Class 1 area.

The sound level limits for steady sound sources are expressed as a 1-hr equivalent sound level (L_{eq}(1 hr) values, in dBA) and is the higher of the NPC-300 exclusionary limits and the existing background sound level. The NPC-300 stationary source noise guidelines in a Class 1 Area are summarized in Table 12 for steady (continuous) sound sources.

Table 12: NPC-300 Class 1 Continuous, Steady Source Sound Level Limits

Point of Reception Category	Time Period	Minimum Exclusionary Sound Level Limit L_{eq}(1-hr), dBA[1]
Outdoors	Daytime (0700-1900h) Evening (1900-2300h) Night-time (2300-0700h)	50 50 N/A[3]
Plane of Window [2]	Daytime (0700-1900h) Evening (1900-2300h) Night-time (2300-0700h)	50 50 45

Notes: [1] Or minimum hourly L_{eq} of background noise; whichever is higher.
[2] Applicable for windows opening into "noise-sensitive spaces" as defined in NPC-300.
[3] Sound level limits during night-time hours are not applicable at outdoor points of reception.

Sound level limits for assessing noise produced by emergency equipment operating in non-emergency situations, such as during routine monthly testing or maintenance, are 5 dB greater than the limits otherwise applicable to stationary sources. Additionally, emergency equipment operating in non-emergency situations is to be assessed independently of all other stationary noise sources.

4.1.2 Ambient Sound Levels from Road Traffic

Since the ambient sound levels were anticipated to exceed the NPC-300 exclusionary limits for most facades and time periods within the proposed development, sound levels from roadway noise were assessed and the corresponding applicable guideline limits were determined.

Table 13 summarizes the current road traffic volumes and details applied in the ambient noise modelling.



Table 13: Summary of Road Traffic Data Used to Determine Minimum 1-hr Ambient Sound Levels

Roadway	Current Traffic Volumes (AADT)[1]	Minimum Day/Evening/Night Hour Volume % of AADT			Commercial Vehicle Breakdown		Vehicle Speed (km/hr)
		Daytime	Evening	Night-time	% Medium Trucks	% Heavy Trucks	
Kumpf Drive	2,400	4.3	3.1	0.4	3.0	6.0	50
Parkside Drive	9,009	4.3	3.1	0.4	2.0	6.0	50 [1]
Weber Street North	13,300	4.3	3.1	0.4	2.0	3.0	60
Northfield Drive West	28,100	4.3	3.1	0.4	1.0	2.0	60
Highway 85 – North of Northfield Drive West	23,000	4.3	3.1	0.4	3.2	9.7	90
Highway 85 – South of Northfield Drive West	42,500	4.3	3.1	0.4	1.8	5.3	90

Notes: [1] The current posted speed limit of Parkside Drive north of Northfield Drive West is 20 km/hr. The City of Waterloo has indicated a speed limit of 50 km/hr, which has been used in the assessment.

As with the Transportation Noise Assessment (refer to Section 2.0), ambient roadway noise was modelled as line sources of sound using the Cadna/A computer model. The minimum hourly L_{eq} for the ambient sound levels were found to exceed the NPC-300 default guideline limits during most periods of the day at assessment locations on the facades of the proposed development. Current road traffic volumes were obtained from the following sources, provided for reference in Appendix C:

- Kumpf Drive, Weber Street North, Northfield Drive West – RMOW Year 2023 data;
- Parkside Drive – City of Waterloo Year 2023 data; and
- Highway 85 – MTO iCorridor Year 2019 data.

Surrounding facility noise impacts were assessed against the higher of the modelled ambient noise levels and the exclusionary limits calculated using road traffic data summarized in Table 13.

Predicted ambient road traffic sound levels at the proposed development for daytime, evening and night-time hours are summarized in Appendix F.

4.2 Site Visits and Stationary Source Inventory

Site visits to the Project site and surrounding area were completed by SLR personnel on January 26, 2024 (daytime hours) and February 1, 2024 (early morning and daytime hours). The Project site was found to be primarily surrounded by employment lands in all directions, with sound levels at the Project site generally dominated by ambient road traffic.

SLR conducted a detailed walk-around of the lands surrounding the proposed development to identify audible sources of sound and inventory facilities requiring additional investigation.

At the northeast portion of the Project site, sound levels from rooftop sources atop the Onward Manufacturing Company Limited/Broil King facility at 585 Kumpf Drive were slightly audible. SLR provided a 'Letter to Industry' to the Environmental Manager at the facility, requesting information specific to the operations of and sources at the facility. A follow up phone call was placed to the facility. No information was received as of the date of this report.

Along the southern portion of the Project site, sound levels were generally dominated by road traffic along Northfield Drive West. Sound levels from Heffner Cabinetry & Woodworking at 145 Northfield Drive West were not audible at the Project site at -grade, but sound from a dust collector along the west side of the facility, and rooftop exhaust stacks, were audible on the sidewalk on the south side of the roadway.

Along Randall Drive north of the Project site, light and medium industrial facilities are located along the north and south (Randall Drive) sides of the road. Other industrial facilities such as Ultra Manufacturing, the Waterloo Hauling & Transfer Station and J.D. Sweid Foods are located along Conrad Place and Kumpf Drive, respectively. These facilities were not audible at the north end of the Project site during the site visits conducts by SLR staff, and are located more than 300 m from noise sensitive portions of the proposed development.

Facilities in all directions surrounding the proposed development were classified in accordance with the MECP D-series guidelines, based on the site visit observations and further desktop review. The proposed development is primarily surrounded by Class I facilities (commercial/retail), and all facilities within 70 m of the noise sensitive portions of the proposed development were modelled and compared to applicable sound level limits. Class II facilities including Onward Manufacturing Limited/Broil King, Teledyne DALSA, and Heffner Cabinetry & Woodworking were also assessed in detail. Facilities modelled and assessed in further detail are summarized in Section 4.3.

There were no Class III facilities in proximity to the proposed development without closer, more exposed points of reception where applicable sound level limits must be met. No Class III facilities were assessed further.

All facilities reviewed with respect to the MECP D-series of guidelines are shown in Figure 11 and summarized in Appendix G. The facilities and associated classifications in Appendix G are based on potential noise impacts only. Setback distances and industrial classifications related to air quality are addressed in a separate report.

4.3 Modelled Stationary Sources

The significant sources of noise with the potential to impact the proposed development have been identified. Modelled noise sources considered in this assessment, along with D-series industrial classification and operating hours and, are as follows:

- Office Building – 565 Kumpf Drive:
  - Class I Light Industry.
  - Includes businesses such as Strong Start Charitable Organization.
  - Operating hours from 0900 hours to 1700 hours based on available information.
- Teledyne DALSA – 575 Kumpf Drive:
  - Class I Light Industry (included for completeness due to number of rooftop units that residential towers are overlooking).
  - Drone Manufacturing.

  - Operating from 0900 hours to 1700 hours.
- Office Building – 101-139 Northfield Drive West:
  - Class I Light Industry.
  - Includes businesses such as Hiddentree Entertainment (video game store), MNP LLP (Accounting, Business Consulting) and Government of Canada Federal Economic Development Agency for Southern Ontario.
  - Operating range from 0830 hours to 1700 hours based on available information.
- Waterloo Nissan – 141 Northfield Drive West:
  - Class I Light Industry.
  - Vehicle dealership and service centre.
  - Operating hours from 0900 hours to 2000 hours.
- Heffner Cabinetry & Woodworking – 145 Northfield Drive West:
  - Class II Medium Industry.
  - Cabinet maker/manufacturer.
  - Operating from 0800 hours to 1630 hours based on available information.
  - Building also contains Drayton Entertainment Youth Academy at south end.
- Greystone Club – 155 Northfield Drive West:
  - Class I Light Industry.
  - Fitness/wellness club.
  - Operating from 0530 hours to 2200 hours (currently temporarily closed for renovations).
- Shoppers Drug Mart – 190 Northfield Drive West:
  - Class I Light Industry.
  - Pharmacy/retail.
  - Operating from 0800 hours to 2200 hours.
- Sobeys Northfield – 640 Parkside Drive:
  - Class I Light Industry.
  - Grocery store.
  - Operating from 0700 hours to 2300 hours.
- Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive:
  - Class II Medium Industry.
  - Manufacturer of barbecues.
  - Operating from 0830 hours to 1630 hours based on available information.



- Waterloo Fire Station 3 – 150 Northfield Drive West:
  - Class I Light Industry.
  - Fire station.
  - Open 24 hours per day, 7 days per week.

4.4 Stationary Source Modelling

Sound levels from stationary sources were modelled using Cadna/A, a software implementation of the internationally recognized ISO-9613-2 environmental noise propagation algorithms. Cadna/A / ISO-9613 is the preferred noise model of the MECP. The ISO 9613 equations account for:

- Source to receiver geometry;
- Distance attenuation;
- Atmospheric absorption;
- Reflections off of the ground and ground absorption;
- Reflections off of vertical walls; and
- Screening effects of buildings, terrain, and purpose-built noise barriers (noise walls, berms, etc.).

The following additional parameters were used in the modelling, which are consistent with providing a conservative (predictable worst-case assessment of noise levels):

- Temperature: 10°C;
- Relative Humidity: 70%;
- Ground Absorption G: G = 0.0 (reflective) as the default global parameter, with localized absorptive ground considered in select locations;
- Reflection: One (1) order of reflection was used (accounts for noise reflecting from walls);
- Wall Absorption Coefficients: Set to 0.37 or 0.21 (37% or 21% of energy is absorbed, 63% or 79% is reflected); and
- Terrain: 1 m topographic contours for the Project site and surrounding area.

Sound level data from site visit measurements and generic SLR historical sound level data were applied in the stationary noise modelling. A summary of the sound levels used in the analysis and equipment operating conditions is provided in Appendix H. All stationary sources modelled are shown in Figure 11 and discussed further in Section 4.5.

The “building evaluation” feature of Cadna/A was used to assess sound levels at the facades of the proposed development podium and towers. This feature allows for sound levels to be predicted across the entire façade of a structure. Outdoor points of reception were assessed with both discrete outdoor points of reception at amenity terrace locations most exposed to the respective surrounding stationary sources and also using sound level contours 1.5 m above the most exposed amenity terrace elevations. A 1.1 m high parapet wall (barrier) was considered around the amenity terraces, as shown in the section drawings provided for reference in Appendix B.

4.5 Predicted Stationary Source Sound Levels

4.5.1 Office Building – 565 Kumpf Drive

Predictable worst-case modelling of sound associated with the Office Building at 565 Kumpf Drive considered the following:

- 8x 5-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 7x 10-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 3x 15-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 2x Rooftop Exhaust Fan:
  - Operating 60 minutes per daytime/evening/night-time hour.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 12 (daytime/evening) and Figure 13 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 14 (daytime), Figure 15 (evening) and Figure 16 (night-time). Outdoor point of reception sound levels are shown in Figure 17 (daytime/evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I1.

Predicted stationary sound levels from 565 Kumpf Drive were found to be at or below established sound level limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.2 Teledyne DALSA – 575 Kumpf Drive

Predictable worst-case modelling of sound associated with the Teledyne DALSA facility at 575 Kumpf Drive considered the following:

- 6x 5-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 4x 10-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x 15-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).



- 1x Rooftop Exhaust Fan:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1 truck movement per daytime hour, travelling at 10 km/hr to the main shipping door.
- 1 heavy truck idling for 5 minutes during a daytime hour (incidental idling).

Truck movements and idling were limited to occurring during only the posted operating hours of the facility.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 18 (daytime/evening) and Figure 19 (night-time). Outdoor point of reception sound levels are shown in Figure 20 (daytime) and Figure 21 (evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I2.

Predicted stationary sound levels from Teledyne DALSA were found to be below both ambient sound level limits and Class 1 minimum exclusionary limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.3 Office/Commercial Building – 101-139 Northfield Drive West

Predictable worst-case modelling of sound associated with the Office/Commercial Building at 101-139 Northfield Drive West considered the following:

- 5x Rooftop Exhaust Fans:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 2x Rooftop Make Up Air Units:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1x Rooftop Fluid Cooler:
  - Operating 60 minutes per daytime/evening hour, and 30 minutes per night-time hour.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 22 (daytime/evening) and Figure 23 (night-time). Outdoor point of reception sound levels are shown in Figure 24 (daytime/evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I3.

Predicted stationary sound levels from 101-139 Northfield Drive West were found to be below both ambient sound level limits and Class 1 minimum exclusionary limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.4 Waterloo Nissan – 141 Northfield Drive West

Predictable worst-case modelling of sound associated with Waterloo Nissan at 141 Northfield Drive West considered the following:

- 3x Rooftop 5-ton HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).



- 2x Rooftop 10-ton HVAC Units:
    - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x Rooftop Make Up Air Unit:
    - Operating 60 minutes per daytime/evening/night-time hour.
- 3x Rooftop Exhaust Fans:
    - Operating 60 minutes per daytime/evening hour when the facility and service centre are open.
- 2x Open Bay Doors (breakout noise):
    - Impact wrench 1 minute per daytime/evening hour when the facility and service centre are open.
    - Compressed air sources 10 minutes per daytime/evening hour when the facility and service centre are open.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 25 (daytime/evening) and Figure 26 (night-time). Outdoor point of reception sound levels are shown in Figure 27 (daytime/evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I4.

Predicted stationary sound levels from Waterloo Nissan were found to be below both ambient sound level limits and Class 1 minimum exclusionary limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.5 Heffner Cabinetry & Woodworking – 145 Northfield Drive West

Predictable worst-case modelling of sound associated with Heffner Cabinetry & Woodworking (and other tenants such as Drayton Youth Academy) at 145 Northfield Drive West considered the following:

- 6x Rooftop 5-ton HVAC Units:
    - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 3x Rooftop 10-ton HVAC Units:
    - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 3x Rooftop 15-ton HVAC Units:
    - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 4x Rooftop Make Up Air Units:
    - Operating 60 minutes per daytime/evening/night-time hour.
- 1x Dust Collector:
    - Operating 60 minutes per daytime hour when the facility is open.
- 7x Paint Booth Exhaust Stacks:

  - Operating 60 minutes per daytime hour when the facility is open.
- 2x Building Exhaust Fans:
  - Operating 60 minutes per daytime hour when the facility is open.
- 2 truck movements per daytime hour, travelling at 10 km/hr to the south shipping doors.
- 2 heavy truck idling for 5 minutes each during a daytime hour (incidental idling).

A summary of the predicted sound levels on each proposed development façade are shown in Figure 28 (daytime), Figure 29 (evening) and Figure 30 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 31 (daytime), Figure 32 (evening) and Figure 33 (night-time). Outdoor point of reception sound levels are shown in Figure 34 (daytime) and Figure 35 (evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I5.

Predicted daytime stationary sound levels from Heffner Cabinetry & Woodworking were found to exceed applicable limits at the west side of Building H1 Tower (by up to 5 dB) and the east side of Building G1 Tower (by up to 2 dB). The excesses are due primarily to the operation of the dust collector. Therefore, mitigation may be required. Refer to Section 4.6.1.

Applicable sound level limits are predicted to be met at all locations within the proposed development during daytime, evening and night-time periods.

4.5.6 Greystone Club – 155 Northfield Drive West

Predictable worst-case modelling of sound associated with the Greystone Club considered the following:

- 7x 5-ton Rooftop HVAC units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x 10-ton Rooftop HVAC unit:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x 15-ton Rooftop HVAC unit:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x Rooftop Exhaust Fan:
  - Operating 60 minutes per daytime/evening/ hour when the facility is open.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 36 (daytime/evening) and Figure 37 (night-time). Outdoor point of reception sound levels are shown in Figure 38 (daytime/evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I6.

Predicted stationary sound levels from Greystone Club were found to be at or below established sound level limits at all locations within the proposed development during daytime, evening and night-time periods.



4.5.7 Shoppers Drug Mart – 190 Northfield Drive West

Predictable worst-case modelling of sound associated with Shoppers Drug Mart considered the following:

- 2x 5-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 4x 10-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x Rooftop Refrigeration Unit:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1x Rooftop Exhaust Fan:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1 truck movement per daytime hour, travelling at 10 km/hr to the main shipping door.
- 1 small reefer truck idling for 30 minutes during a daytime hour.

Truck movements and idling were limited to occurring during only daytime hours (0700 hours to 1900 hours) in accordance with the City of Waterloo Noise By-Law. The Noise By-Law prohibits loading/unloading/shipping/delivering and similar activities from being audible at points of reception in residential areas, such as those located immediately west and southwest of the Shoppers Drug Mart off Weber Street North/Northfield Drive West.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 39 (daytime), Figure 40 (evening) and Figure 41 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 42 (daytime), Figure 43 (evening) and Figure 44 (night-time). Outdoor point of reception sound levels are shown in Figure 45 (daytime) and Figure 46 (evening).

A complete summary table of predicted facade sound levels is provided in Appendix I, Table I7.

Predicted stationary sound levels from Shoppers Drug Mart were found to be below established sound level limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.8 Sobeys – 640 Parkside Drive

Predictable worst-case modelling of sound associated with Sobeys considered the following:

- 2x 5-ton Rooftop HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 30 minutes per night-time hour.
- 1x 10-ton Rooftop Make Up Air Unit:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1x Rooftop Refrigeration Unit:
  - Operating 60 minutes per daytime/evening/night-time hour.



- 1x Rooftop 4-Fan Packaged Chiller/Cooler:
  - Operating 60 minutes per daytime/evening hour, 30 minutes per night-time hour.
- 1x Rooftop 8-fan Air Cooled Chiller:
  - Operating 60 minutes per daytime/evening hour, 30 minutes per night-time hour.
- 2x Rooftop Exhaust Fans:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 2 truck movement per daytime hour, travelling at 10 km/hr to the main shipping door.
- 1 heavy truck idling for 60 minutes during a daytime hour.
- 1 refrigeration unit associated with a truck idling for 60 minutes during a daytime hour.

Truck movements and idling were limited to occurring during only daytime hours (0700 hours to 1900 hours) in accordance with the City of Waterloo Noise By-Law. The Noise By-Law prohibits loading/unloading/shipping/delivering and similar activities from being audible at points of reception in residential areas, such as those located immediately west of Sobeys off Weber Street North.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 47 (daytime), Figure 48 (evening) and Figure 49 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 50a (daytime), Figure 51 (evening) and Figure 52a (night-time). Outdoor point of reception sound levels are shown in Figure 53 (daytime) and Figure 54 (evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I8.

Predicted stationary sound levels from Sobeys were found to be at or below established sound level limits at all locations within the proposed development during evening hours.

During daytime hours, minor excesses of up to 3 dB are predicted at very isolated locations on Floors 8 and 9 of the Building E Tower west façade (see Figure 50b). As shown in Figure 52b, a minor 1 dB excess is also predicted during night-time hours at Floor 7, west façade of Building F1 Tower. The predicted excesses are discussed further in Section 4.6.2.

4.5.9 Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive

Predictable worst-case modelling of sound associated with Onward Manufacturing Company Limited/Broil King considered the following:

- 4x Rooftop 5-ton HVAC Units:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x Rooftop 20-ton HVAC Unit:
  - Operating 60 minutes per daytime/evening hour, and 15 minutes per night-time hour (outside facility operating hours).
- 1x Rooftop 5-ton HVAC Unit:
  - Operating 60 minutes per daytime/evening hour, and 30 minutes per night-time hour in the manufacturing area of the building.



- 1x Rooftop Make Up Air Unit:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 17x Rooftop Exhaust Fans:
  - Operating 60 minutes per daytime/evening/night-time hour.
- 3x Rooftop Process Exhaust Fans:
  - Operating 60 minutes per daytime hour when the facility is open.
- 6x Rooftop Process Exhaust Stacks:
  - Operating 60 minutes per daytime hour when the facility is open.
- 5 outdoor forklift movements at the south (most exposed) location during a daytime hour.
- 2 heavy truck idling for 5 minutes each at east and west shipping doors during a daytime hour (incidental idling).
- 2 truck movement per daytime hour, travelling at 10 km/hr to the main shipping doors at the west and east sides of the facility.

Truck movements and idling were limited to occurring during only the posted operating hours of the facility.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 55 (daytime), Figure 56 (evening) and Figure 57 (night-time). Outdoor point of reception sound levels are shown in Figure 58 (daytime) and Figure 59 (night-time).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I9.

Predicted stationary sound levels from Onward Manufacturing Company Limited/Broil King were found to be below both ambient sound level limits and Class 1 minimum exclusionary limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.10 Waterloo Fire Station 3

4.5.10.1 Emergency Generator Testing

Predictable worst-case modelling of sound associated with emergency generator testing at Waterloo Fire Station 3 considered the following:

- 1x 35 kW Emergency Generator (CofA Number 8495-7HMQZ5):
  - Testing for 60 minutes of a daytime hour.

A summary of the predicted sound levels on each proposed development façade are shown in Figure 60 (daytime), with predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits shown in Figure 61. Outdoor point of reception sound levels are shown in Figure 62.

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I10a.

Predicted sound levels at all locations due to emergency generator testing are shown to meet applicable sound level limits during daytime hours.

4.5.10.2 Continuous Sources

Predictable worst-case modelling of sound associated with the Waterloo Fire Station 3 continuous sources considered the following:

- 2x Rooftop Exhaust Fans
  - Operating 60 minutes per daytime/evening/night-time hour.
- 1x Rooftop Split-System Condenser Units
  - Operating 60 minutes per daytime/evening hour, and 30 minutes per night-time hour.

Sources associated with routine maintenance of fire trucks or other safety equipment were not assessed, as they are exempt in Section 6.0 of the City of Waterloo Noise By-Law (Schedule 3).

A summary of the predicted sound levels on each proposed development façade are shown in Figure 63 (daytime/evening) and Figure 64 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 65 (daytime), Figure 66 (evening) and Figure 67 (night-time). Outdoor point of reception sound levels are shown in Figure 68 (daytime/evening).

A complete summary table of predicted façade sound levels is provided in Appendix I, Table I10b.

Predicted stationary sound levels from continuous sources at Waterloo Fire Station 3 were found to be at or below established sound level limits at all locations within the proposed development during daytime, evening and night-time periods.

4.5.11 All Stationary Sources

All sources discussed in Section 4.5.1 through Section 4.5.10 inclusive (with the exception of the emergency generator) were modelled cumulatively for informational purposes. Operating scenarios and sources considered were modelled as discussed in the preceding report Sections.

It is unlikely that predictable worst-case operations associated with all ten (10) facilities considered in this assessment will ever occur simultaneously. Furthermore, facilities are permitted through the MECP on an individual basis, assessed against the NPC-300 guideline limits. Cumulative sound levels from other stationary sources are not considered in the MECP environmental approvals process.

A summary of the cumulative predicted sound levels on each proposed development façade are shown in Figure 69 (daytime), Figure 70 (evening) and Figure 71 (night-time). Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 72 (daytime), Figure 73 (evening) and Figure 74 (night-time). Outdoor point of reception sound levels are shown in Figure 67 (daytime) and Figure 68 (evening).

A complete summary table of predicted façade sound levels from all sources is provided in Appendix I, Table I11.

A sample calculation from simultaneous modelling of all stationary sources (excluding the emergency generator at Waterloo Fire Station 3) is provided in Appendix J.



4.6 Proposed Mitigation Measures

4.6.1 Heffner Cabinetry & Woodworking – 145 Northfield Drive West

Based on a preliminary assessment of stationary source noise from the facility, sound levels at the proposed development are predicted to exceed applicable daytime limits as follows:

- West side of Building H1 Tower – sound levels 1 to 5 dB in excess of the Class 1 Area guideline limits; and
- East side of Building G1 Tower – sound levels 2 dB in excess of the Class 1 Area limits.

Predicted sound levels relative to the higher of ambient sound levels/minimum exclusionary limits for a Class 1 area are shown in Figure 31 (daytime).

The daytime excesses result from the following sound sources, which were modelled based on SLR measurements during the site visits (dust collector), and SLR historical data for similar sources (Paint Booth Exhaust Stacks and 15-ton HVAC units):

- Dust Collector along the west side of the facility;
- 7x Paint Booth Exhaust Stacks at the northwest portion of the facility rooftop; and
- 3x 15-ton HVAC units located on the north half of the facility rooftop.

4.6.1.1 Source Based Noise Mitigation

To meet the applicable sound level limits (higher of ambient road traffic sound levels/Class 1 Area minimum exclusionary limits), the following maximum allowable sound levels would be required for the sources:

- Dust Collector – 92 dBA (overall reduction of 10 dB);
  - Potential mitigation measures (if needed): motor casing/enclosure, lagging of ductwork and silo.
- Paint Booth Exhaust Stacks – 86 dBA per stack (overall reduction of 4 dB per stack compared to the modelled SLR database sound levels);
  - Potential mitigation measures (if needed): silencers.
- 15-ton HVAC units – 90 dBA (overall reduction of 3 dB per unit)
  - Potential mitigation measures (if needed): compressor blankets, barriers.

Predicted sound levels with the maximum source sound power levels noted above are shown in Figure 76.

The potential mitigation measures noted above appear to be technically feasible. However, their installation would require the agreement of Heffner Cabinetry & Woodworking. Additional noise measurements will be required to confirm emitted sound levels and the appropriateness/ design of noise mitigation measures, including structural loads on the building roof. This work can be completed as the project proceeds through the Planning approvals process, for example prior to or as a part of Site Plan Approval. The cost of purchase and installation of noise mitigation should be borne by the Developer.



4.6.1.2 Receptor Based Noise Mitigation

Alternatively, should the required mitigation be found to not be technically or economically feasible (for example, if the required mitigation interferes with operations or required extensive structural refits), or if the mitigation is administratively infeasible (if Heffner Cabinetry & Woodworking are not a cooperative party and an agreement to install noise mitigation cannot be reached), a Class 4 Area designation would be appropriate, for the portion of the development encompassing Buildings G1 Tower and Building H1 Tower.

Under MECP Publication NPC-300 noise guidelines, noise sensitive receptors are defined using area classifications. The receptor areas are classified as either:

- Class 1 – Urban areas
- Class 2 – Suburban / semi-rural areas
- Class 3 – Rural areas
- Class 4 – Infill areas

Depending on the receptor area classification, different guideline limits apply. The Class 4 designation is a new designation, intended to allow for infill and redevelopment, whilst still protecting residences from undue noise.

In NPC-300, a Class 4 area is defined as:

> "'Class 4 area'
>
> means an area or specific site that would otherwise be defined as Class 1 or 2 and which:
>
> - is an area intended for development with new noise sensitive land use(s) that are not yet built;
> - is in proximity to existing, lawfully established stationary source(s); and
> - has formal confirmation from the land use planning authority with the Class 4 area classification which is determined during the land use planning process."

The proposed development meets these requirements. The local planning authority in this case is the City of Waterloo or the Region of Waterloo. The Class 4 Area designation provides elevated noise guideline limits (+10 dBA for window facades, and +5 dBA for outdoor points of reception) and allows for the use of receptor-based noise mitigation measures.

In this case, if the development were classified as a Class 4 Area, additional physical noise mitigation at Heffner Cabinetry & Woodworking would not be required. Mandatory air conditioning and a Type F noise warning clause would be needed for the affected development buildings.

4.6.1.3 Feasibility of Noise Mitigation

Both source-based and receptor-based noise mitigation measures are feasible. The final selection of mitigation measures (at source physical mitigation measures, or at-receptor use of a Class 4 Area designation) can be completed as the project proceeds through the Planning approvals process, as a part of Site Plan Approval.



4.6.2 Sobeys – 640 Parkside Drive

As noted in Section 4.5.8, minor excesses of up to 3 dB are predicted at very localized locations on Floors 8 and 9 of the Building E Tower west façade. The excess locations are isolated to two floors (Floor 8, and the south-half of Floor 9). These are shown in Figure 50b.

4.6.2.1 Source Based Noise Mitigation

To meet the applicable sound level limits (higher of ambient road traffic sound levels/Class 1 Area minimum exclusionary limits), noise mitigation would be required for the following sources:

- Idling refrigeration truck;
- Rooftop 4-fan Packaged Air Cooled Chiller/Condenser; and
- Rooftop 8-fan Air Cooled Condenser.

The potential need for mitigation measures should be confirmed based on at-source measurements or confirmation of manufacturers sound level data for the rooftop 4-fan Packaged Air Cooled Chiller/Condenser and 8-fan Air Cooled Condenser. Additional noise measurements will be required to confirm emitted sound levels and the appropriateness/ design of noise mitigation measures, including structural loads on the building roof.

Noise mitigation of idling refrigeration trucks can be very difficult, and may require the construction of full enclosures and the installation of additional rooftop cooling systems to allow for the trailer refrigeration system to be shut off (thus creating another noise source requiring mitigation). As a result, such mitigation measures are generally not technically or economically feasible.

An assessment of the feasibility of source-based mitigation can be completed as the project proceeds through the Planning approvals process, for example prior to/ as a part of Site Plan Approval. The cost of purchase and installation of noise mitigation should be borne by the Developer.

Receptor Based Noise Mitigation

Alternatively, should the required mitigation be found to not be technically or economically feasible (for example, if the required mitigation interferes with operations or required extensive structural refits), or if the mitigation is administratively infeasible (if Sobeys are not a cooperative party and an agreement to install noise mitigation cannot be reached), a Class 4 Area designation would be appropriate, for the portion of the development encompassing Building E Tower.

In this case, if the development were classified as a Class 4 Area, additional physical noise mitigation at Heffner Cabinetry & Woodworking would not be required. Mandatory air conditioning and a Type F noise warning clause would be needed for the affected development buildings.

Feasibility of Noise Mitigation

Both source-based and receptor-based noise mitigation measures are feasible. The final selection of mitigation measures (at source physical mitigation measures, or at-receptor use of a Class 4 Area designation) can be completed as the project proceeds through the Planning approvals process, as a part of Site Plan Approval.



4.6.3 Warning Clauses Recommendations

An MECP Type E warning clause is recommended for all residential units within the proposed development, due to the proximity of stationary sources in all directions surrounding the Project site. Refer to Appendix E.

If a Class 4 Area designation is provided for Building G1 Tower, Building H1 Tower and Building E Tower, as discussed above, then mandatory air conditioning and an MECP Type F noise warning clause would be required for those residential units.

Part 2: Impacts of the Development on Itself

5.0 Stationary Source Noise from the Development on Itself

5.1 Residential and Mixed Uses

At the time of this assessment, mechanical systems for the proposed development have not been sufficiently designed to complete a detailed assessment of stationary source noise from the development on itself.

For common mechanical systems that will be implemented as part of the proposed development, sound levels from all noise-generating equipment should comply with the guideline limits in MECP Publication NPC-300. The potential noise from mechanical equipment in the proposed development (such as from make-up air units, cooling towers, parking garage exhaust fans, emergency generators, etc.) should be assessed as part of the final building design. The applicable criteria can be met at all on-site receptors through appropriate selection of mechanical equipment, by locating equipment with sufficient setback from noise sensitive locations, and by incorporating control measures (e.g., silencers) into the design. This can be confirmed either later in the site plan approval process, or at the building permit approval stages.

It is recommended that the mechanical systems be reviewed by an acoustical consultant prior to final equipment selection.

5.2 Proposed Flex Commercial and Industrial Condominium Uses

As the proposed development includes high density residential developments (podiums/towers) within the Project site adjacent to proposed flex commercial uses to the north and industrial condominiums further to the north, there is the potential for noise impacts from these facilities. These facilities within the Project site, including both flex commercial and industrial condominium uses, will need to comply with the sound level limits in Publication NPC-300.

Only typical ‘Light Industrial’ uses (i.e., Class I light industries in accordance with MECP D-series of guidelines) should be permitted for the industrial condominium buildings, Industrial Condo K and Industrial Condo L. In general, Class I light industrial noise impacts are not anticipated to be a concern for the residential portions of the proposed development, and can be addressed through appropriate/strategic building design, equipment layout, equipment selection and inclusion of noise controls (if needed) at Site Plan Approval for those facilities.

Similarly, sound levels from the flex commercial buildings (Flex Commercial I and Flex Commercial J) can be sufficiently controlled with appropriate/strategic building design, equipment layout, equipment selection and inclusion of noise controls (if needed).

Considerations that could be incorporated in the design process to minimize potential noise impacts from these facilities at the residential portions of the proposed development include the following:

- Locating truck delivery and loading/unloading areas on the north sides of the buildings, facing away from the noise-sensitive residences.
- Selecting appropriate HVAC systems and mechanical equipment, and having these selections reviewed by a qualified acoustic practitioner prior to final design and construction.
- Implementing no idling policies for delivery trucks.
- Directing exhaust stacks/openings associated with mechanical systems or emergency generators away from the noise-sensitive land uses (i.e., to the north)
- Implementing physical noise control measures such as silencers or noise barriers, if necessary.

These mitigation measures are feasible. Any future use with significant emissions will also require Environmental Compliance Approvals (ECAs) or Environmental Activity and Sector Registry (EASR) registrations with the MECP. Part of that approval is proving that the noise guideline can be met.

With consideration of the design recommendations above, it is expected that future facilities associated with the Project site can be operated in compliance with applicable MECP and City of Waterloo/RMOW guidelines.

Part 3: Impacts of the Development on the Surrounding Area

6.0 Stationary Source Noise from the Development on the Surroundings

6.1 Residential and Mixed Uses

With respect to the acoustic environment of the area (i.e., Class 1), it is expected that the proposed development will have a negligible effect on neighbouring noise-sensitive properties.

Traffic related to the proposed development will be small relative to the existing traffic volumes within the area and is not of concern with respect to potential transportation noise.

Other sources associated within the proposed development with the potential to generate noise are mechanical equipment (e.g., air conditioning units, make up air units, cooling units, and parking garage exhaust fans). Sound levels due to operation of these sources should meet MECP Publication NPC-300 noise guidelines at all off-site noise sensitive receptors.

Off-site sound levels are not expected to be of concern are not anticipated because systems will be designed to ensure that the applicable noise guidelines are met at on-site receptors.

Regardless, off-site sound levels from mechanical equipment should be assessed as part of the final building designs.



The applicable criteria can be met at all surrounding receptors though the use of routine mitigation measures, including the appropriate selection of mechanical equipment, by locating equipment with sufficient setback from noise sensitive locations, and by incorporating control measures (e.g., silencers, barriers) into the designs.

It is recommended that the mechanical systems be reviewed by an acoustical consultant prior to final selection of equipment.

6.2 Proposed Flex Commercial and Industrial Condominium Uses

The flex commercial and industrial condominium facilities within the Project site will also need to comply with the sound level limits in NPC-300 at other off-site points of reception (e.g., residential dwellings west of Weber Road North).

The flex commercial buildings (Flex Commercial I and Flex Commercial J) and industrial condominium buildings (Industrial Condo K and Industrial Condo L) should be designed to meet applicable guideline limits at the nearest and more exposed points of reception at the residential portions of the proposed development, as noted in Section 5.2, through appropriate/strategic building design, equipment layout, equipment selection and inclusion of noise controls (if needed).

In doing so, applicable guideline sound level limits will be met at other off-site points of reception that are less exposed to these facilities.

7.0 Conclusions and Recommendations

The potential for noise impacts on and from the proposed development have been assessed. Impacts of the environment on the development, the development on itself, and the development on the surrounding area have been considered. Based on the results of this assessment, the following conclusions have been reached:

Transportation Noise

- An assessment of transportation noise impacts from surrounding roadways, the Waterloo Central Railway Guelph Spur and Grand River Transit ION LRT has been completed.
- Based on predicted transportation façade sound levels, upgraded glazing is required for the proposed development. Refer to Section 2.5.1
- Predicted façade sound levels are sufficiently high such that specific ventilation requirements are applicable for all building in the proposed development The provision for installing central air conditioning at a later date/MECP Type C warning clauses and central air conditioning/ MECP Type D warning clauses should be included in agreements registered on Title for the residential units and included in agreements of purchase and sale, outlined in Section 2.5.1.
- Sound levels at the common outdoor amenity area are predicted to be within acceptable levels without the need for mitigation measures. MECP Type A OLA warning clauses are recommended for some building within the proposed development, as noted in Section 2.5.2.
- The parapet wall constructed around the terraces should meet minimum barrier requirements outlined in NPC-300. See Section 2.4.

- All transportation noise warning clause requirements are summarized in Appendix E.

Environmental Vibration

- The proposed development is located within 75 m of the Waterloo Central Railway Guelph Spur and the Grand River Transit ION LRT.
- Rail vibration measurements of freight rail and ION LRT train movements were performed by SLR between January 26, 2024 and February 1, 2024.
- Vibration levels due to rail traffic are below applicable criteria, and no mitigation is required, as outlined in Section 3.0.
- No significant industrial vibration sources were identified in the vicinity of the proposed development that require assessment.

Stationary Source Noise

- Stationary source noise impacts onto the proposed development from the surrounding commercial facilities were assessed, as outlined in Section 4.0.
- Sound levels from the surrounding stationary sources are predicted to meet applicable guideline limits at all building façade and at outdoor point of reception locations without the need for noise control measures for most facilities, other than those referenced below.
- Potential excesses of the Class 1 Area noise guideline limits are predicted due to operation of Heffner Cabinetry & Woodworking (145 Northfield Drive West), and Sobeys (640 Parkside Drive).
    - The design of source-based noise mitigation measures can be completed as part of future Planning applications for the development. Alternatively, a Class 4 Area could be provided by the City/Region for portions of the development.
- Assessment of building design, equipment layout, equipment selection and inclusion of noise controls (if needed) should be completed at Site Plan Approval for Flex Commercial buildings I and J, and Industrial Condominium buildings K and L.
    - Stationary source sound levels at the proposed development from these facilities can be sufficiently controlled with appropriate building design, equipment layout, equipment selection and inclusion of noise controls (if needed). These uses will be subject to the MECP ECA/EASR approvals/ registration process, which will confirm that the applicable noise guidelines are met.
- An MECP Type E warning clause is recommended for all residential units in the proposed development. An MECP Type F noise warning clause may be required if a Class 4 Area designation is provided by the City/Region.

Overall Assessment

- Noise from the environment on the proposed development can be adequately controlled with the inclusion of upgraded glazing, ventilation and warning clause recommendations as detailed in **Part 1** of this report.
- Noise from the proposed development on itself is not expected to be of concern and can be adequately controlled by following the design guidance outlined in **Part 2** of this report.



- Noise from the proposed development on the surroundings is expected to meet the applicable guideline limits, and can be adequately controlled by following the design guidance outlined in **Part 3** of this report.
- As the mechanical systems for the proposed development have not been designed in detail, the acoustical design should be reviewed by an acoustical consultant during site plan approval process, or as part of the final building design.

8.0 Closure

Should you have any queries, please contact the undersigned.

Regards,

SLR Consulting (Canada) Ltd.





Keni Mallinen, M.A.Sc., P.Eng.
Senior Acoustics Engineer
kmallinen@slrconsulting.com

R. L. Scott Penton, P.Eng.
Principal Acoustics Engineer
spenton@slrconsulting.com

9.0 References

City of Waterloo, Noise Bylaw, Bylaw Number: 2010-073, last passed by council May 17, 2010.

City of Waterloo, Terms of Reference: Noise Study, dated June 30, 2023.

International Organization for Standardization, ISO 9613-2: Acoustics – Attenuation of Sound During Propagation Outdoors Part 2: General Method of Calculation, Geneva, Switzerland, 1996.

Ontario Ministry of the Environment, Conservation and Parks, 1989, Ontario Road Noise Analysis Method for Environment and Transportation (ORNAMENT).

Ontario Ministry of the Environment, Conservation and Parks, Publication NPC-300: Environmental Noise Guideline, Stationary and Transportation Sources – Approval and Planning, 2013.

Ontario Ministry of the Environment, Conservation and Park, STAMSON v5.04: Road, Rail and Rapid Transit Noise Prediction, 1996.

Ontario Ministry of the Environment and Energy, Publication NPC-216: Residential Air Conditioning Devices, 1993.

Regional Municipality of Waterloo, Noise Policy Implementation Guideline, updated October 2019.

The Federation of Canadian Municipalities and the Railway Association of Canada, Guidelines for New Development in Proximity to Railway Operations, May 2013.

U.S. Department of Transportation, Federal Transit Administration (FTA, 2018), Transit Noise and Vibration Impact Assessment Manual, September 2018.



Figures


Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.


SLR Project No.: 241.030968.00001

March 14, 2024

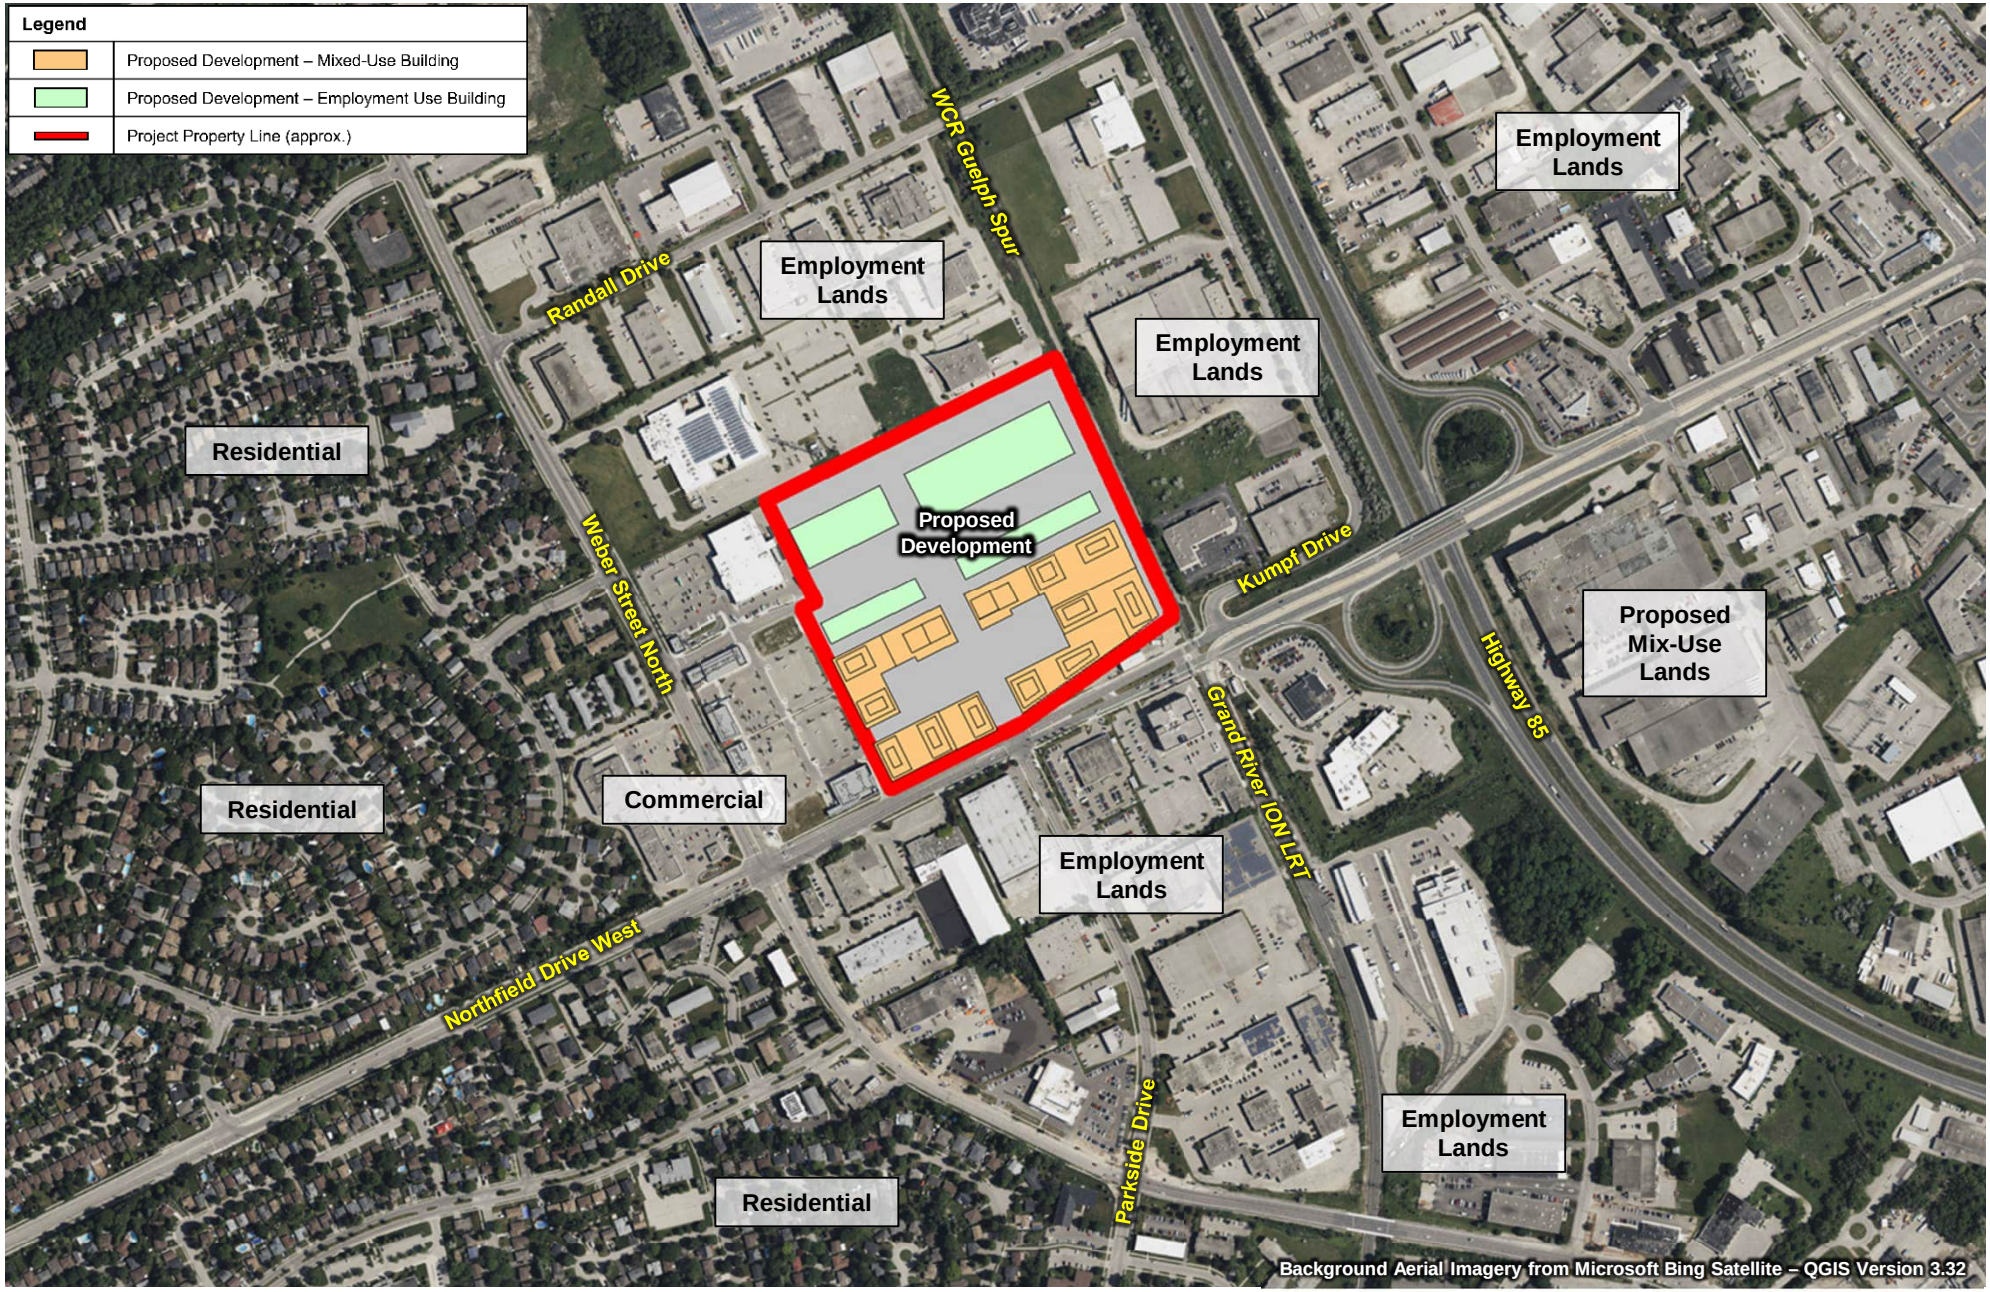


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:8,000	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev. 0	Figure No. **1**
CONTEXT PLAN		Project No. 241.030968.00001	

SLR

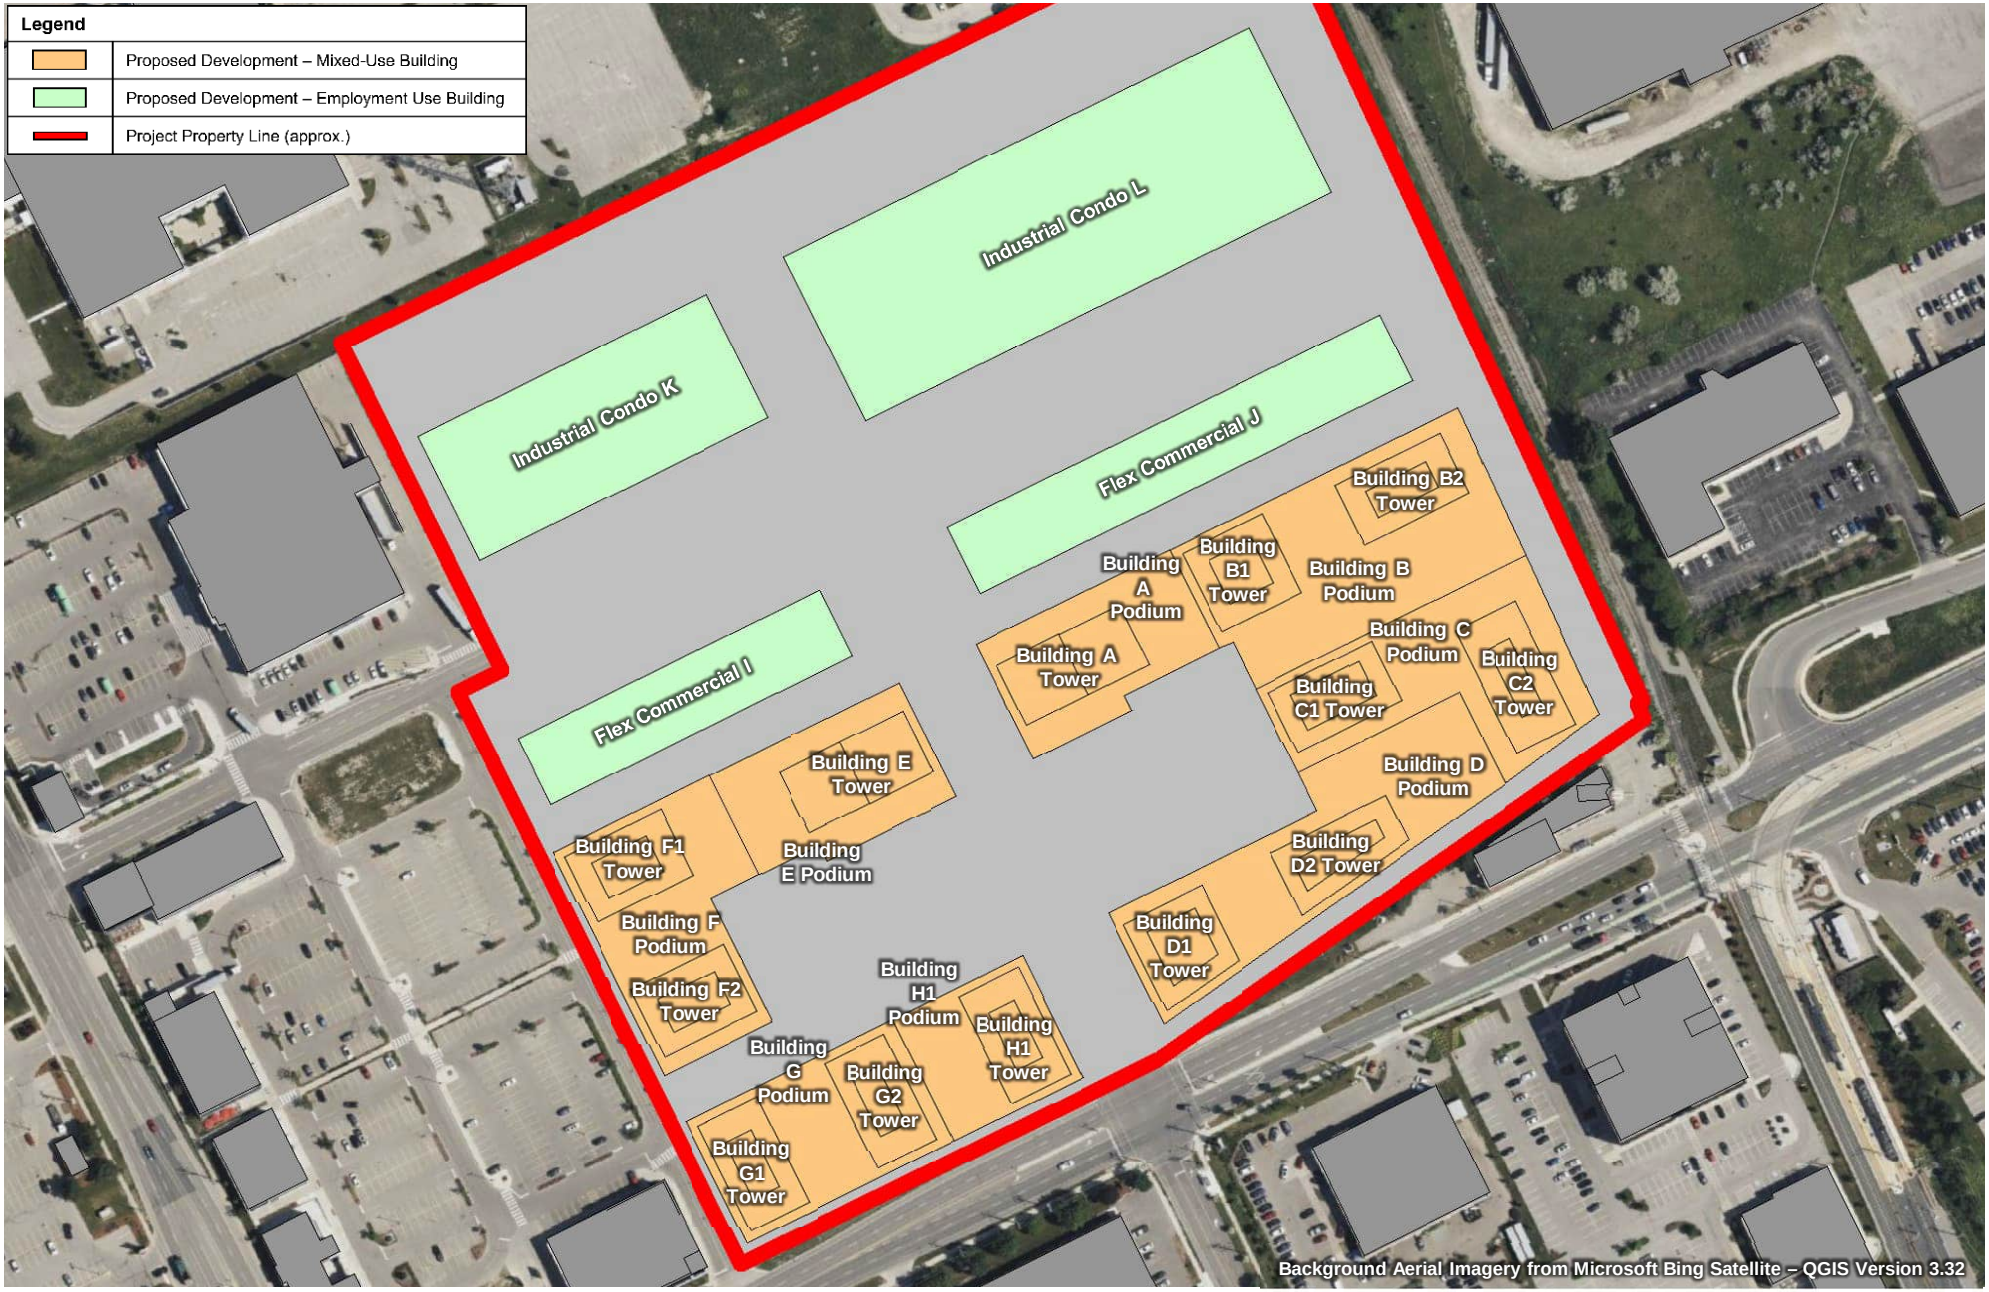


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **2**
SITE PLAN EXCERPT		Project No. 241.030968.00001	

SLR

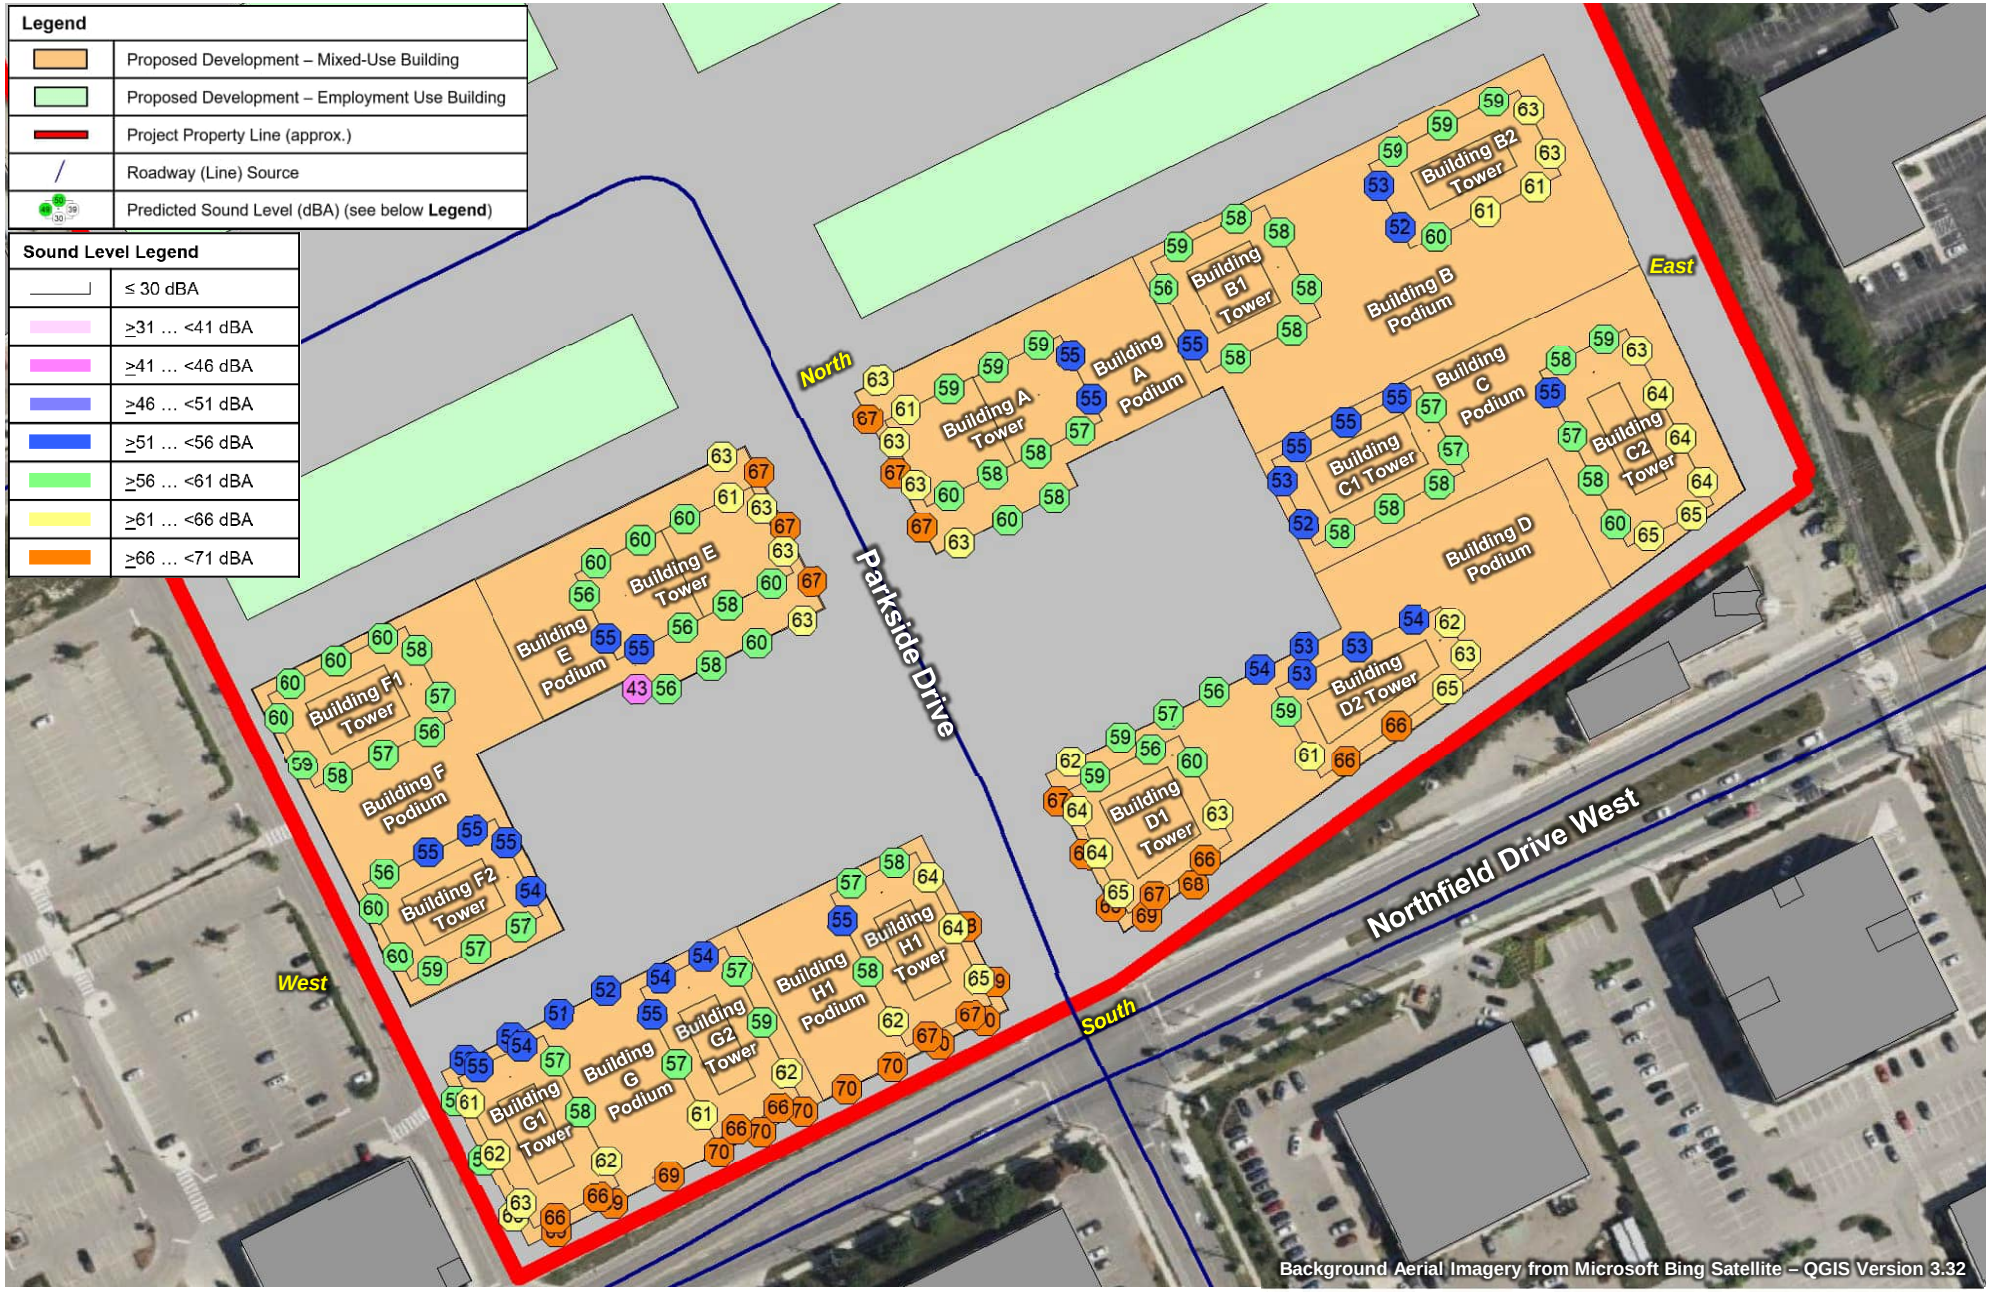


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **3**
PREDICTED FAÇADE SOUND LEVELS – ROAD TRAFFIC – DAYTIME		Project No. 241.030968.00001	

SLR

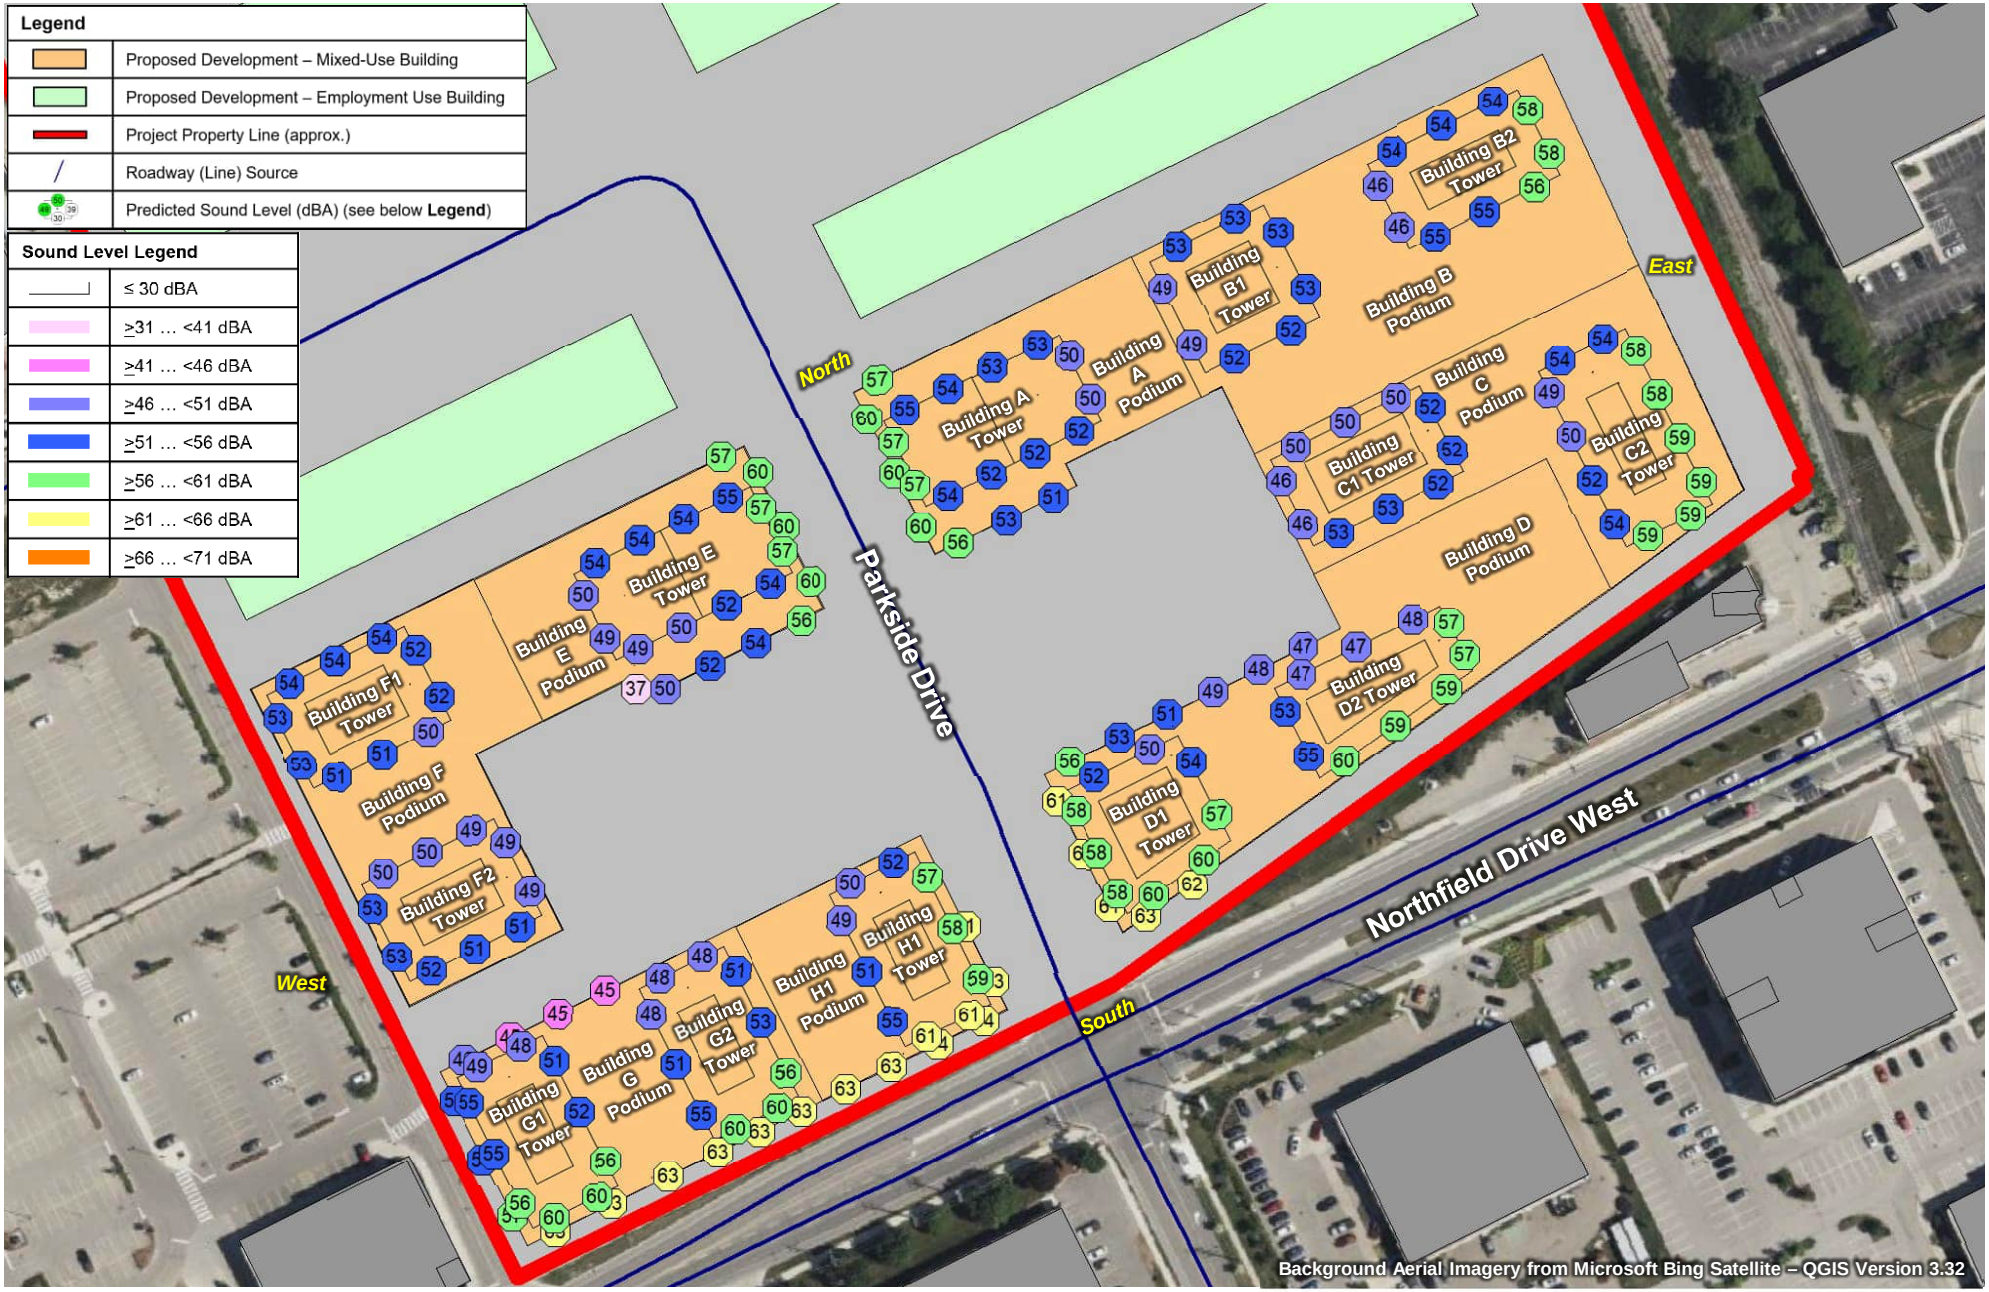


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **4**
PREDICTED FAÇADE SOUND LEVELS – ROAD TRAFFIC – NIGHT-TIME		Project No. 241.030968.00001	

SLR

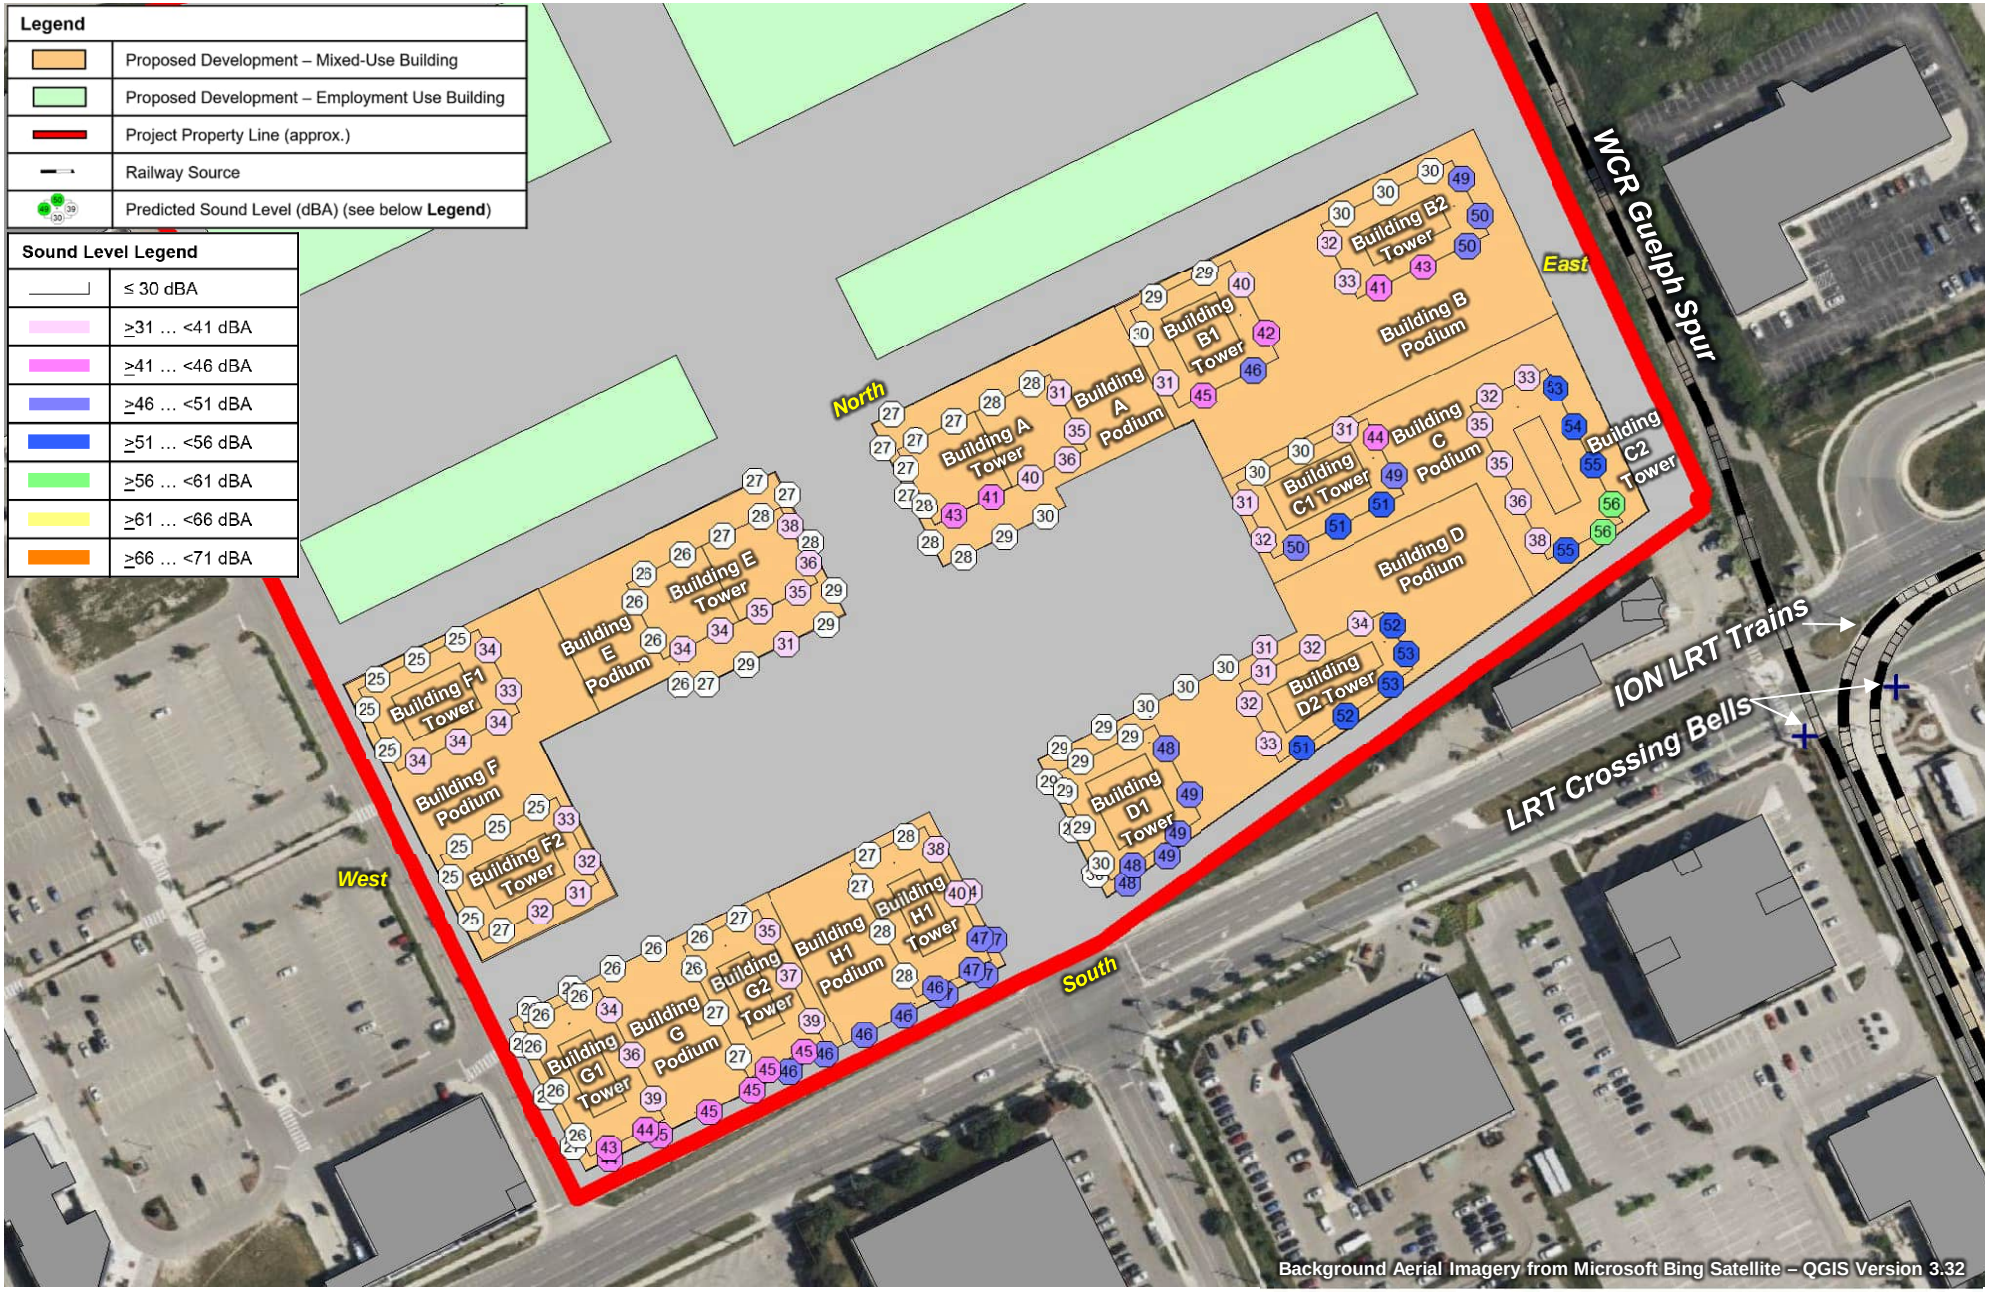


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,000	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **5**
PREDICTED FAÇADE SOUND LEVELS – RAIL SOURCES – DAYTIME		Project No. 241.030968.00001	

SLR

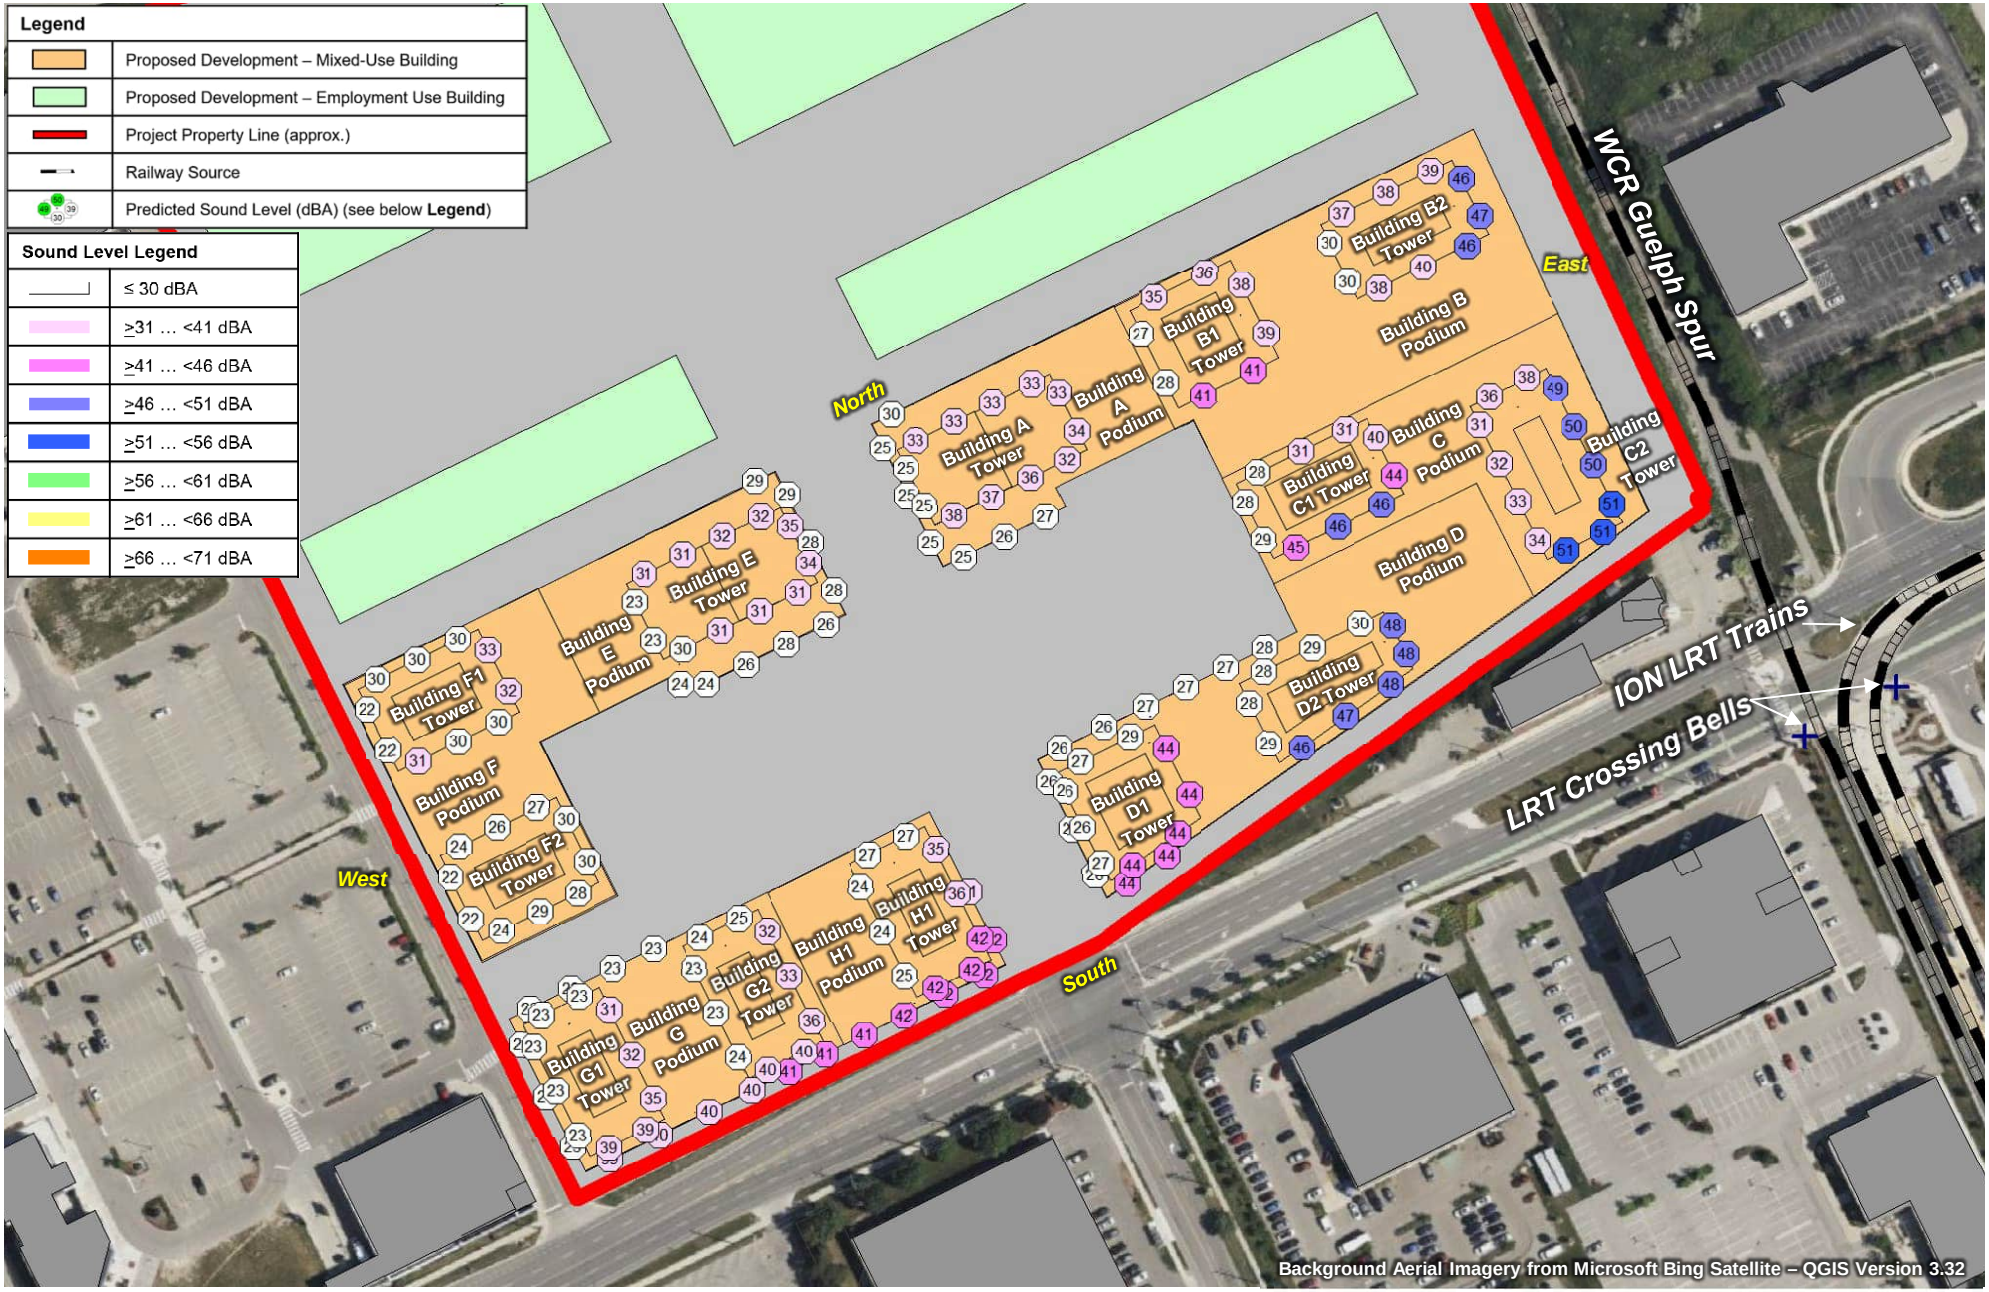


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,000	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **6**
PREDICTED FAÇADE SOUND LEVELS – RAIL SOURCES – NIGHT-TIME		Project No. 241.030968.00001	

SLR

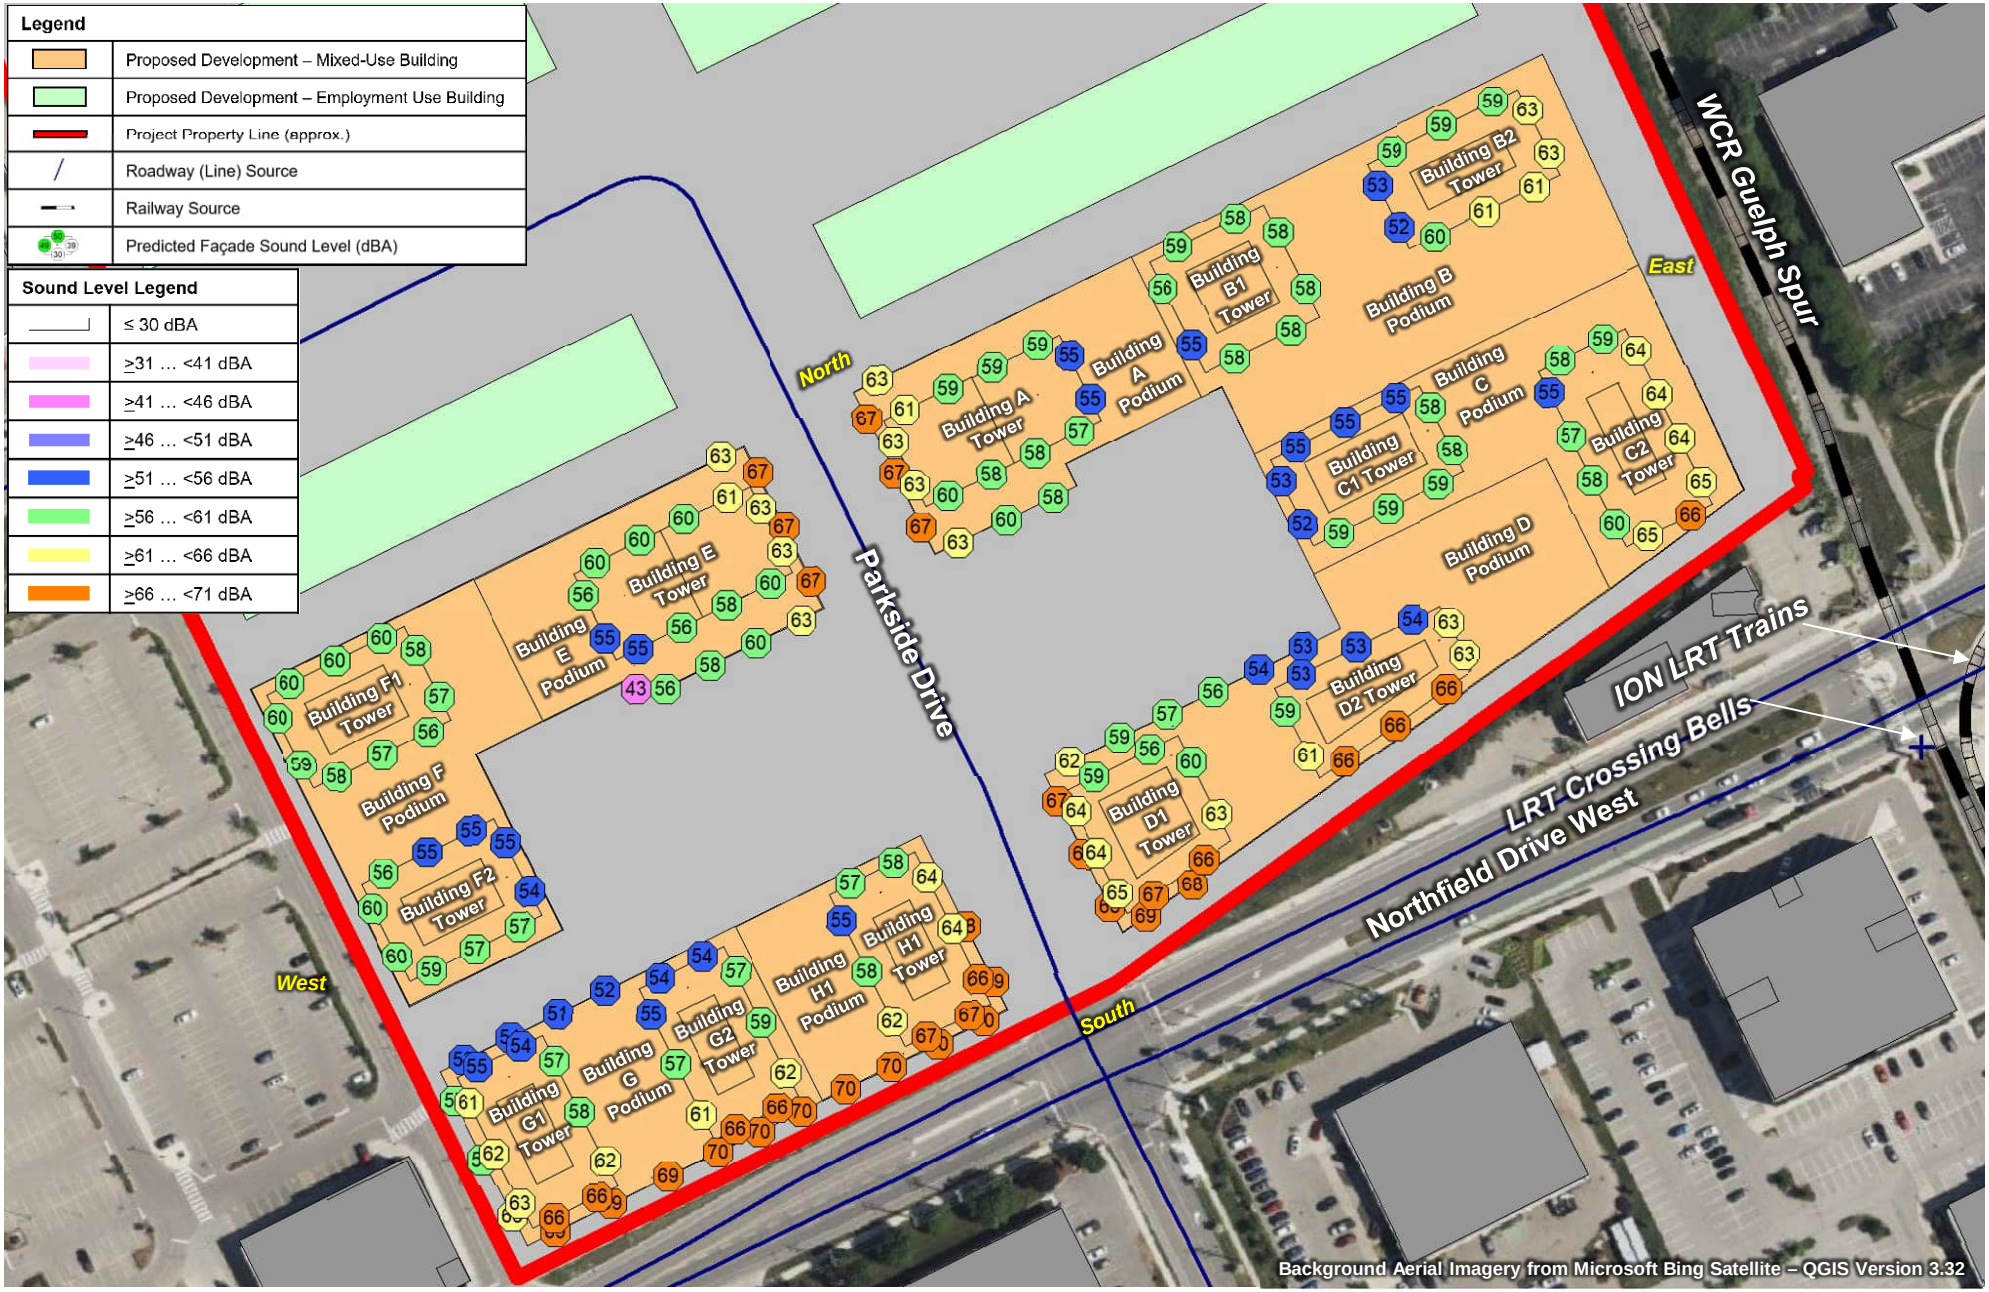

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **7**
PREDICTED FAÇADE SOUND LEVELS – TRANSPORTATION SOURCES – DAYTIME		Project No. 241.030968.00001	SLR

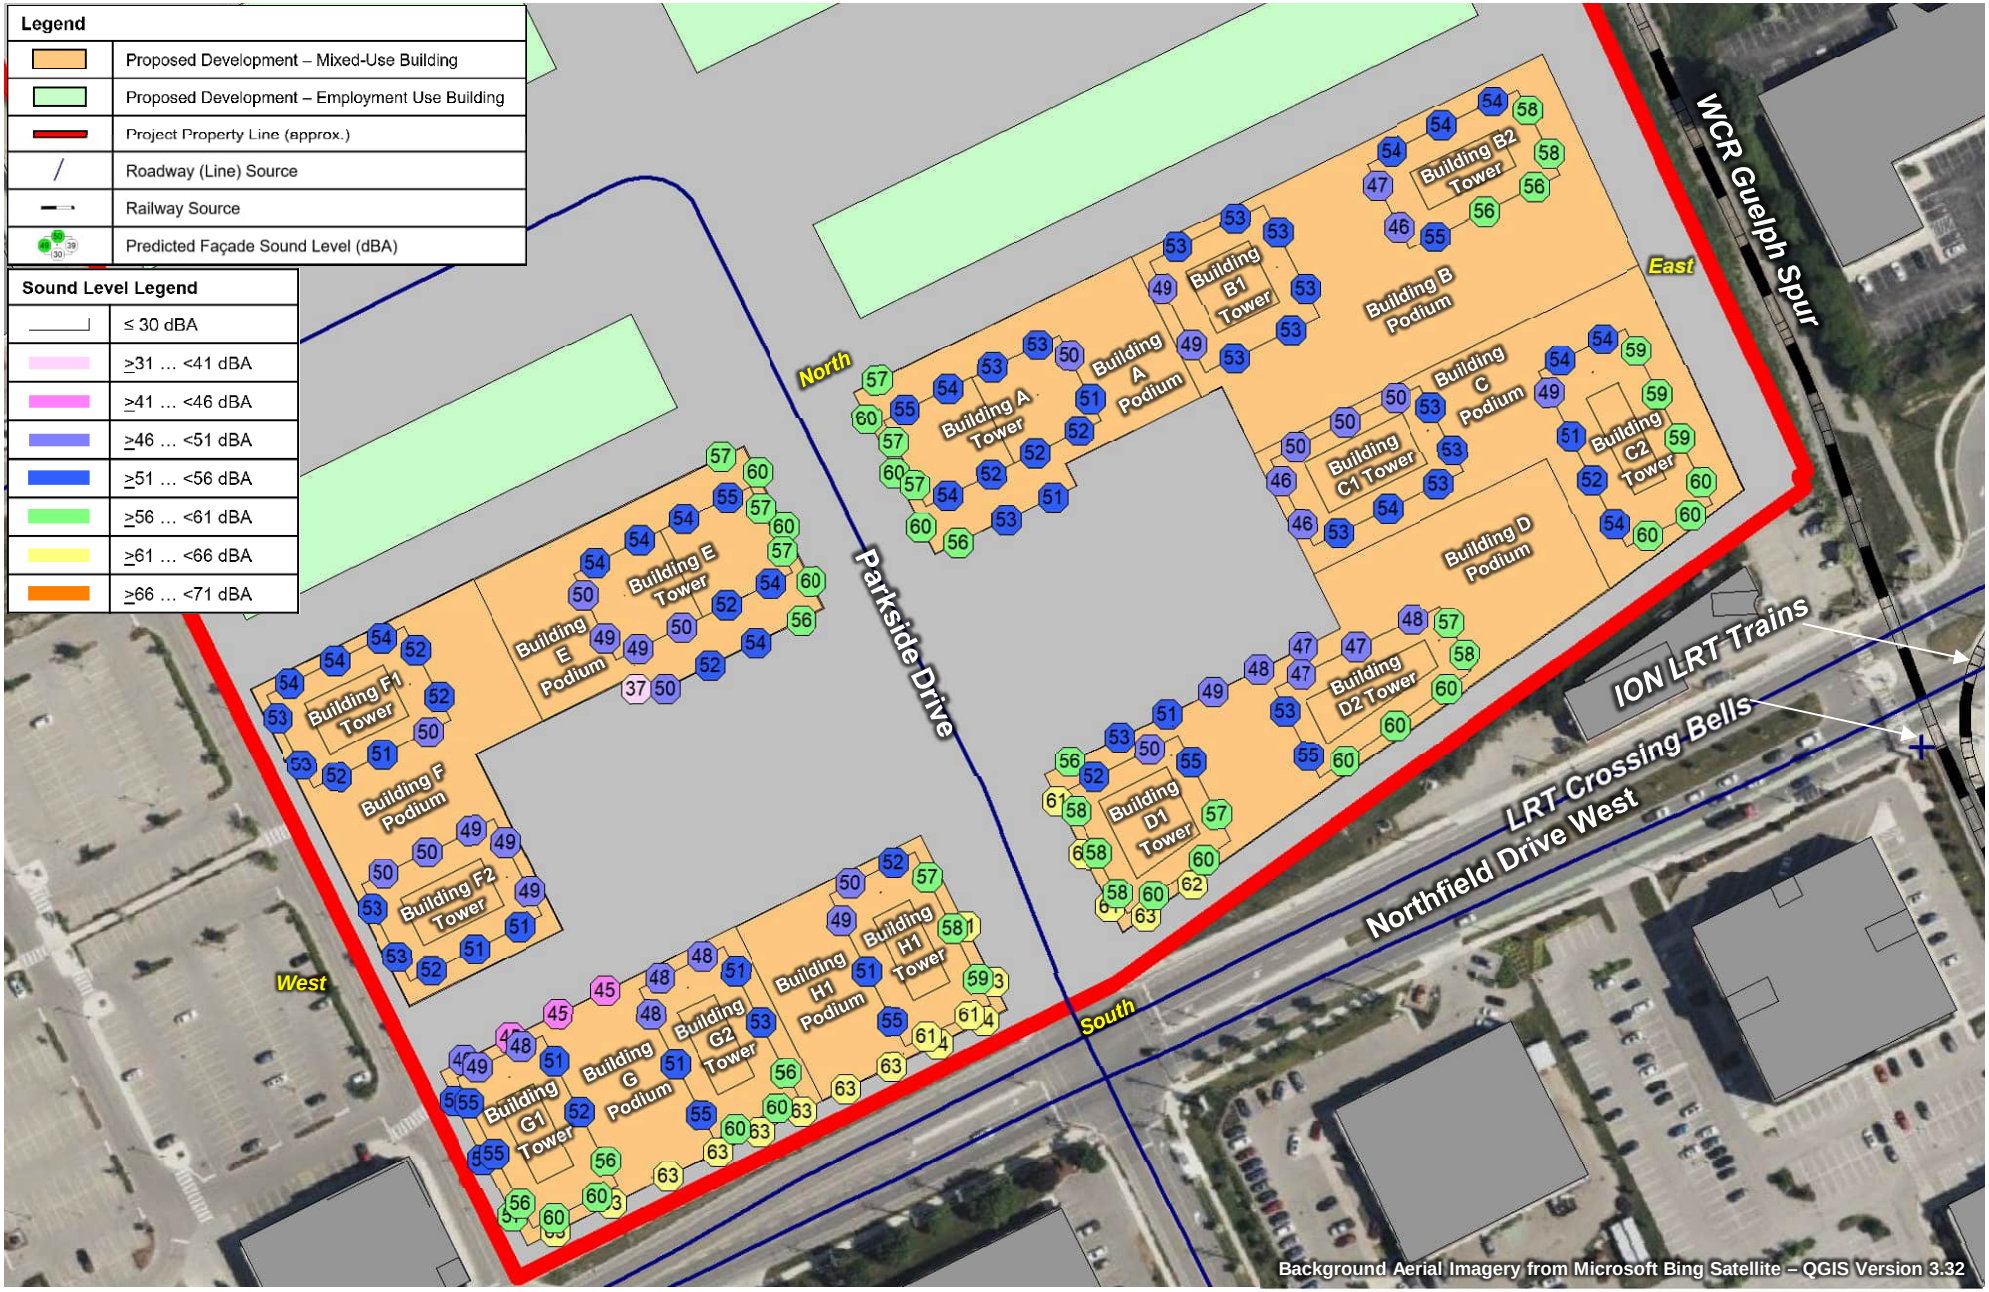


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **8**
PREDICTED FAÇADE SOUND LEVELS – TRANSPORTATION SOURCES – NIGHT-TIME		Project No. 241.030968.00001	

SLR



FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **9**
PREDICTED OUTDOOR LIVING AREA SOUND LEVELS – TRANSPORTATION SOURCES – DAYTIME		Project No. 241.030968.00001	

SLR

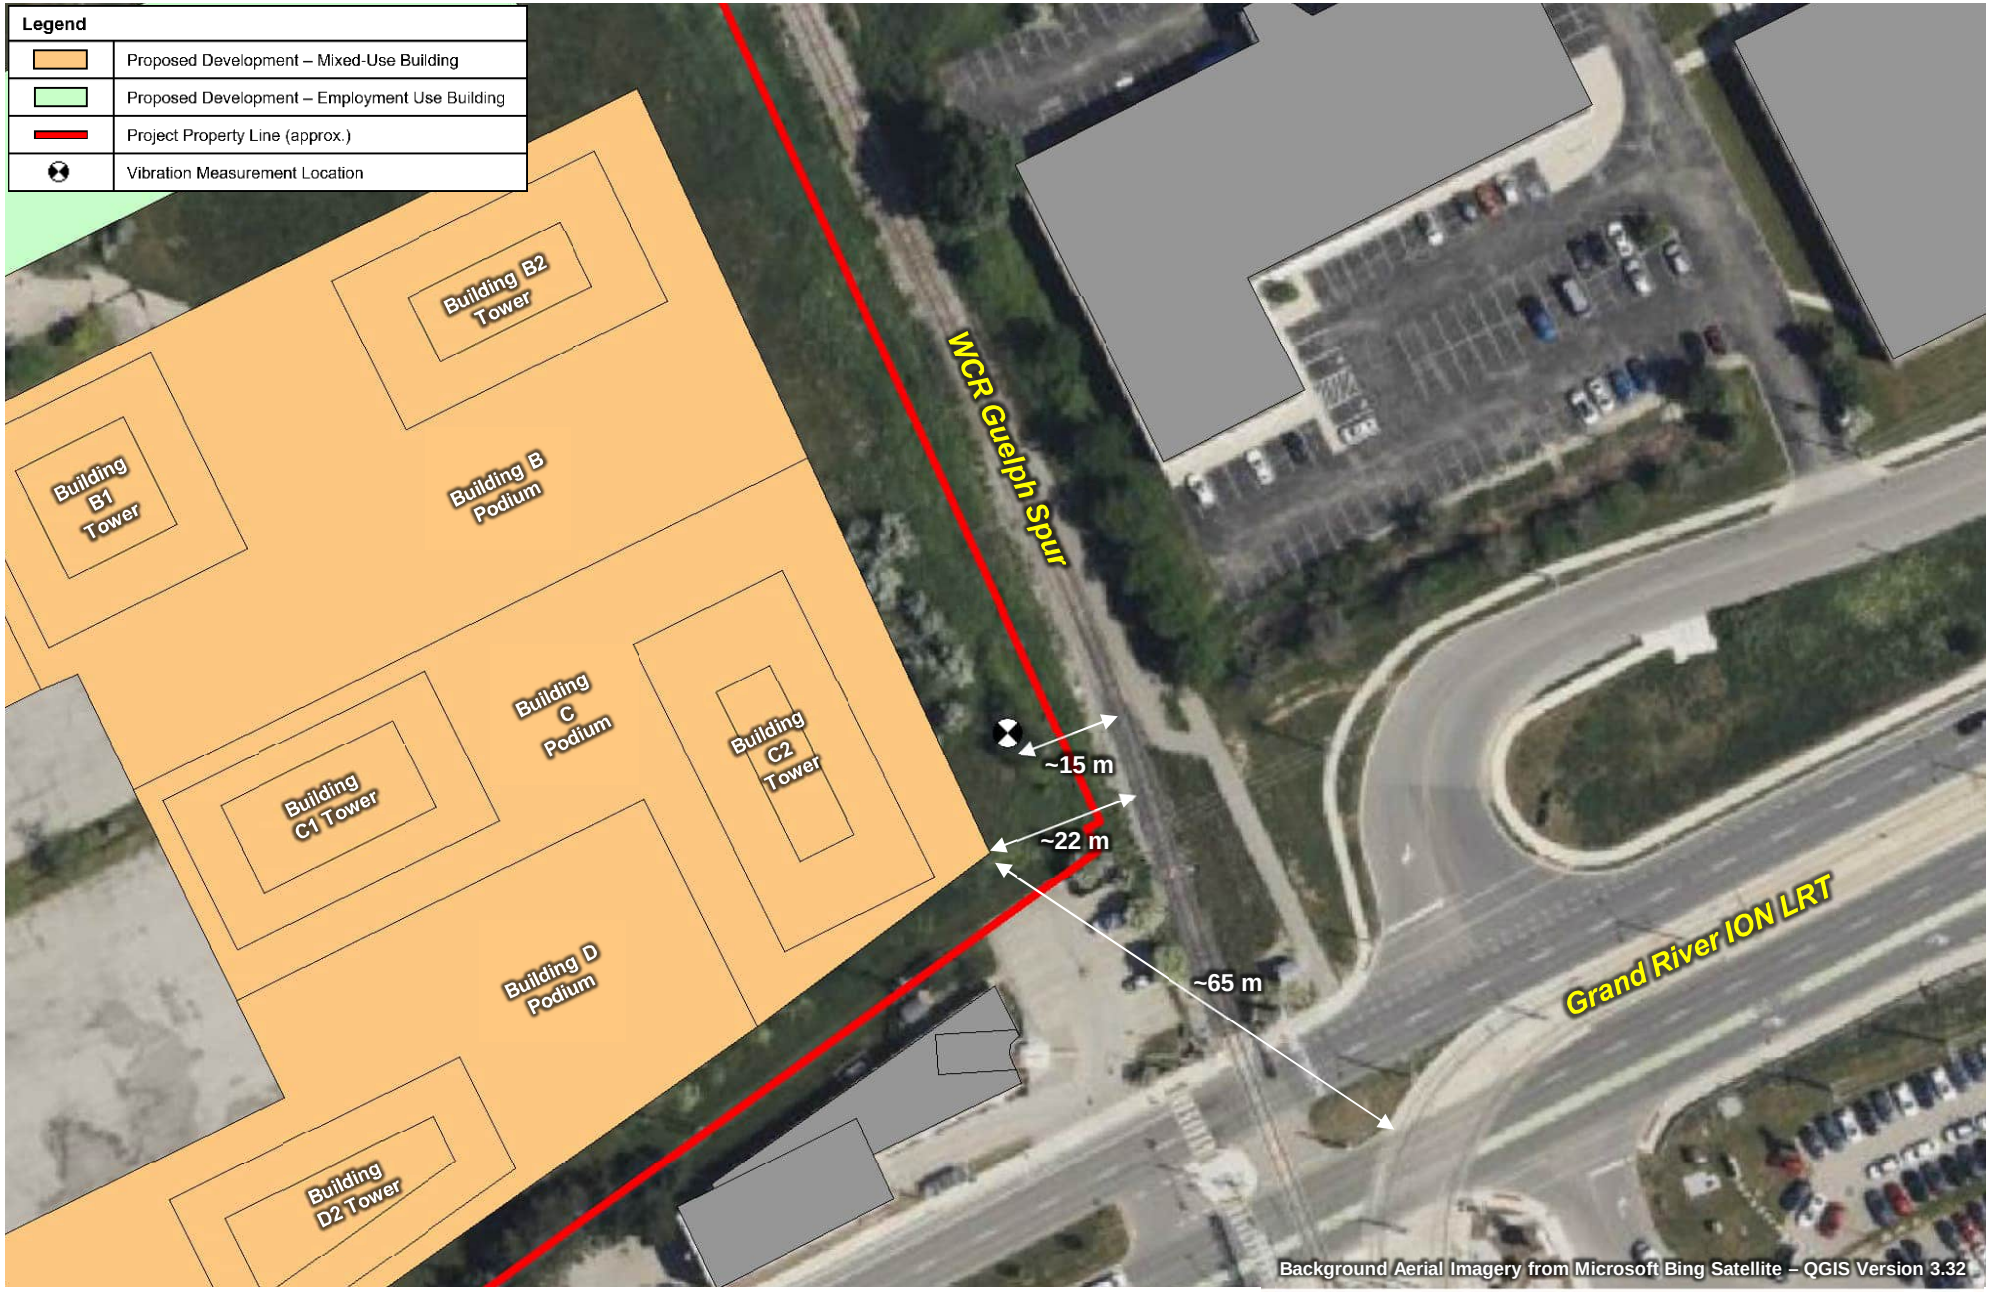

FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

VIBRATION MEASUREMENT LOCATION AND SETBACK DISTANCES

True North

Scale: 1:1,000


METRES

Date: March 14, 2024 Rev 1.0

Project No. 241.030968.00001

Figure No. **10**

SLR

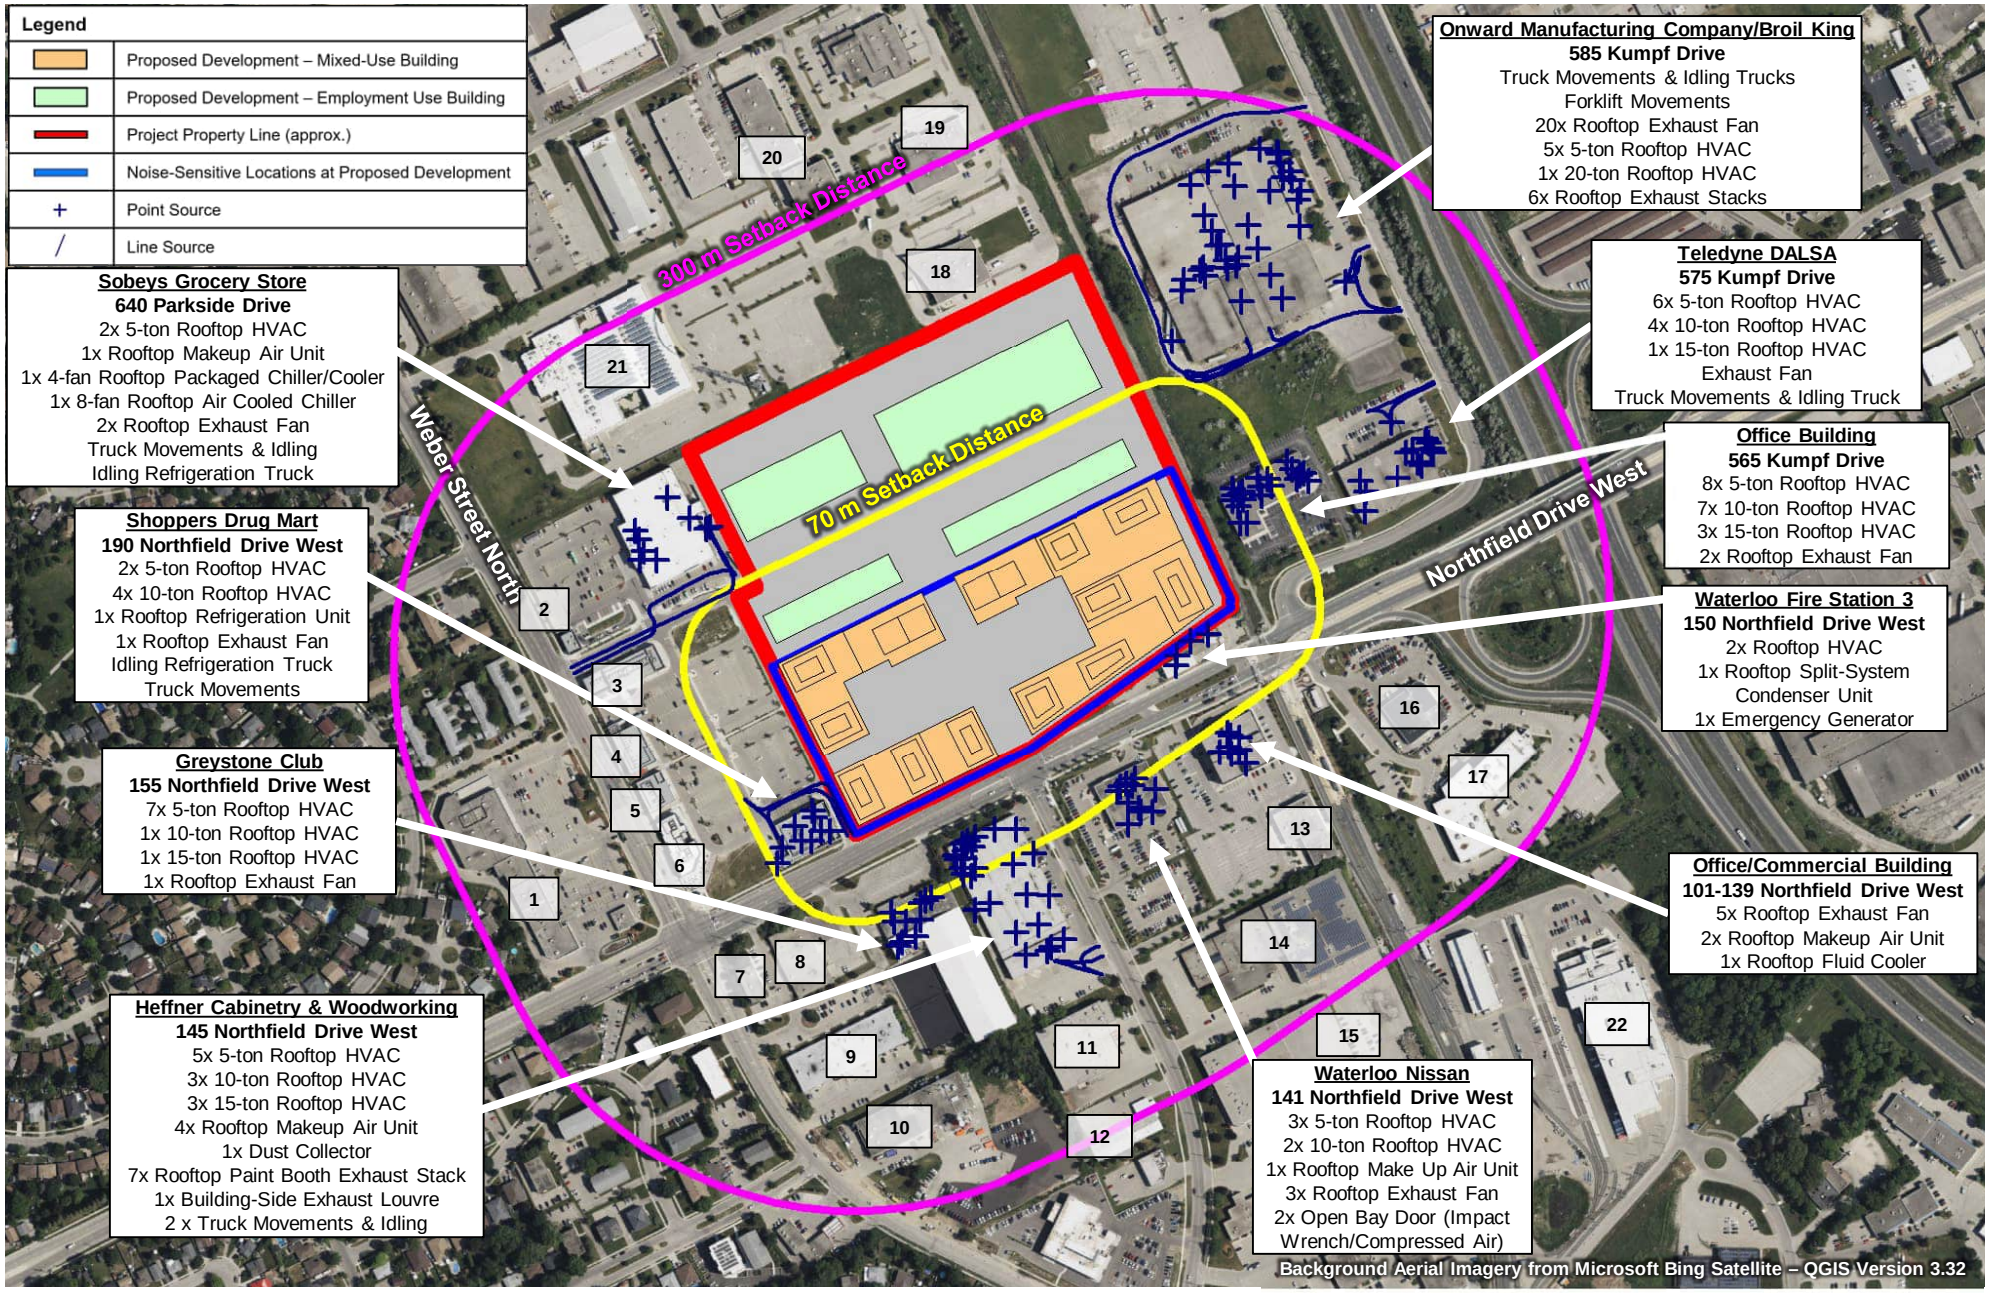

FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

SURROUNDING STATIONARY SOURCE LOCATIONS

True North

Scale: 1:6,000


METRES

Date: March 14, 2024 Rev 1.0

Project No. 241.030968.00001


Figure No. **11**

SLR

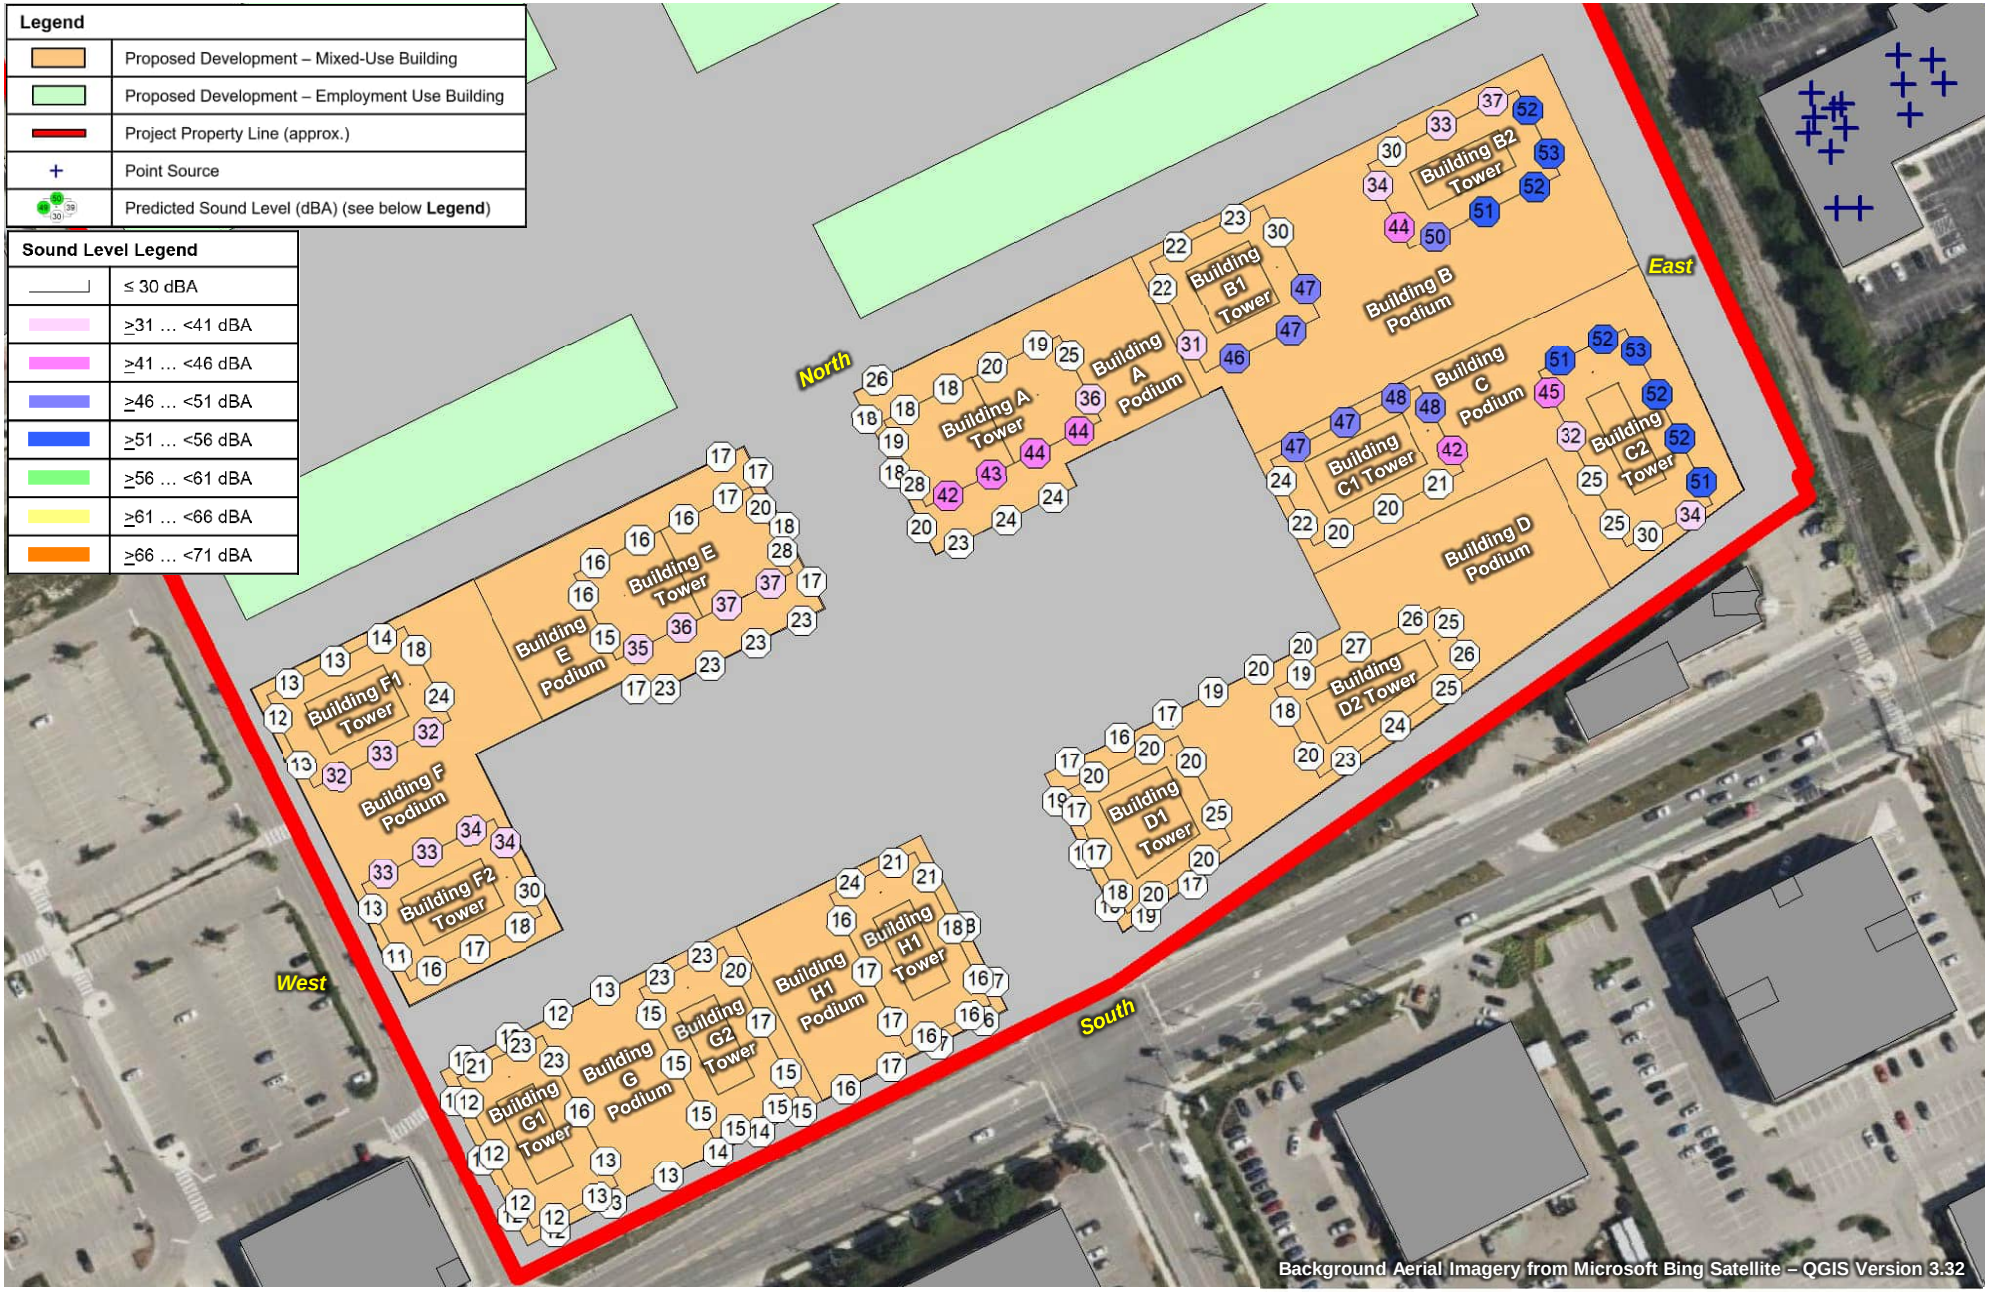


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **12**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

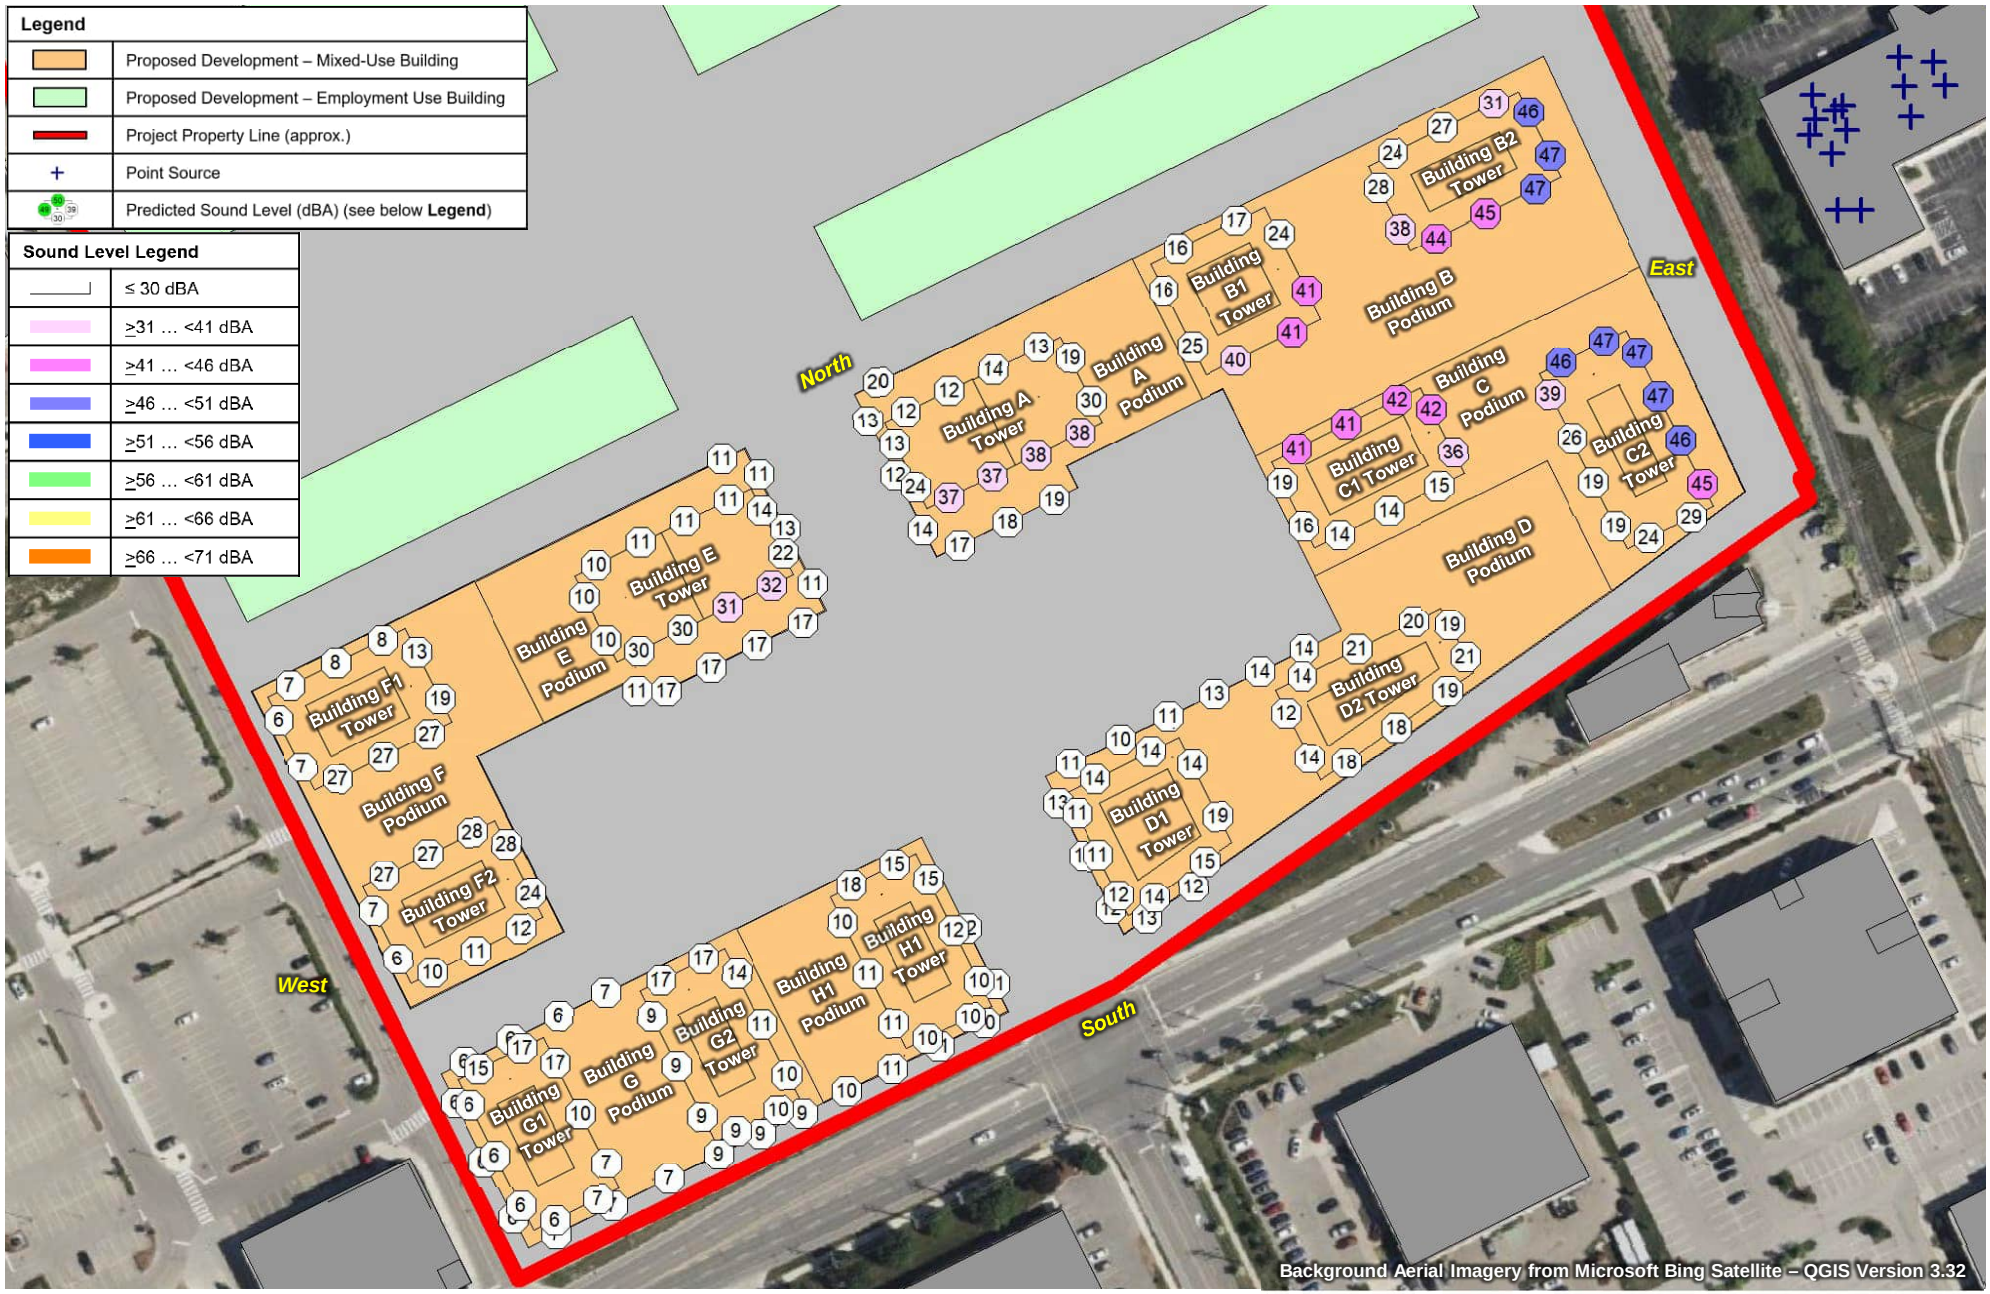


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **13**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – NIGHT-TIME		Project No. 241.030968.00001	

SLR

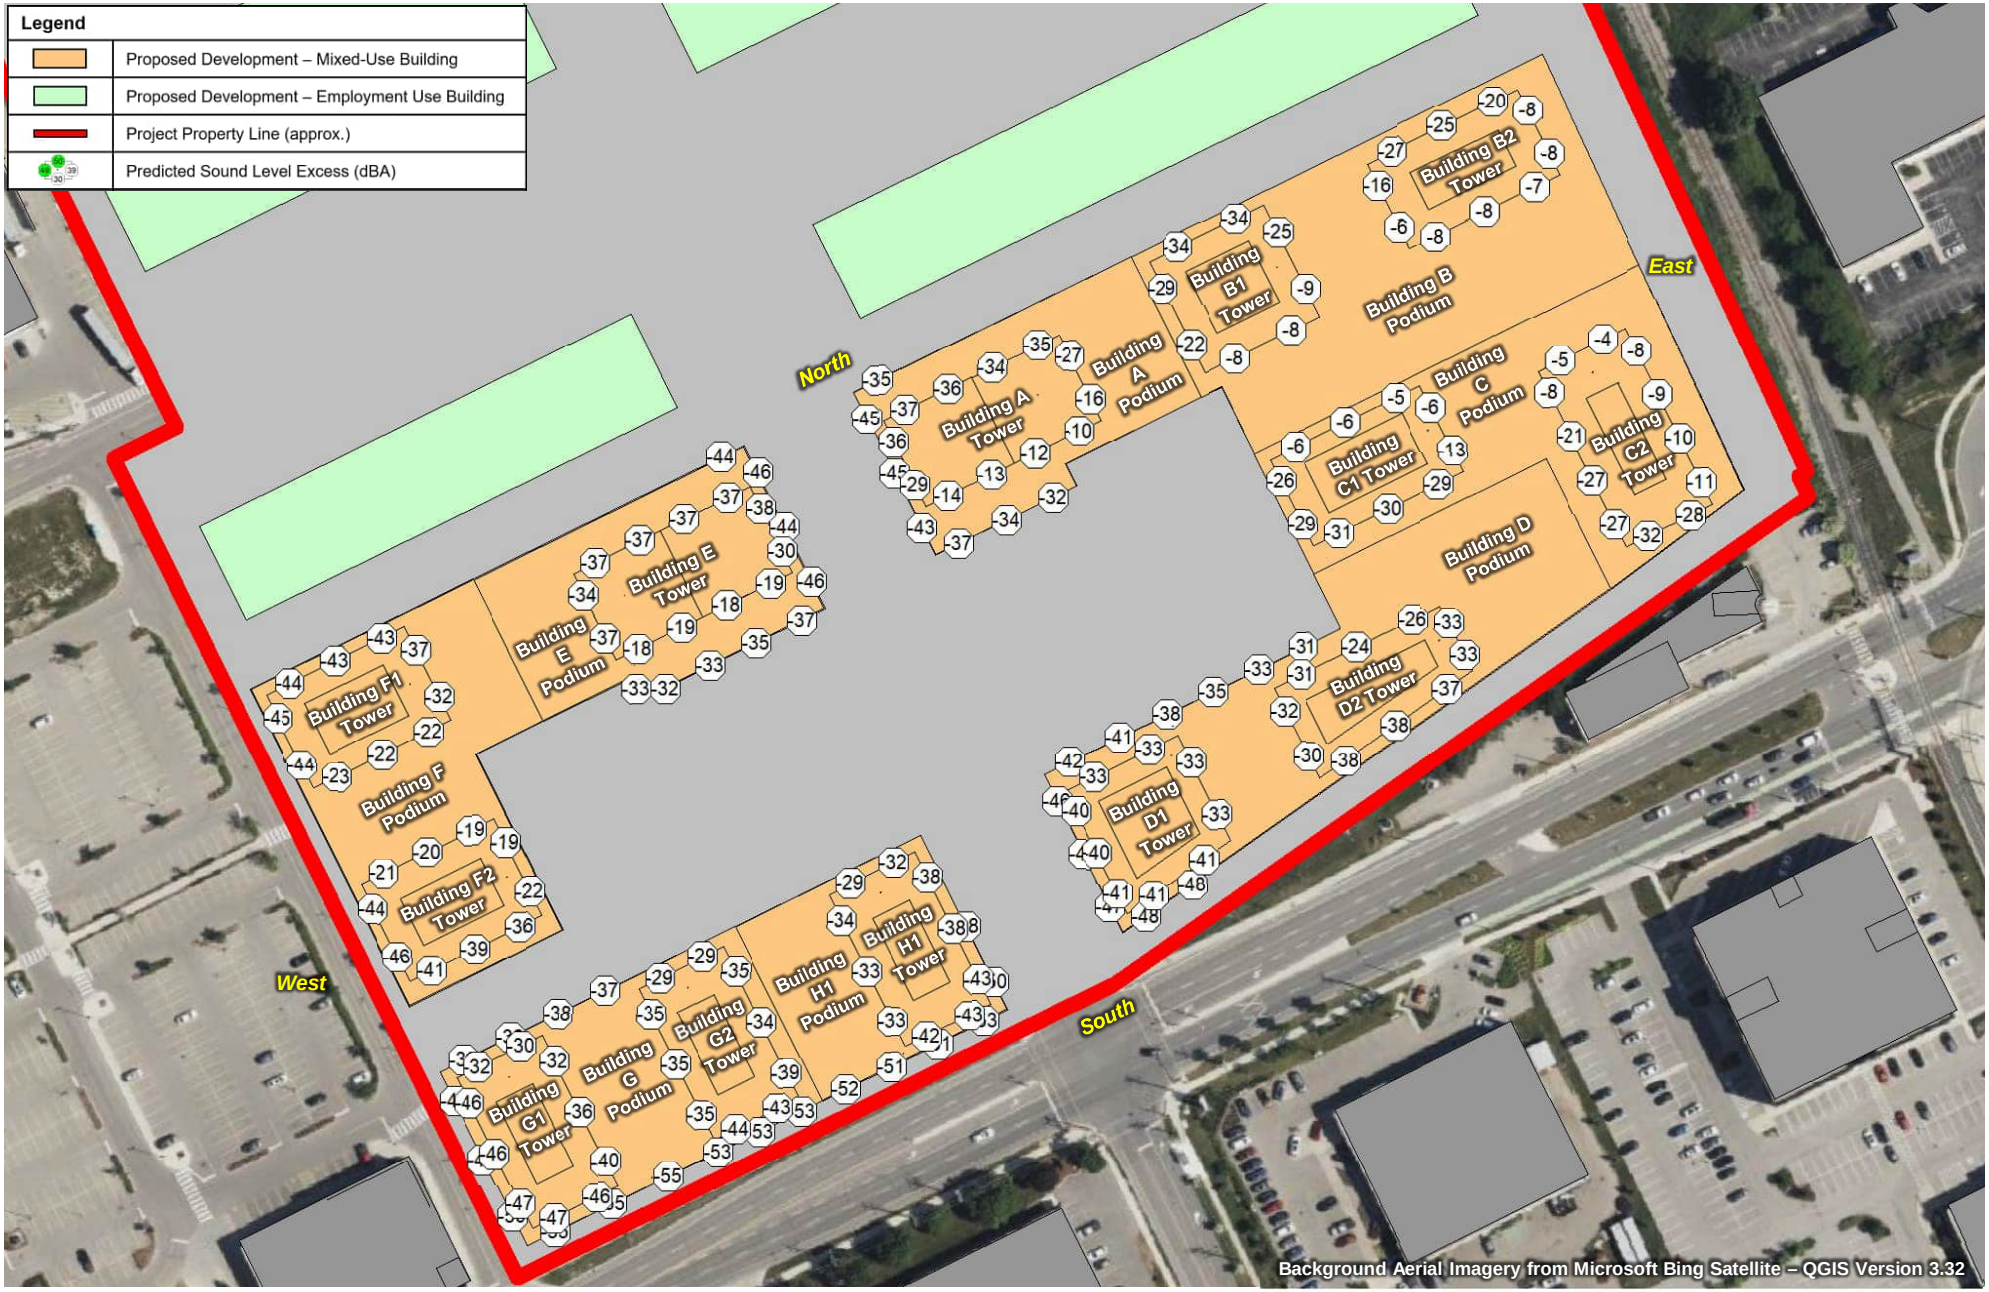


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **14**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – DAYTIME		Project No. 241.030968.00001	

SLR

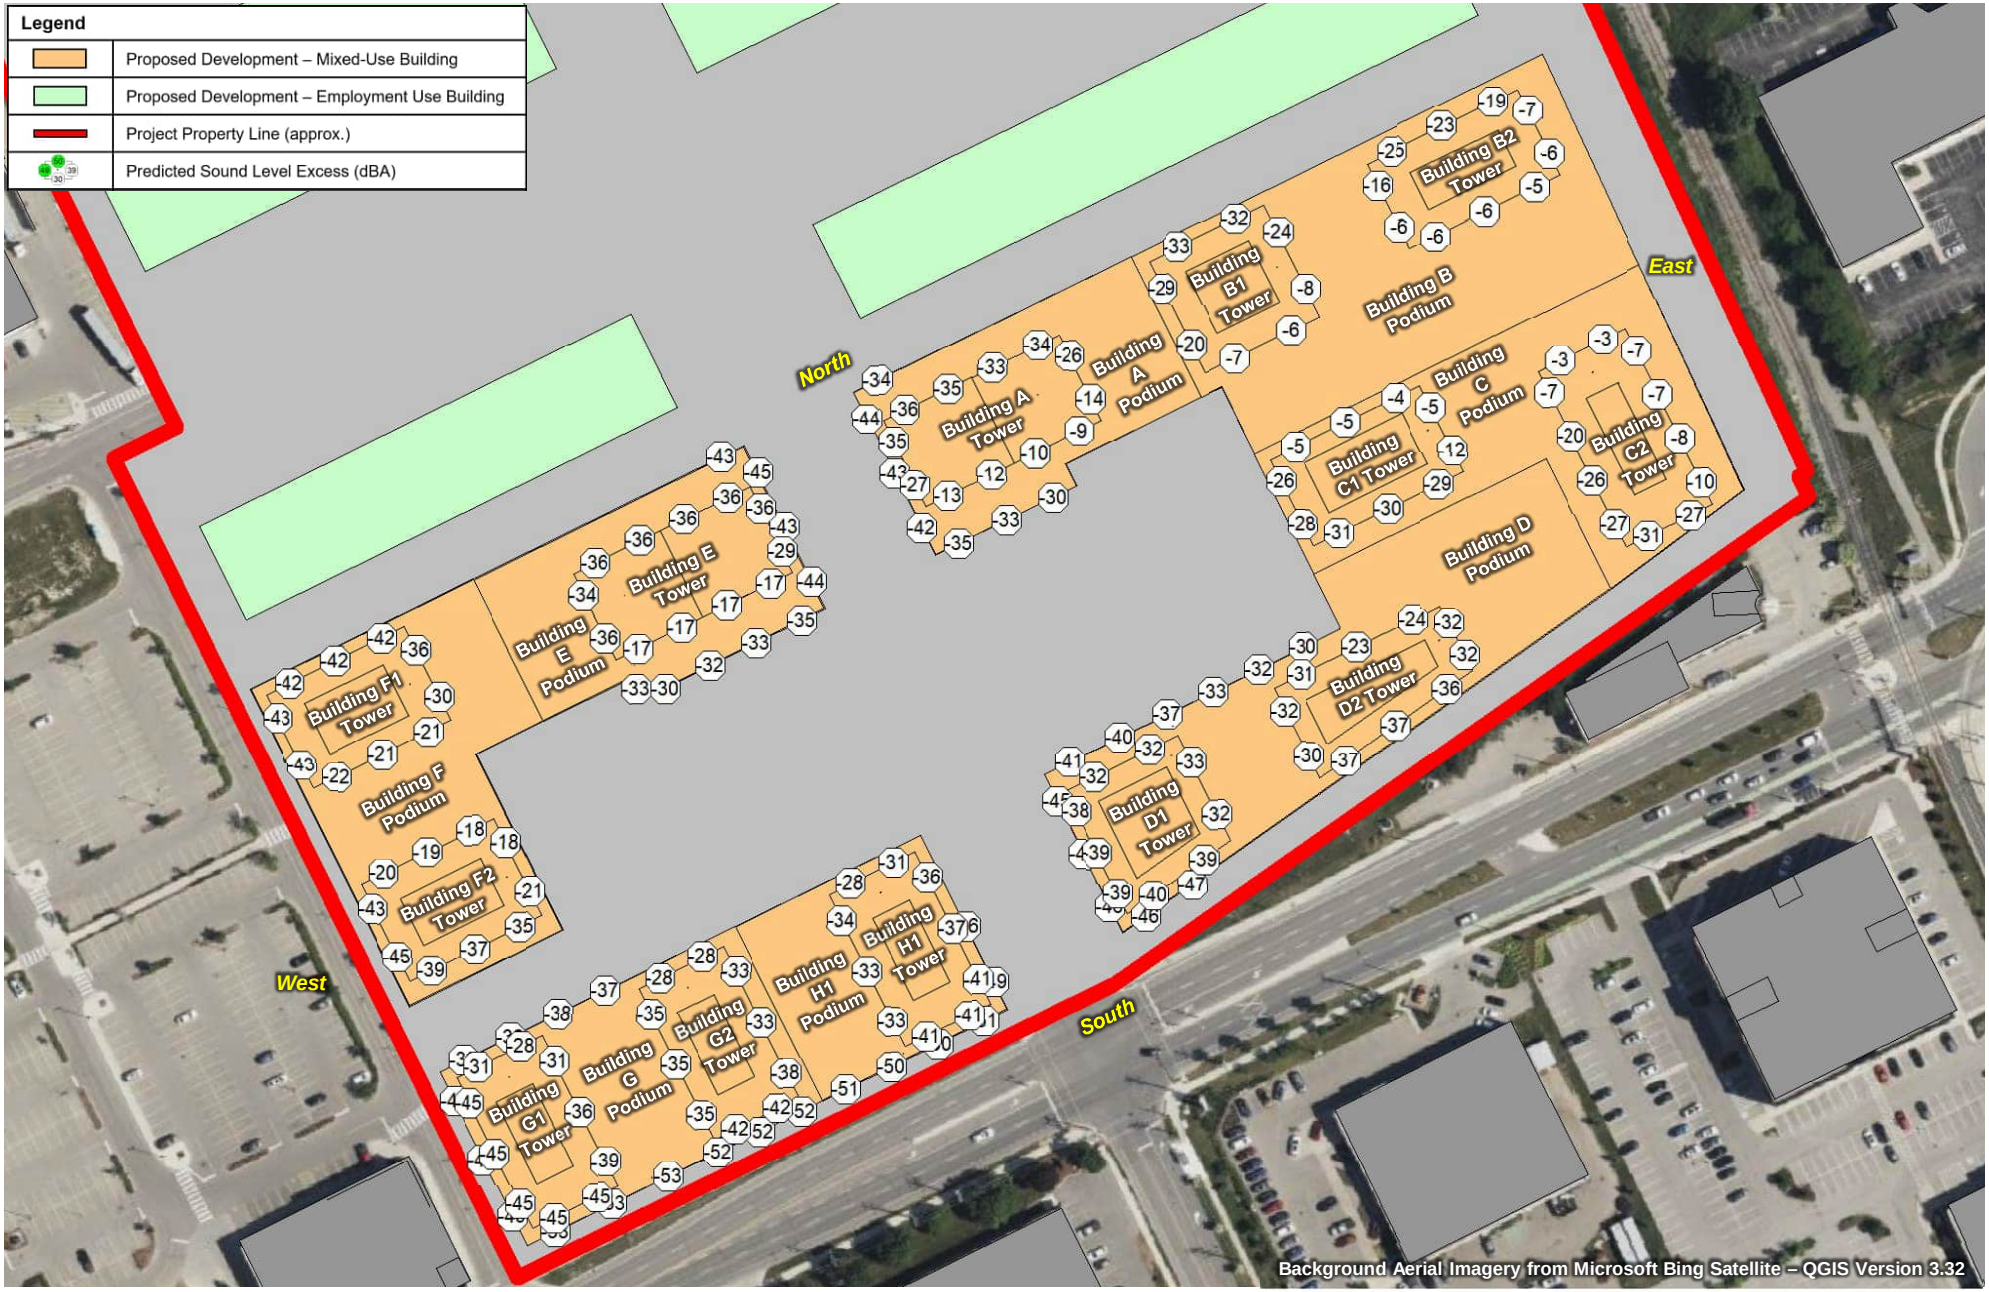


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **15**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – EVENING		Project No. 241.030968.00001	

SLR

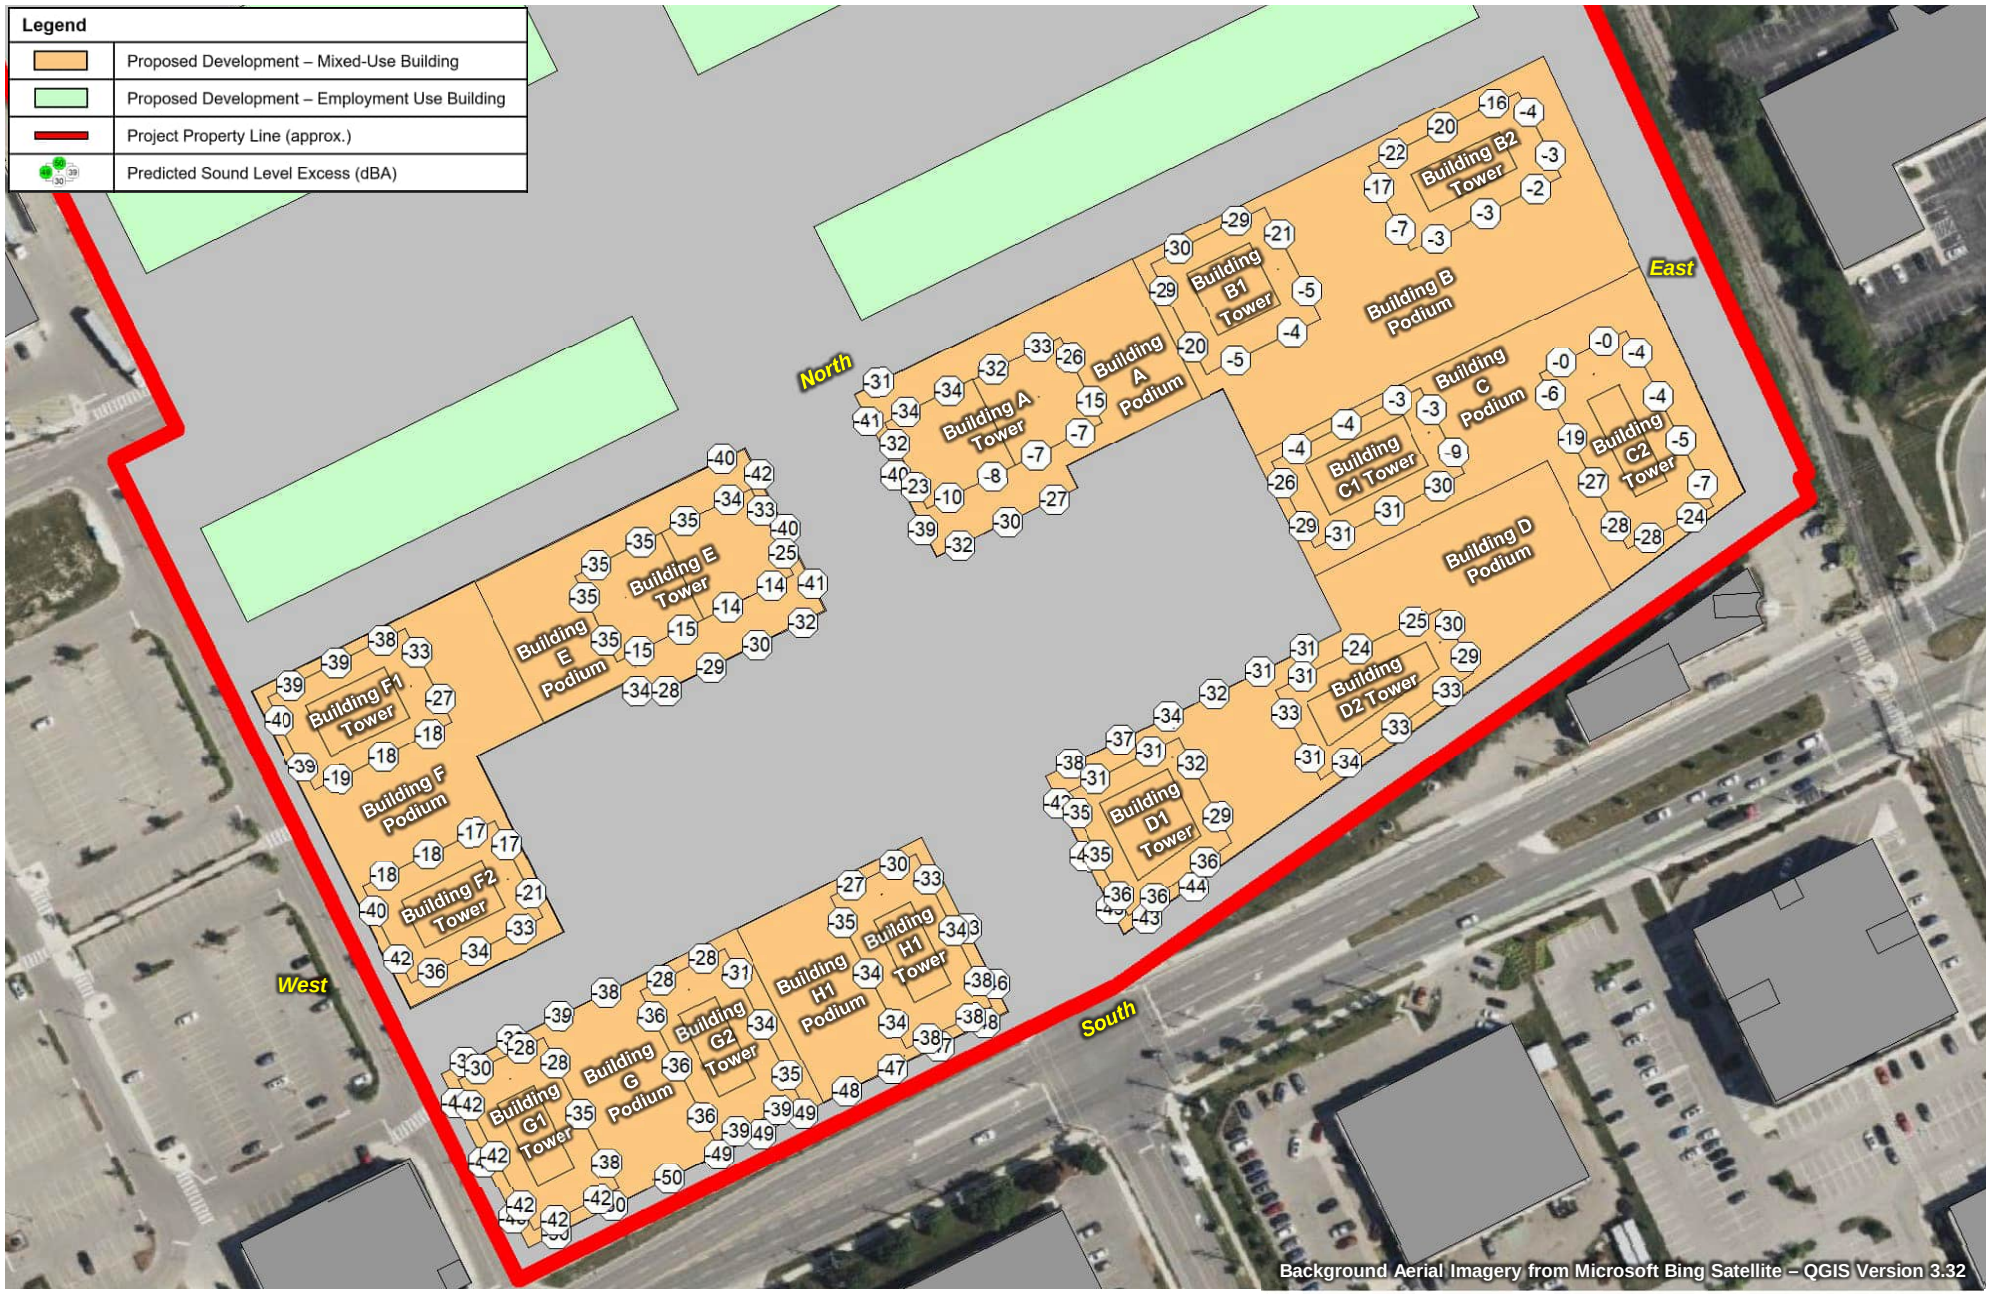


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **16**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – NIGHT-TIME		Project No. 241.030968.00001	

SLR

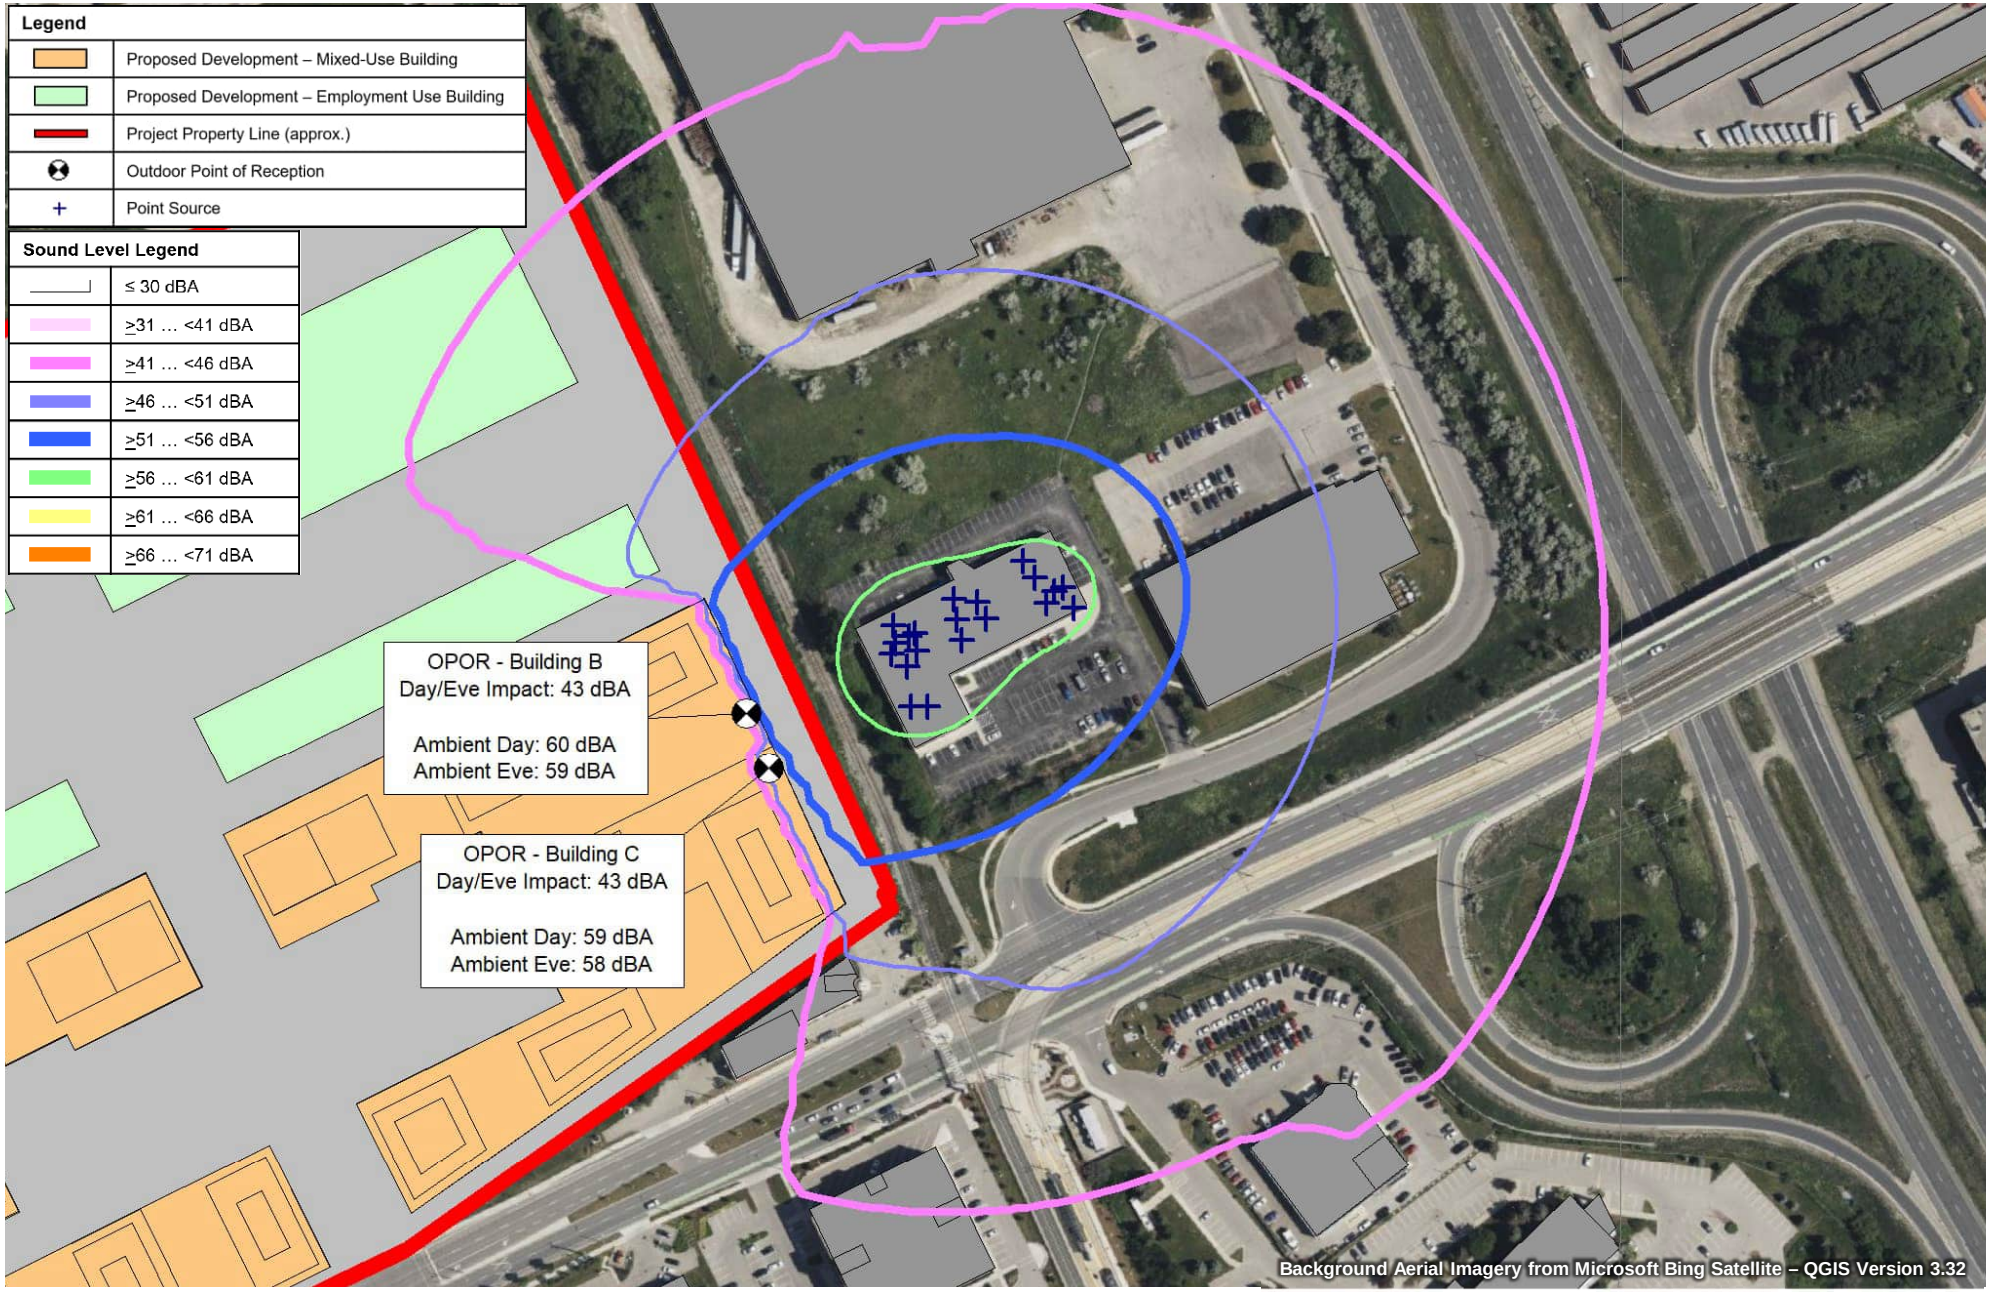


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **17**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – OFFICE BUILDING, 565 KUMPF DRIVE – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

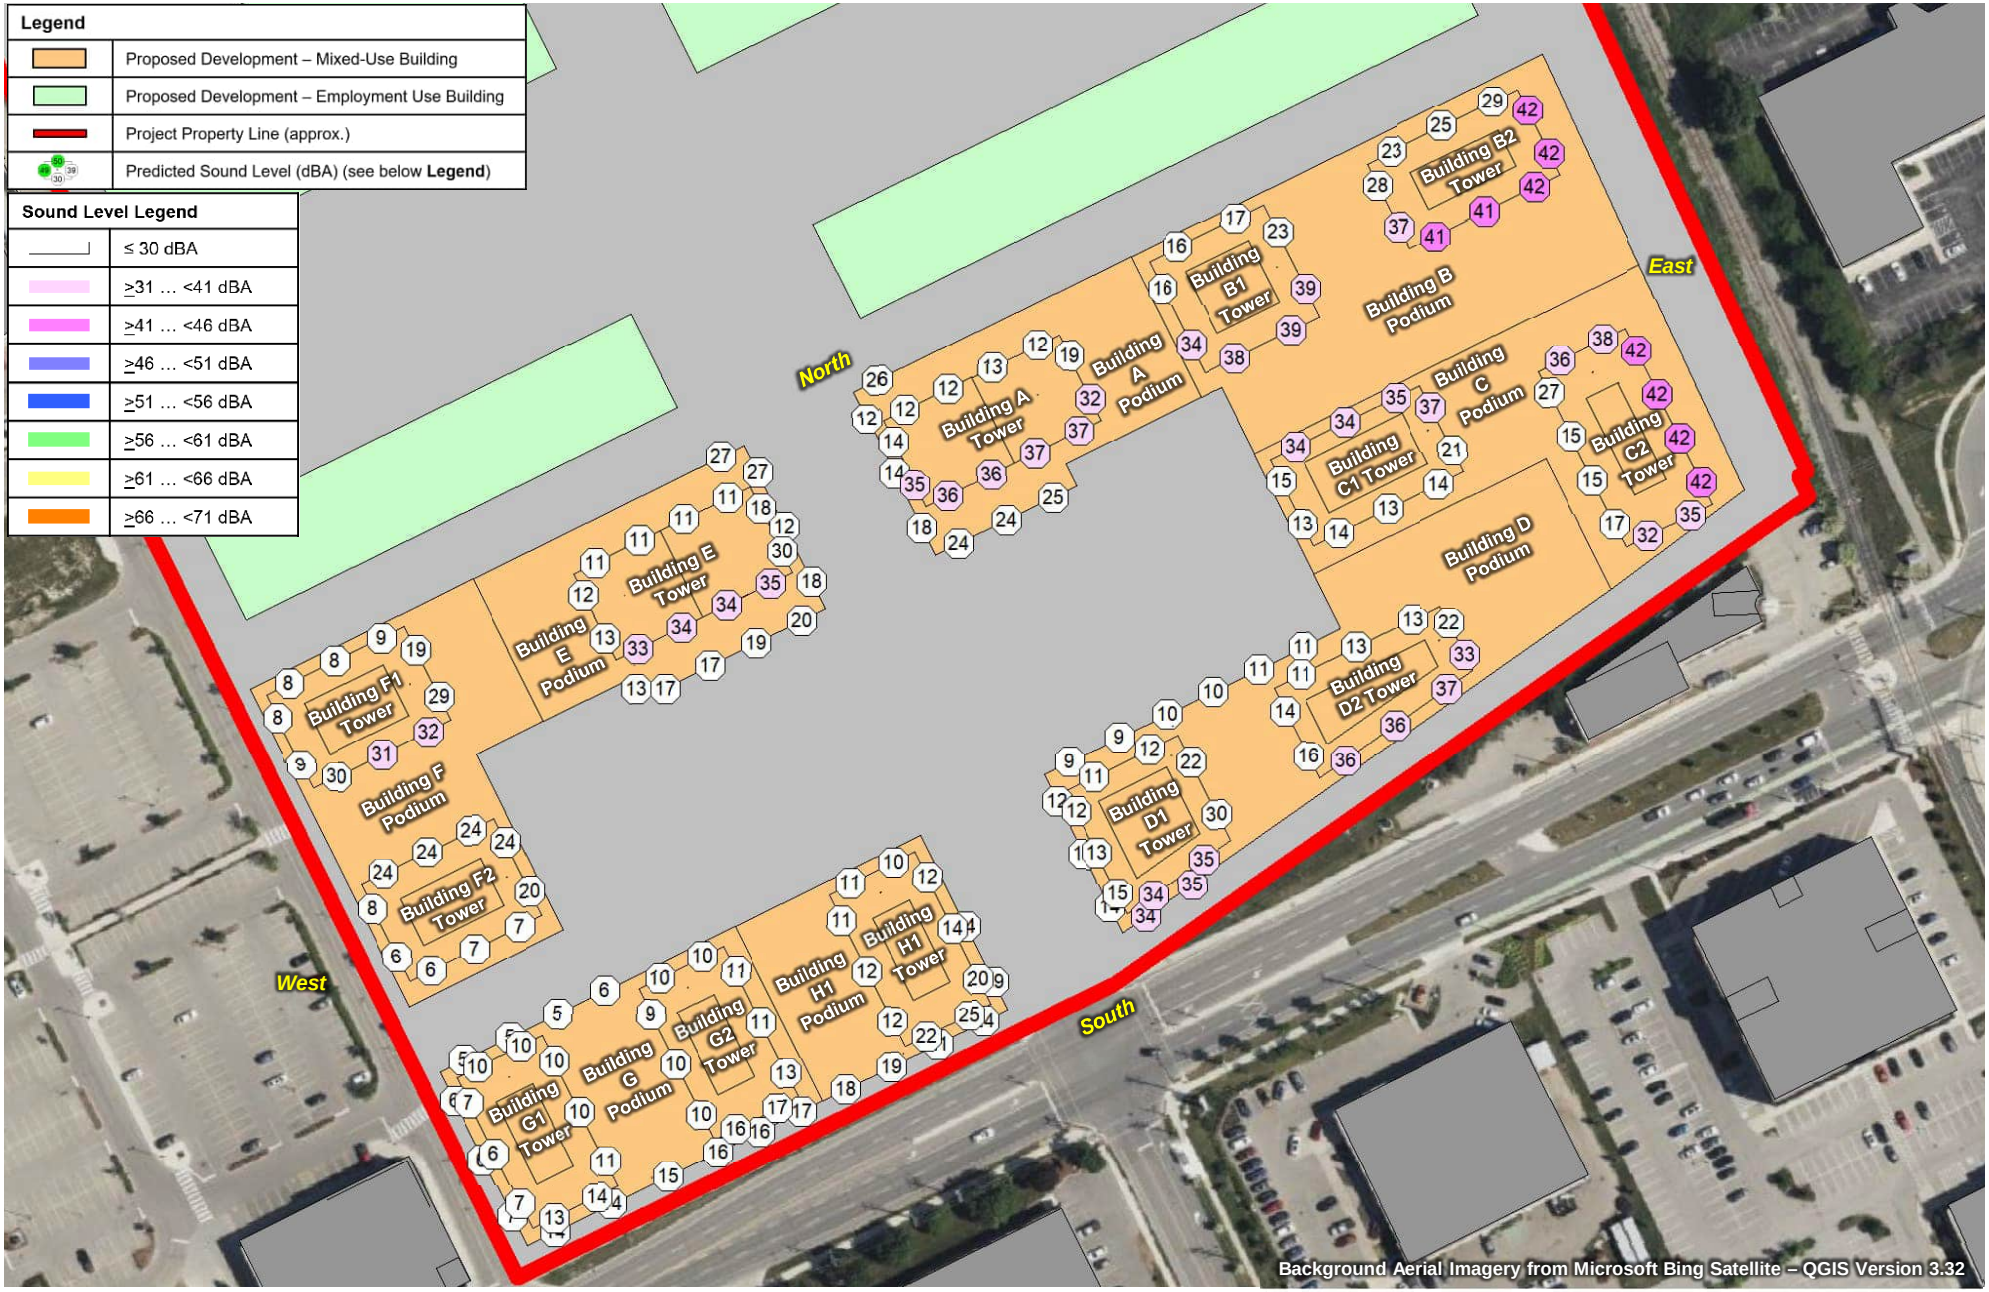


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **18**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – TELEDYNE DALSA – 575 KUMPF DRIVE – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

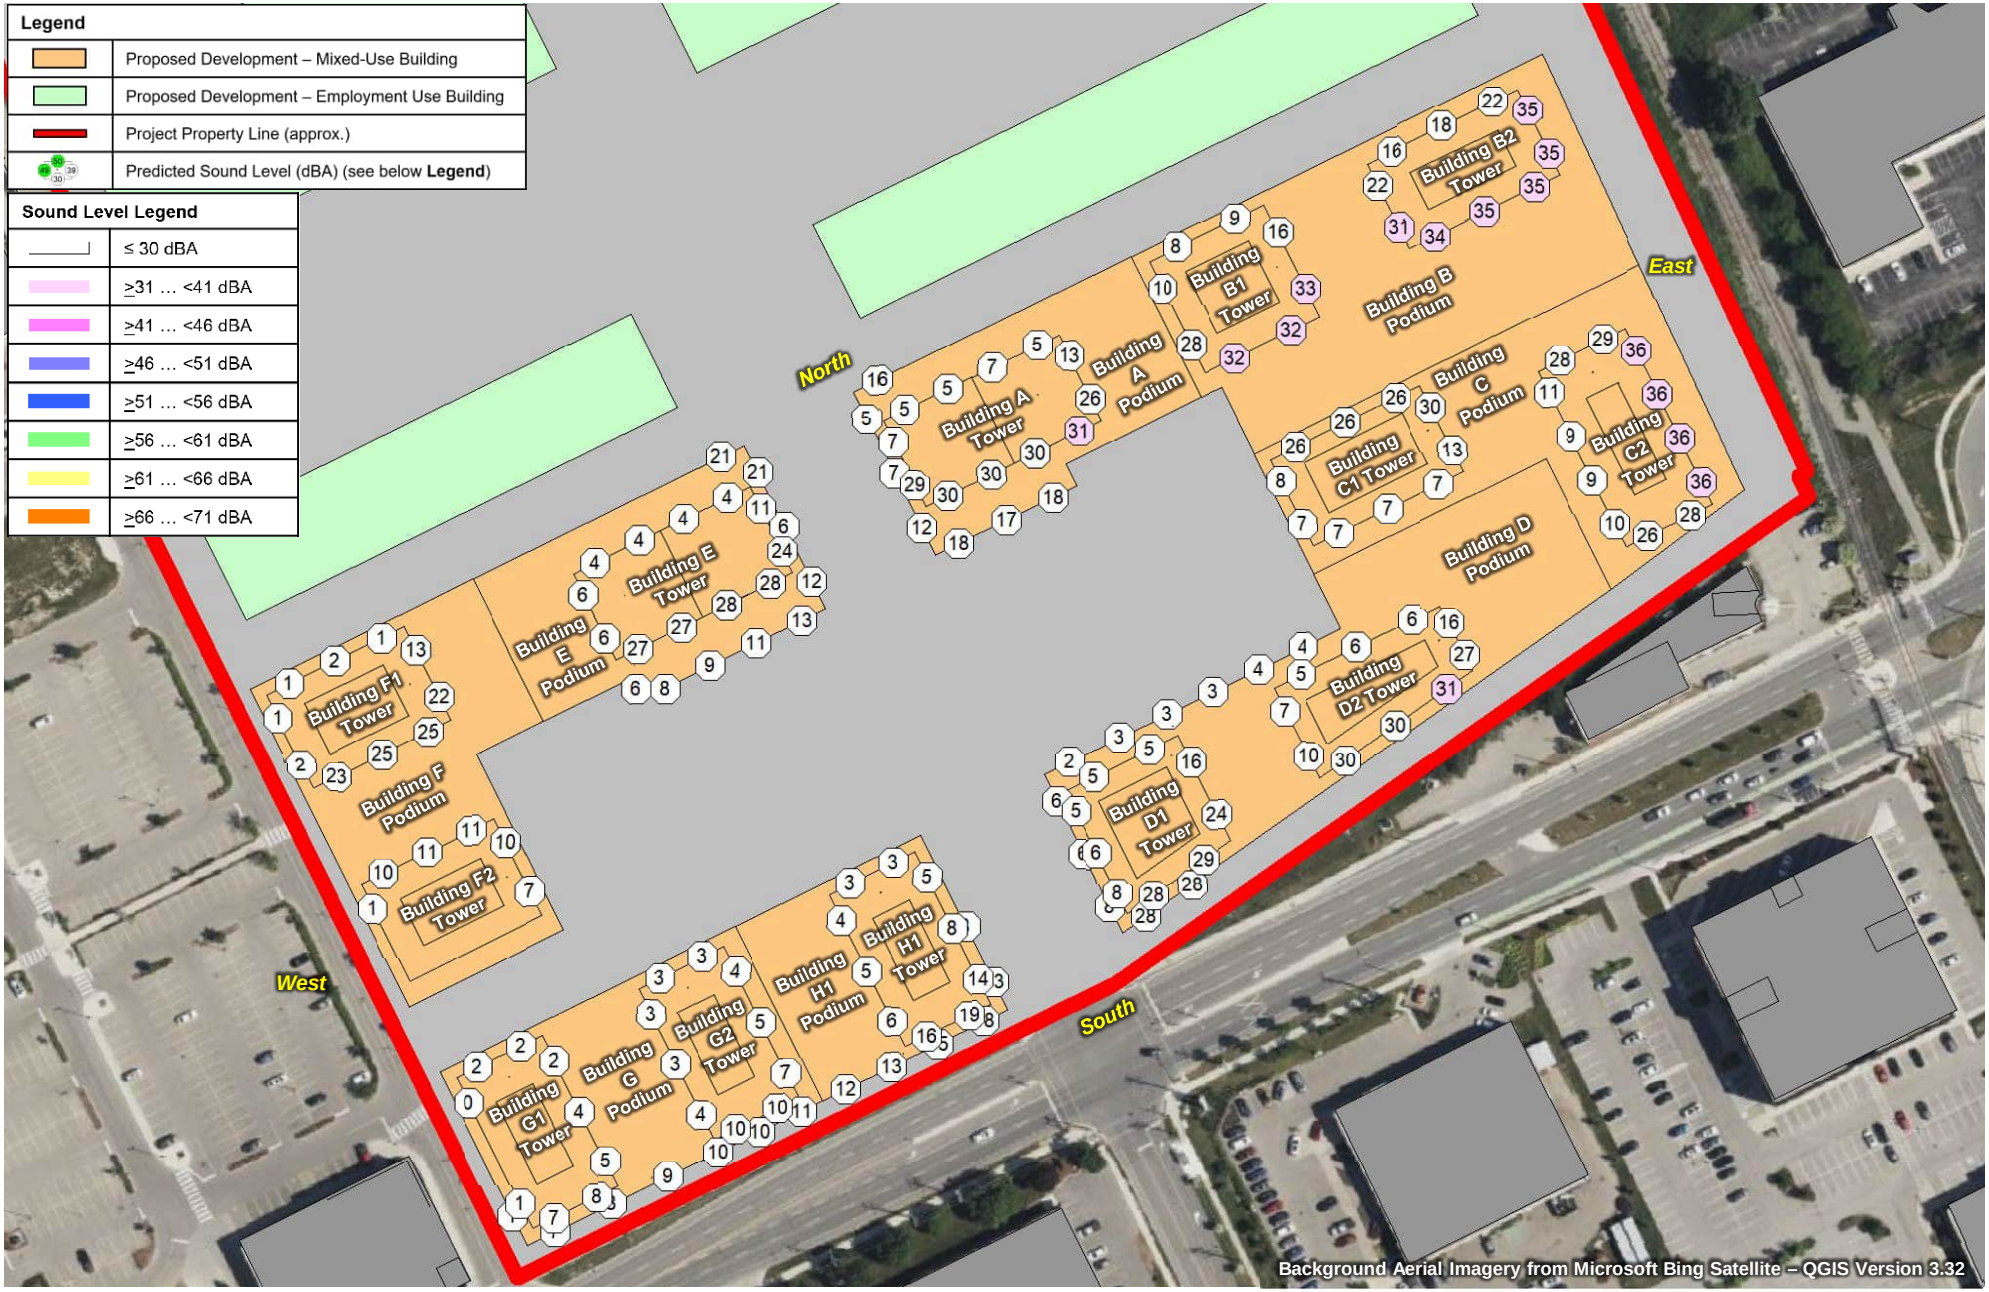


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **19**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – TELEDYNE DALSA – 575 KUMPF DRIVE – NIGHT-TIME		Project No. 241.030968.00001	

SLR

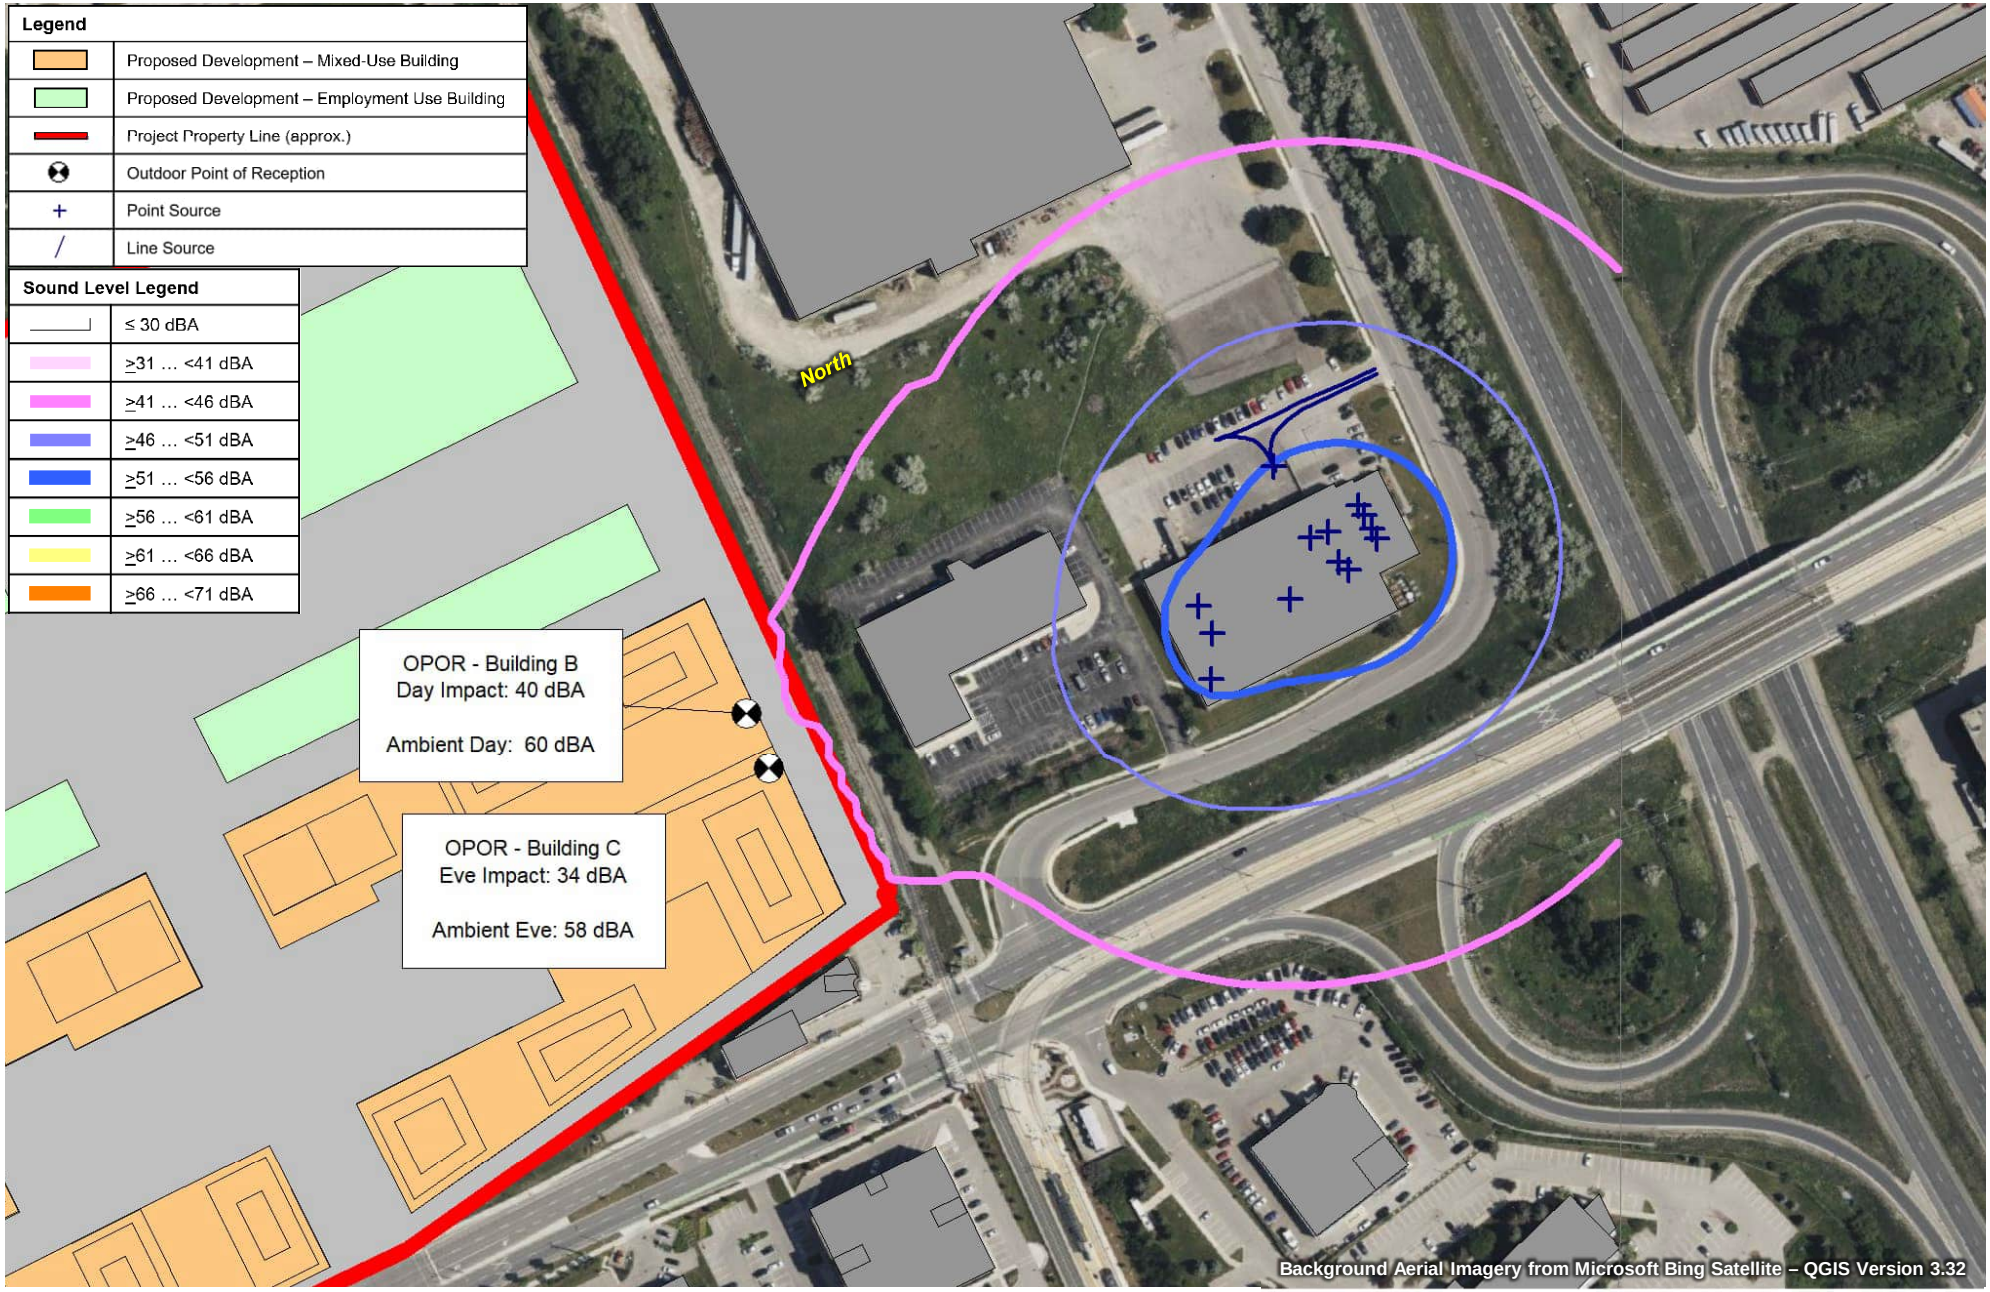


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **20**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – TELEDYNE DALSA, 575 KUMPF DRIVE – DAYTIME		Project No. 241.030968.00001	


SLR

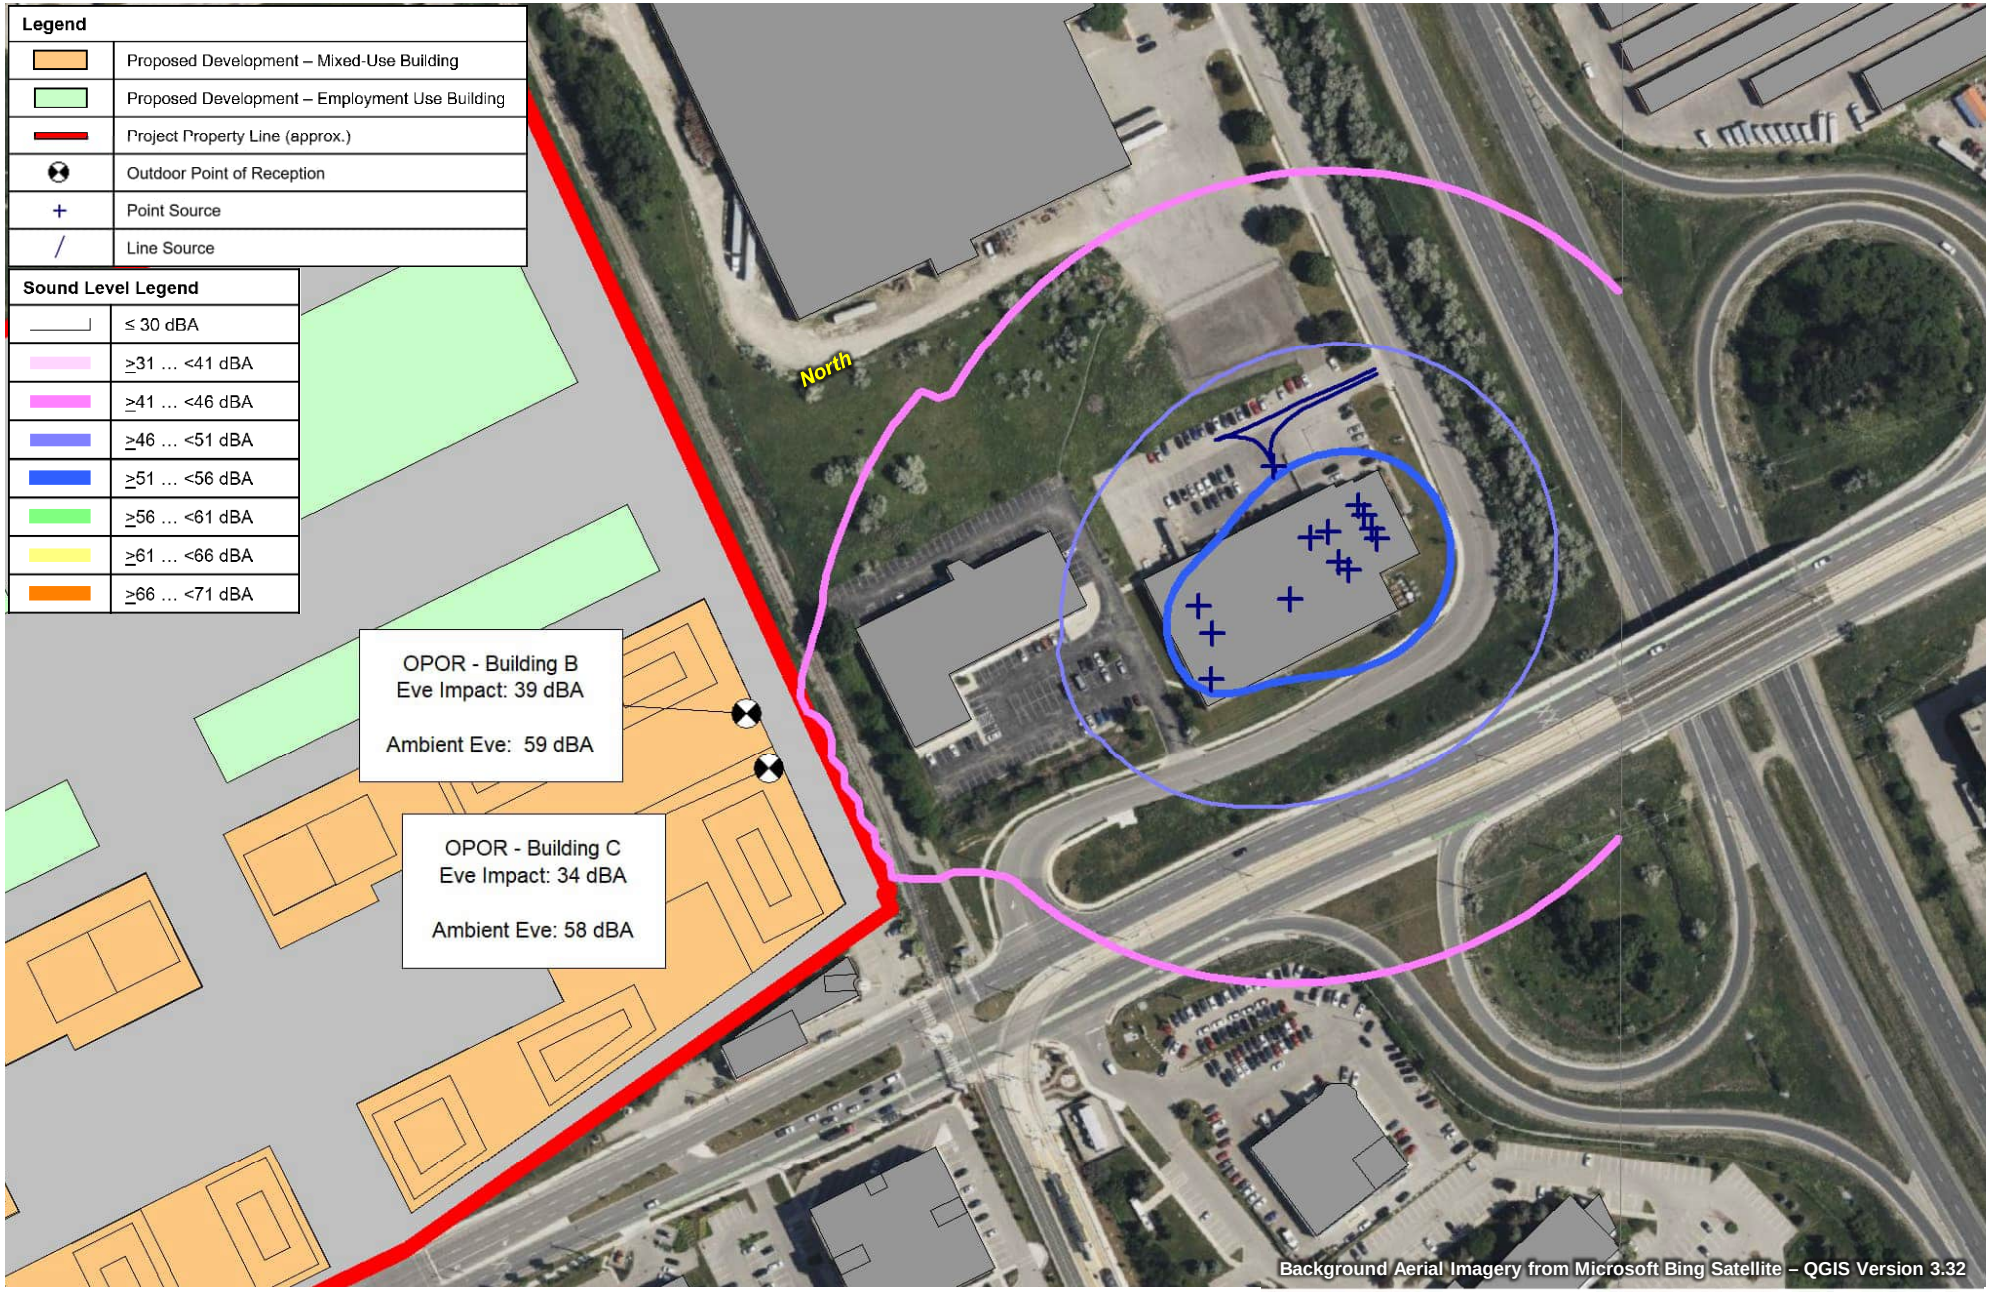

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **21**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – TELEDYNE DALSA, 575 KUMPF DRIVE – EVENING		Project No. 241.030968.00001	SLR

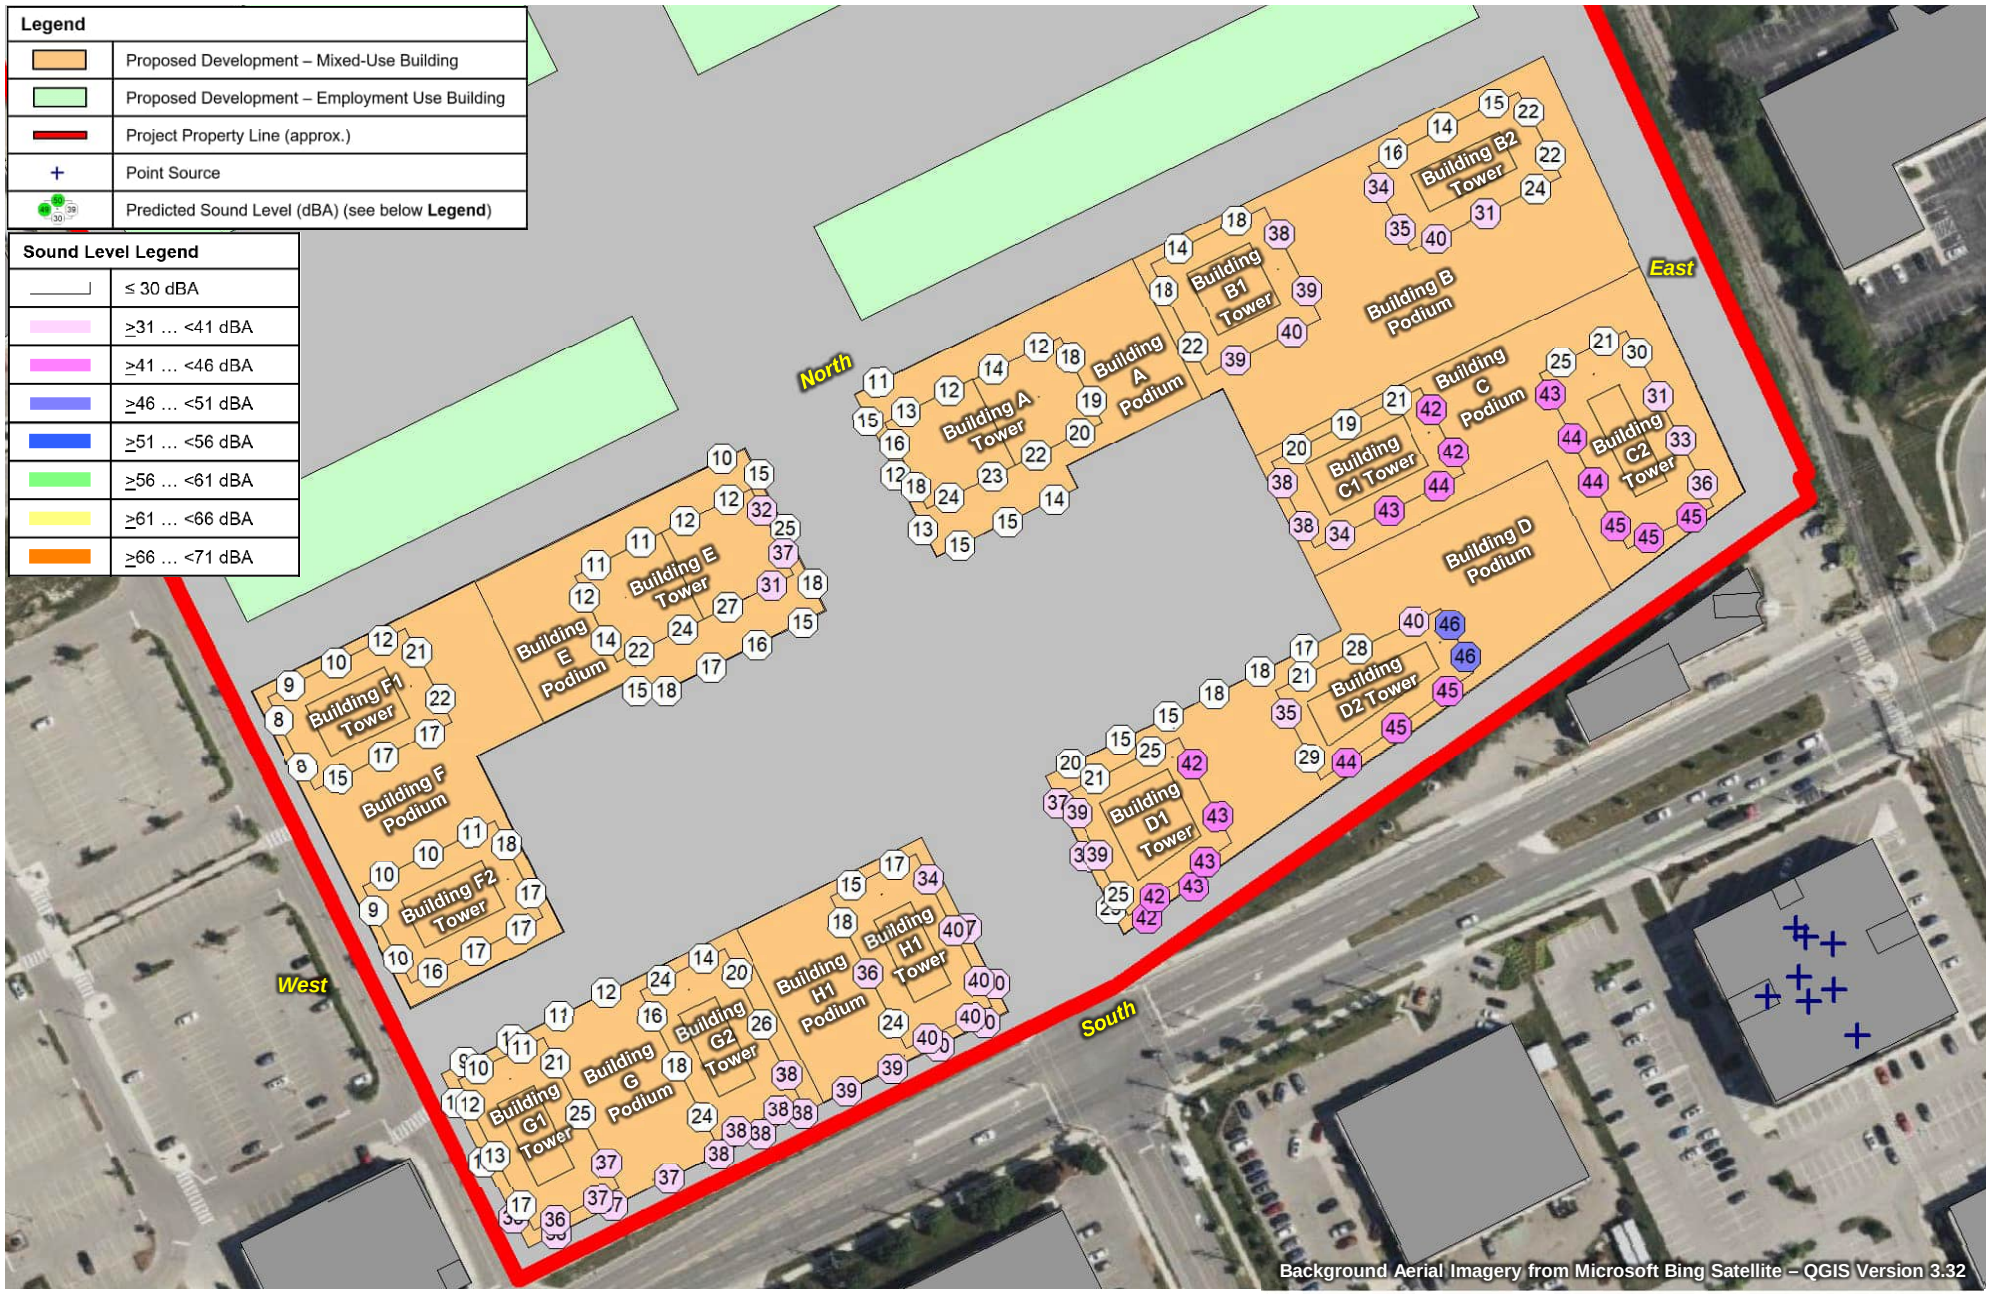


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **22**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – OFFICE/COMMERCIAL BUILDING, 101-139 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	SLR

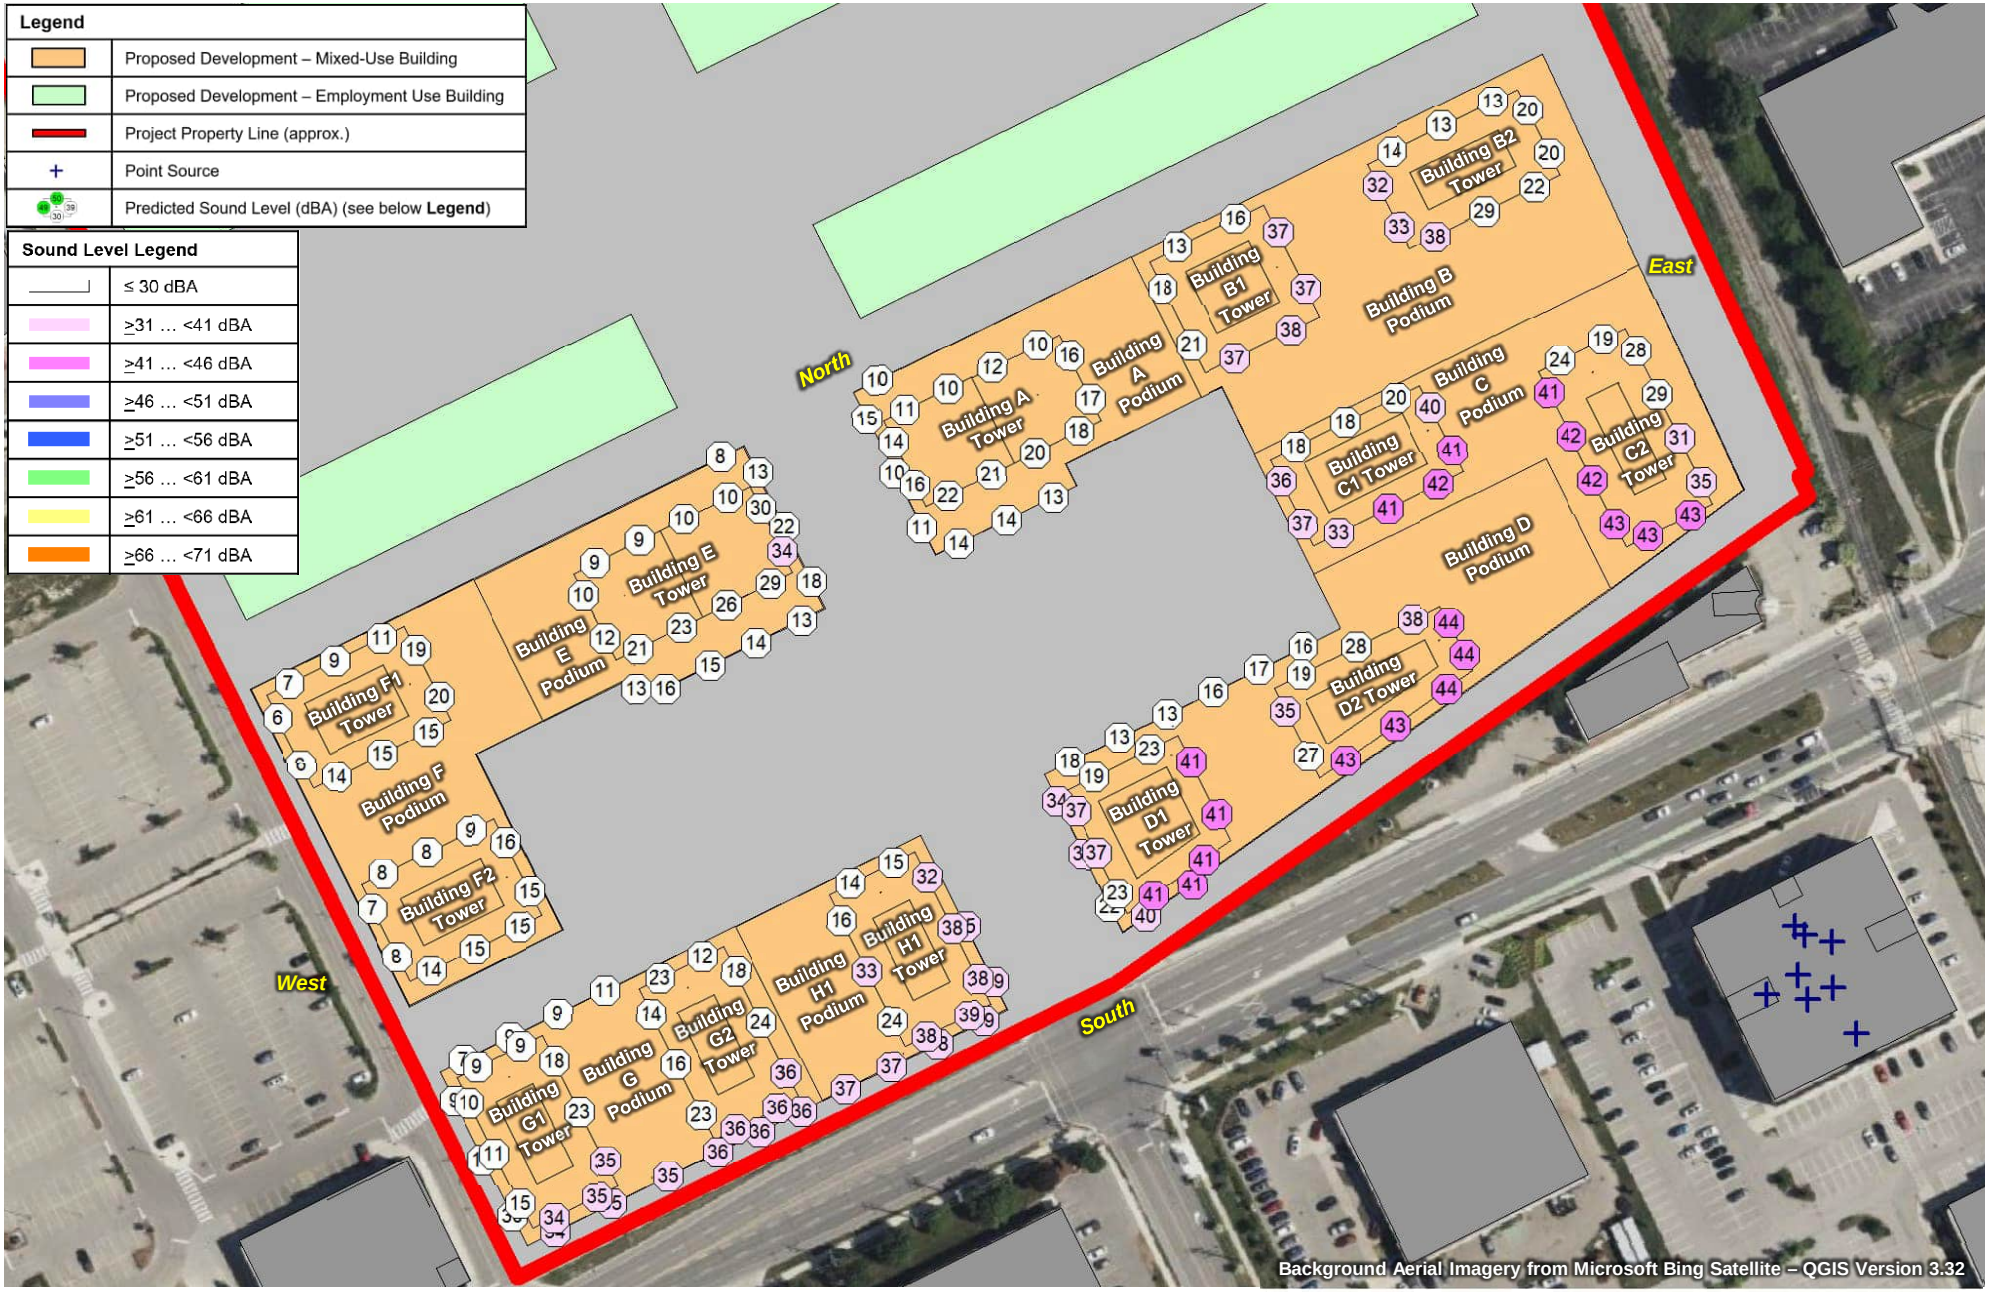


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **23**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – OFFICE/COMMERCIAL BUILDING, 101-139 NORTHFIELD DRIVE WEST – NIGHT-TIME		Project No. 241.030968.00001	

SLR

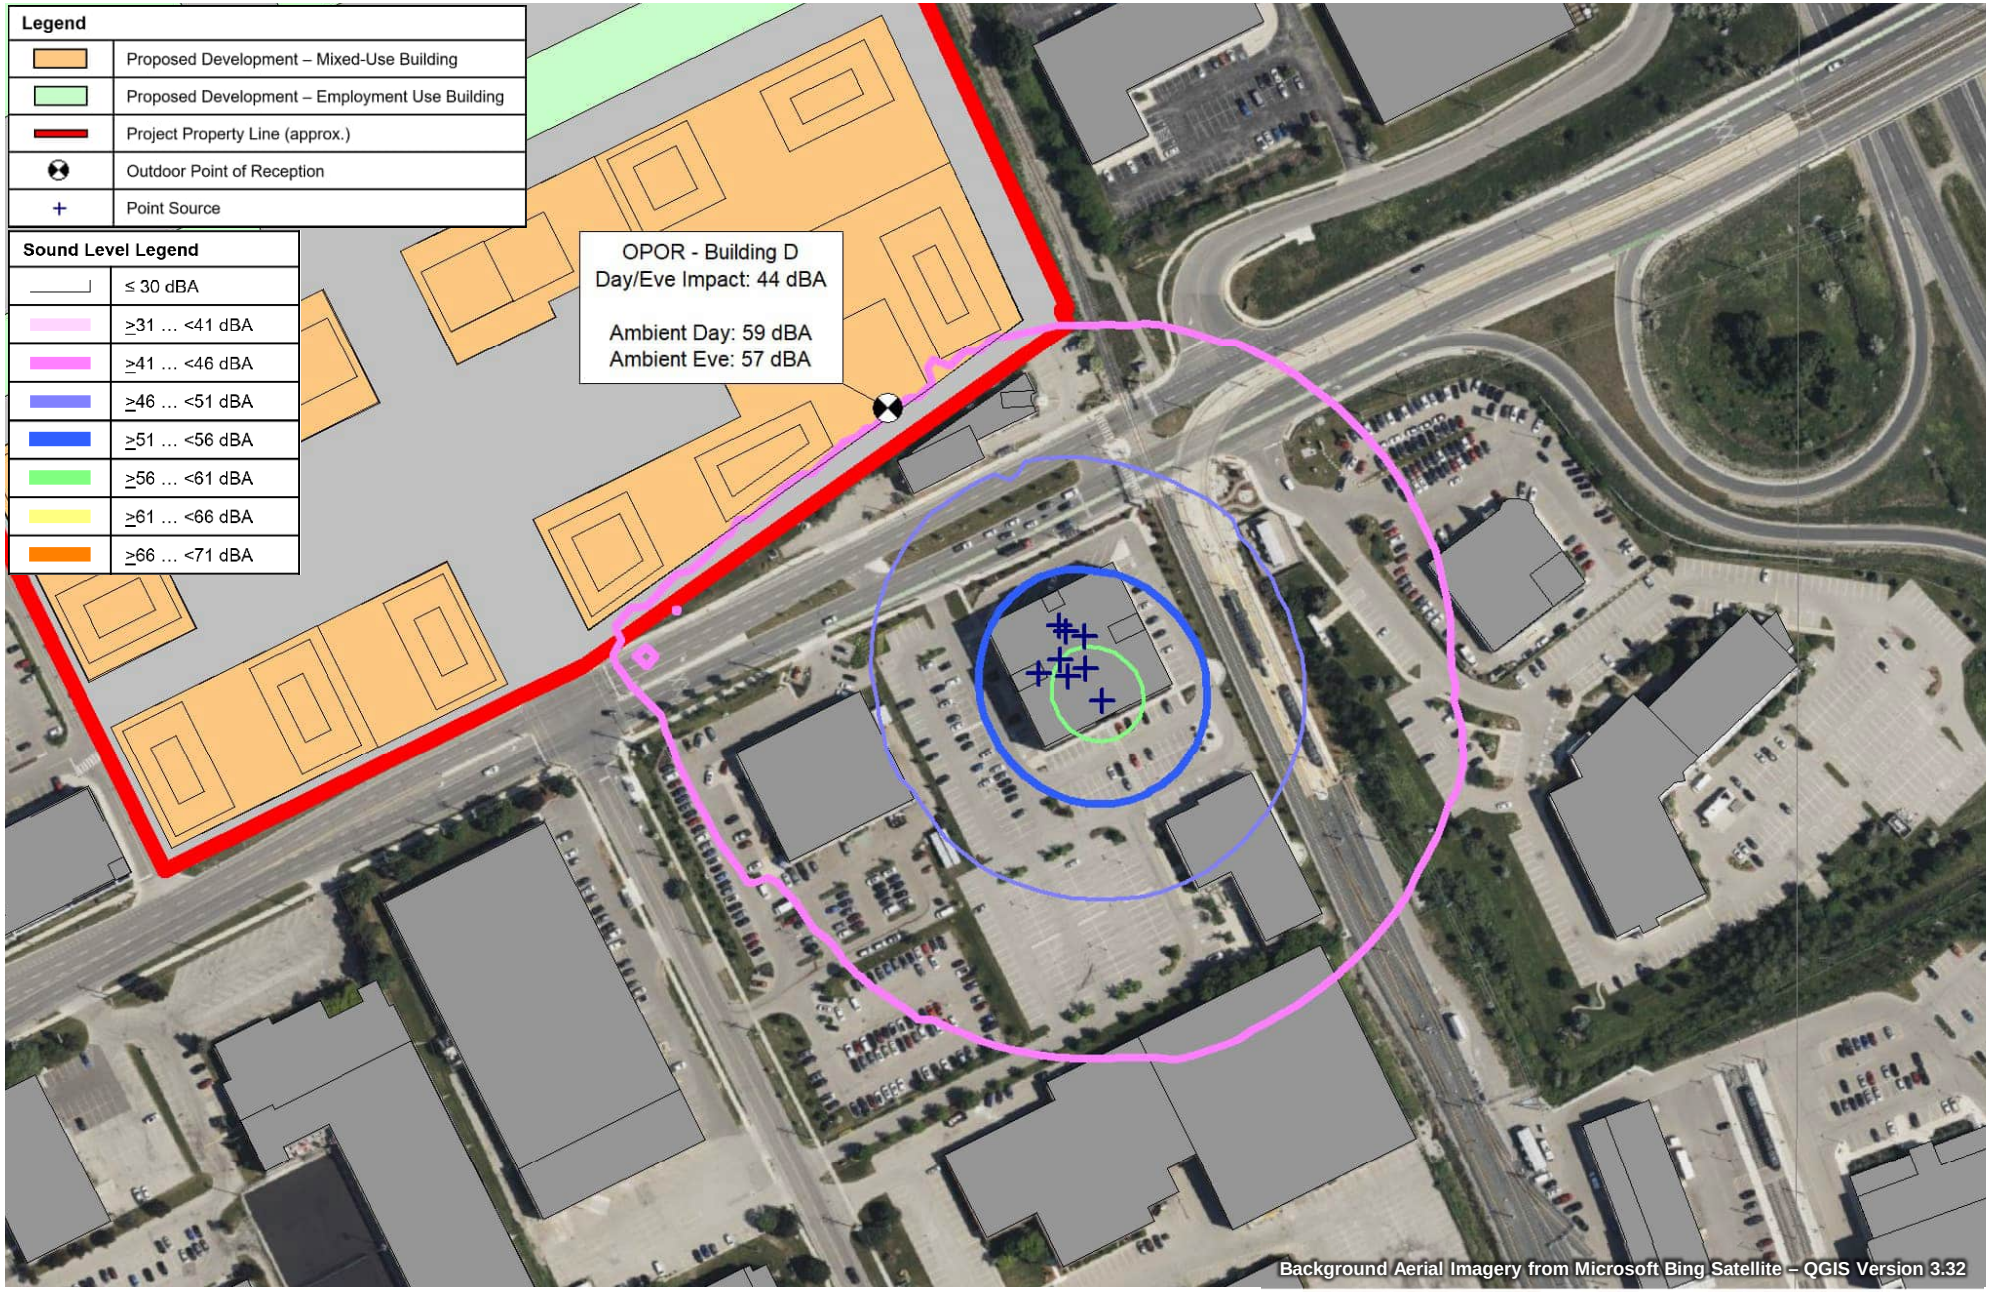


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **24**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – OFFICE/COMMERCIAL BUILDING, 101-139 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

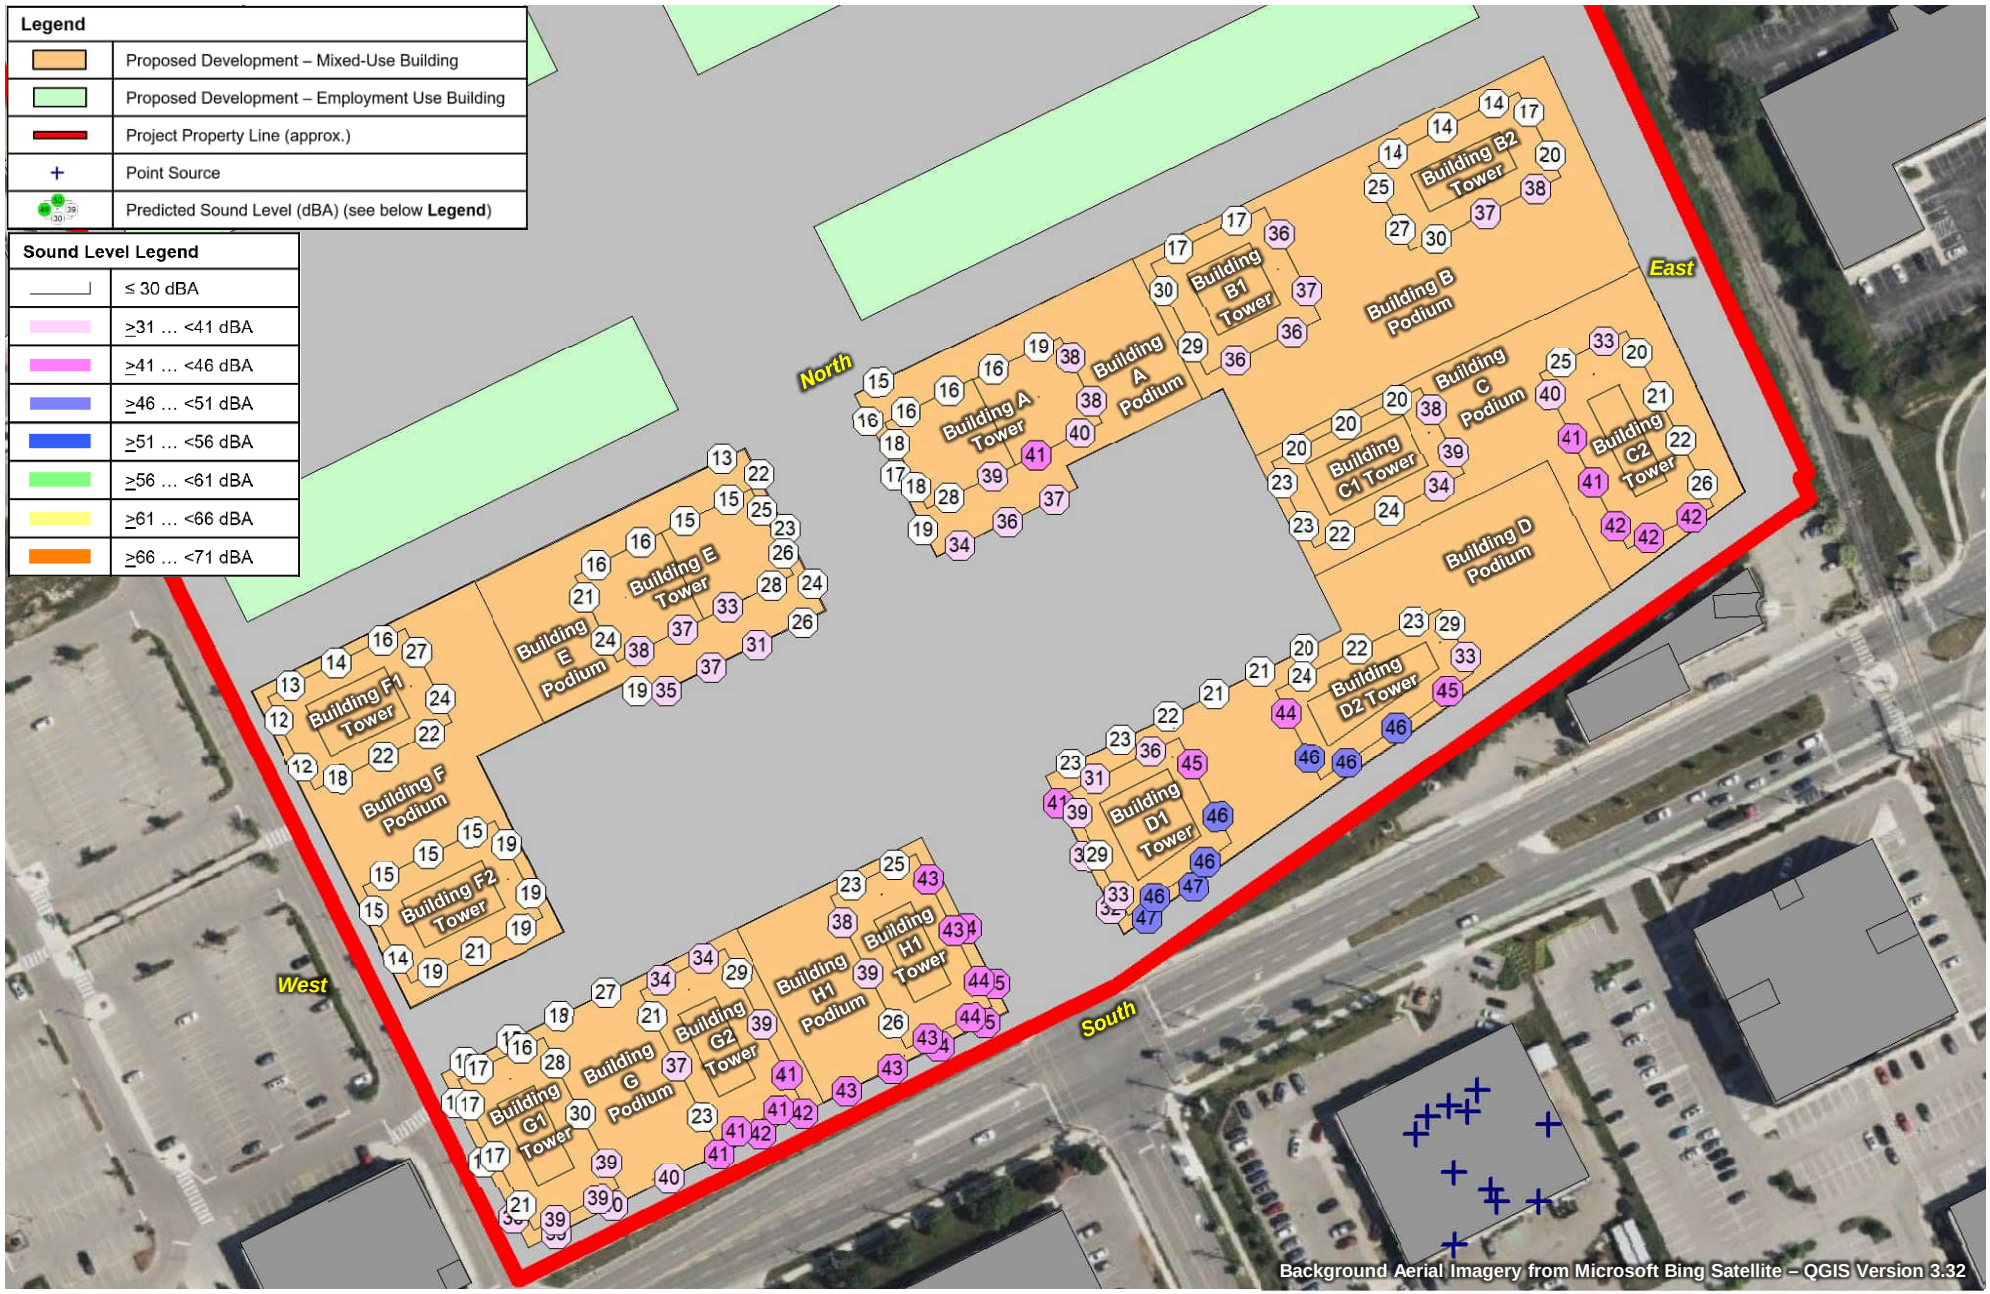


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **25**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – WATERLOO NISSAN, 141 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

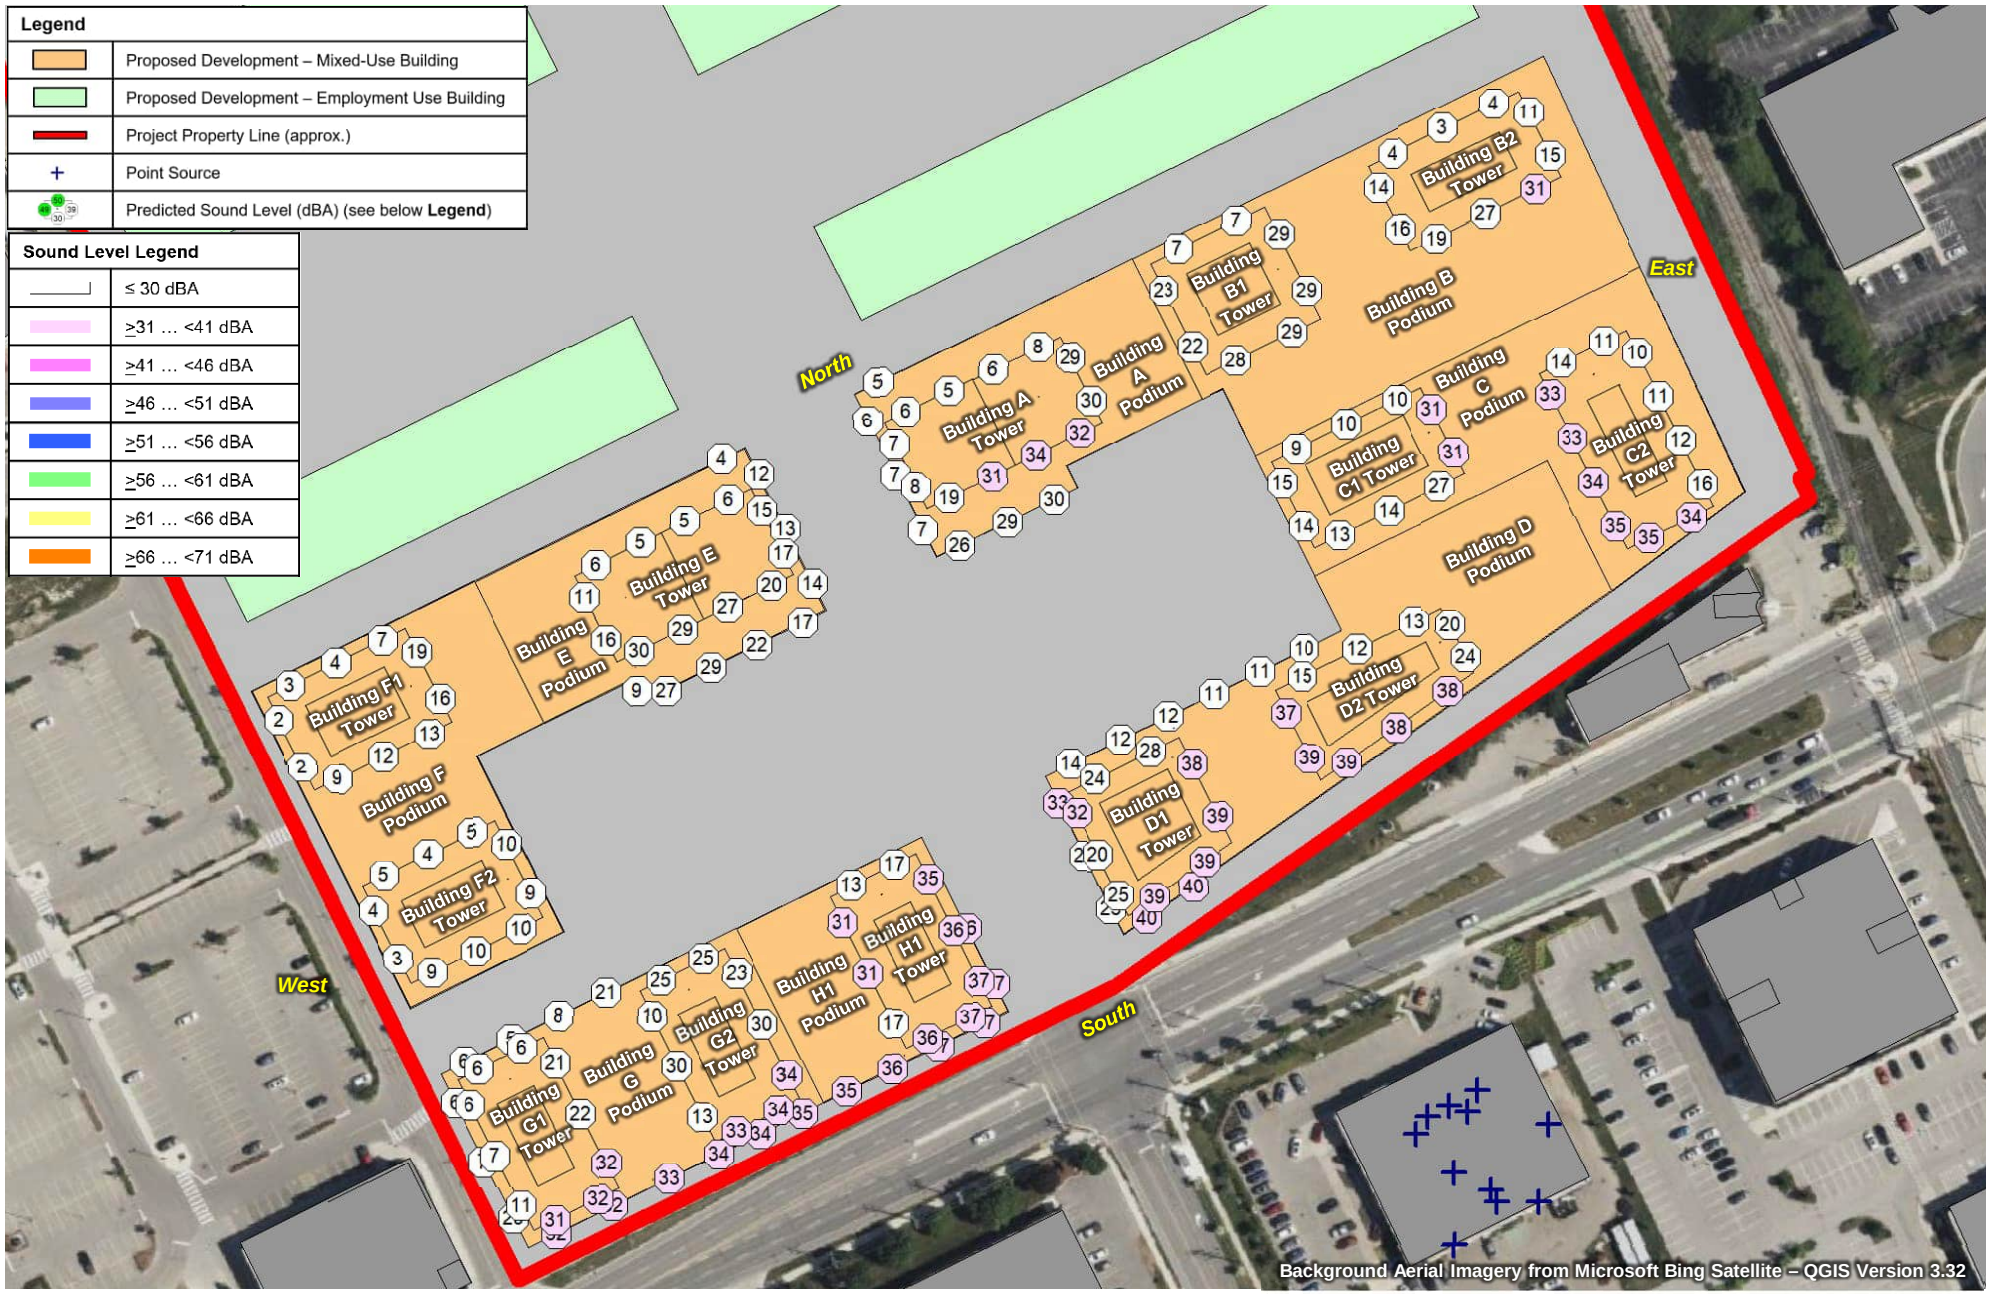


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **26**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – WATERLOO NISSAN, 141 NORTHFIELD DRIVE WEST – NIGHT-TIME		Project No. 241.030968.00001	SLR

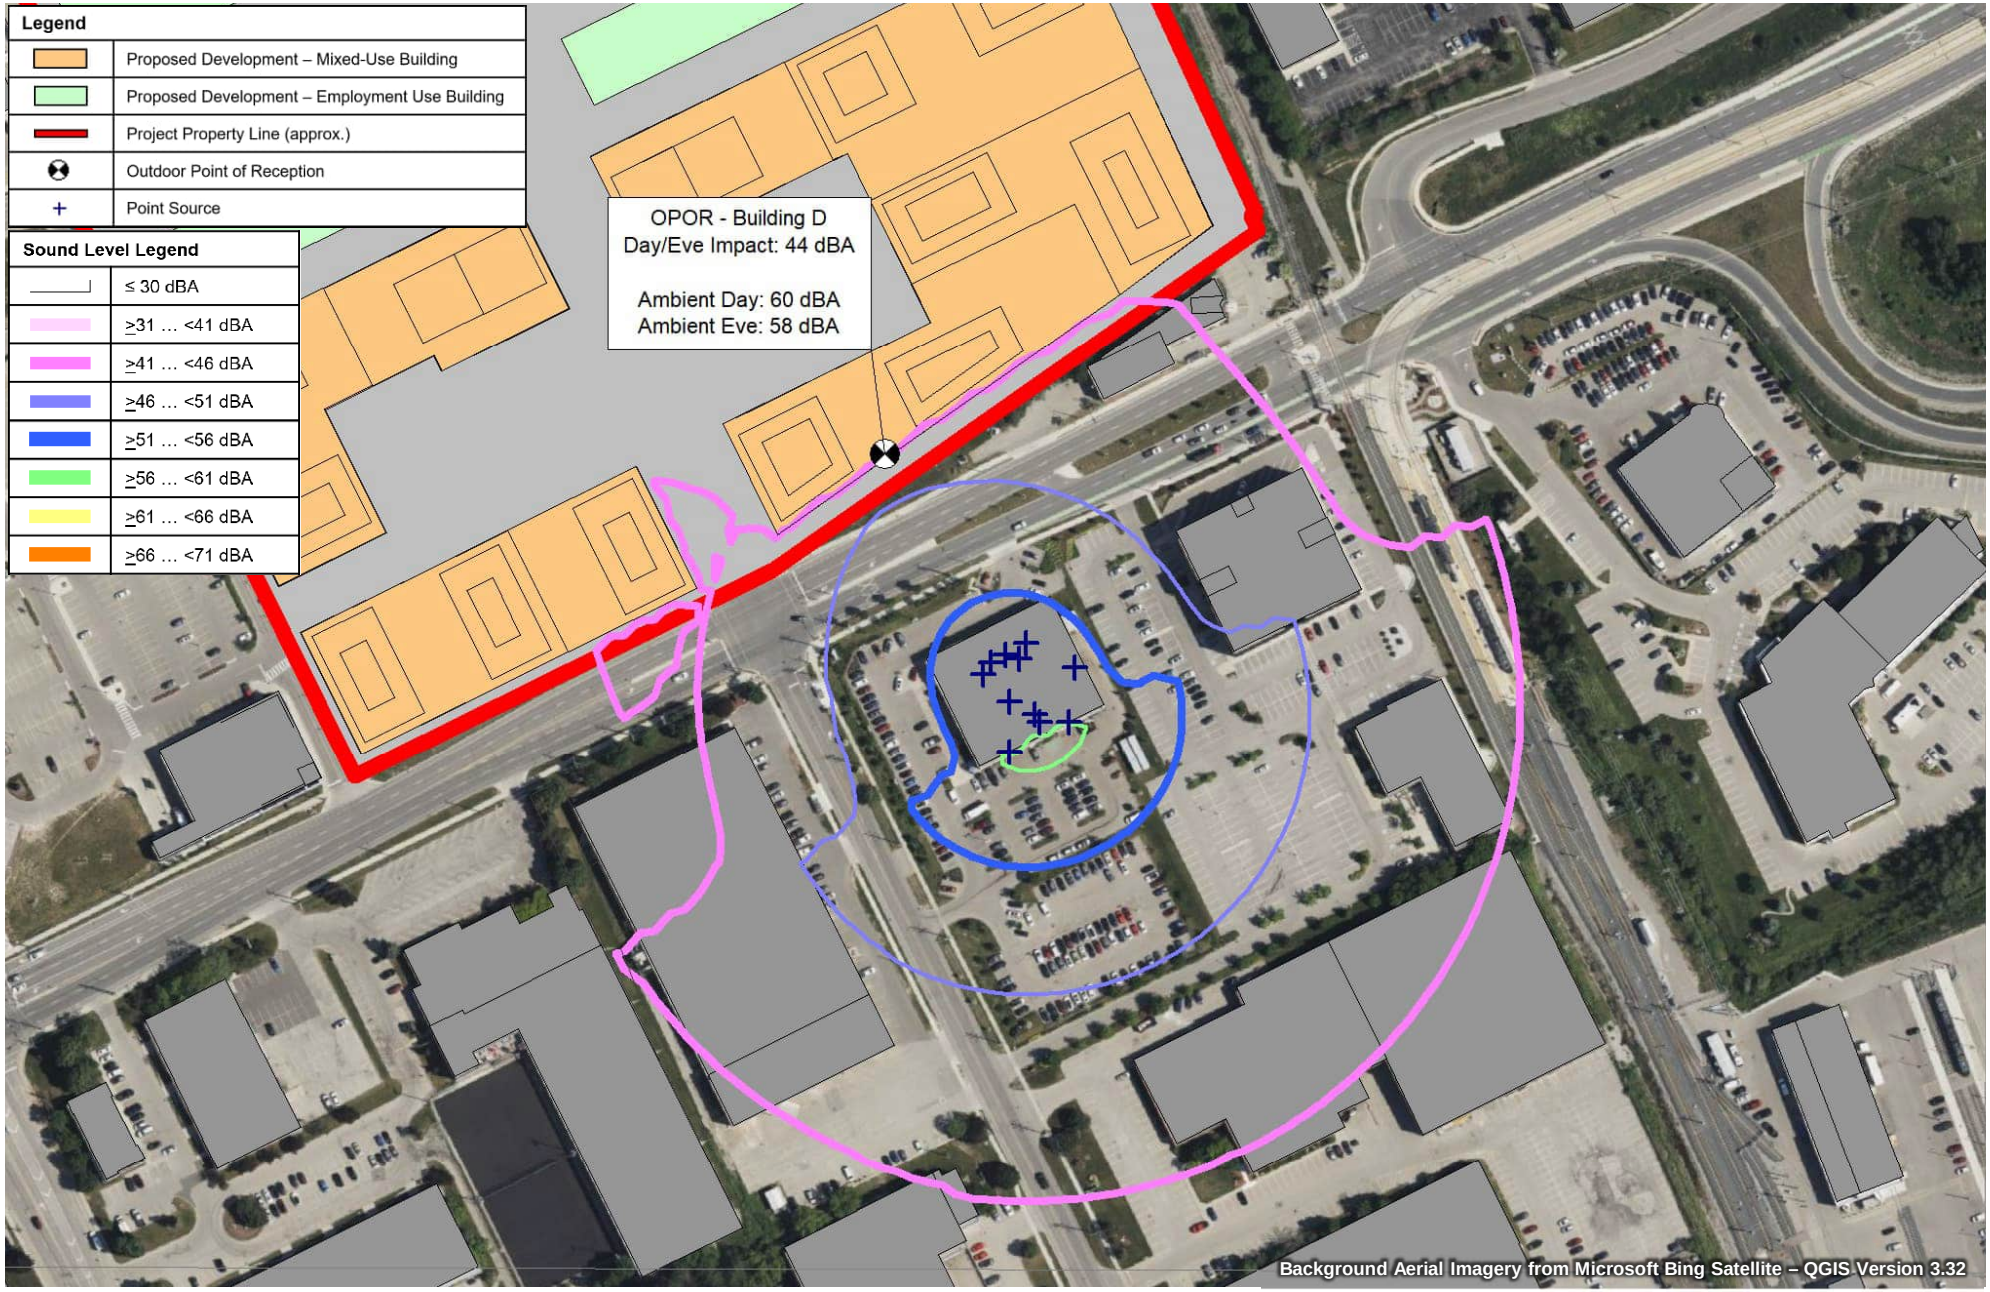


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **27**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – WATERLOO NISSAN, 141 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

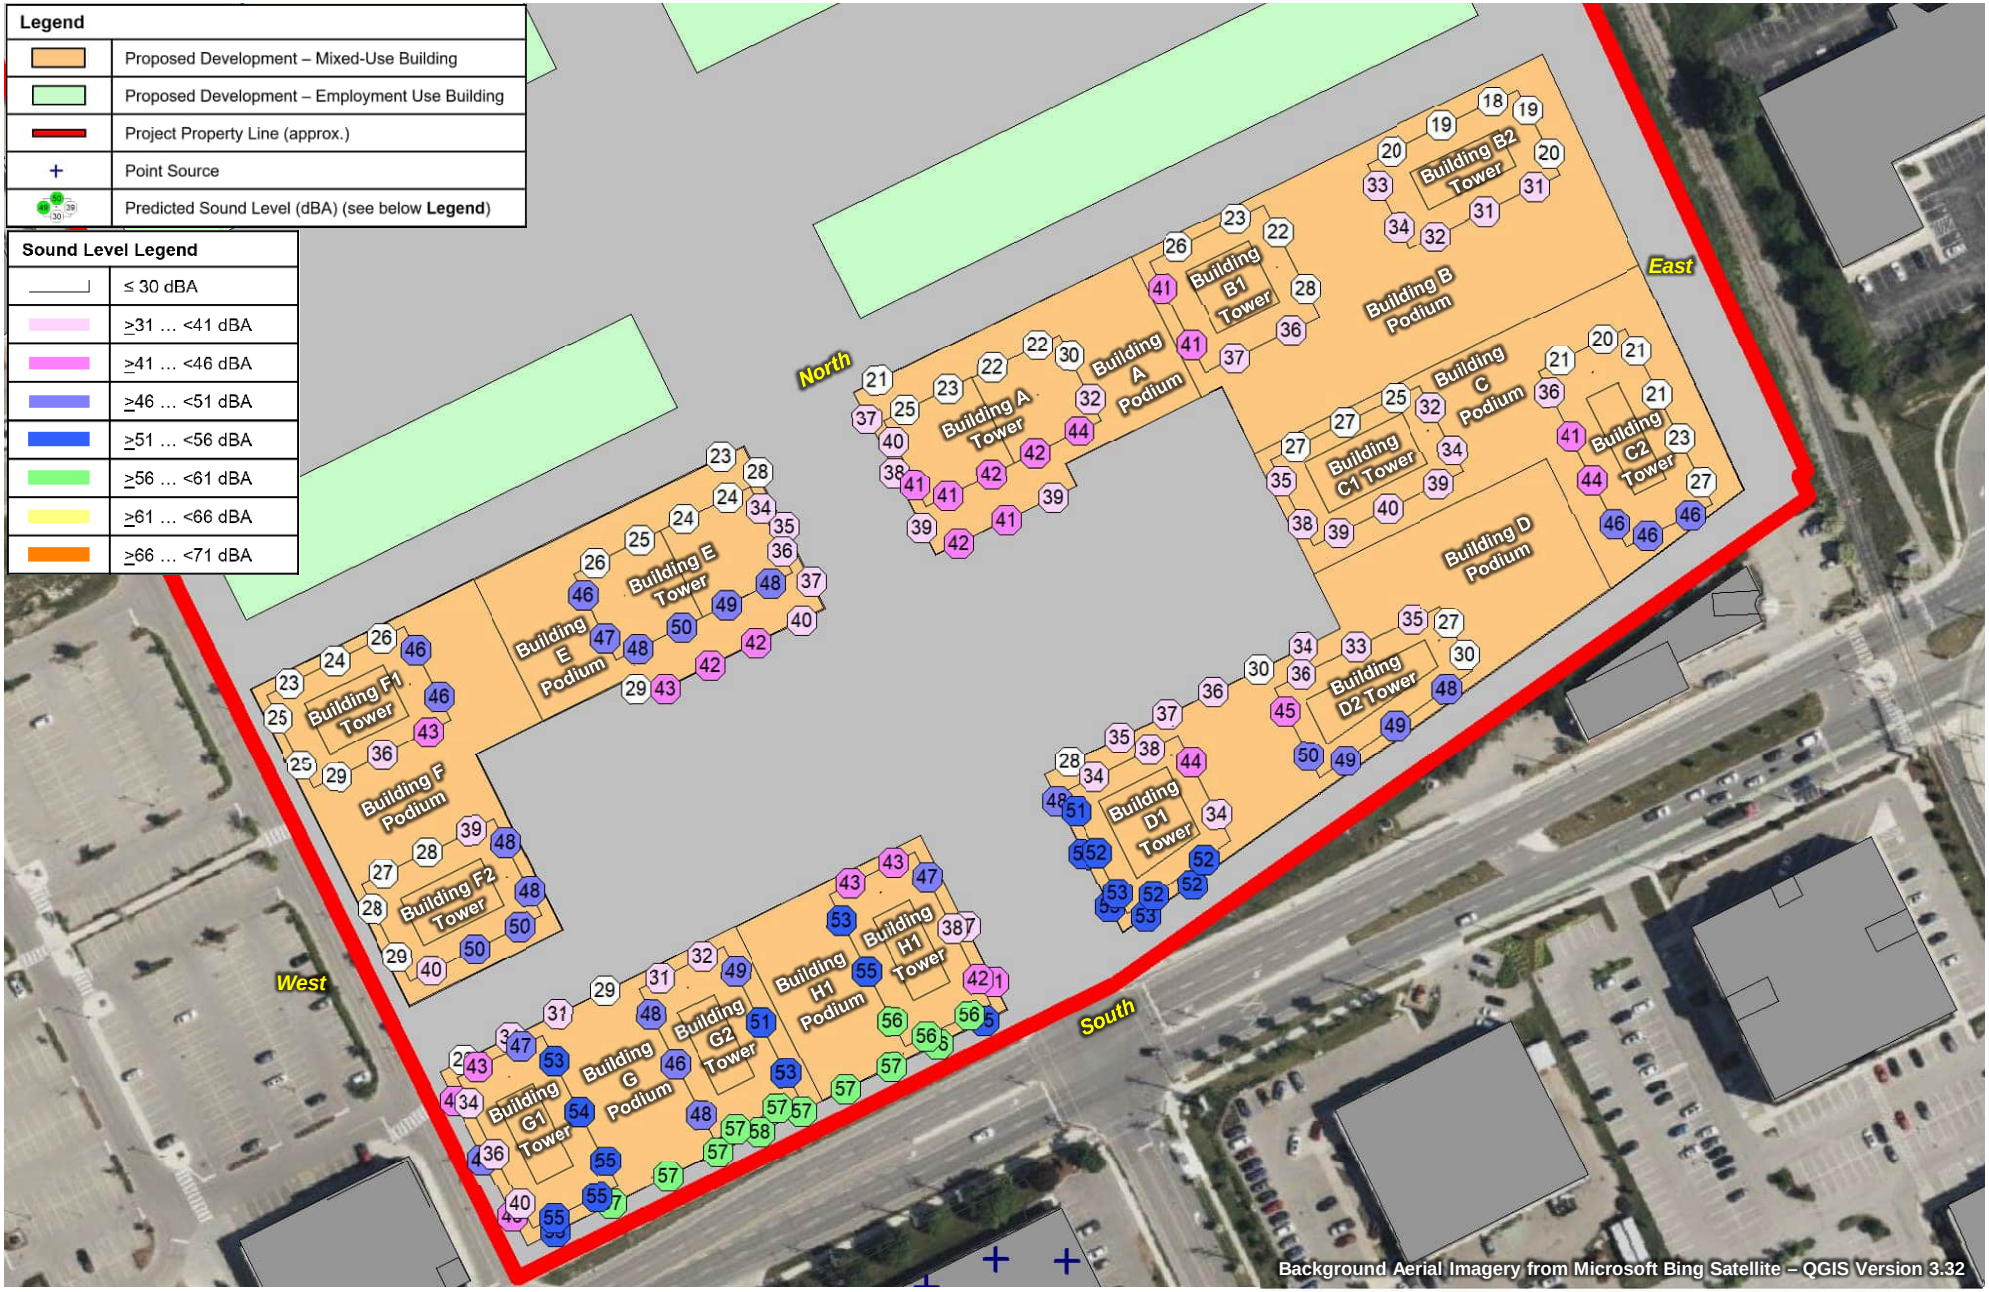


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **28**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – DAYTIME		Project No. 241.030968.00001	

SLR

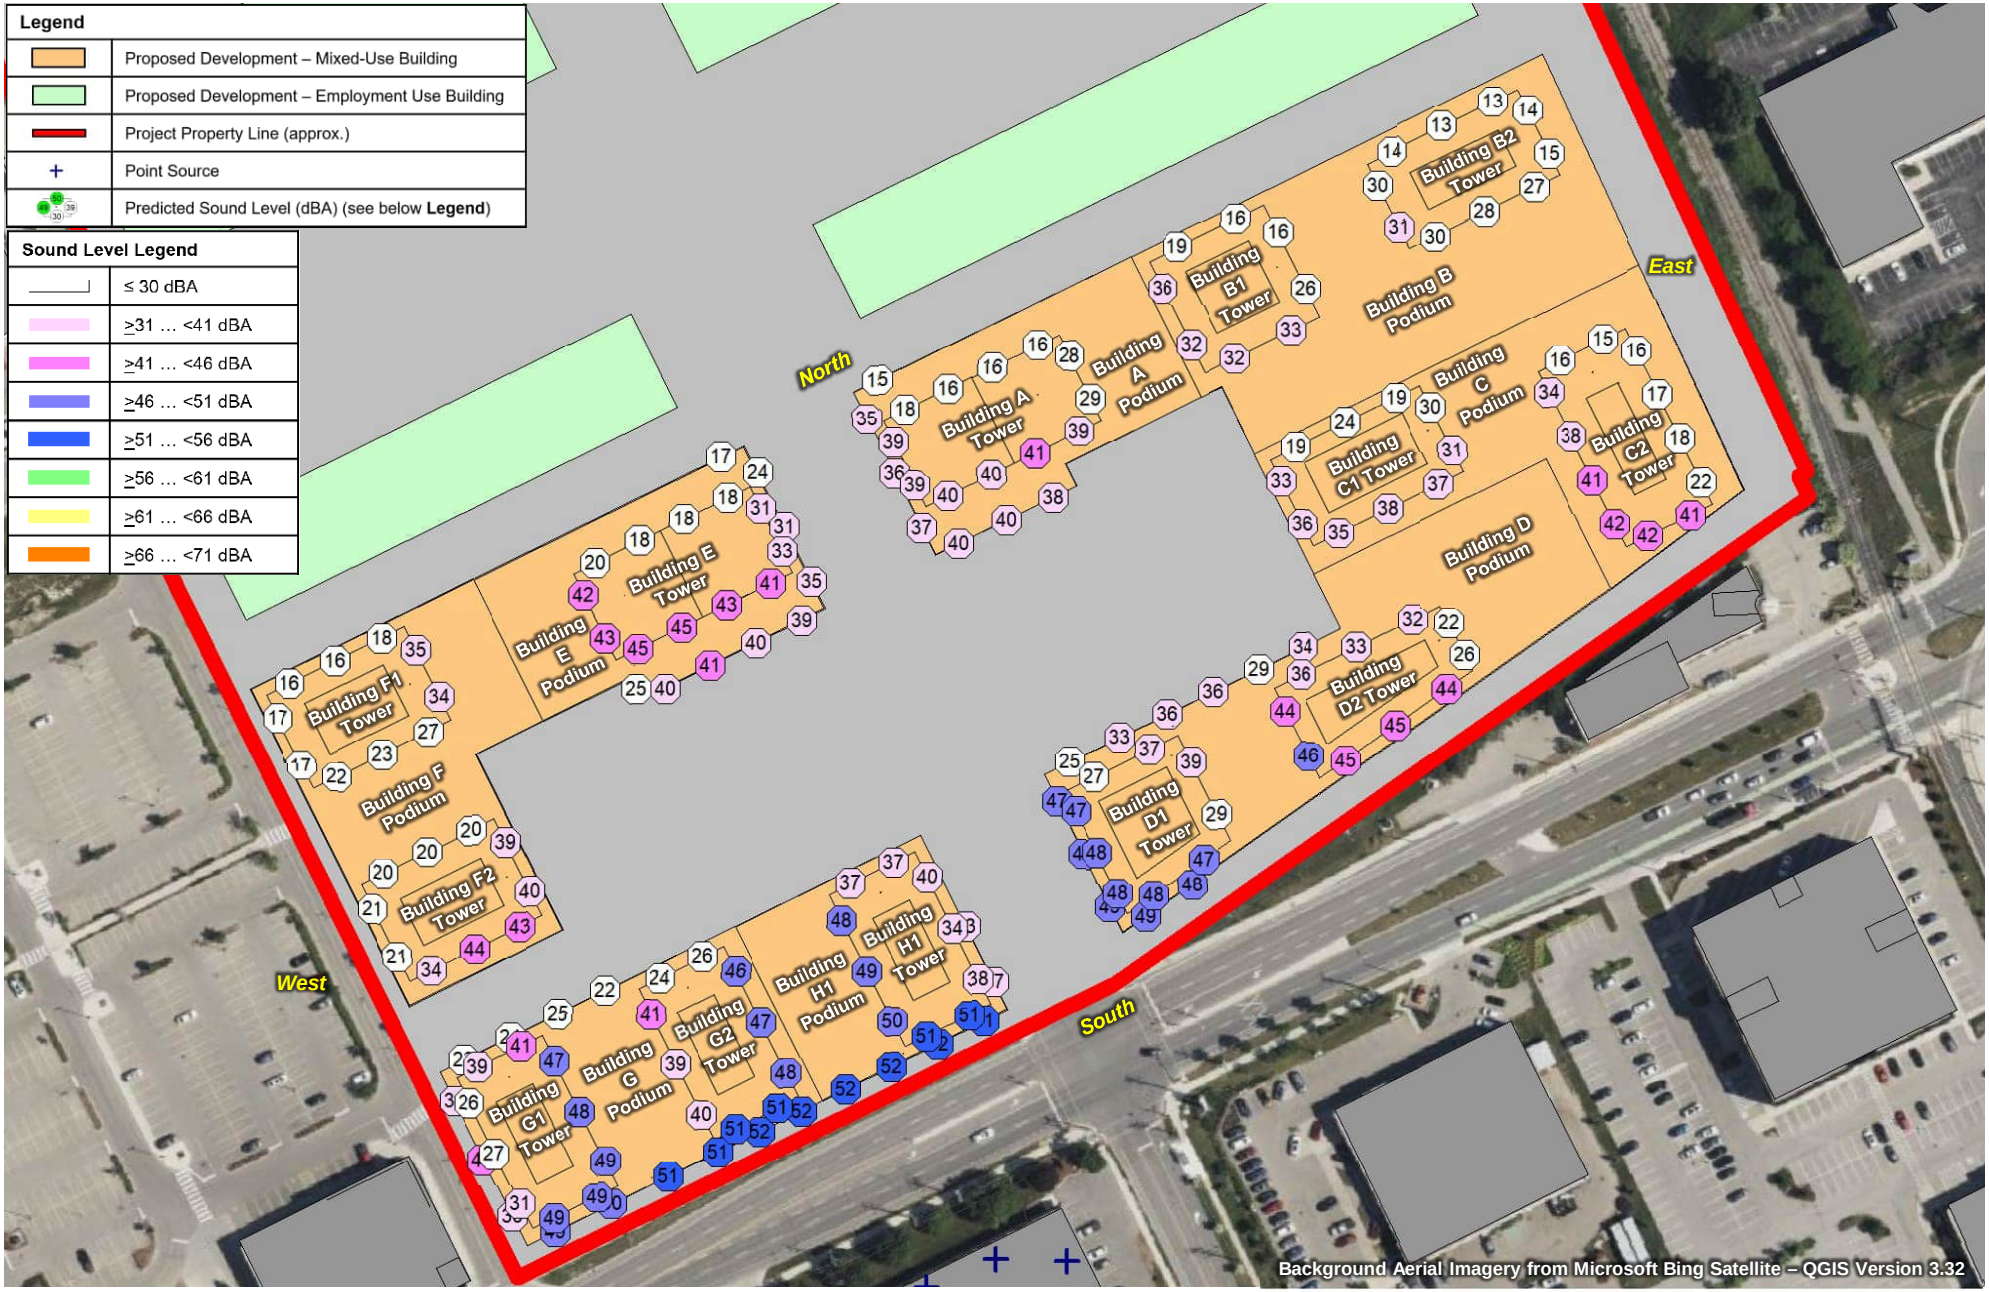


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **29**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – EVENING		Project No. 241.030968.00001	

SLR

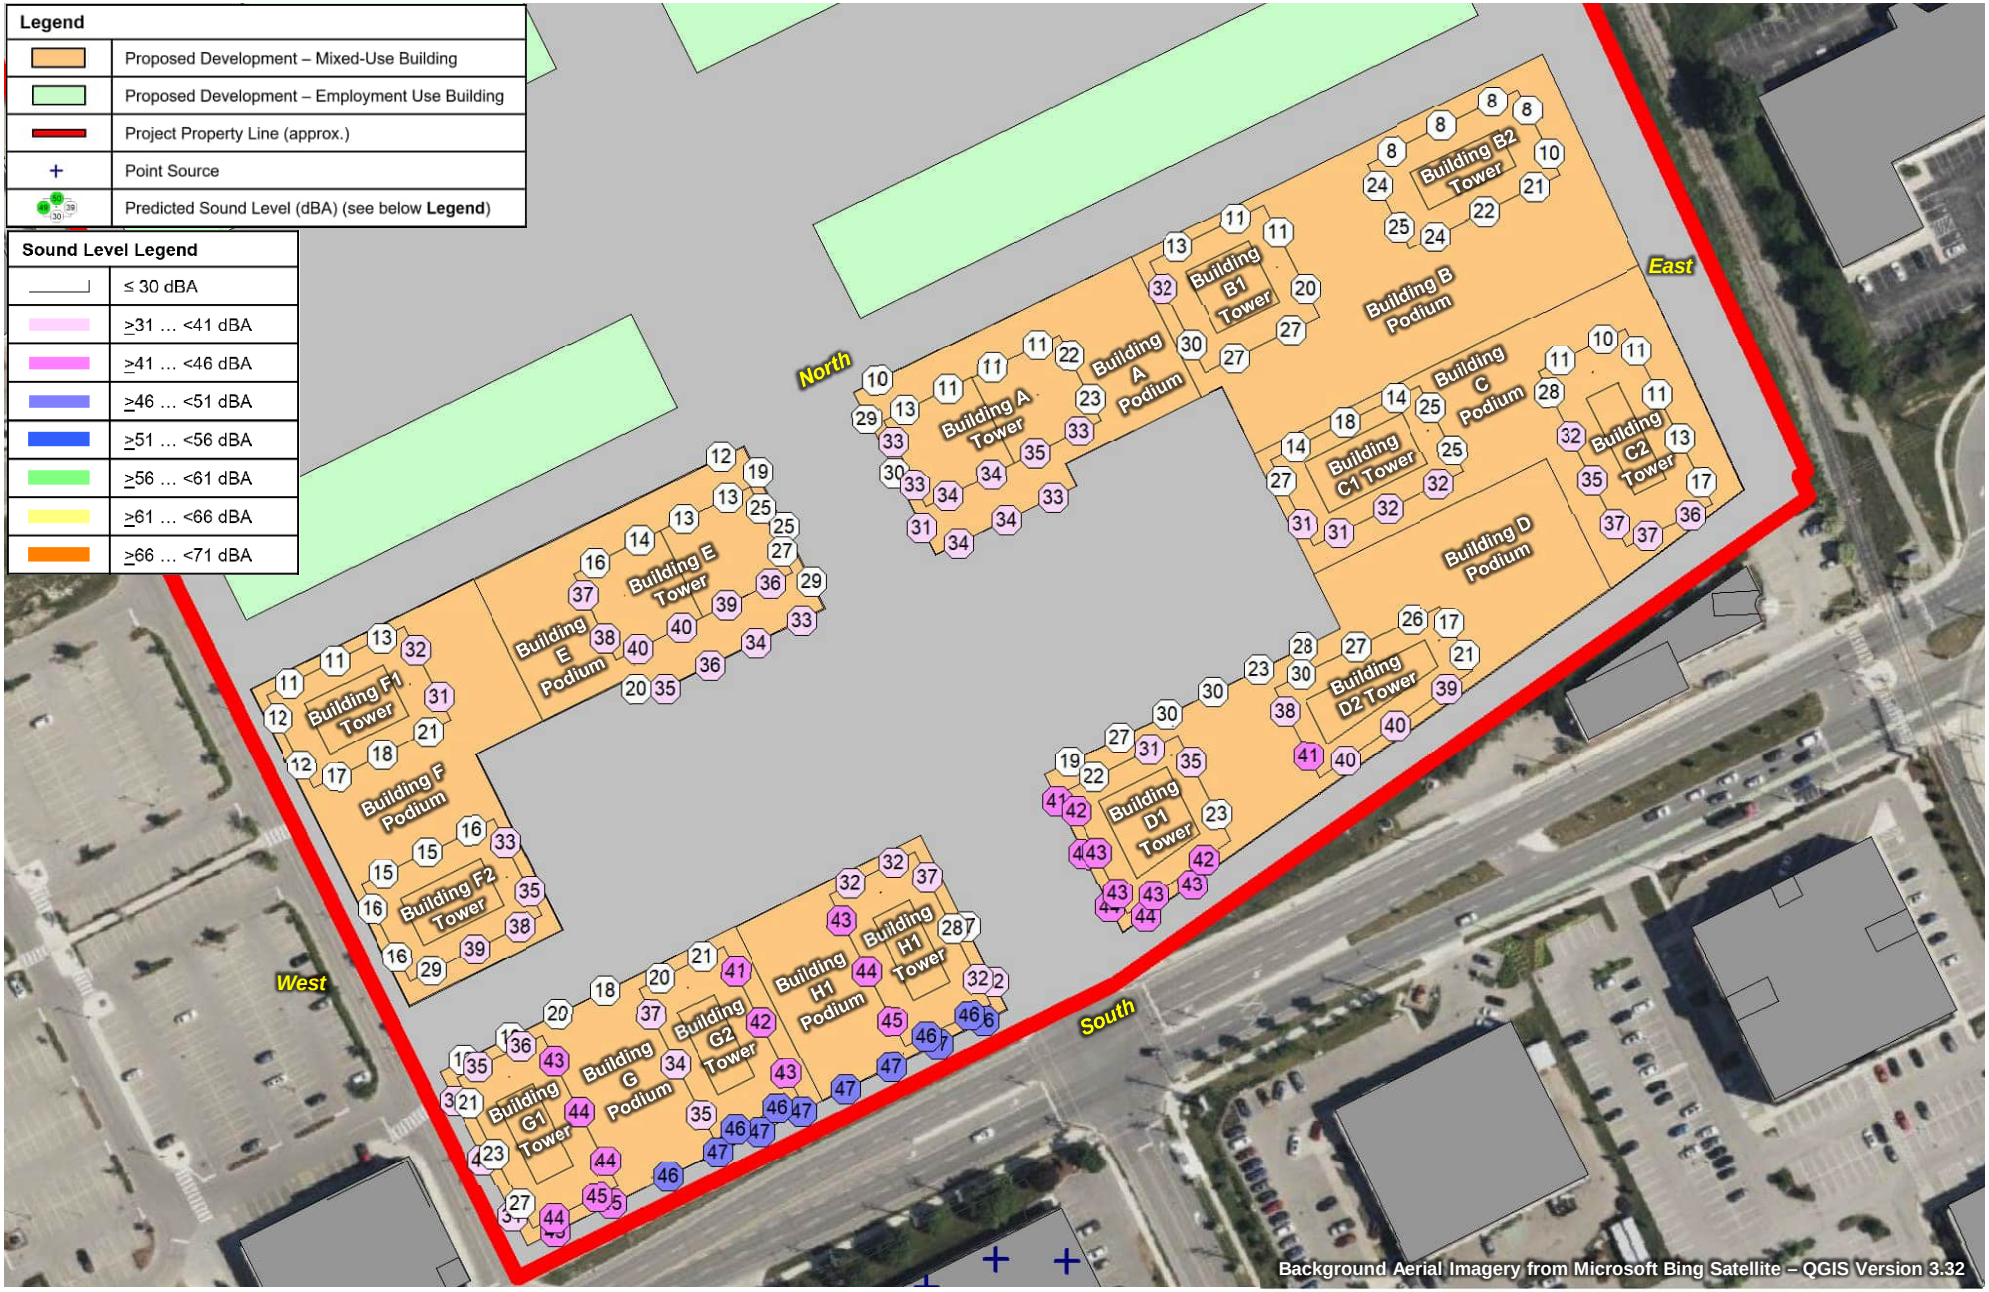


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **30**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – NIGHT-TIME		Project No. 241.030968.00001	

SLR

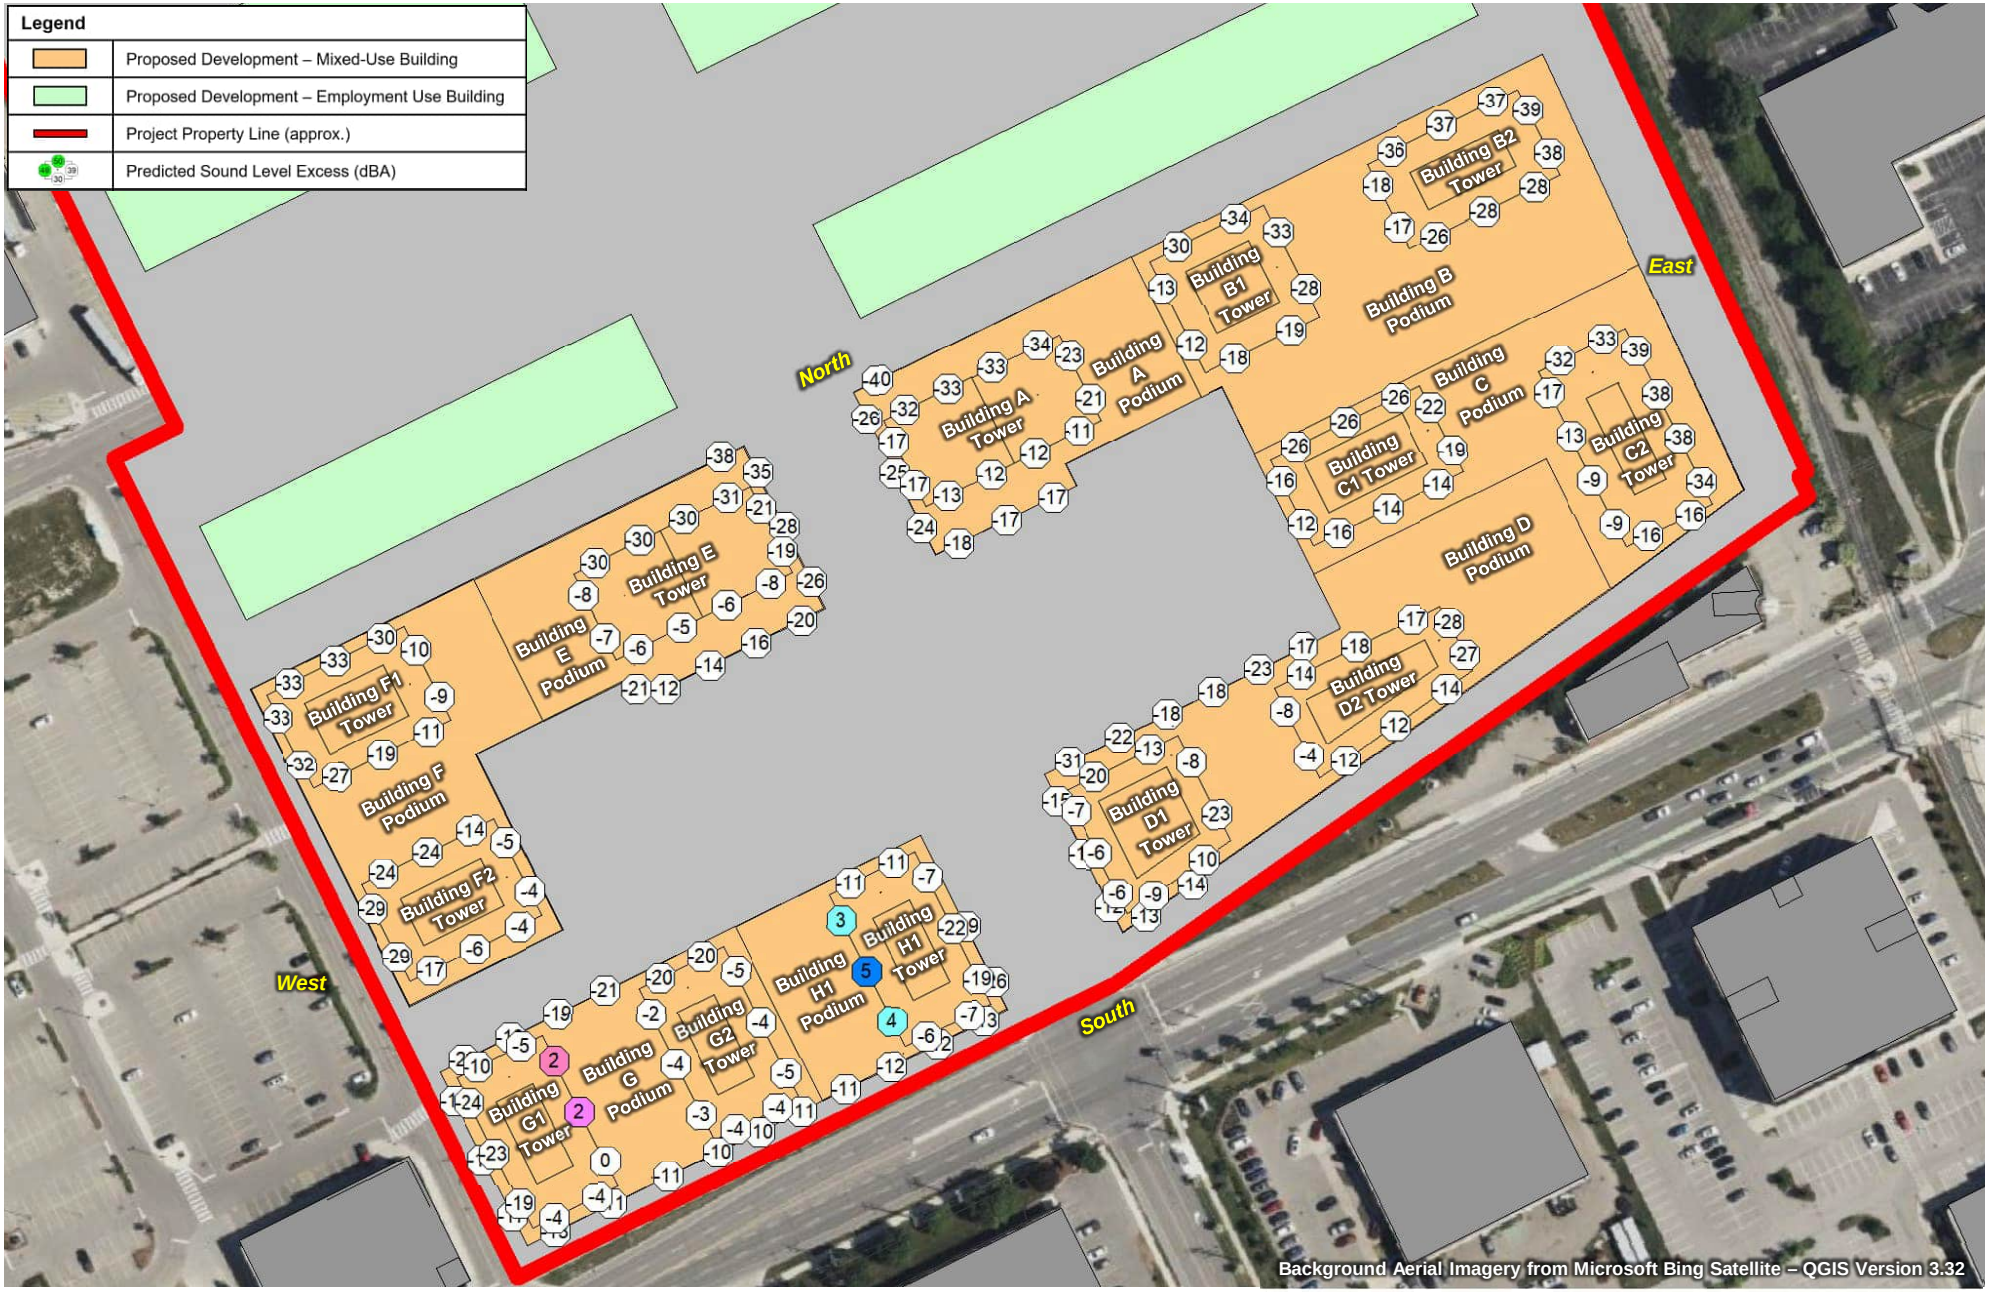


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **31**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – DAYTIME – UNMITIGATED		Project No. 241.030968.00001	

SLR

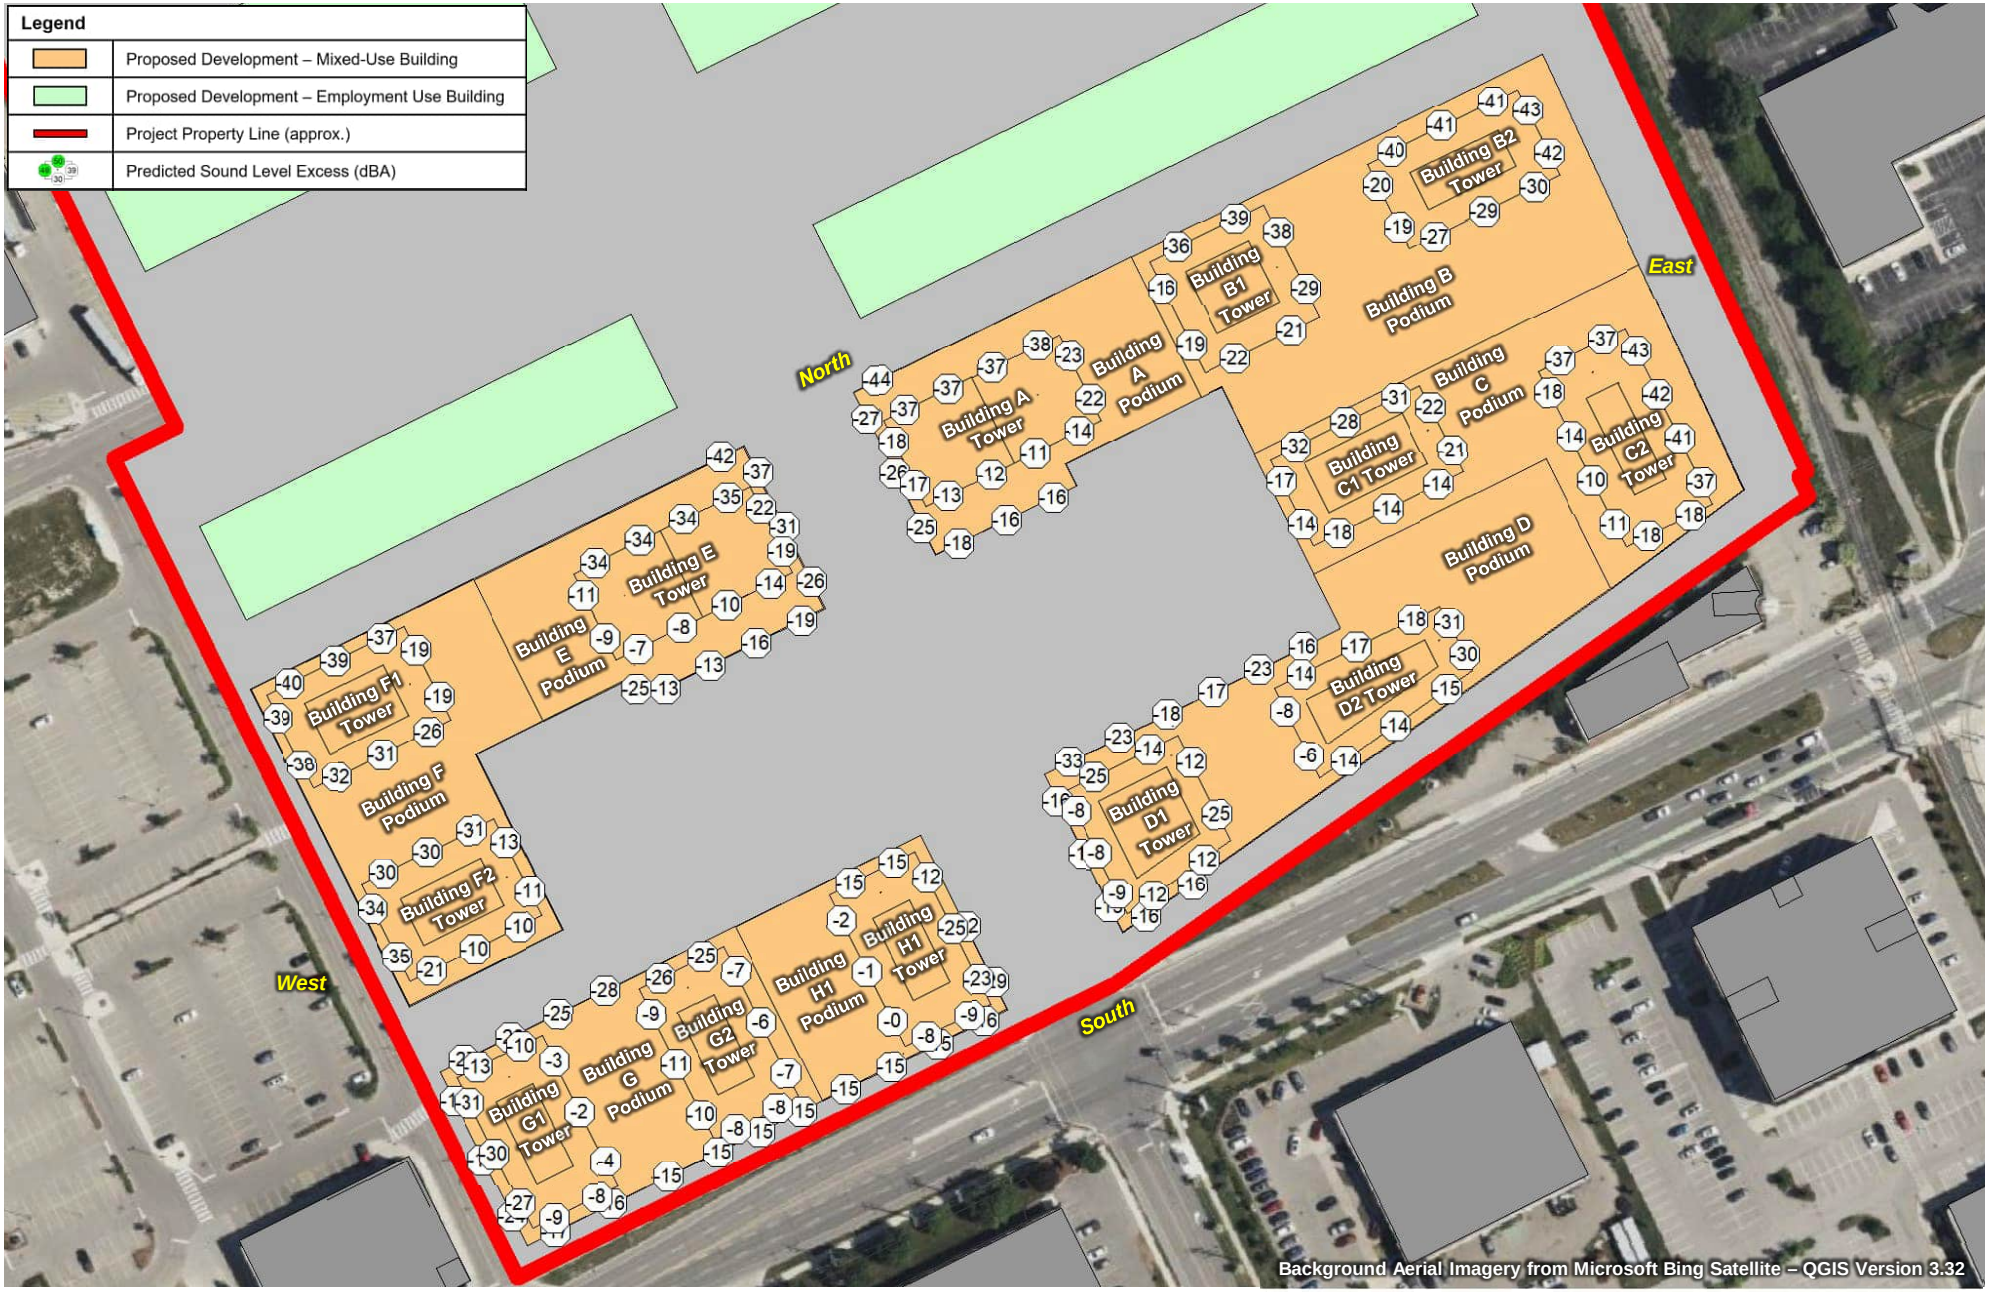


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **32**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – EVENING – UNMITIGATED		Project No. 241.030968.00001	

SLR

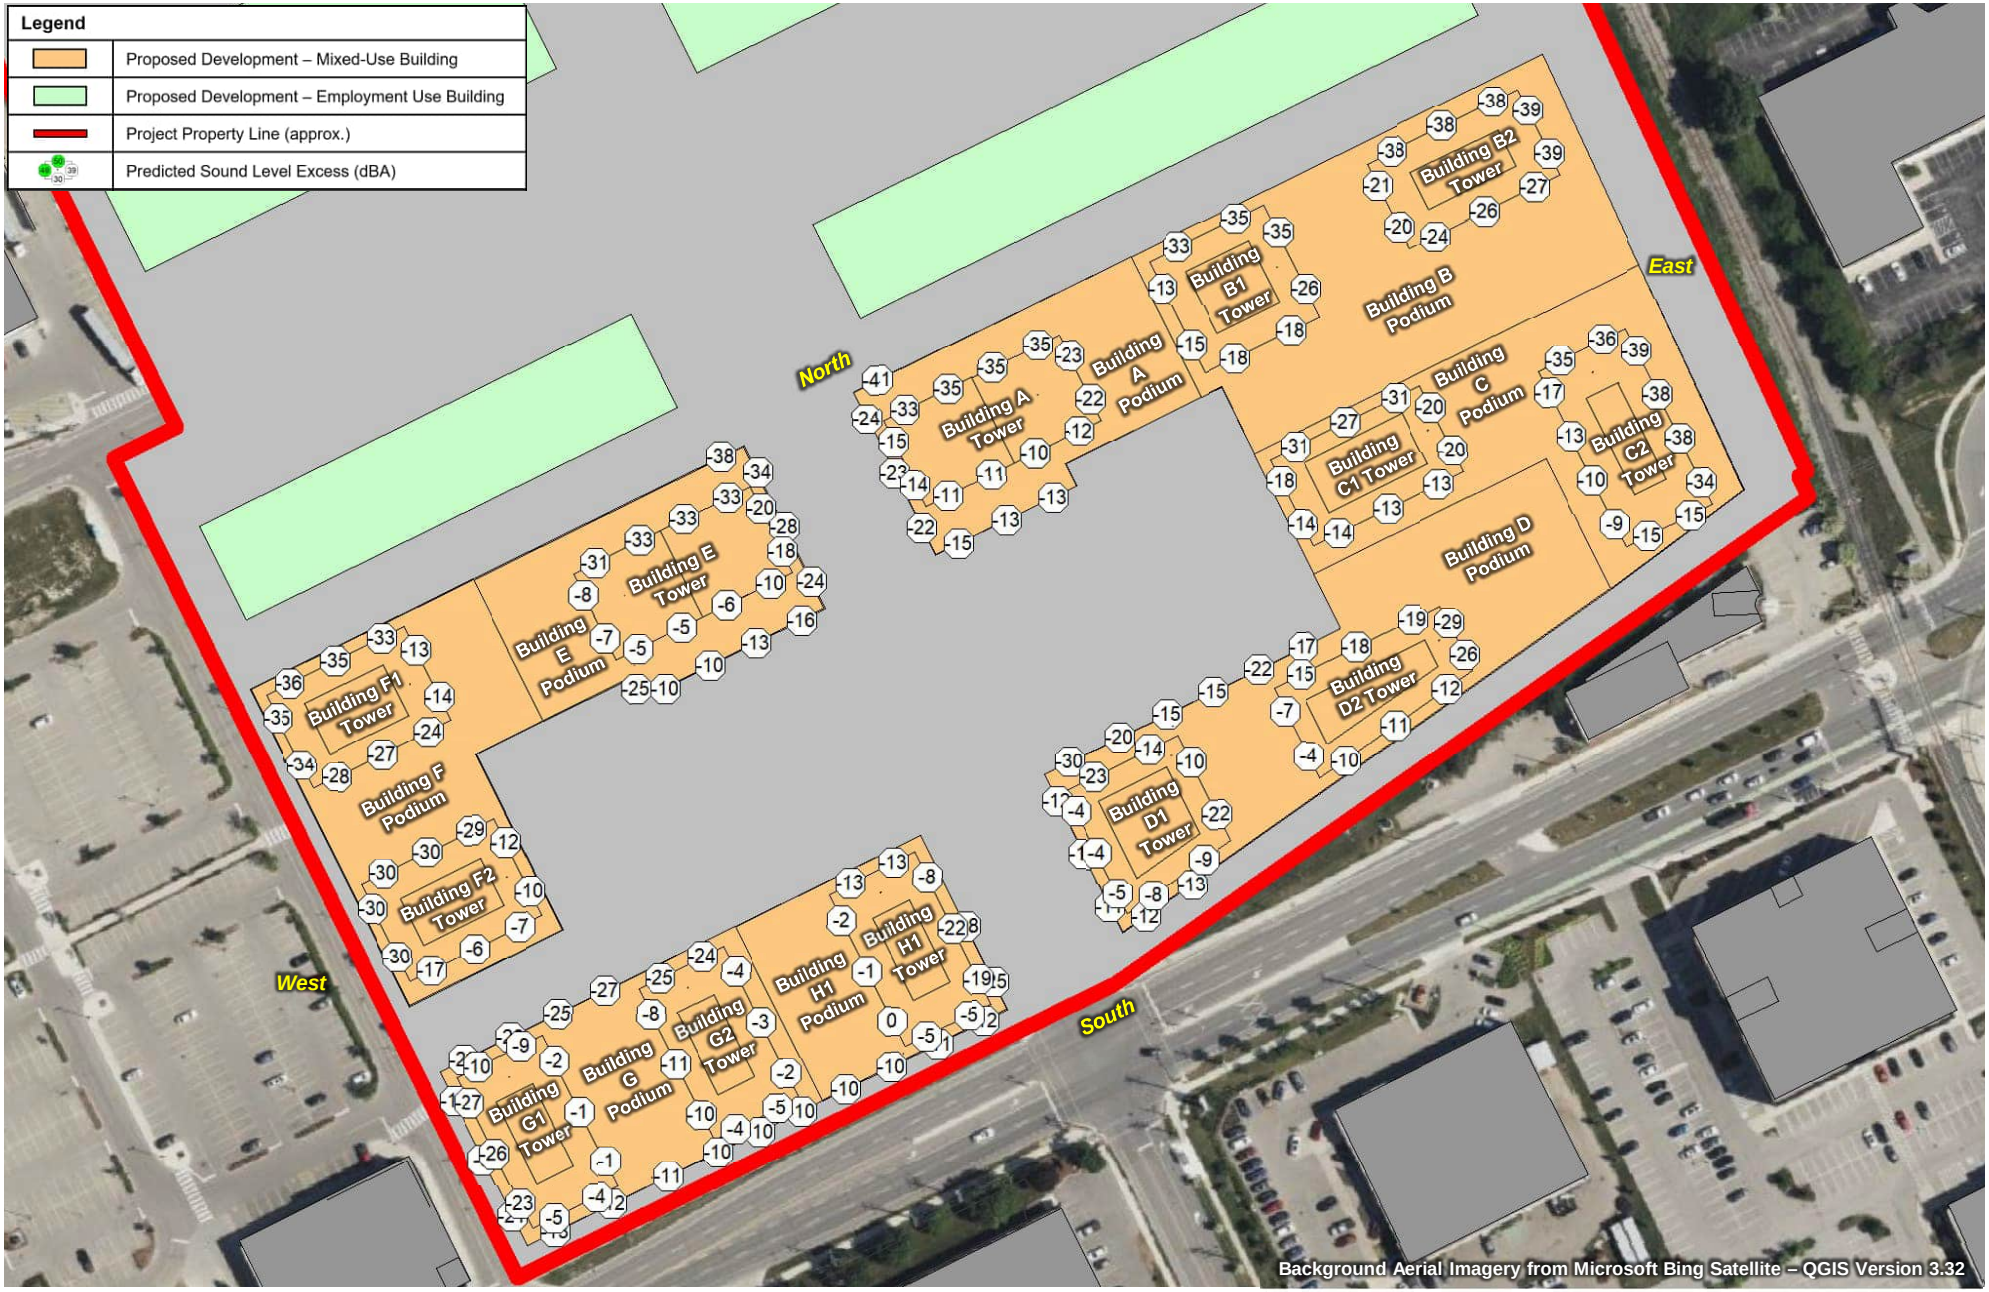


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **33**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – NIGHT-TIME – UNMITIGATED		Project No. 241.030968.00001	

SLR

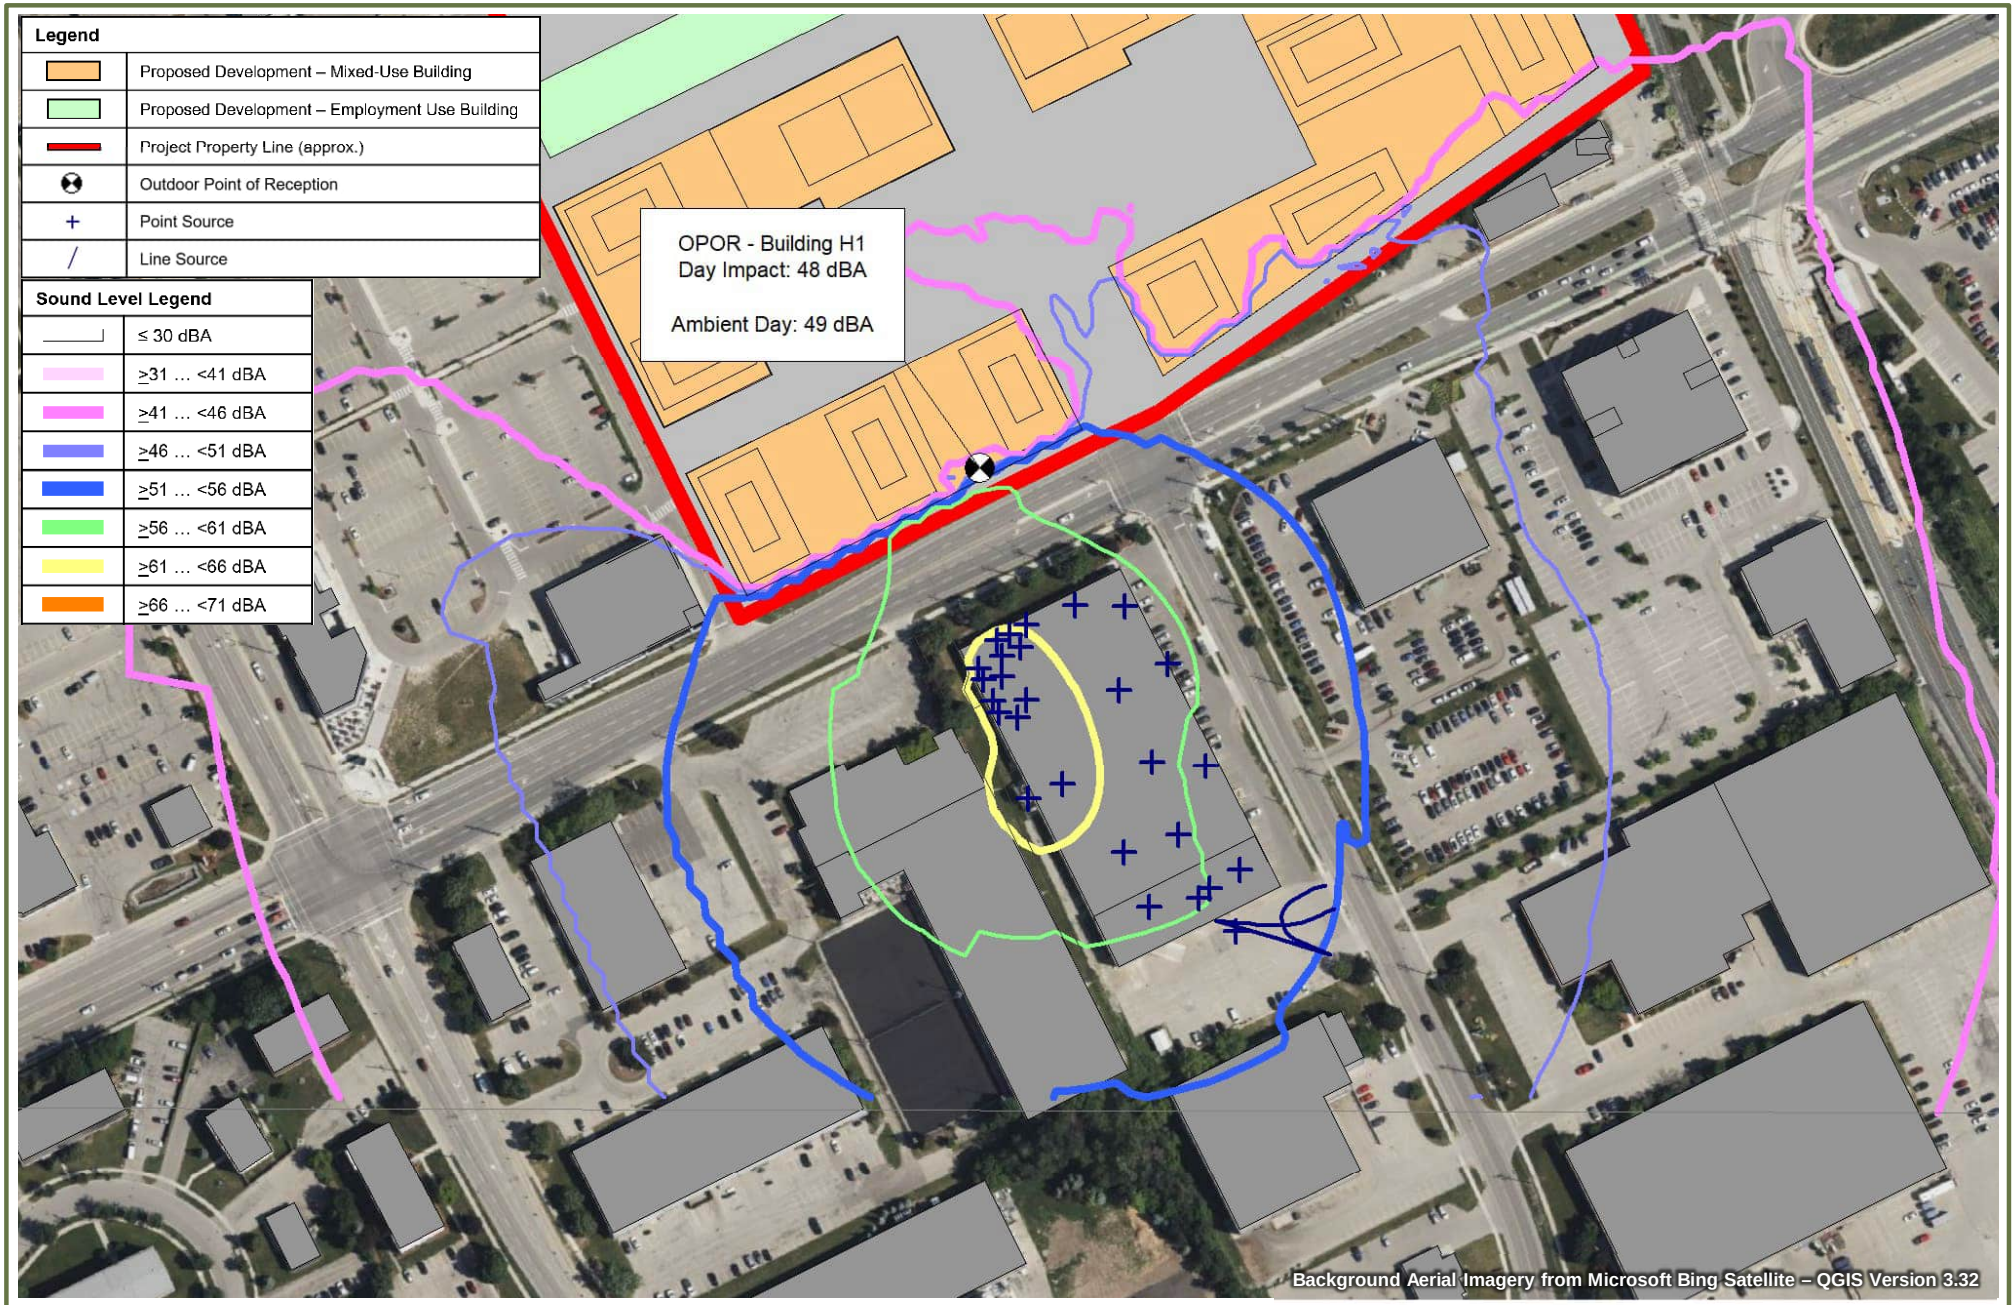


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **34**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – DAYTIME		Project No. 241.030968.00001	

SLR

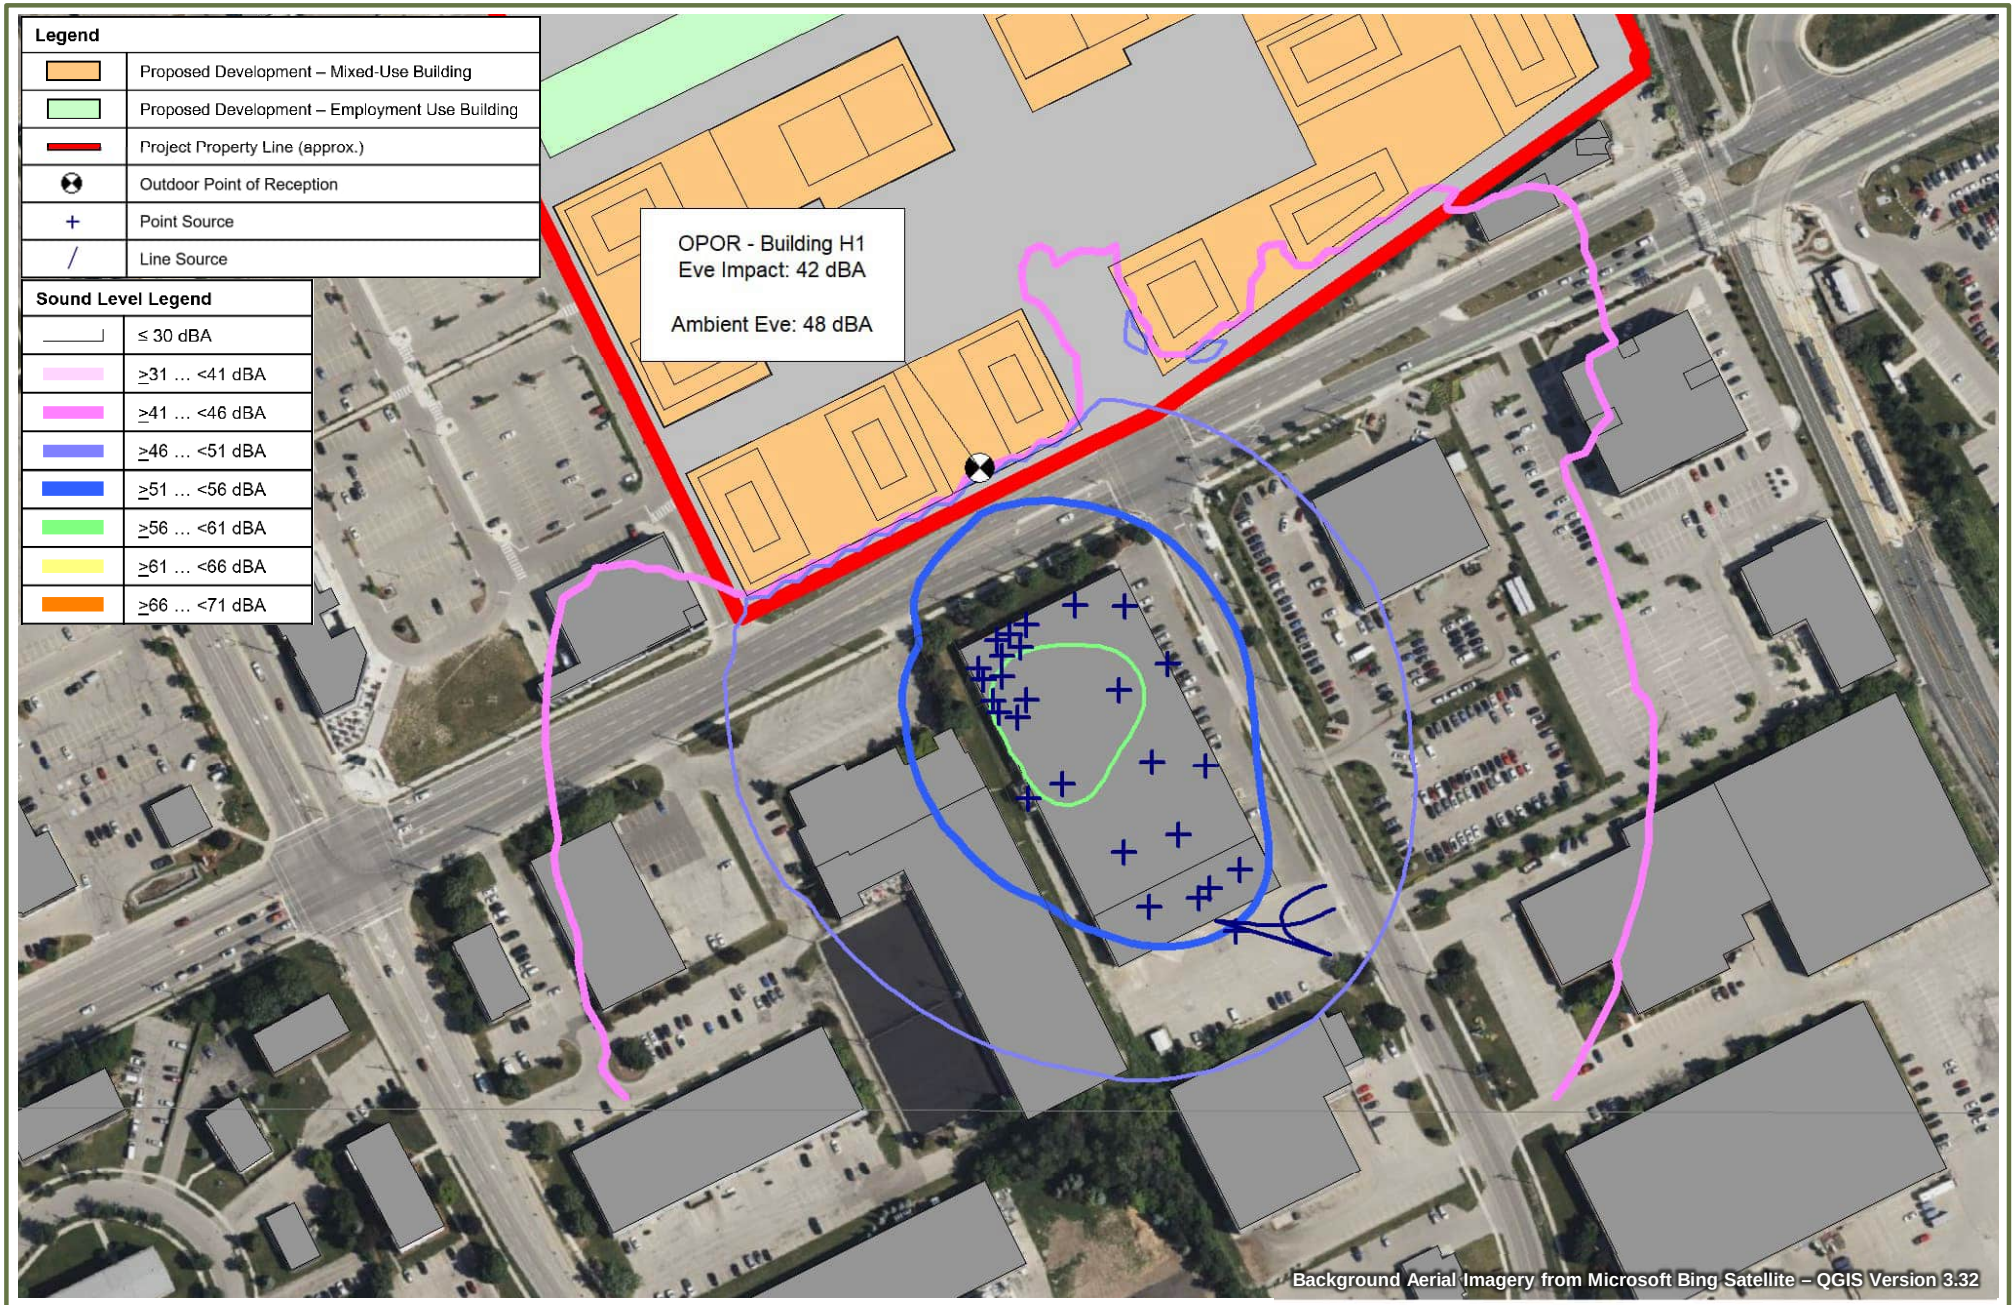


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **35**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – EVENING		Project No. 241.030968.00001	

SLR

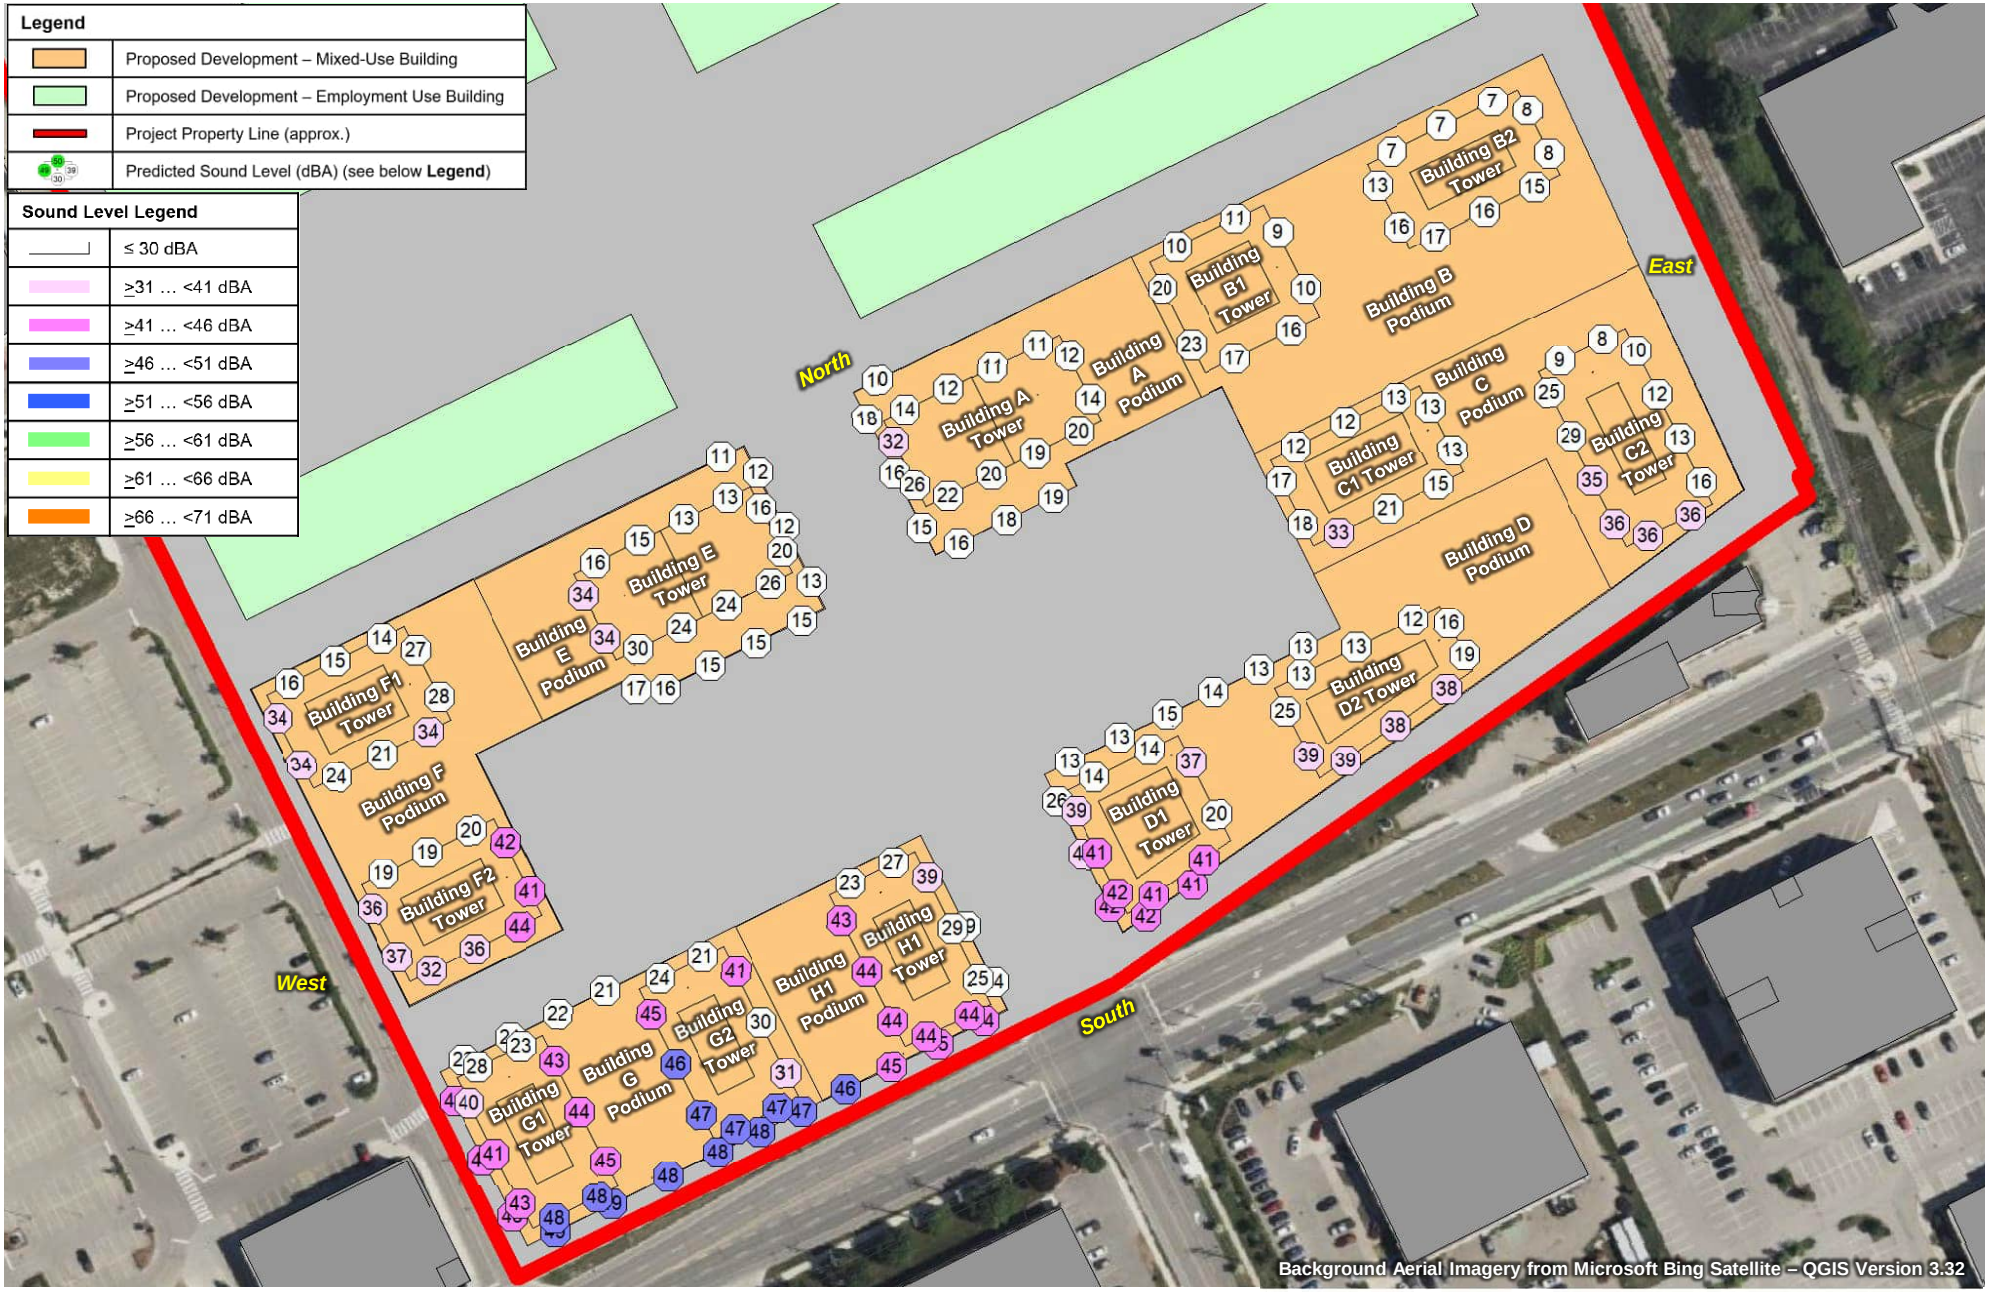


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **36**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – GREYSTONE CLUB, 155 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

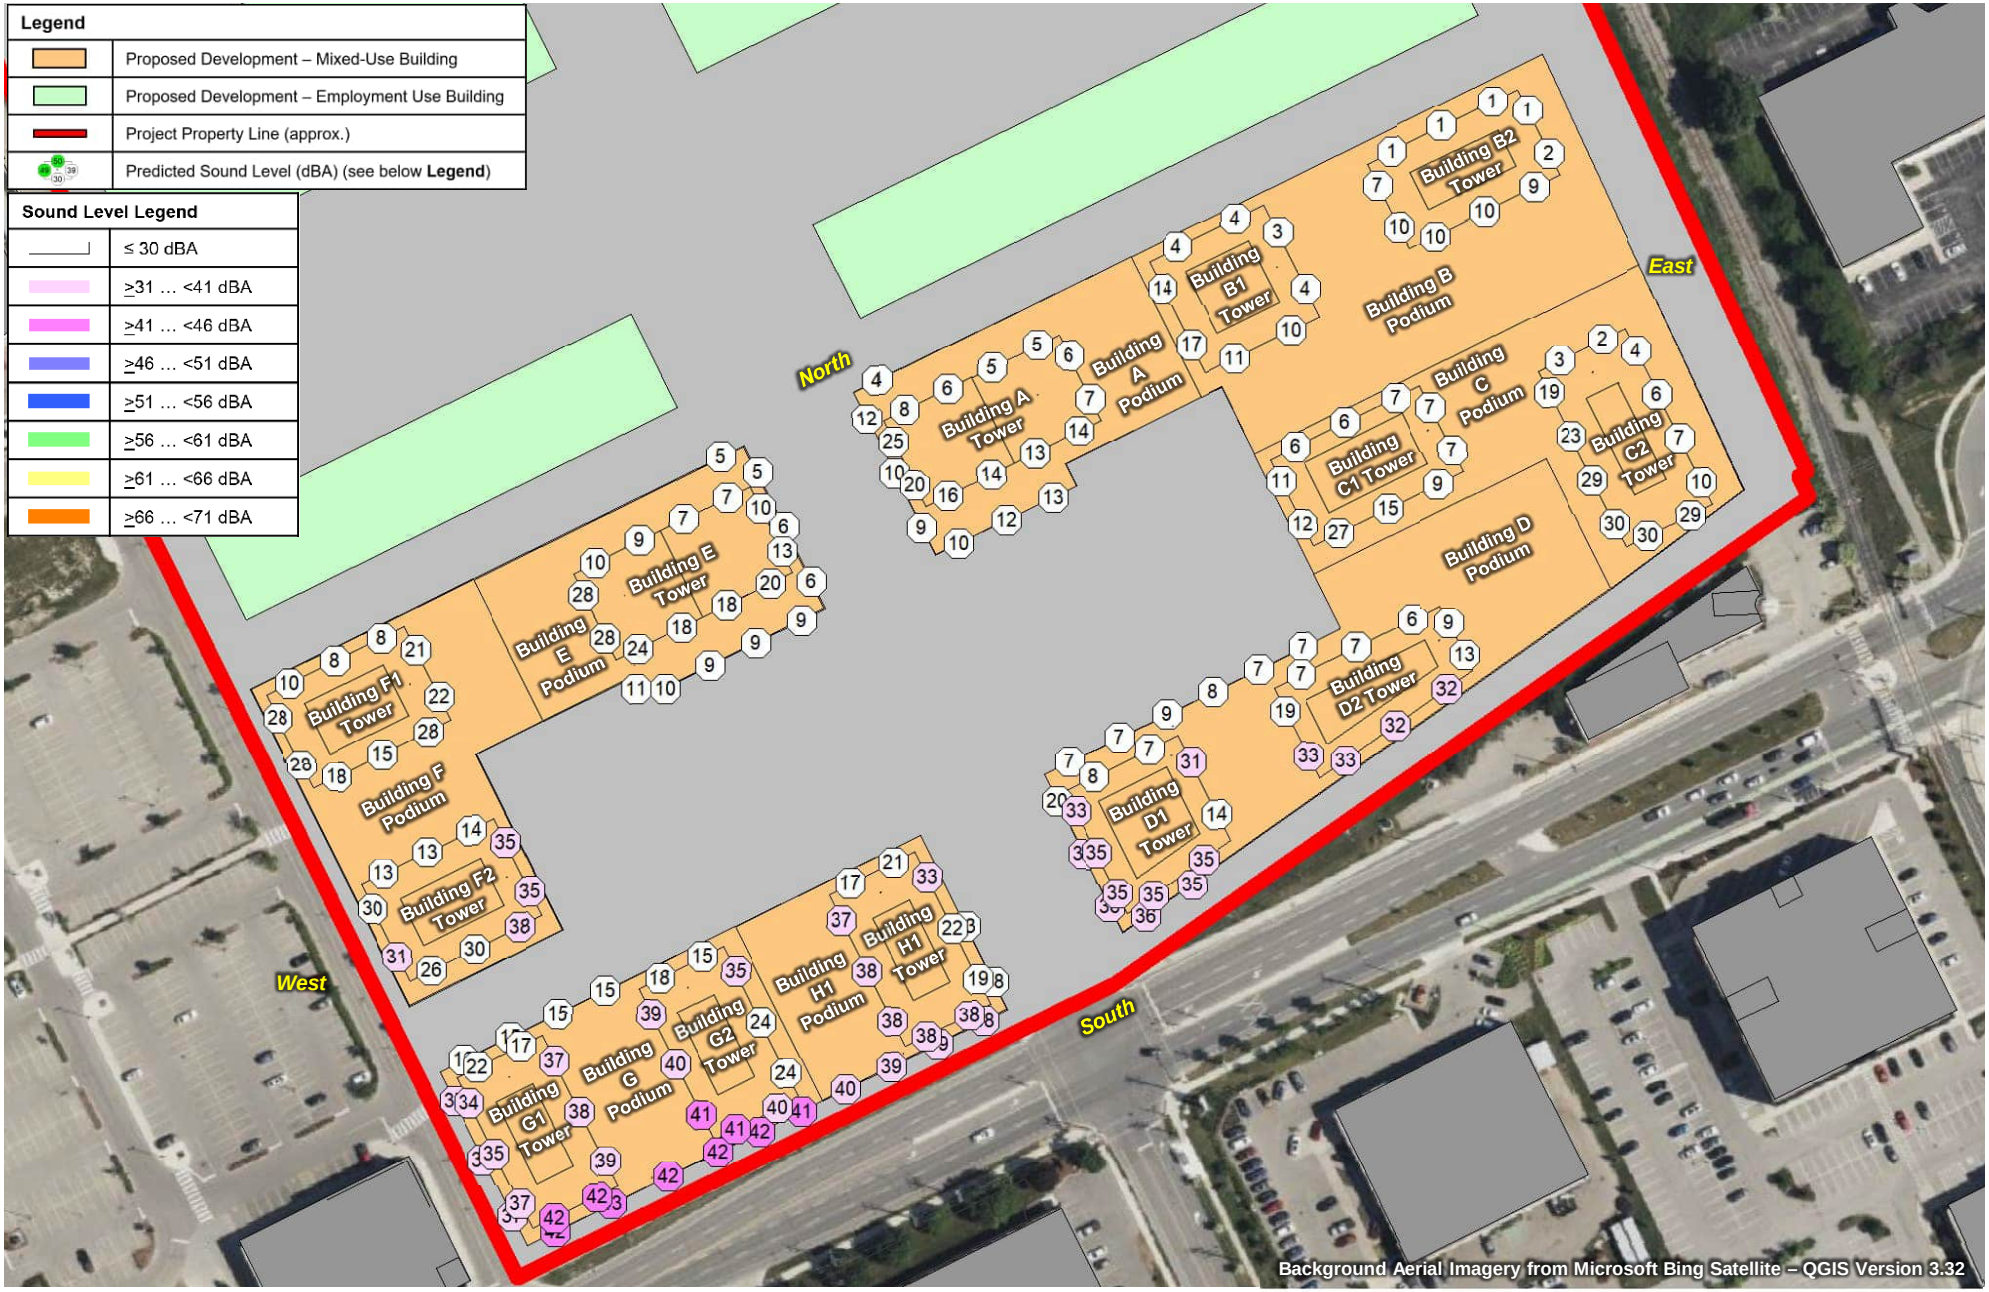


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **37**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – GREYSTONE CLUB, 155 NORTHFIELD DRIVE WEST – NIGHT-TIME		Project No. 241.030968.00001	

SLR

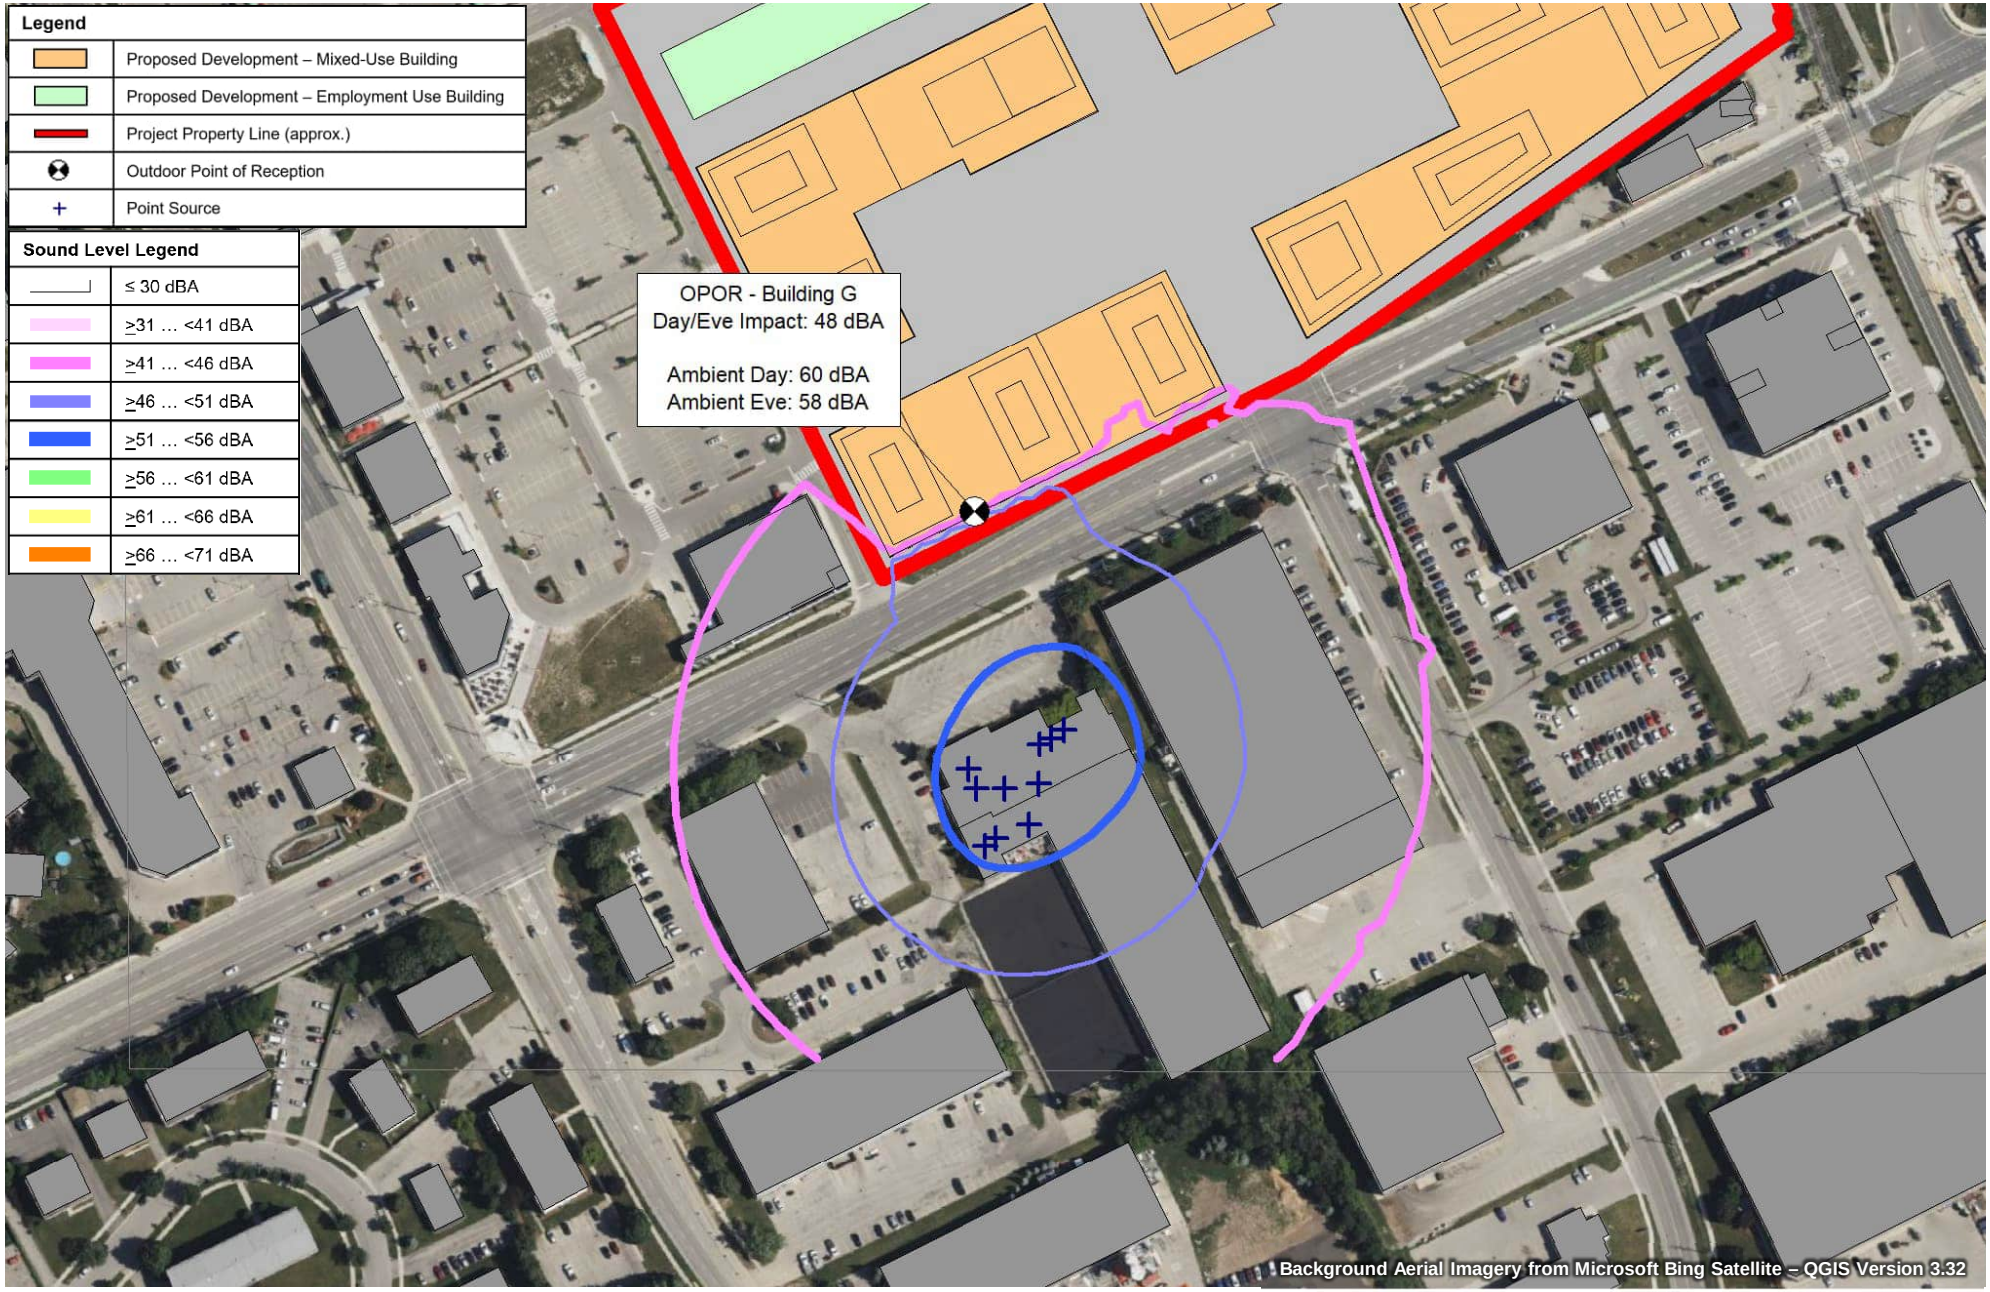


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **38**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – GREYSTONE CLUB, 155 NORTHFIELD DRIVE WEST – DAYTIME/EVENING		Project No. 241.030968.00001	SLR

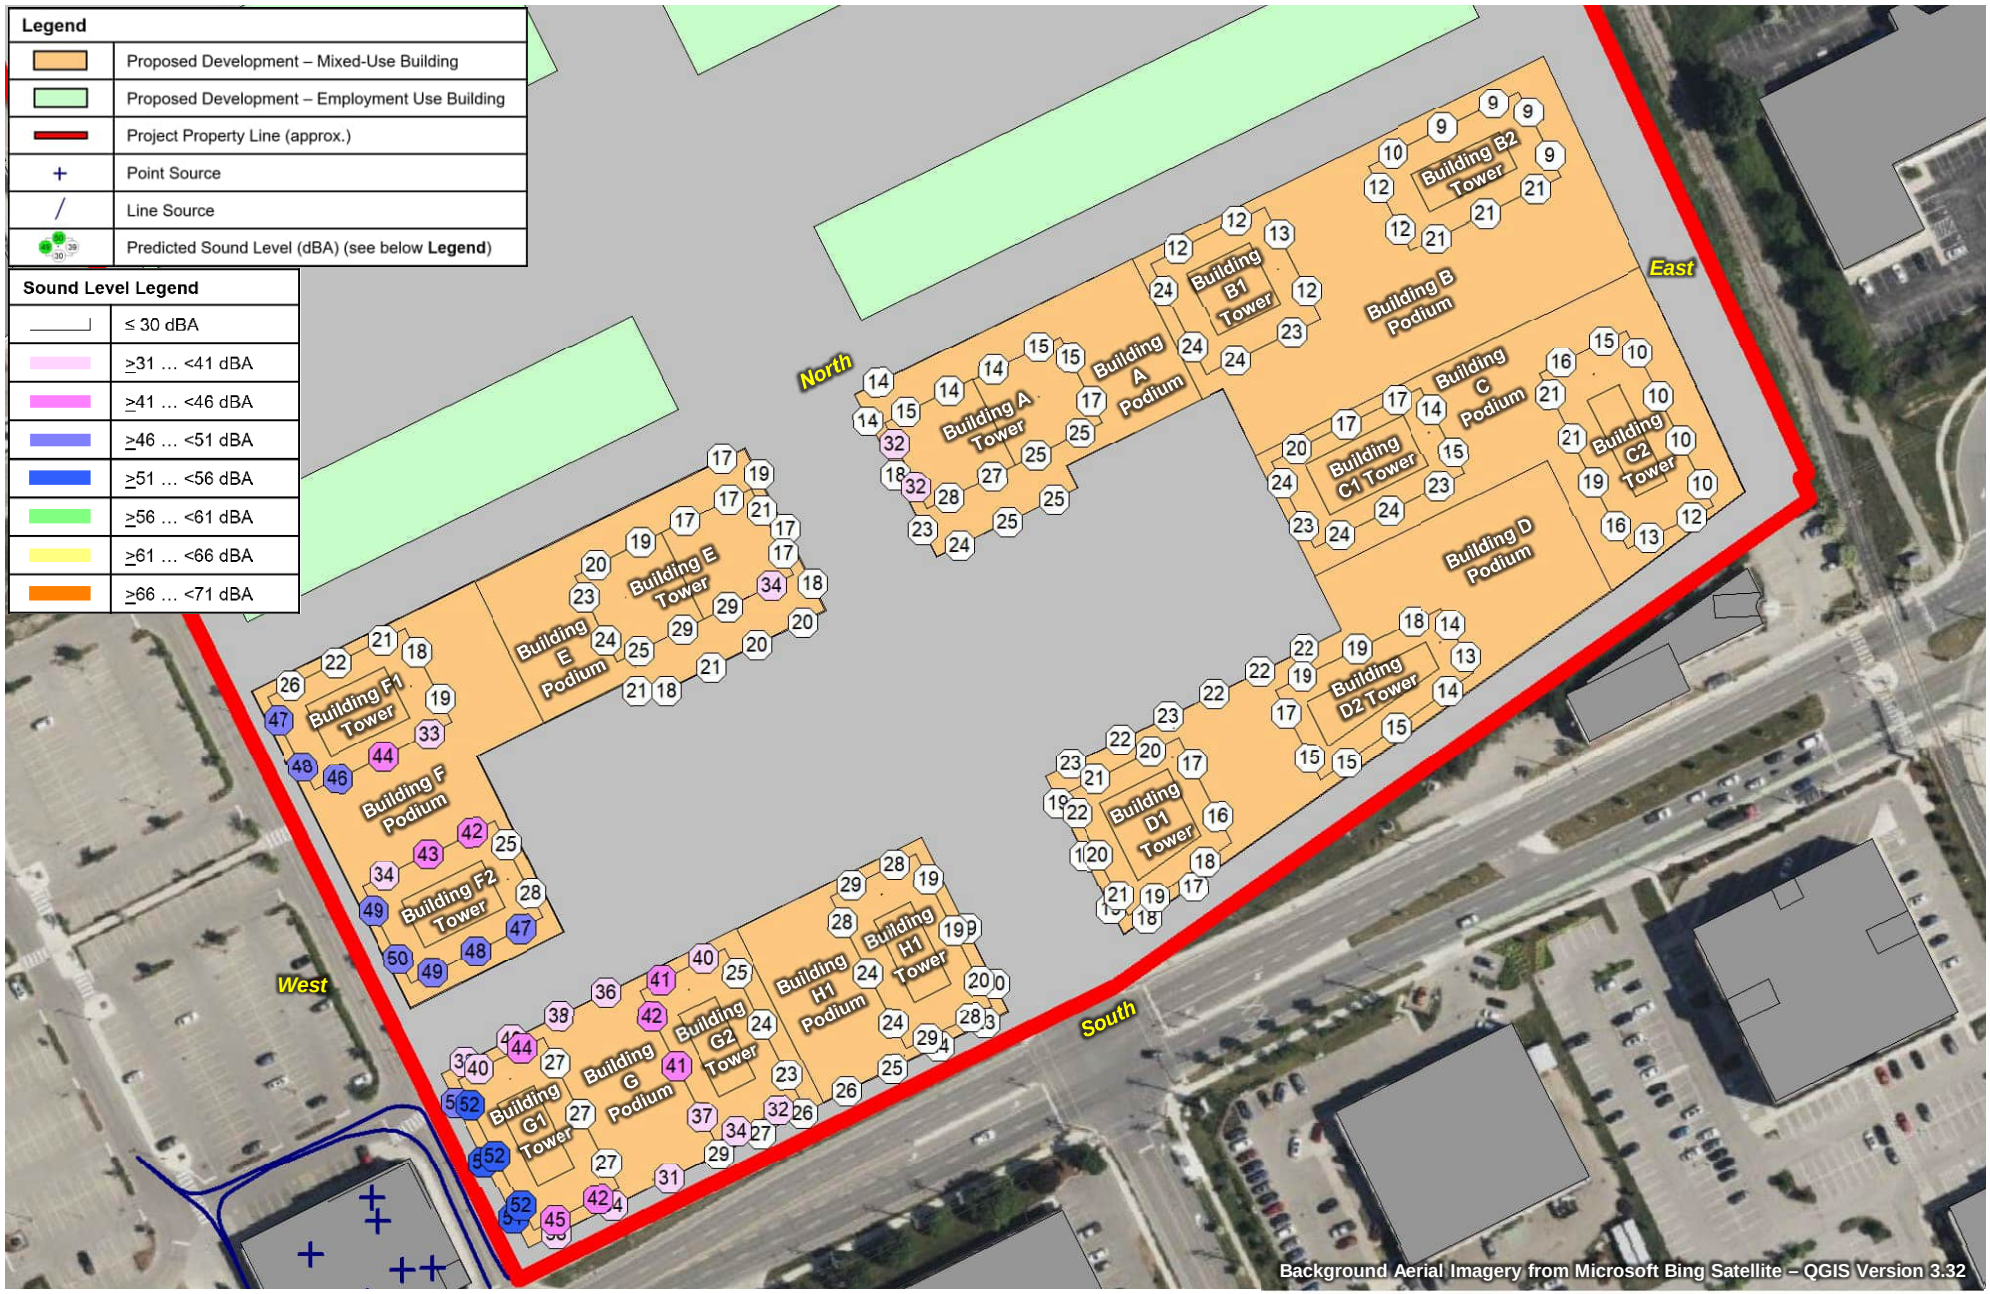


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **39**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – DAYTIME		Project No. 241.030968.00001	

SLR

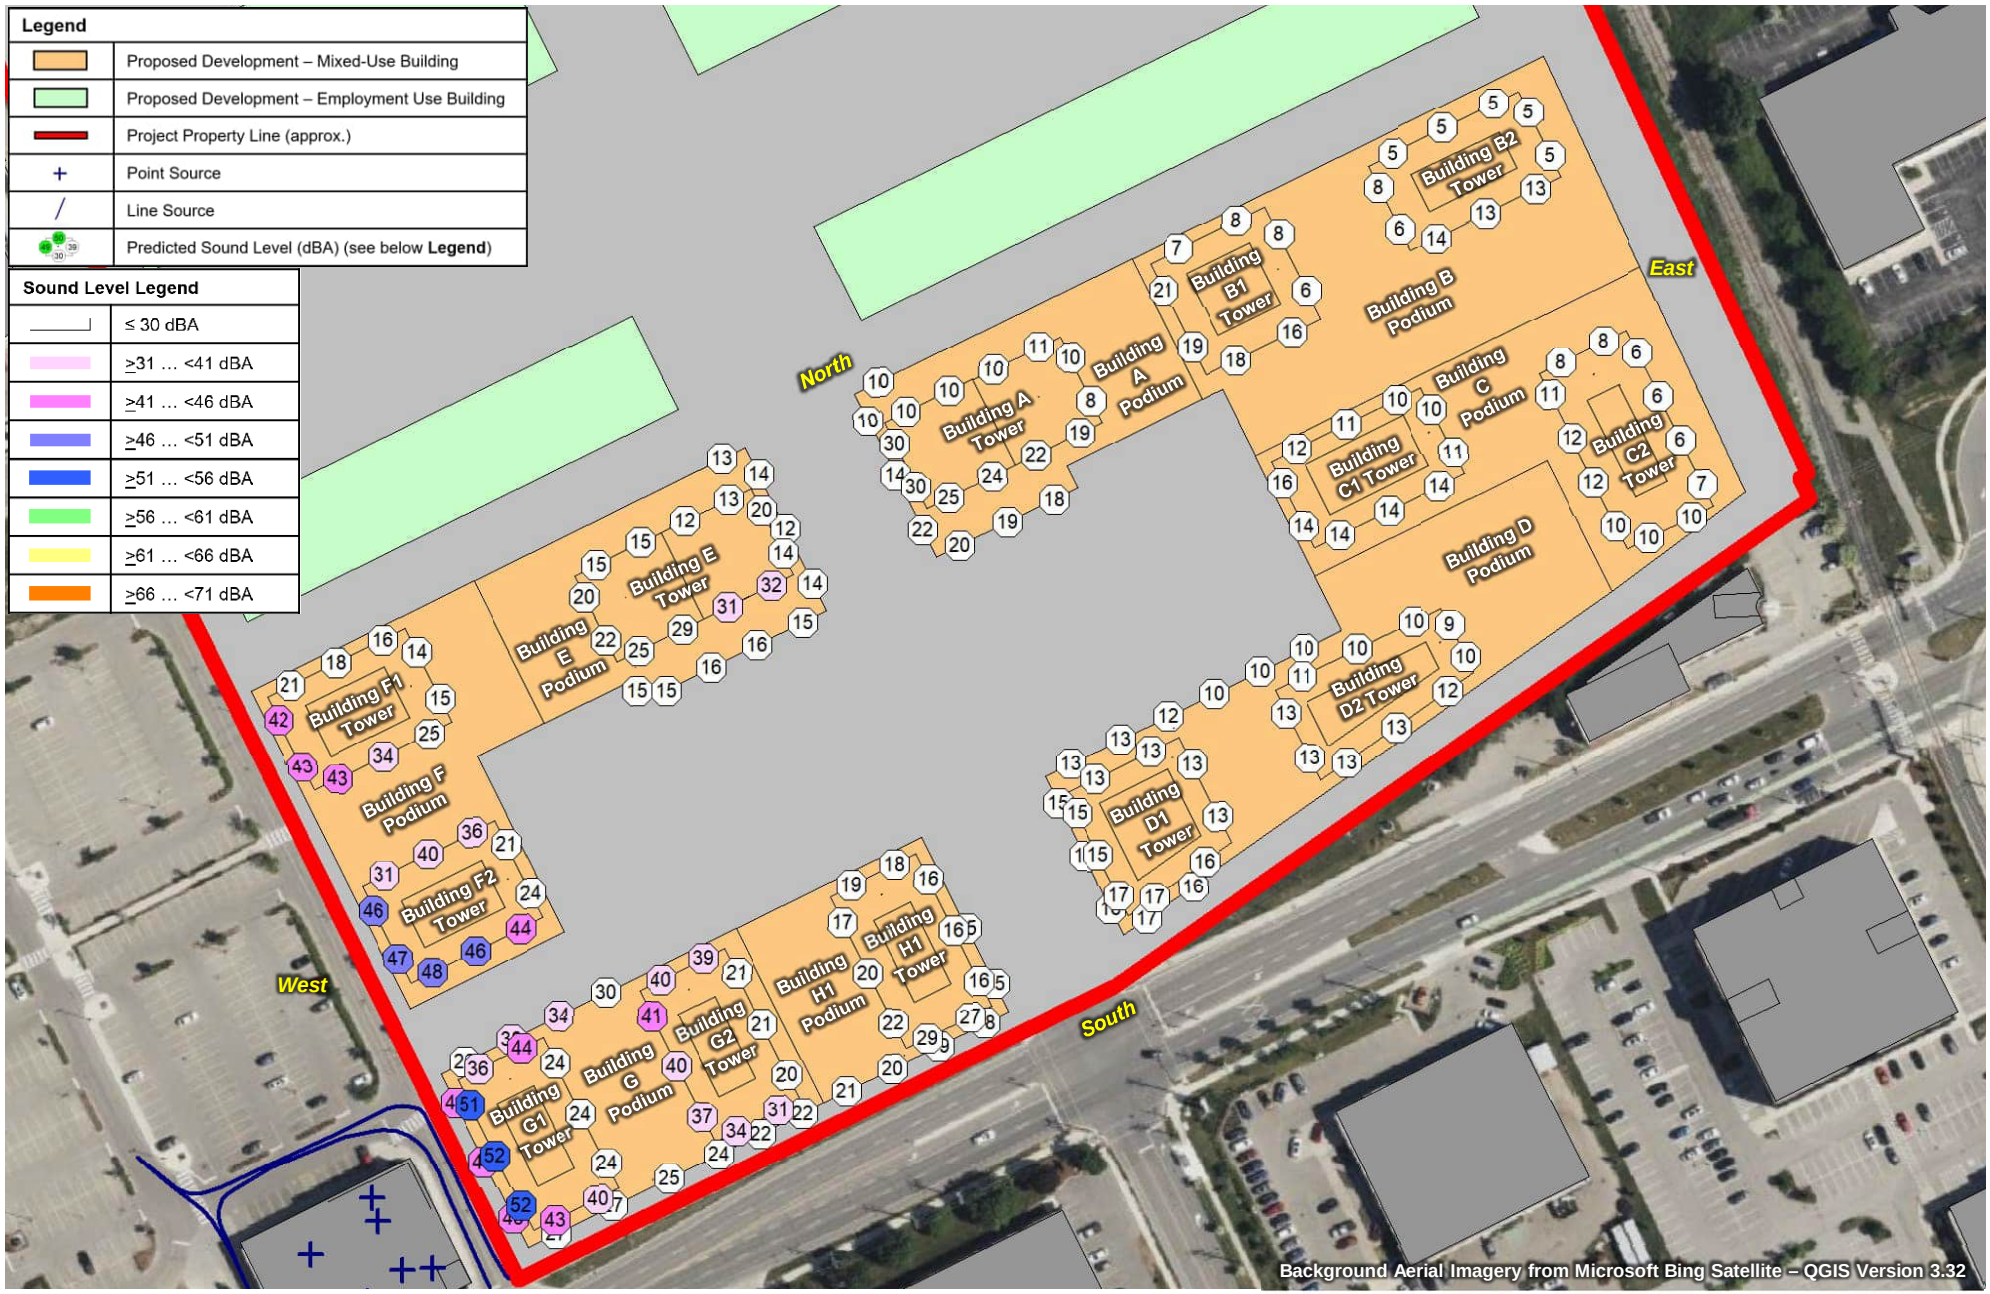

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **40**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – EVENING		Project No. 241.030968.00001	

SLR

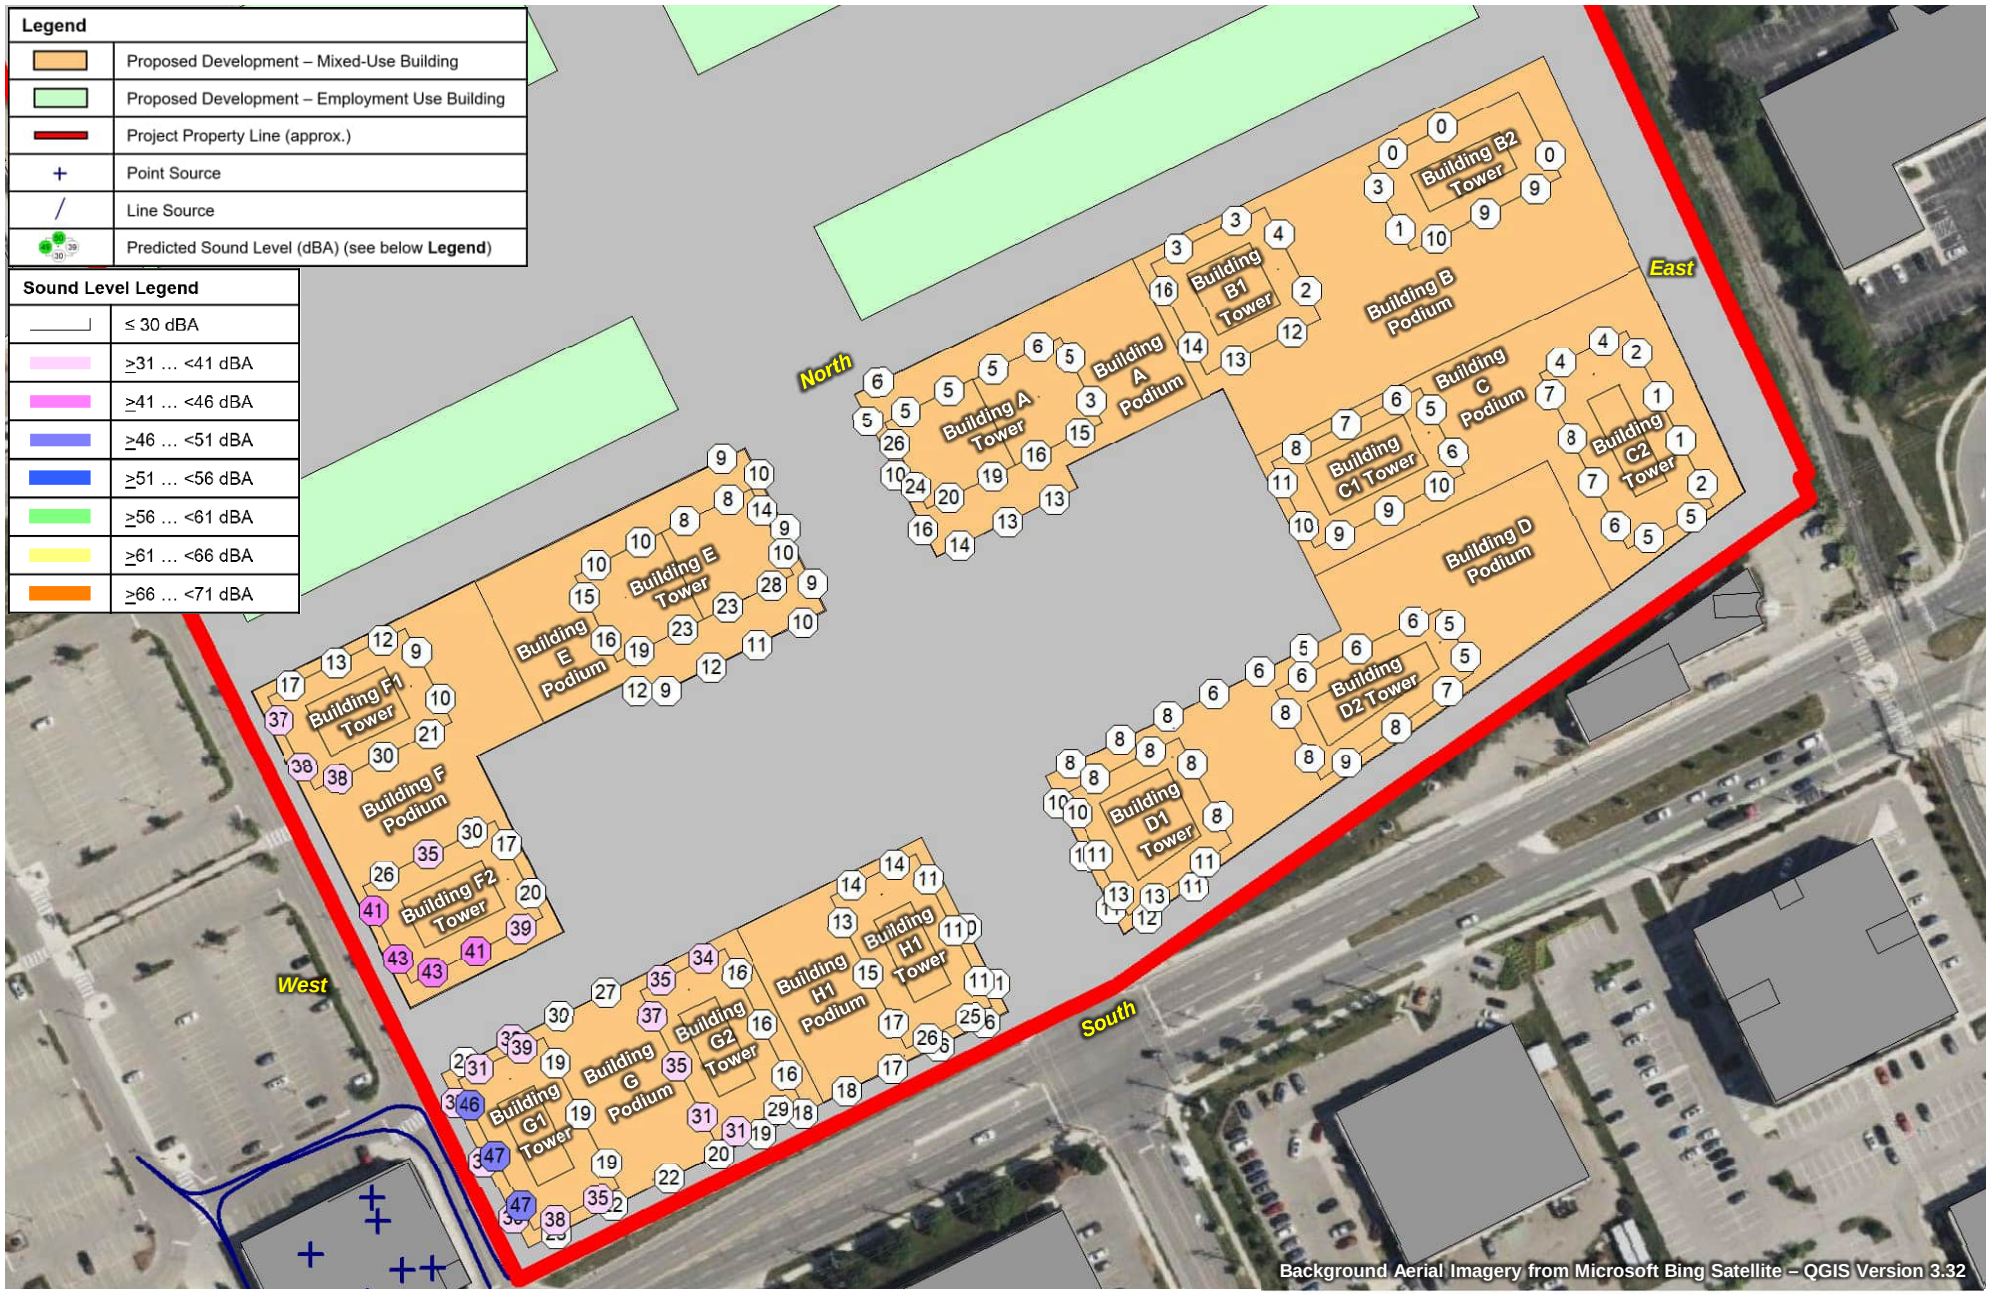

FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES –
SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – NIGHT-TIME

True North

Scale: 1:1,750


METRES

Date: March 14, 2024 Rev 1.0

Project No. 241.030968.00001


Figure No. **41**

SLR

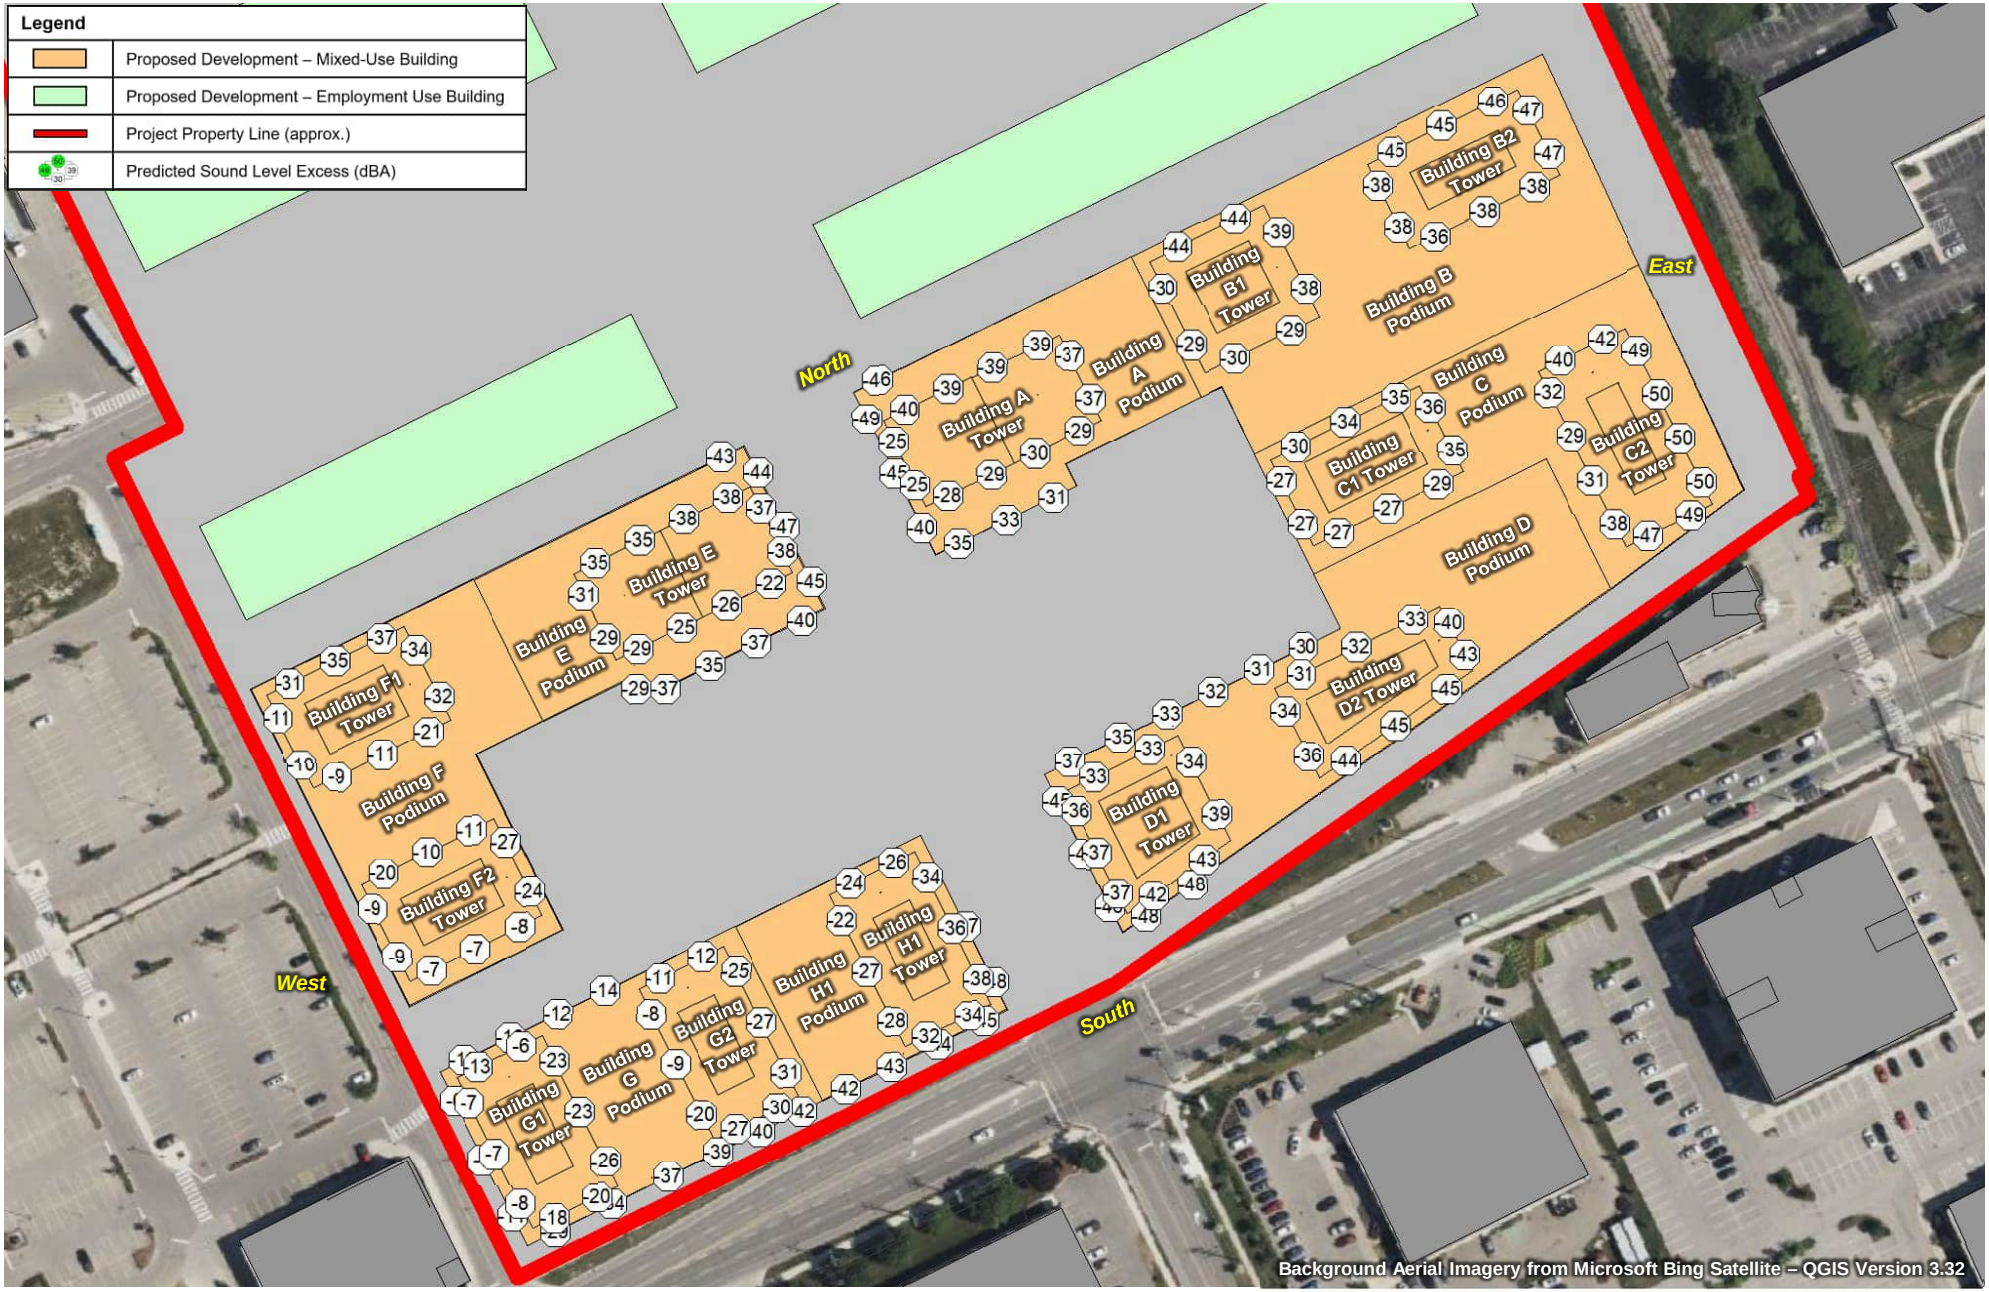


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **42**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – DAYTIME		Project No. 241.030968.00001	

SLR

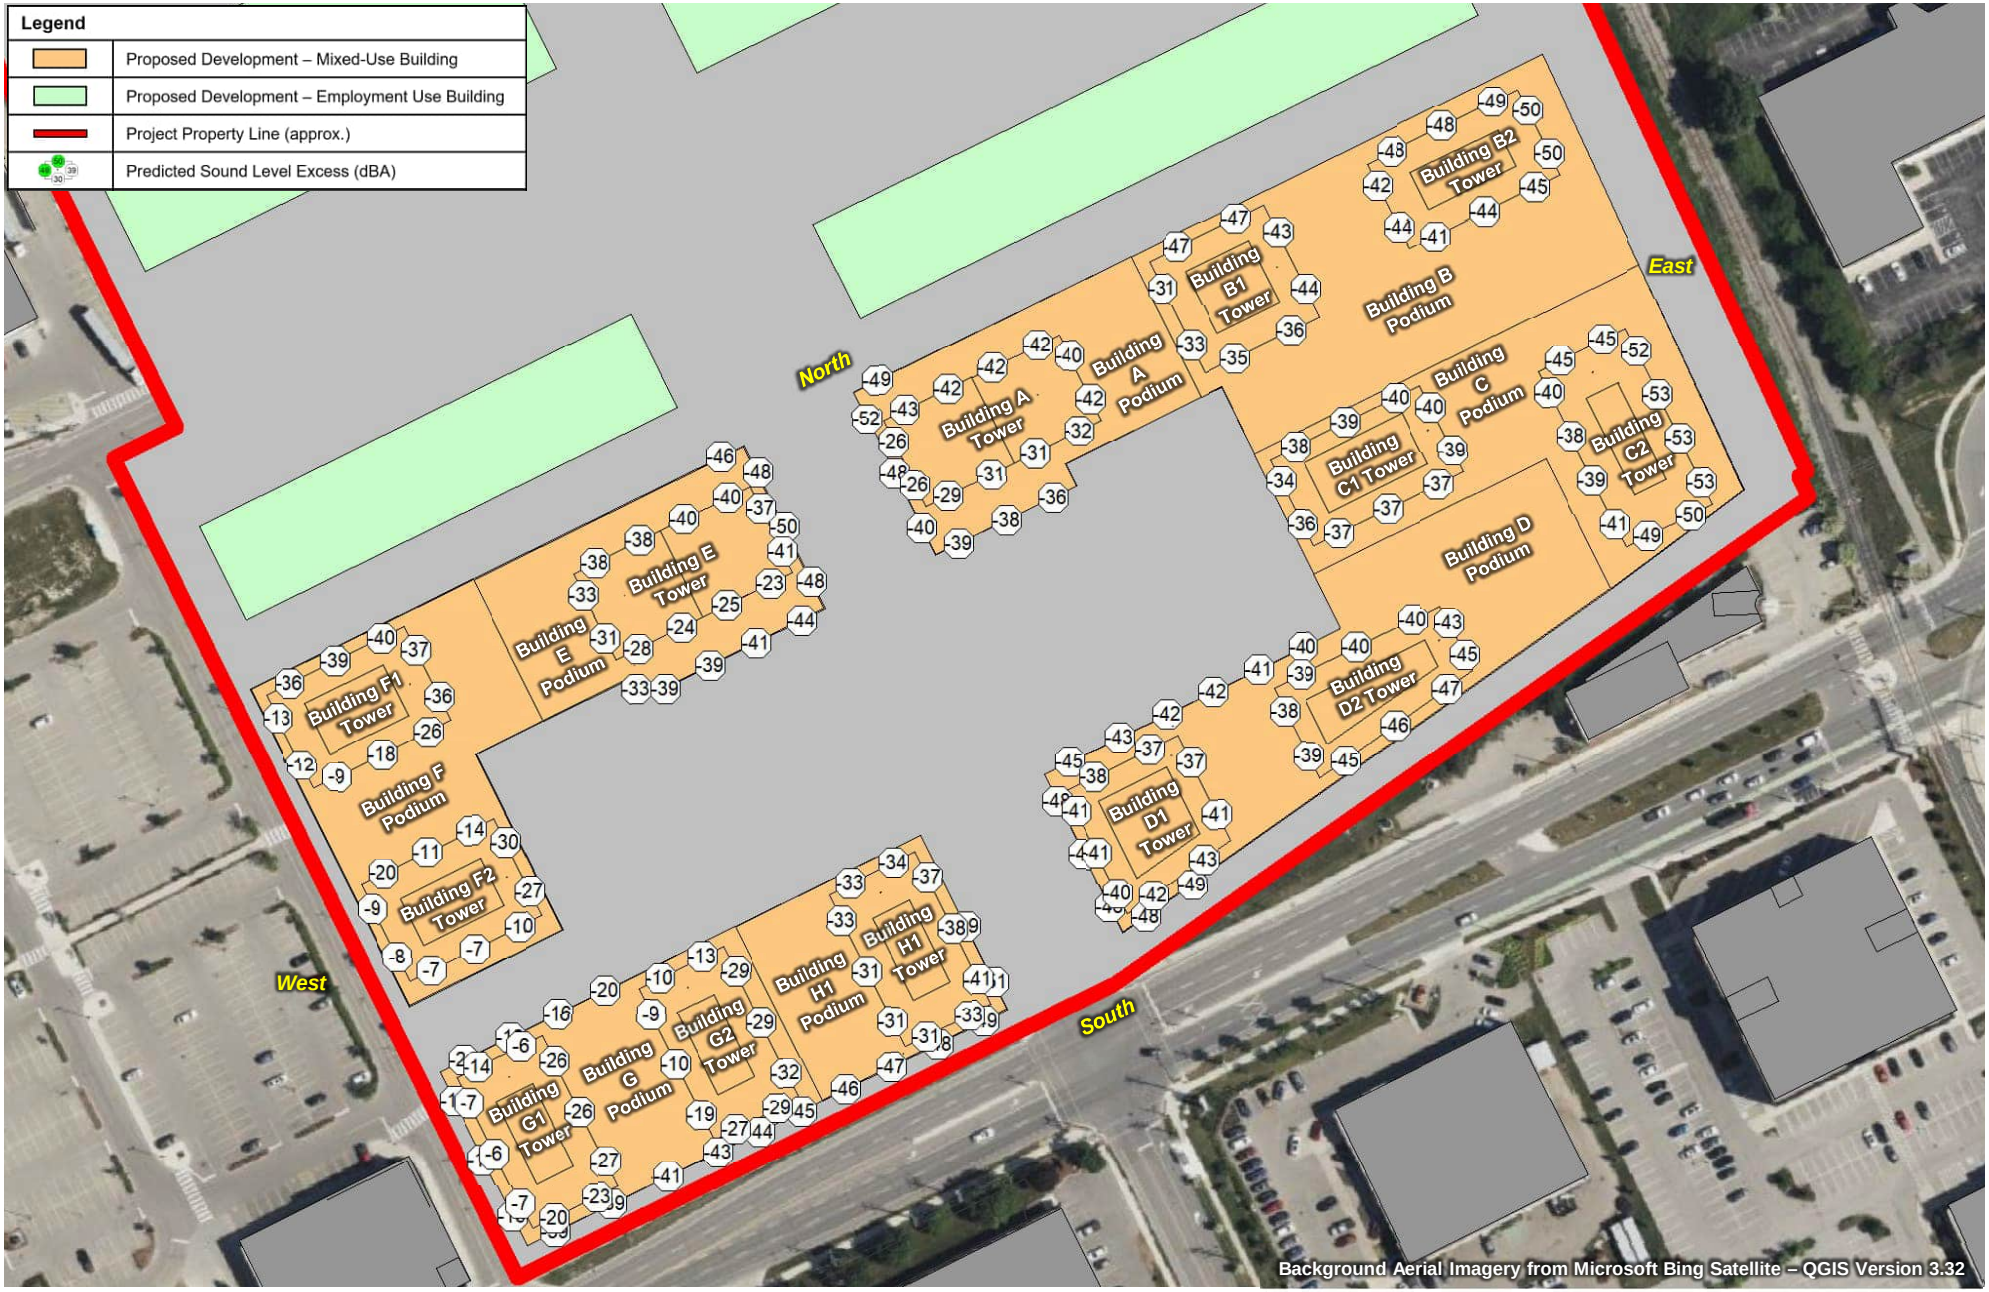


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **43**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – EVENING		Project No. 241.030968.00001	

SLR

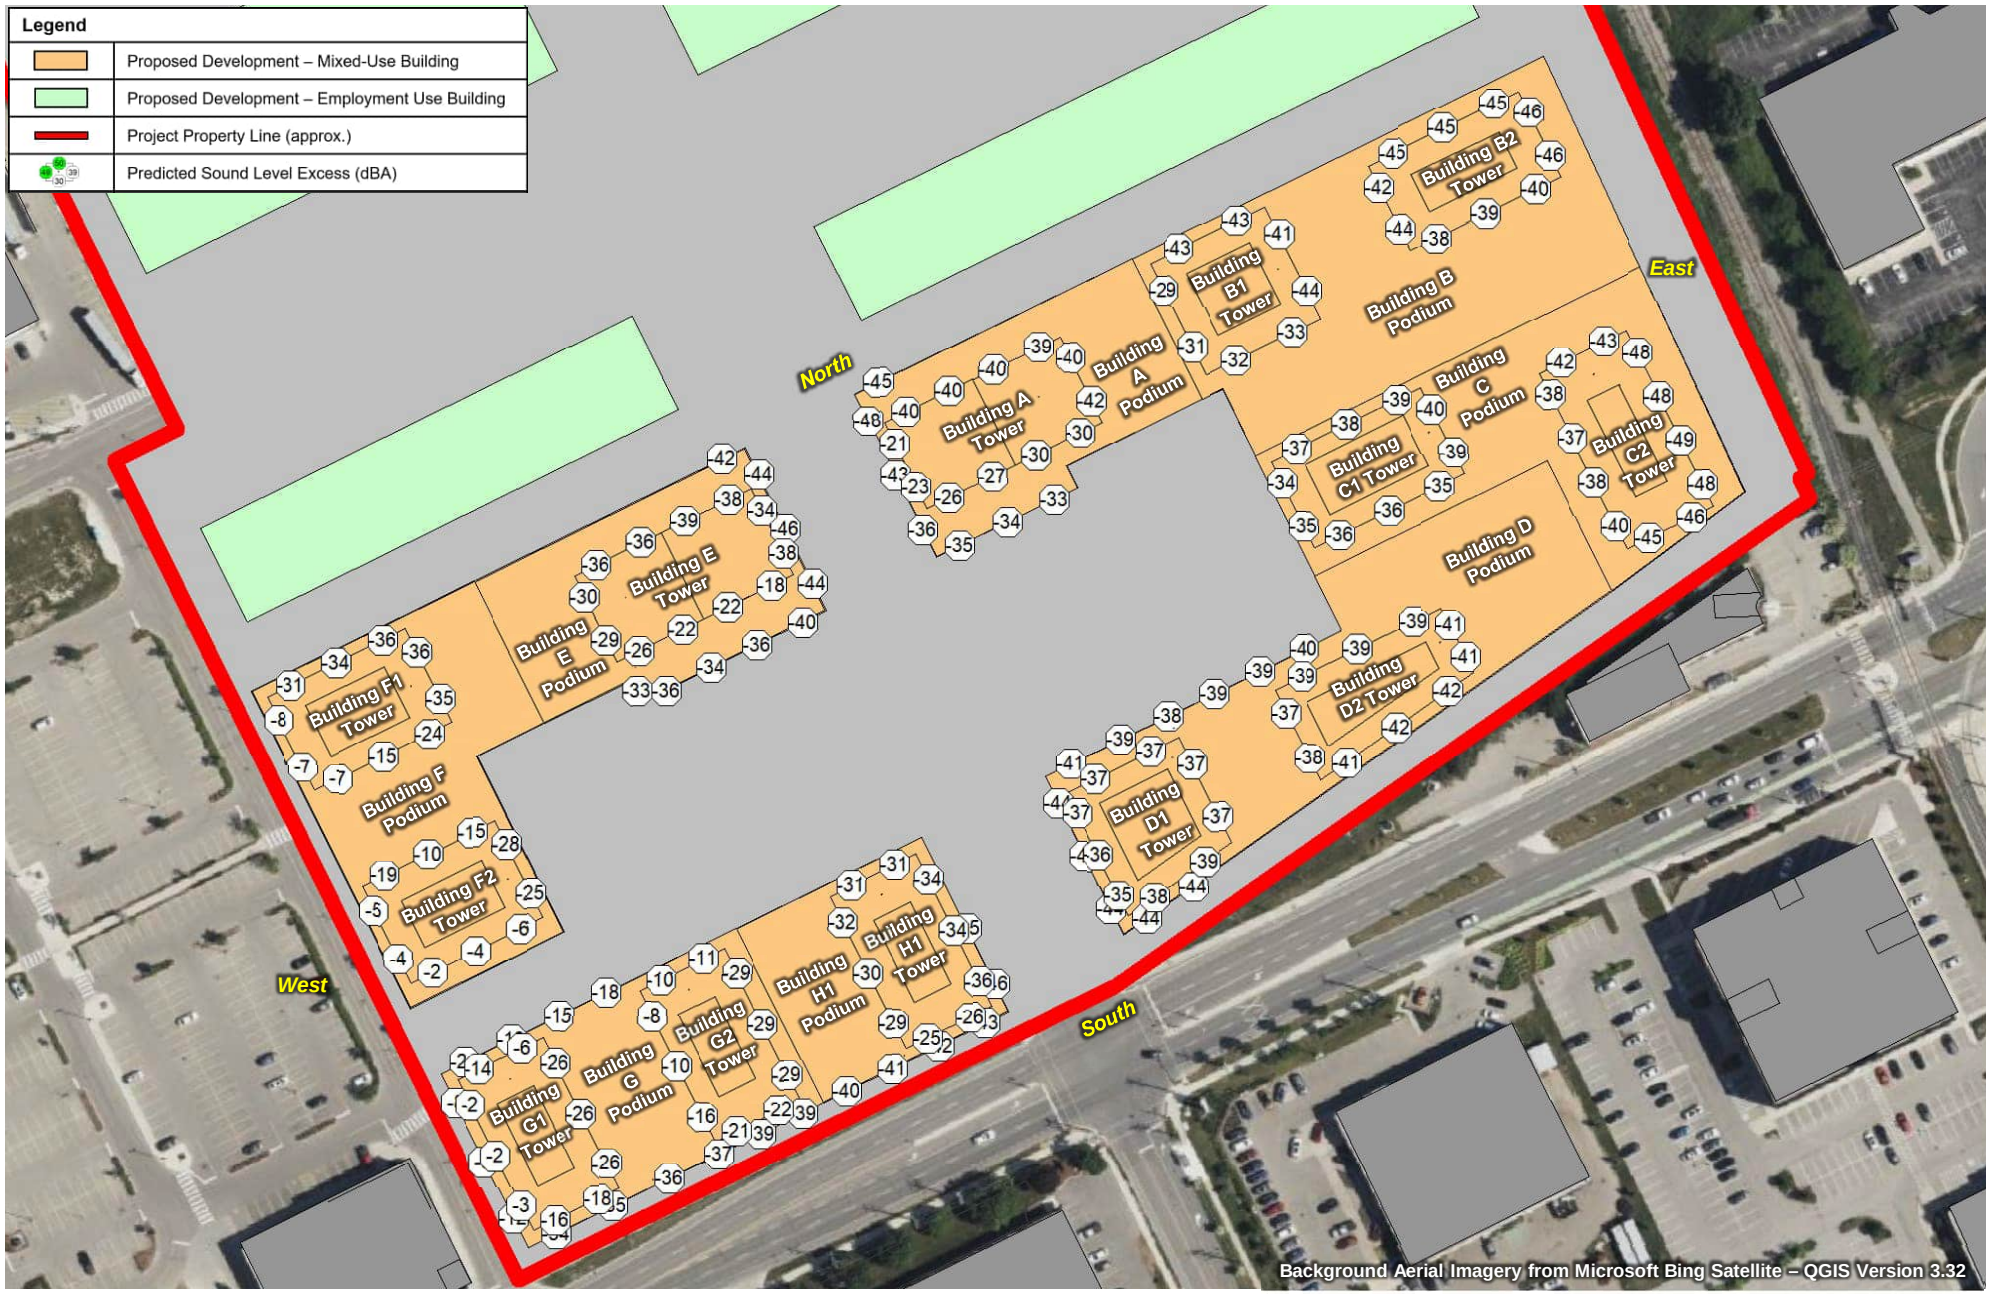


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **44**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – NIGHT-TIME		Project No. 241.030968.00001	

SLR

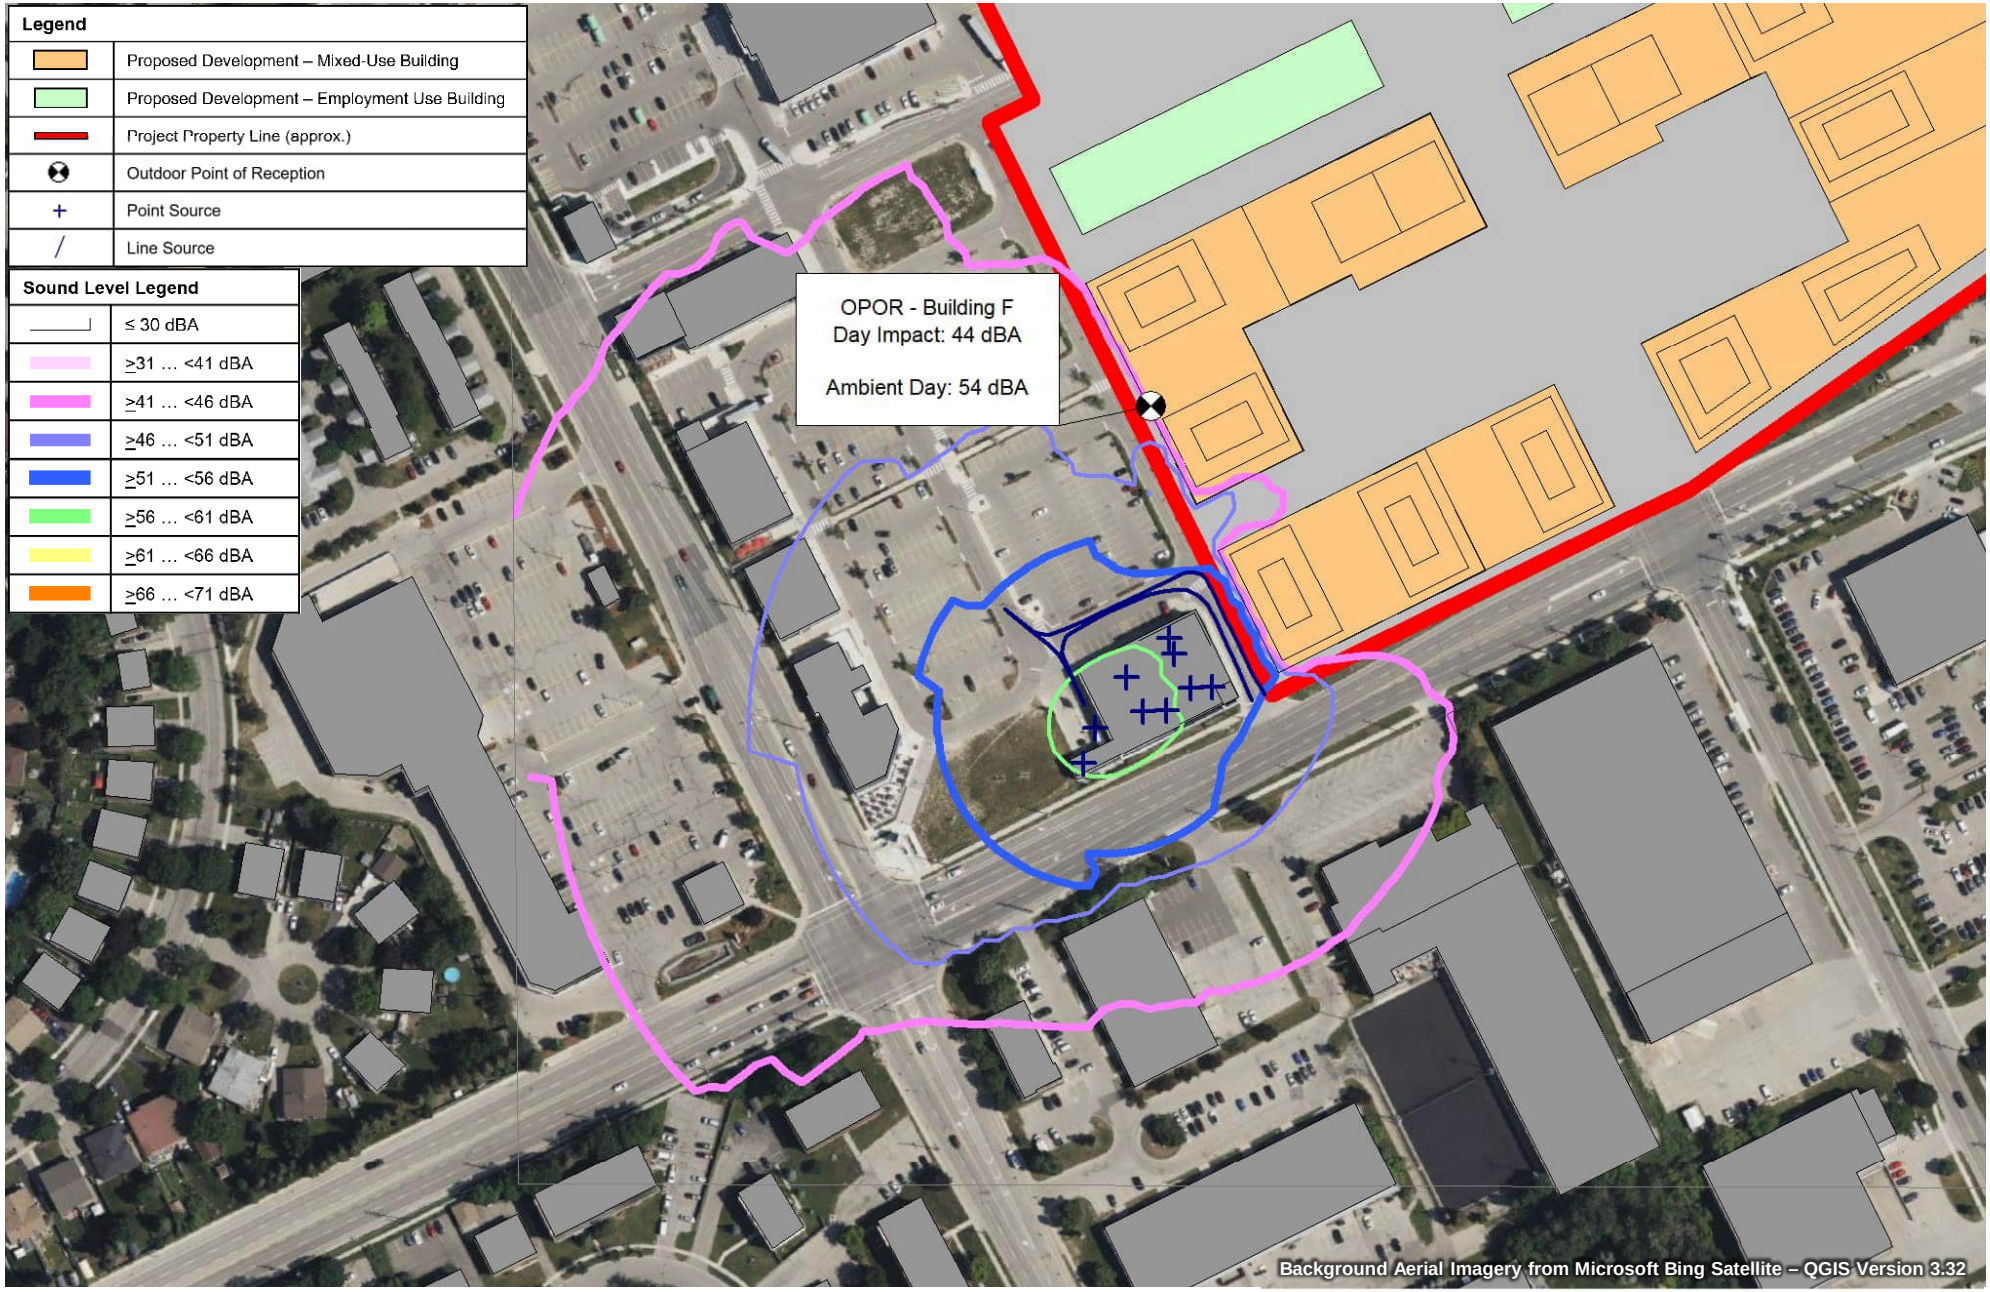


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **45**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – DAYTIME		Project No. 241.030968.00001	

SLR

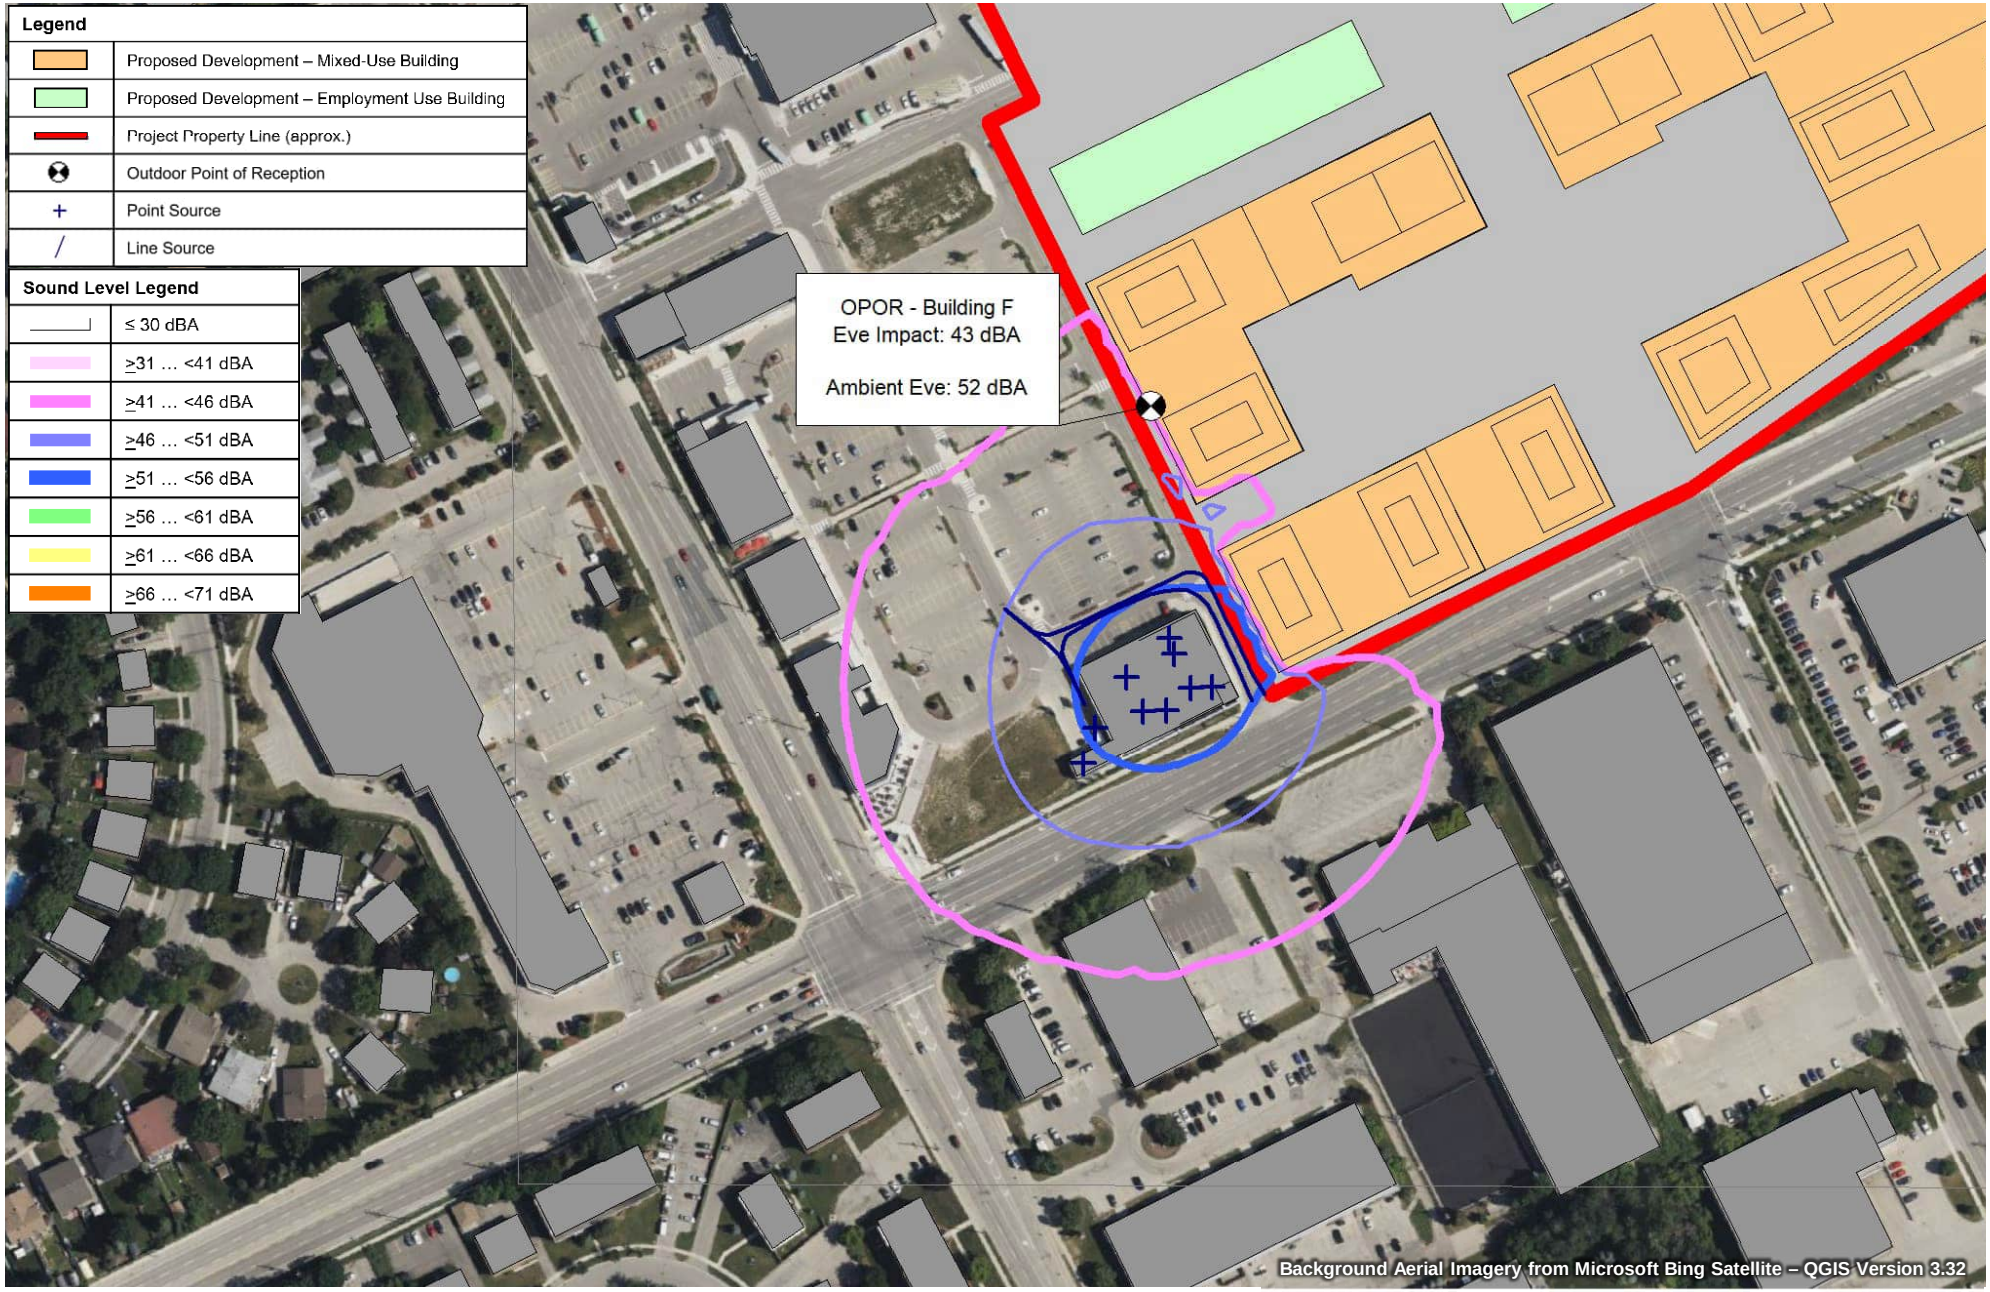


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **46**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – SHOPPERS DRUG MART, 190 NORTHFIELD DRIVE WEST – EVENING		Project No. 241.030968.00001	


SLR

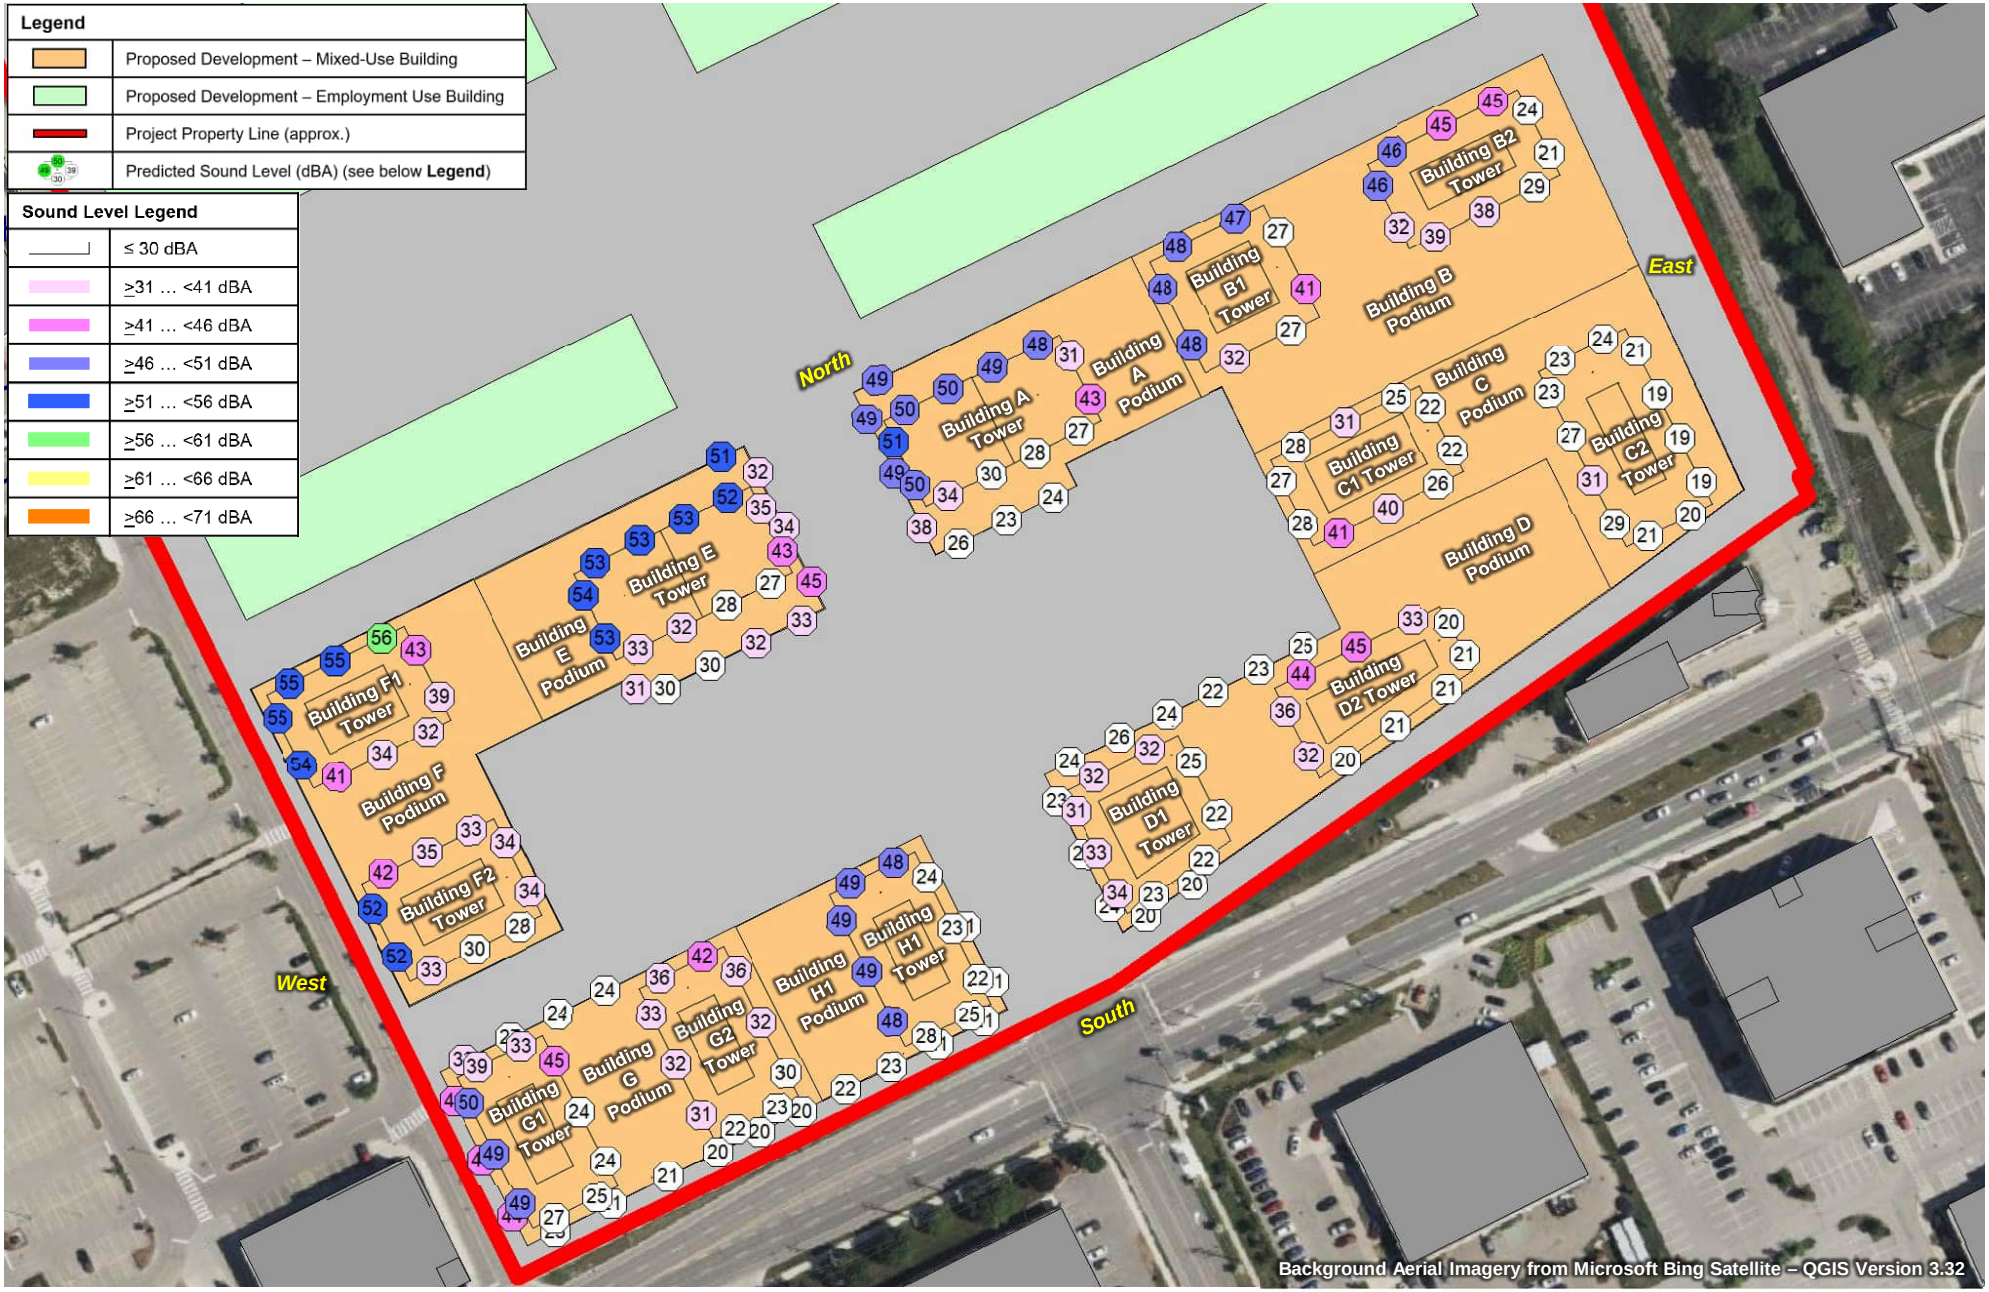


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **47**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – DAYTIME		Project No. 241.030968.00001	SLR

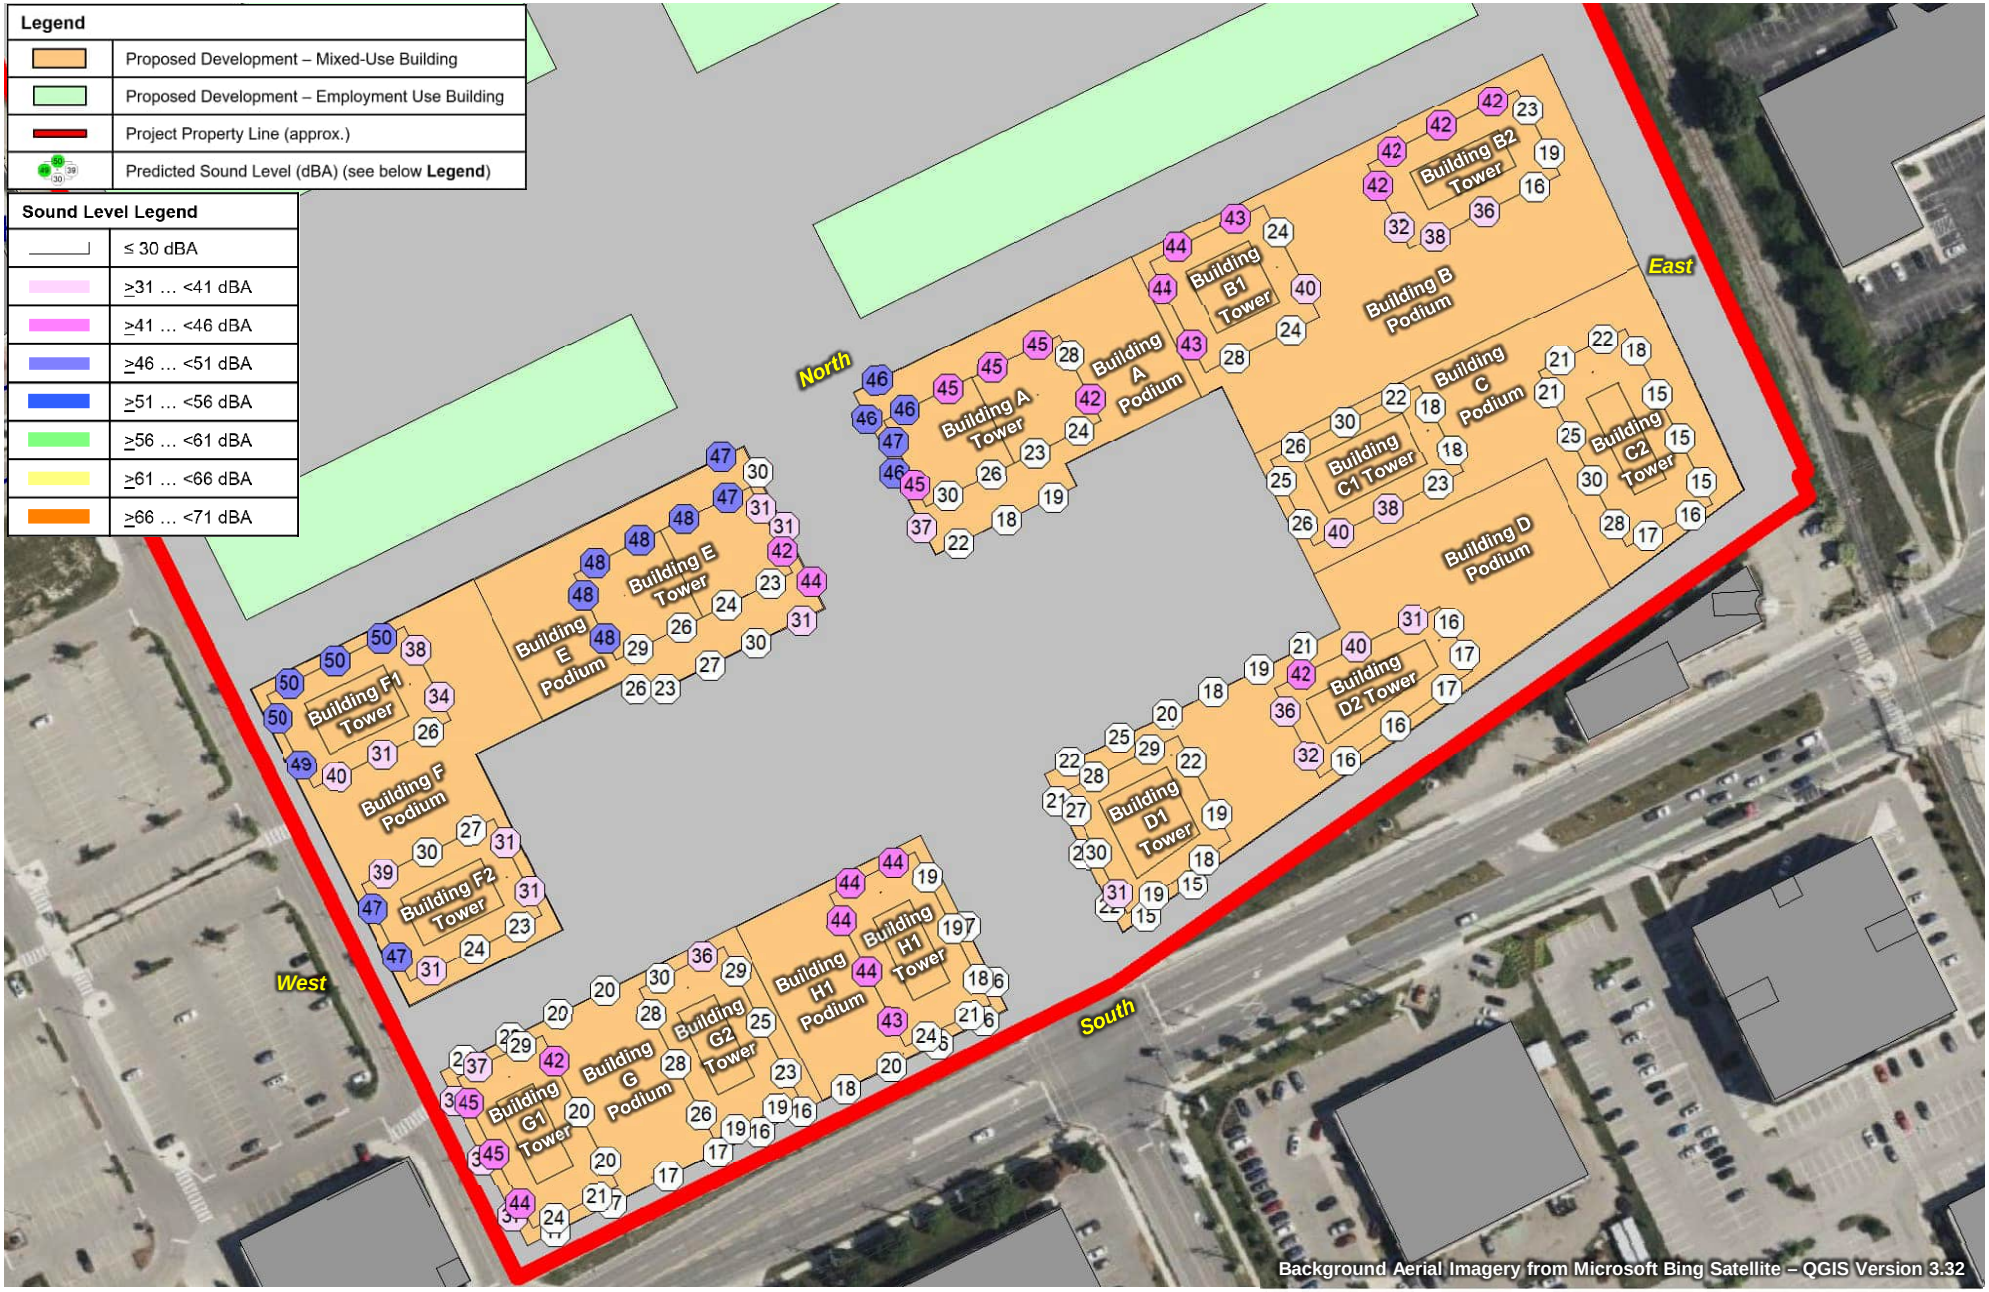

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **48**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – EVENING		Project No. 241.030968.00001	SLR

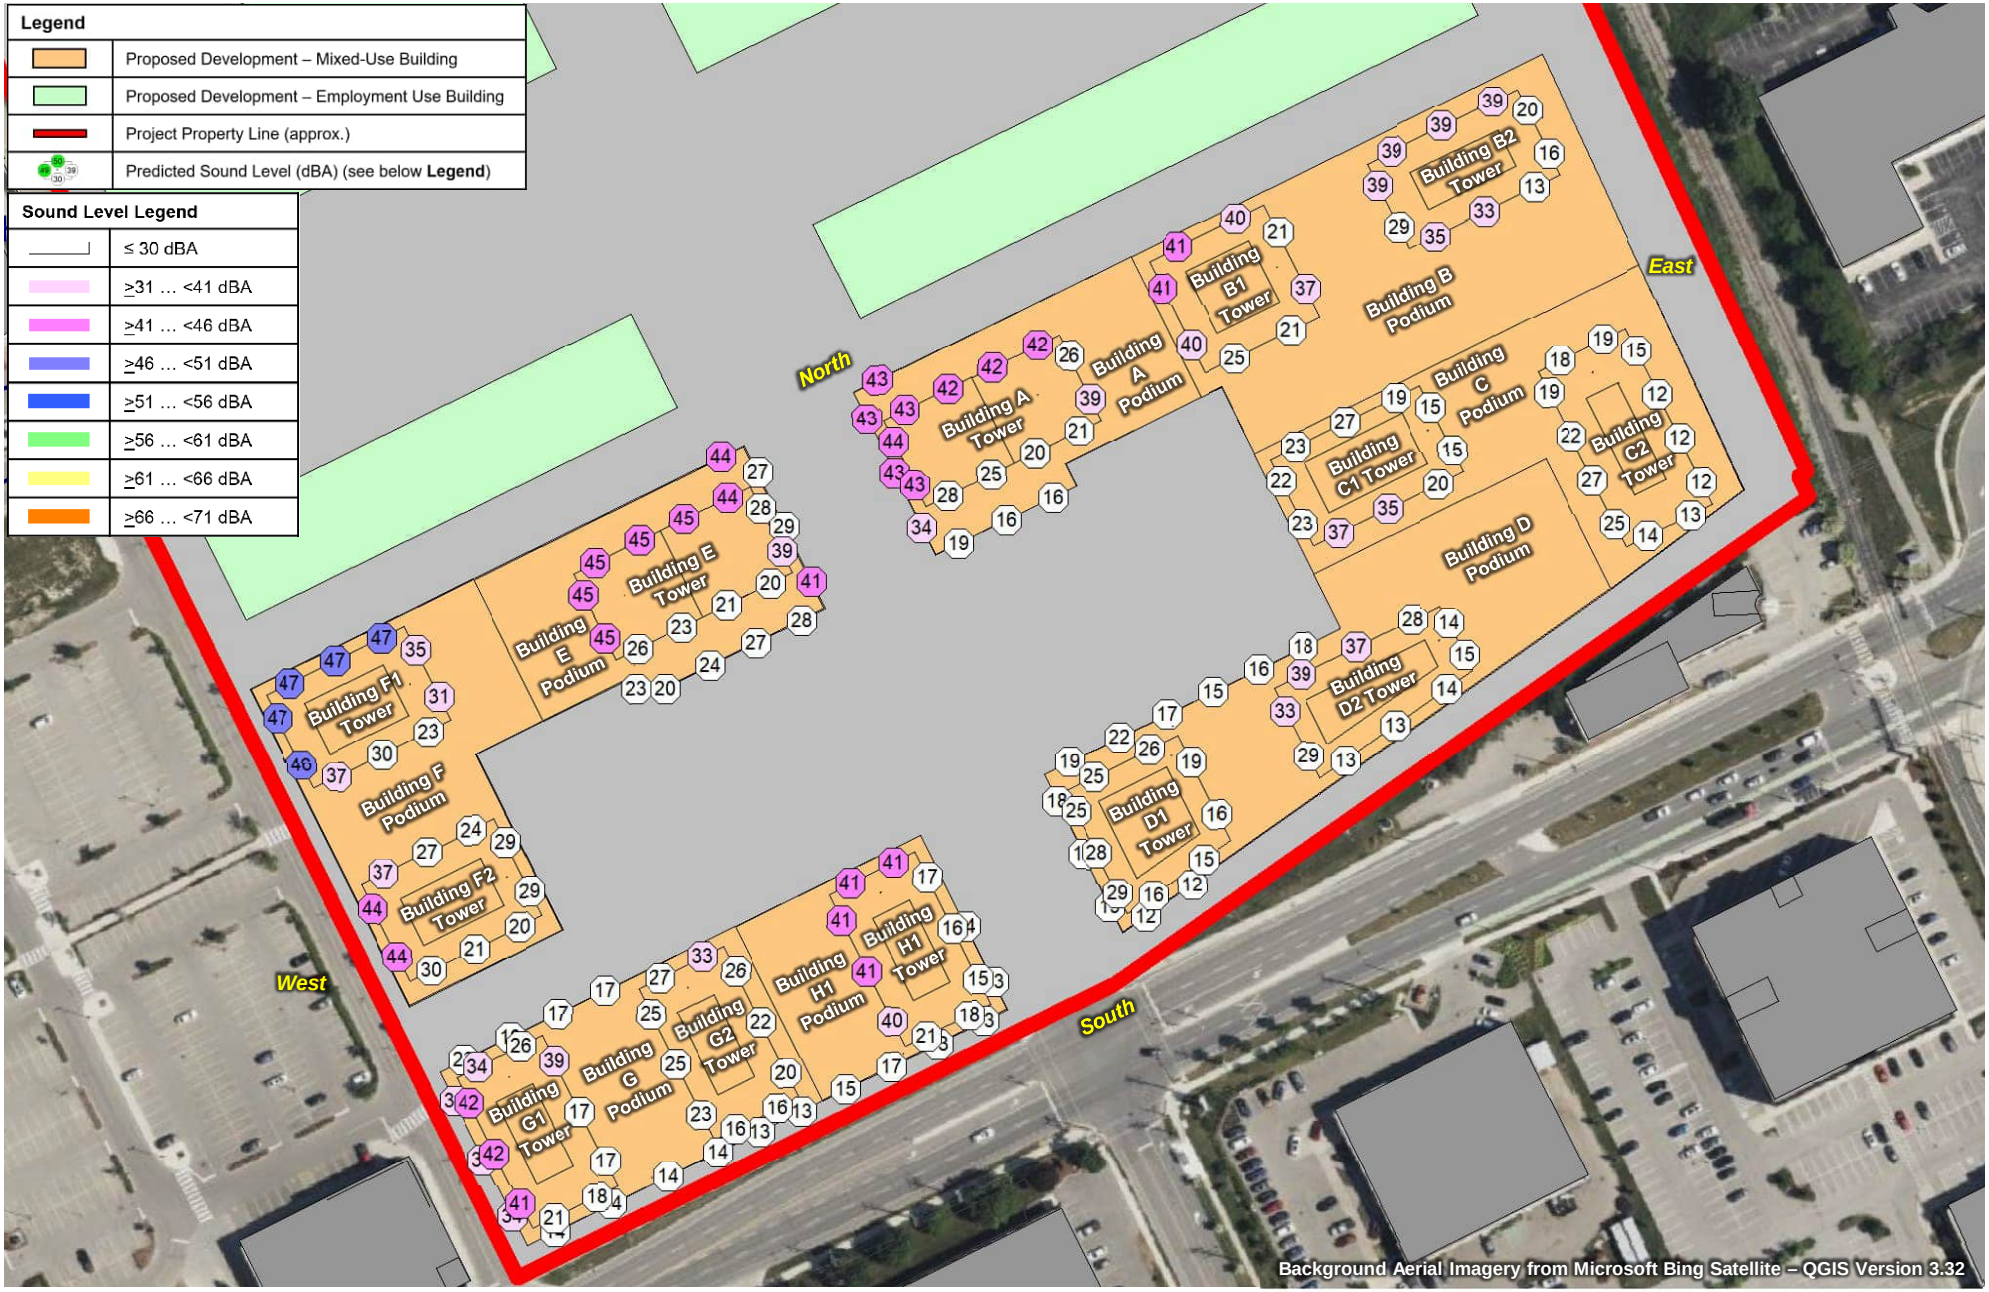


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **49**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – NIGHT-TIME		Project No. 241.030968.00001	SLR

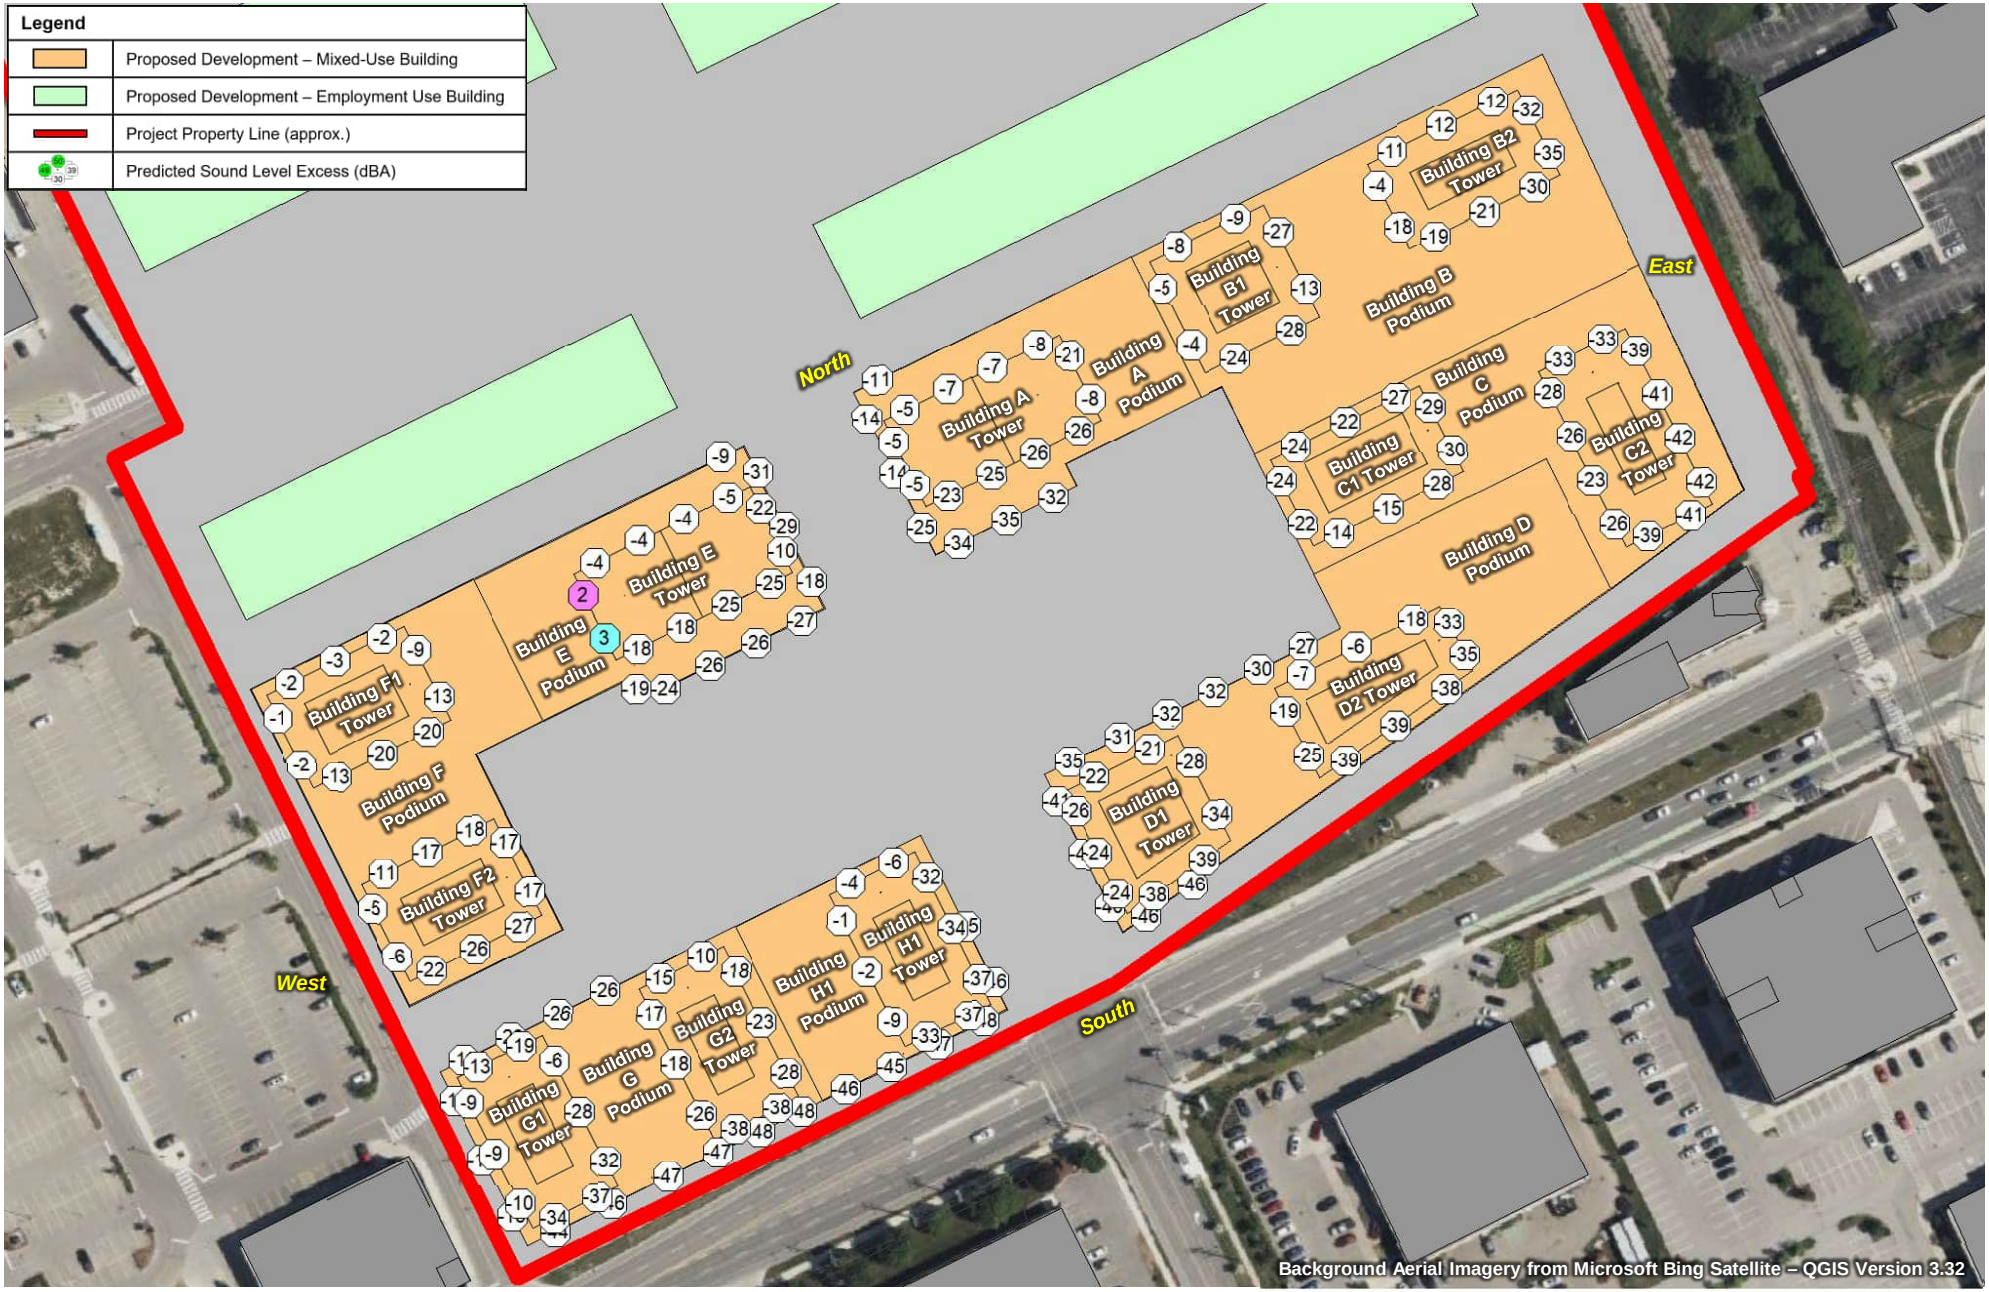


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **50a**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – DAYTIME		Project No. 241.030968.00001	

SLR

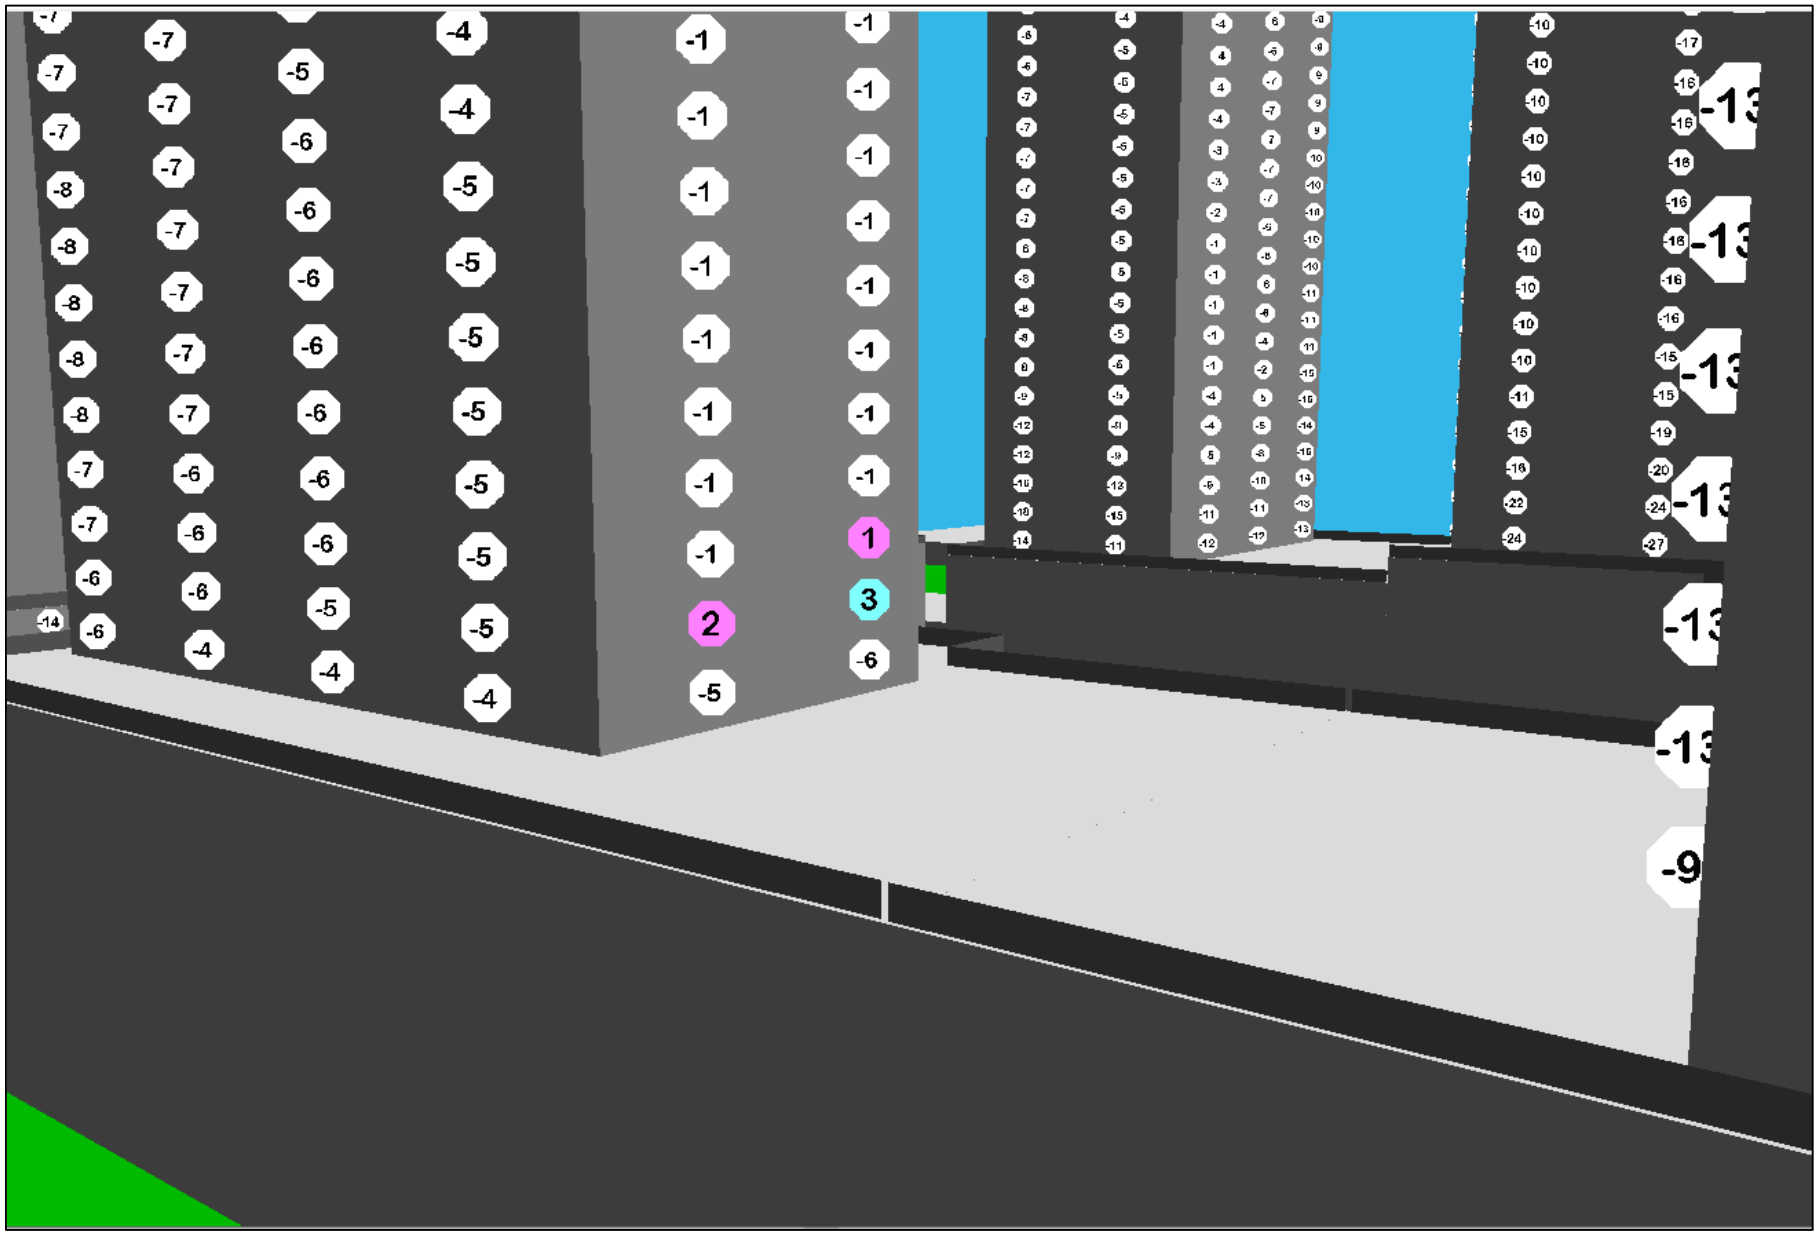


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: N.T.S.	METRES	SLR
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **50b**	
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – DAYTIME – 3D (FROM NORTHWEST)		Project No. 241.030968.00001		

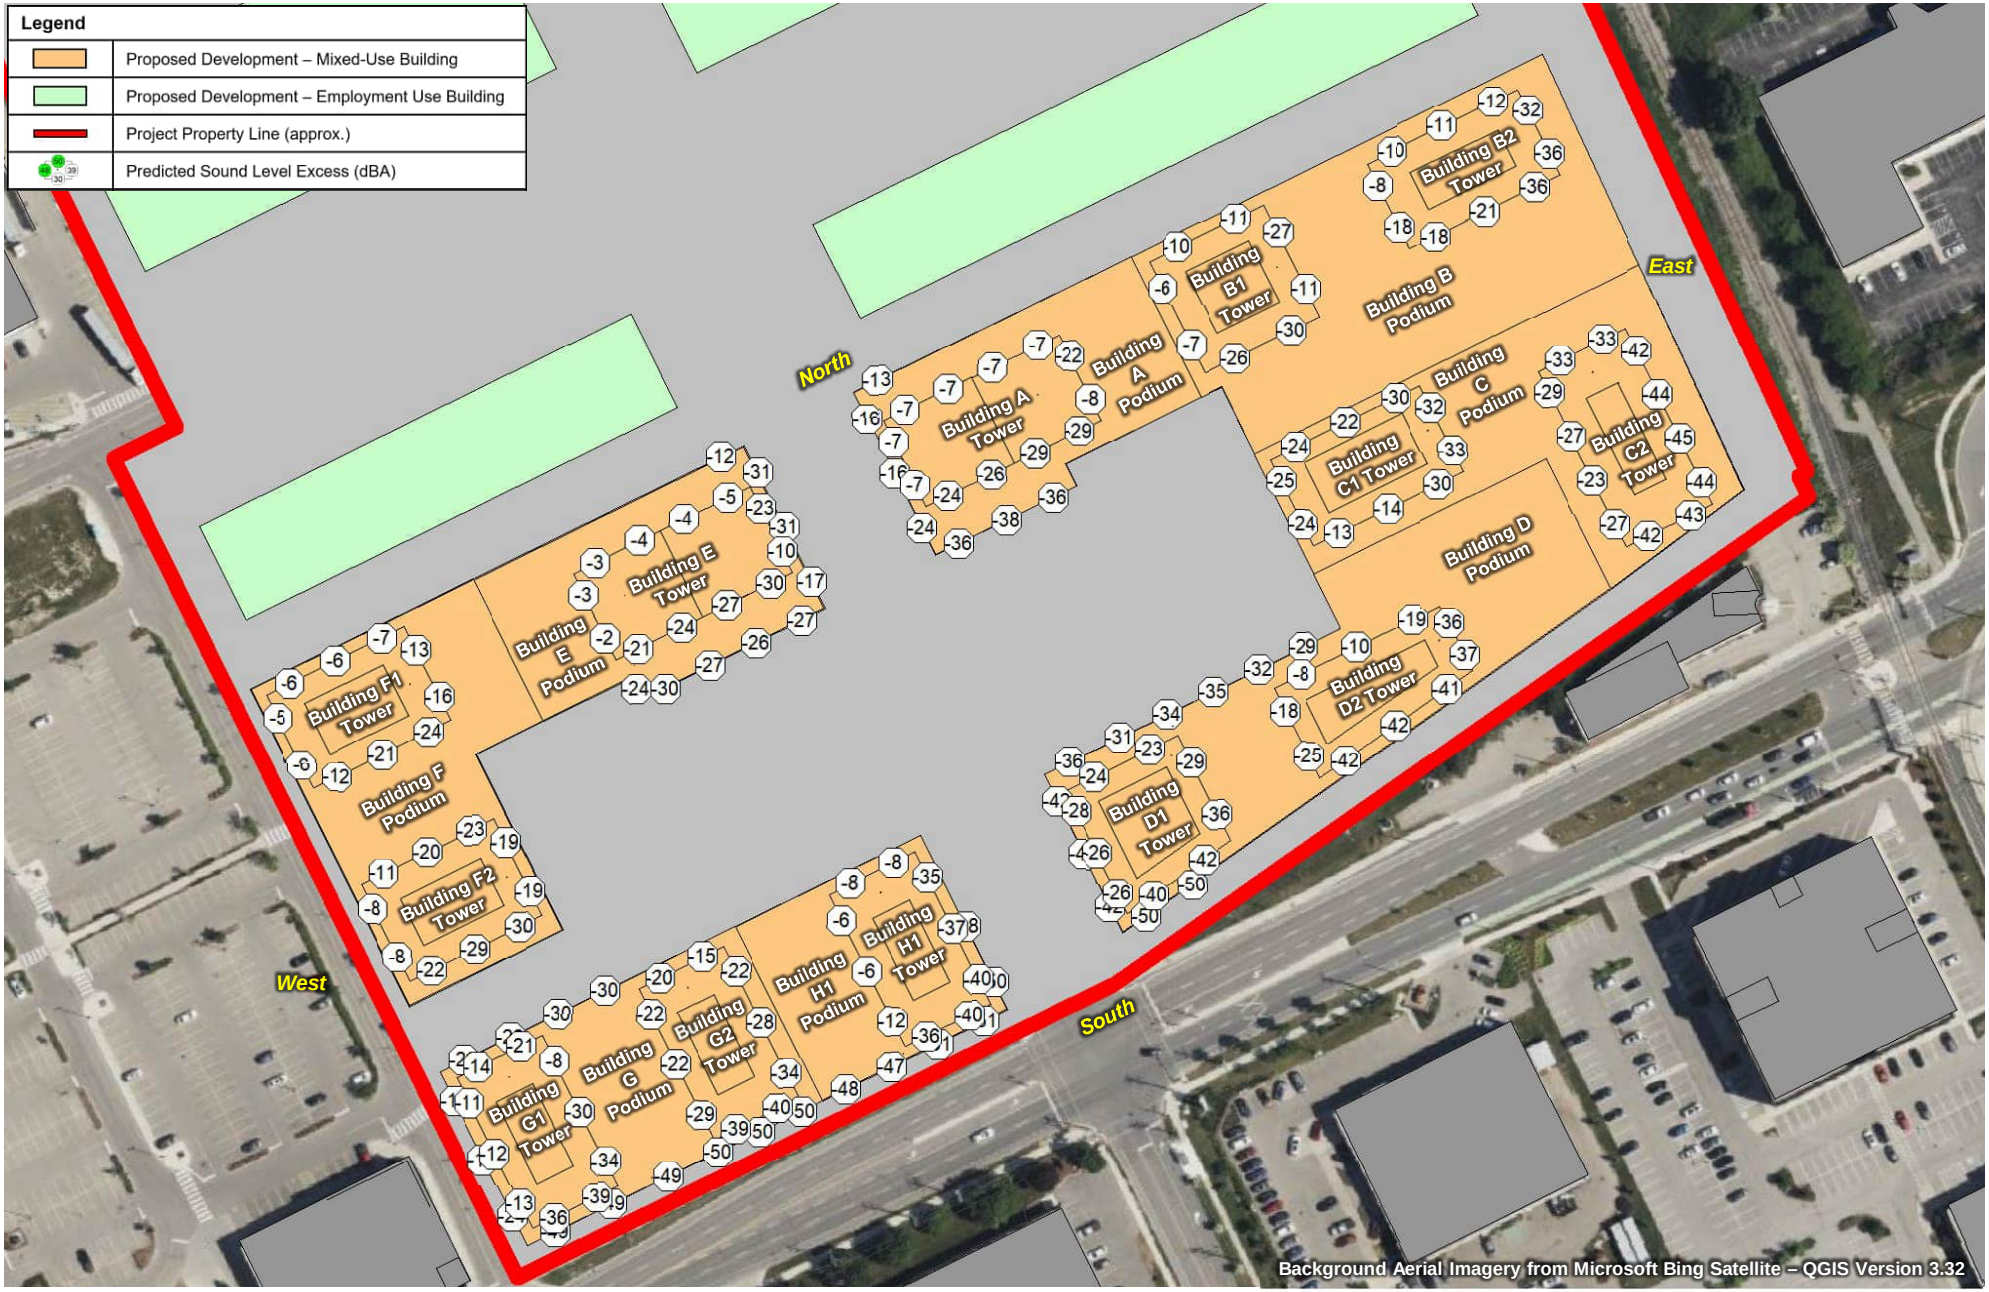


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **51**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – EVENING		Project No. 241.030968.00001	

SLR

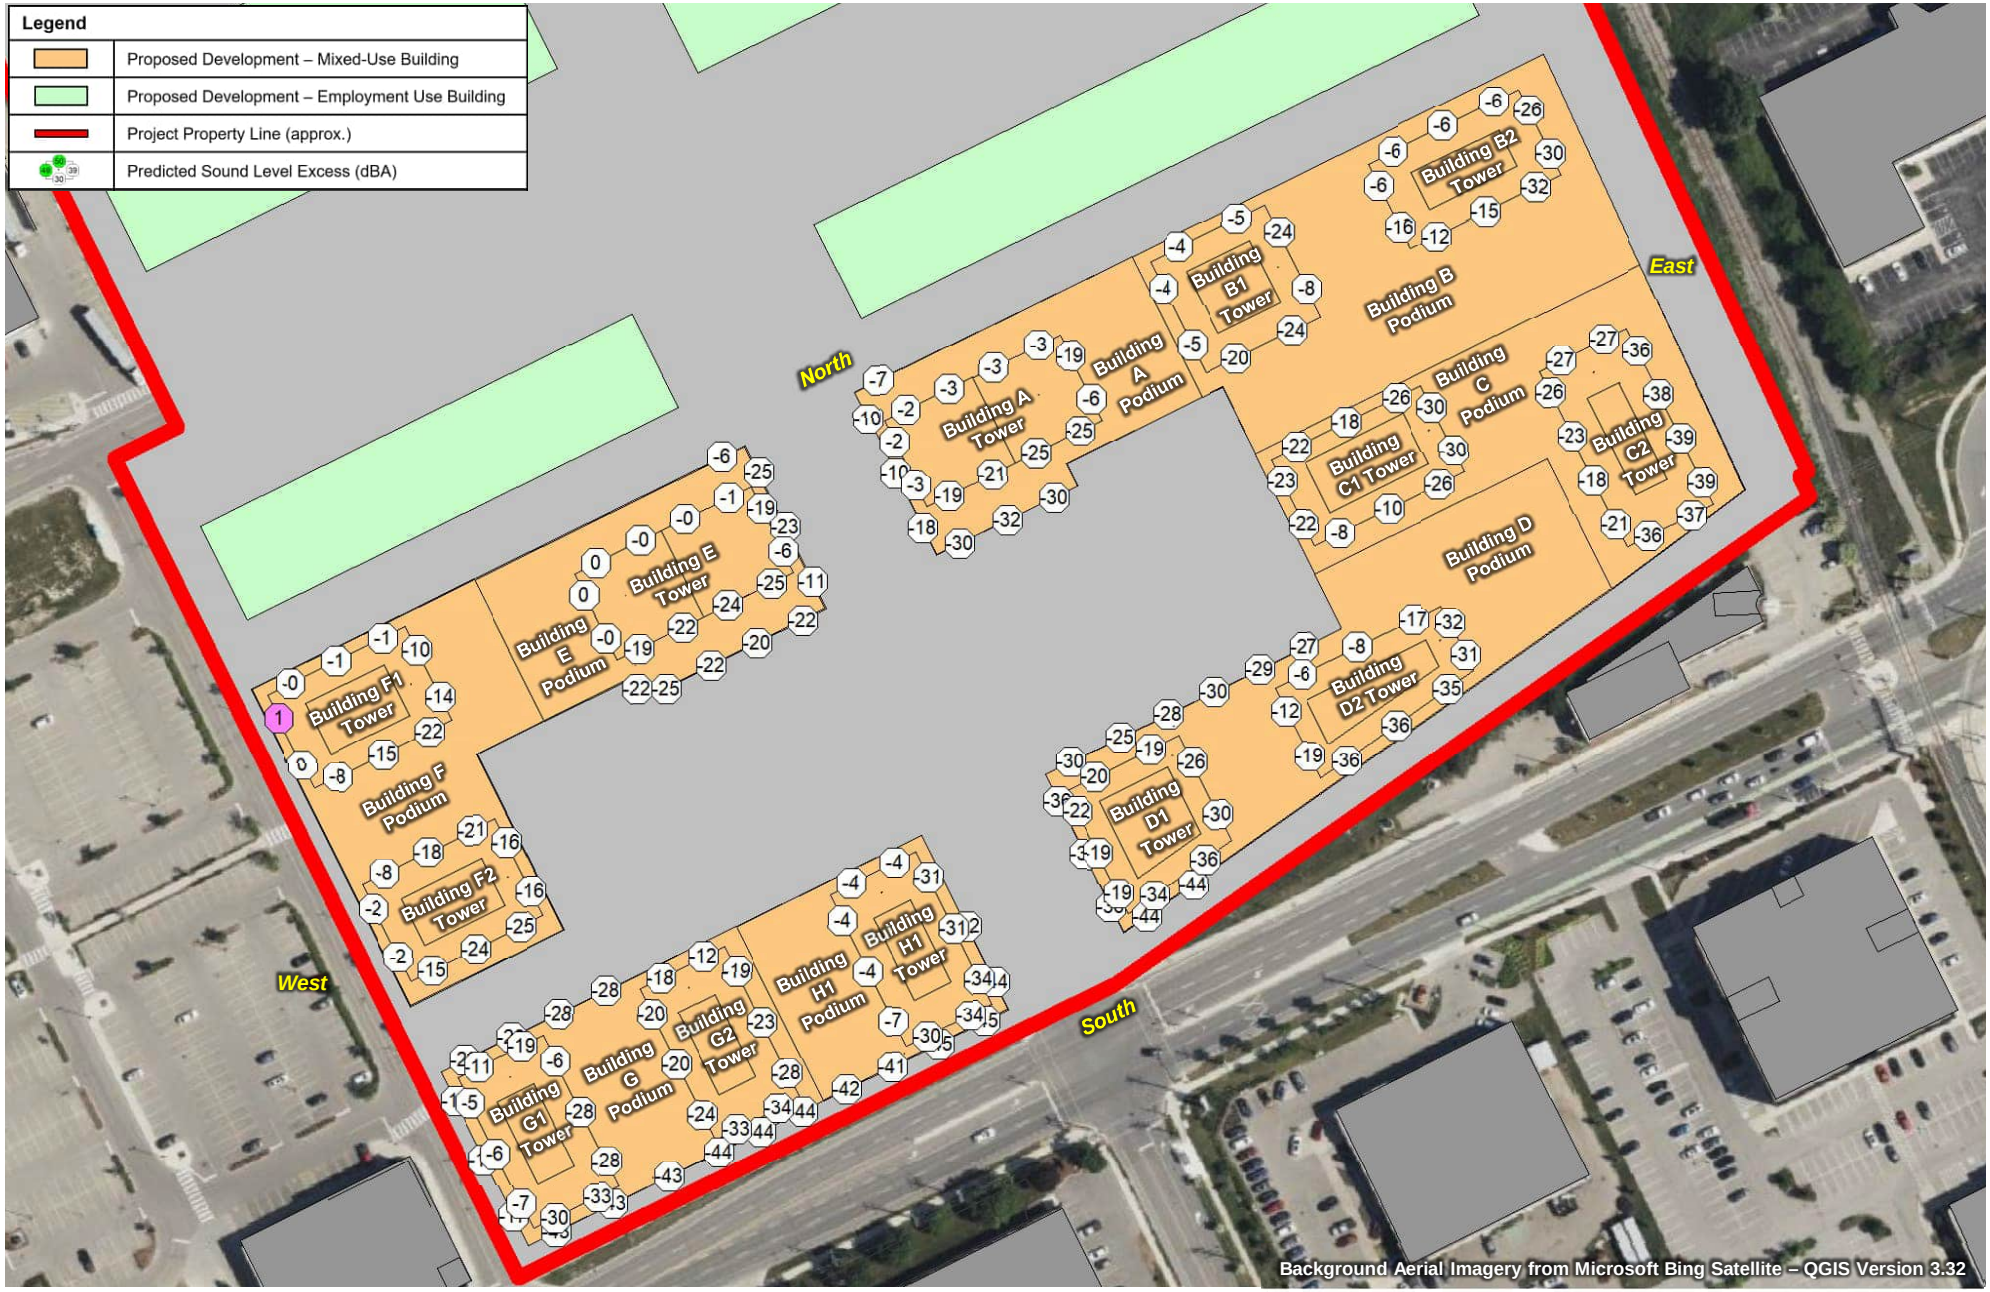


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **52a**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – NIGHT-TIME		Project No. 241.030968.00001	


SLR

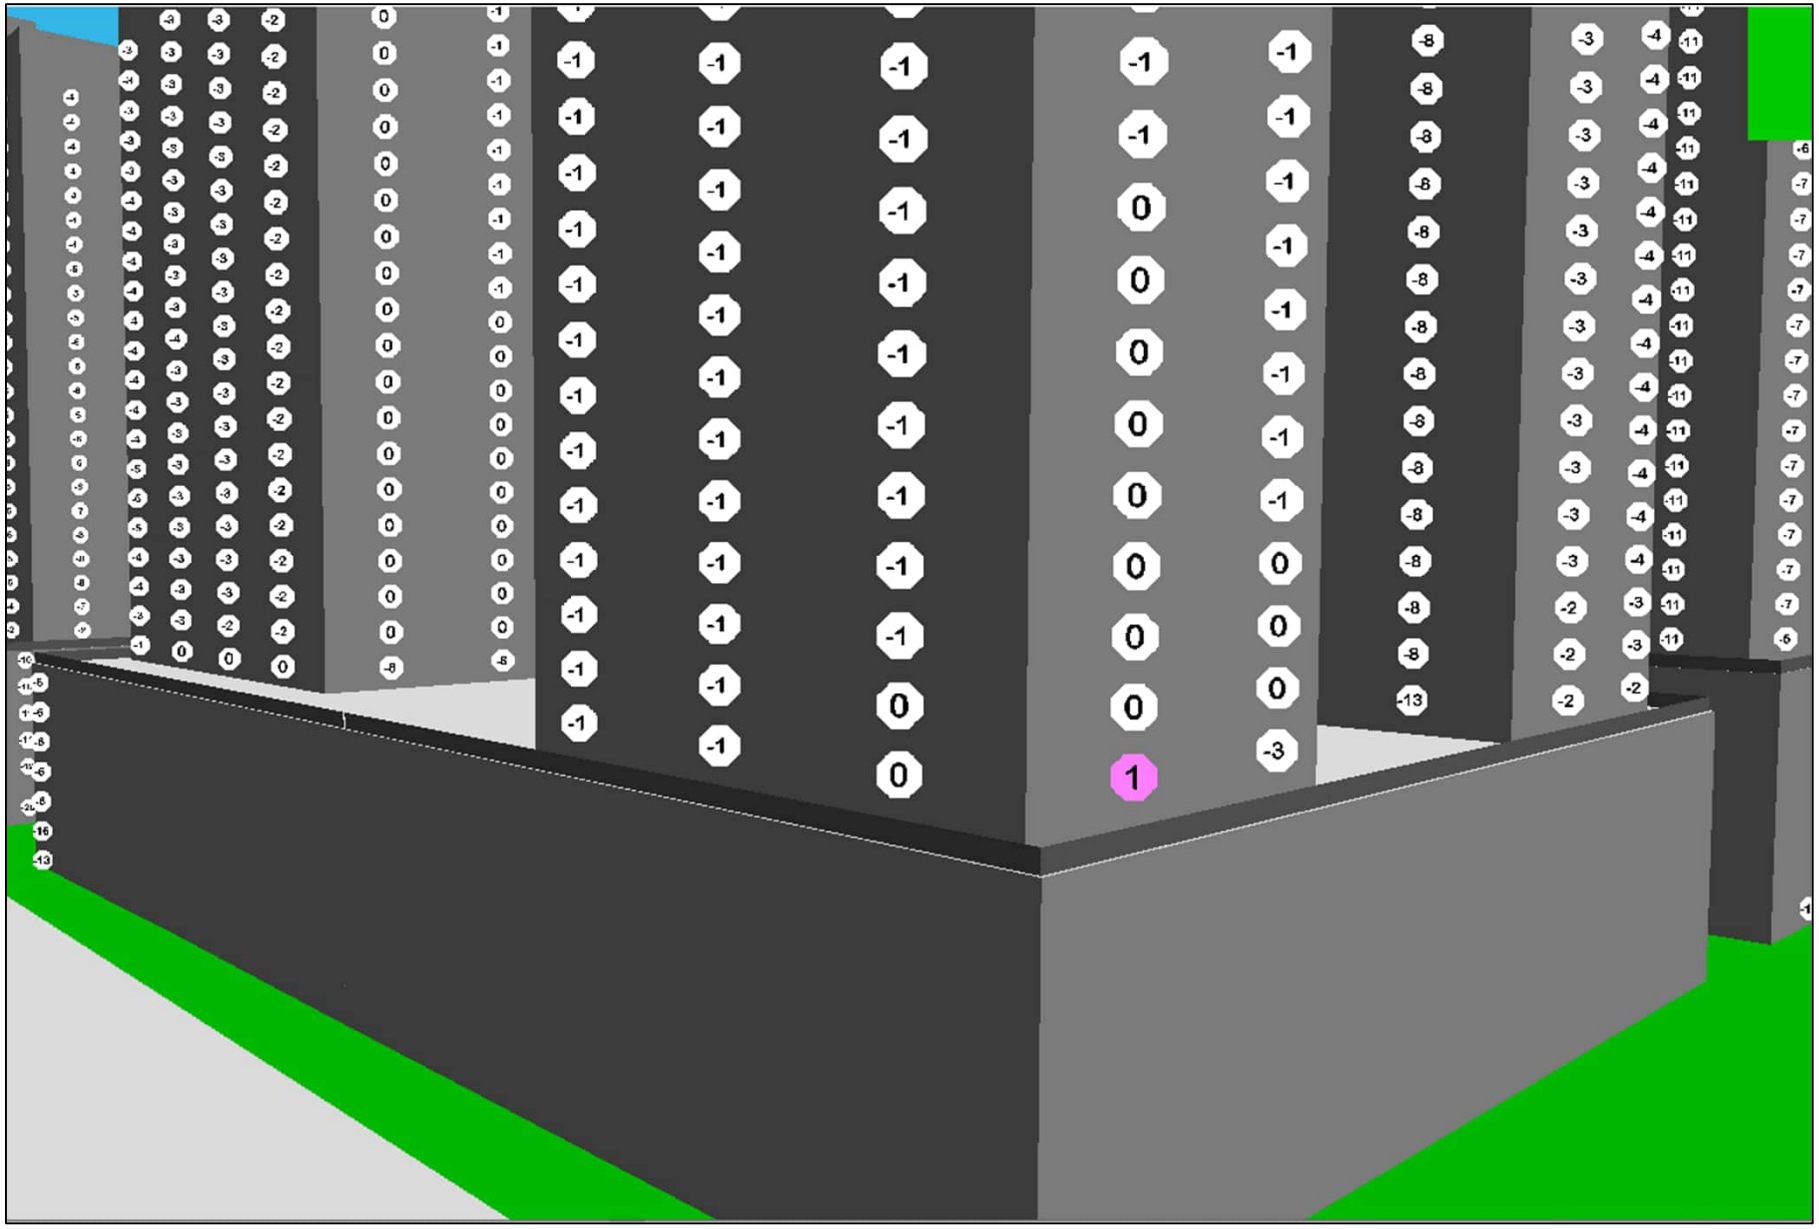

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: N.T.S.	METRES	SLR
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **52b**	
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – NIGHT-TIME – 3D (FROM NORTHWEST)		Project No. 241.030968.00001		

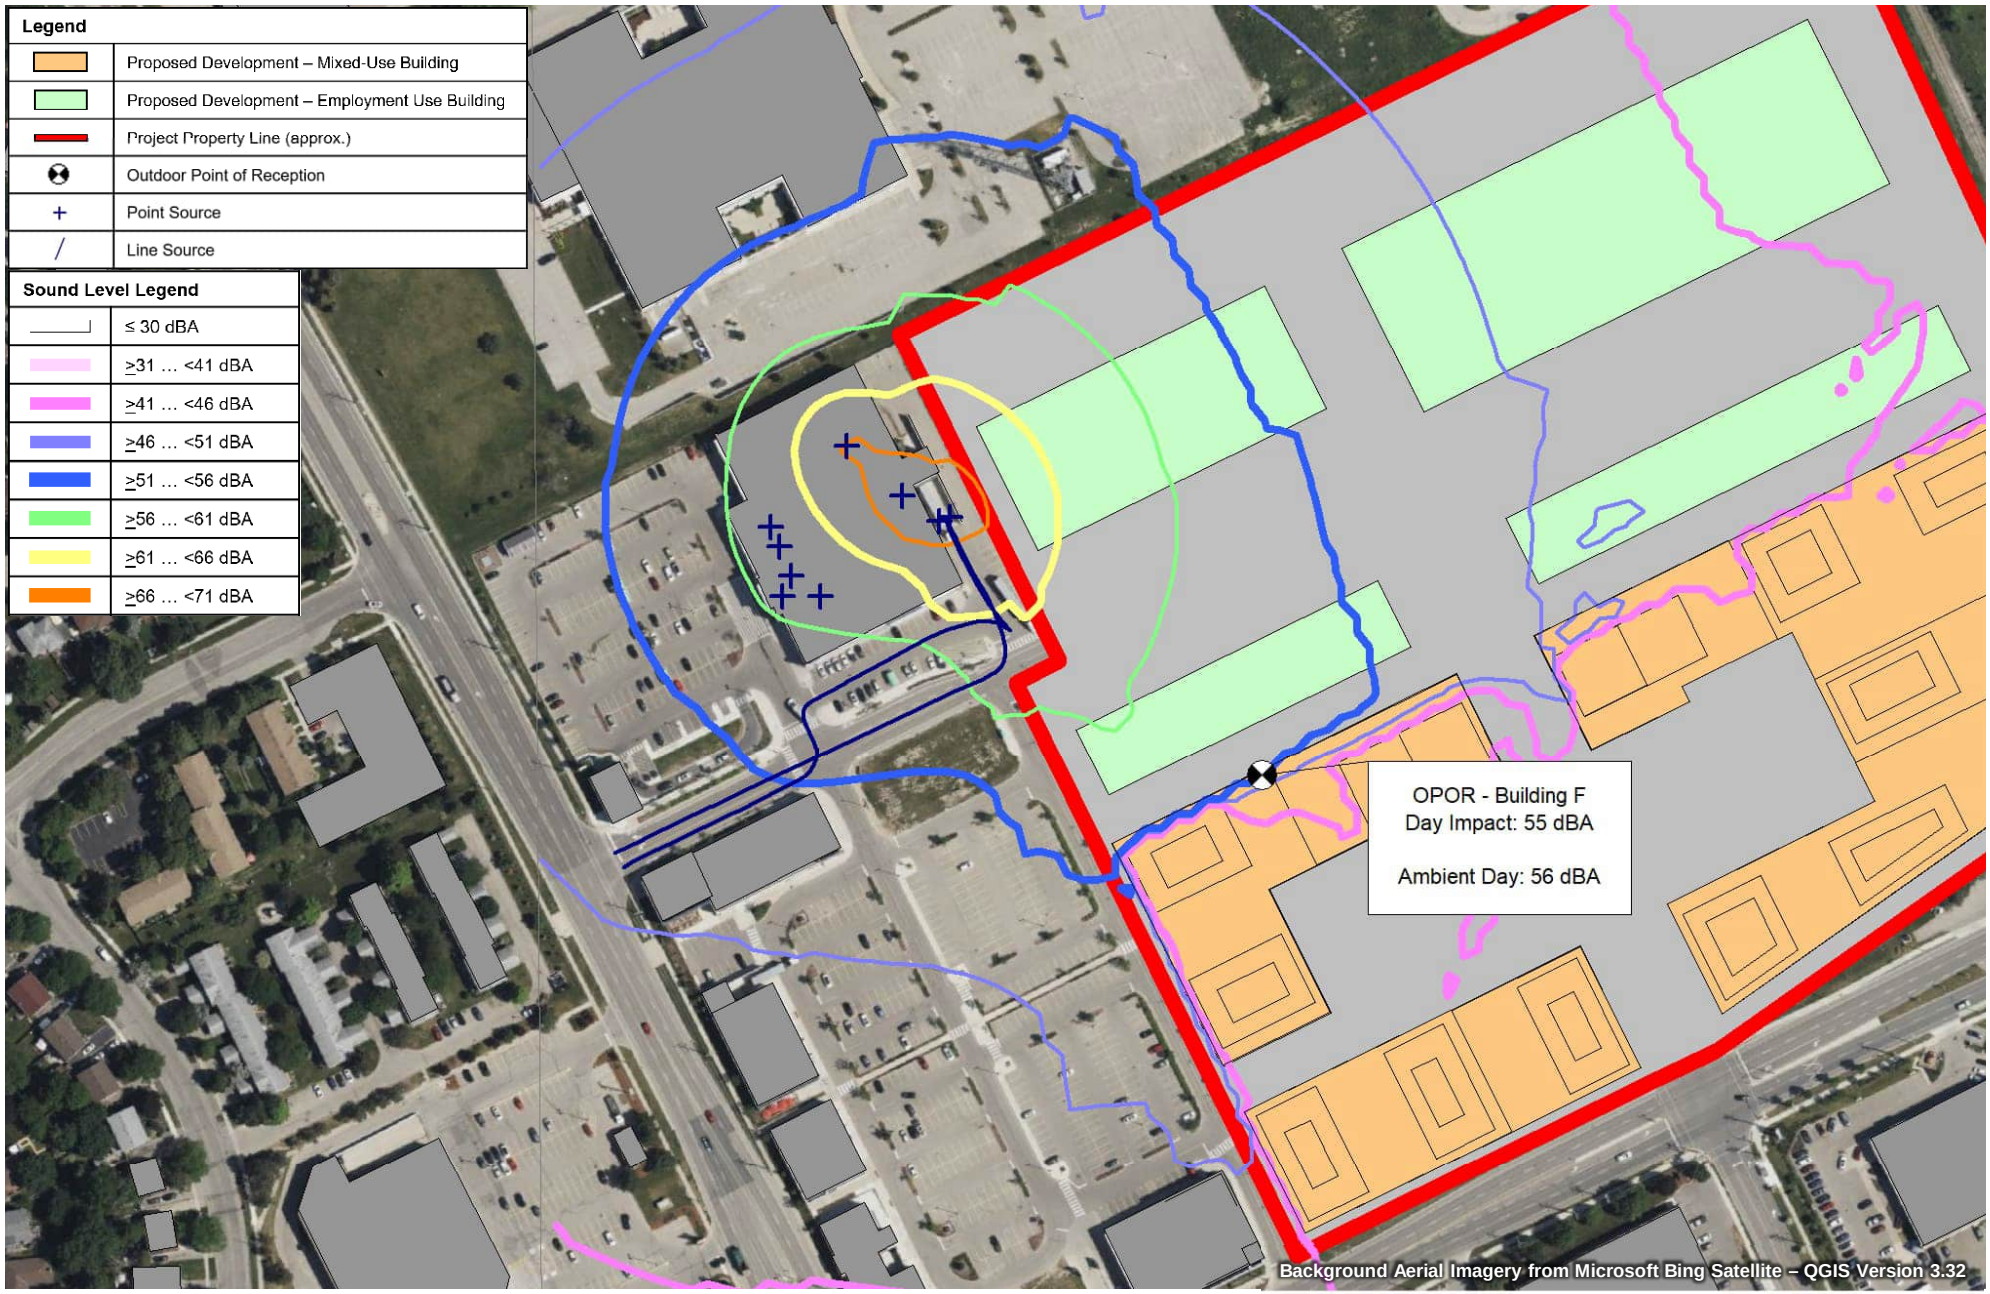


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **53**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – DAYTIME		Project No. 241.030968.00001	SLR

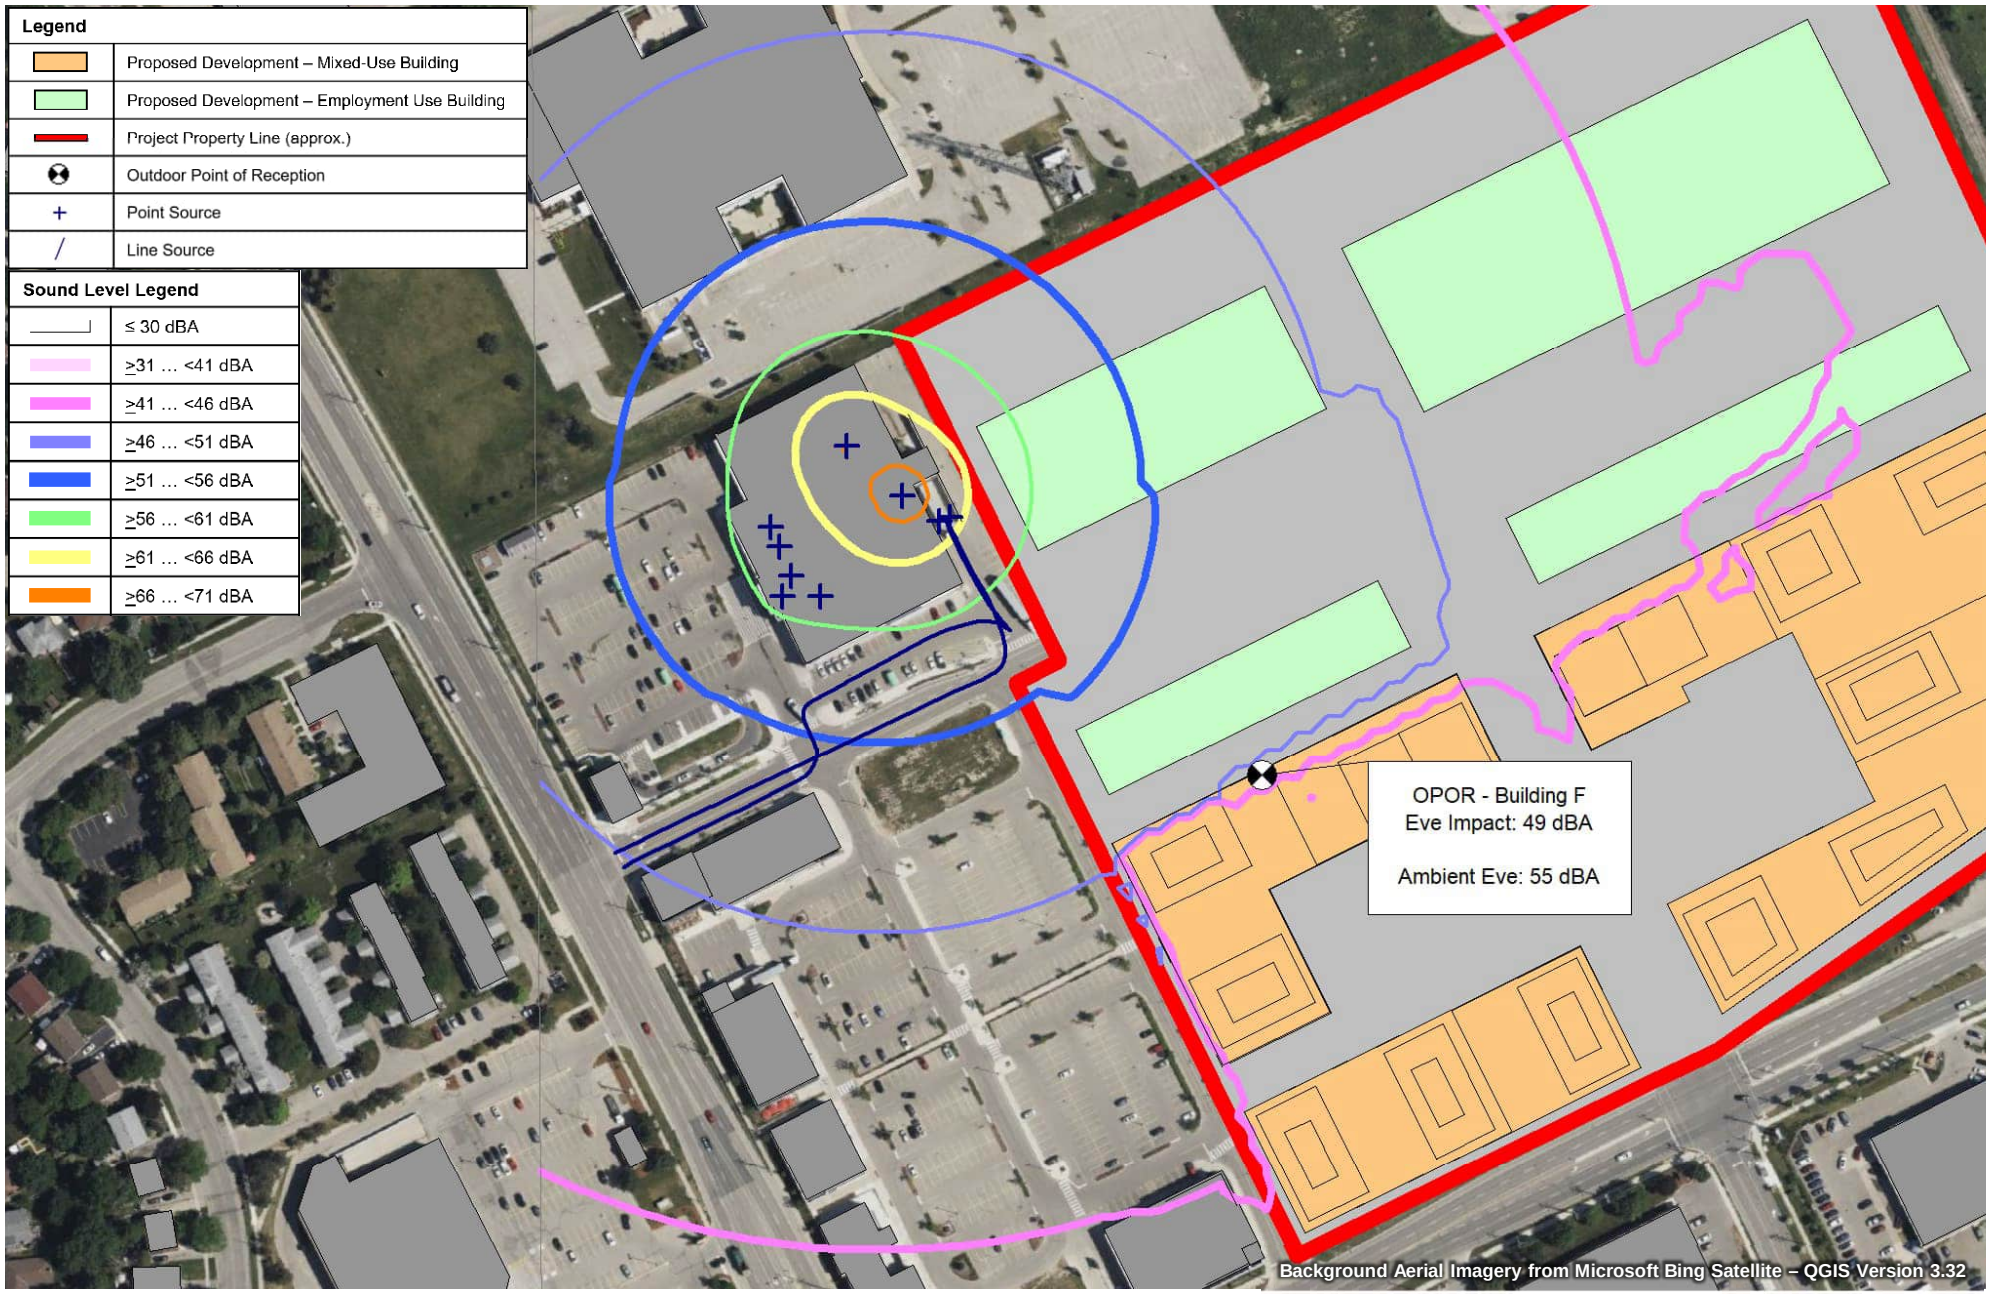


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **54**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – SOBEYS, 640 PARKSIDE DRIVE – EVENING		Project No. 241.030968.00001	

SLR

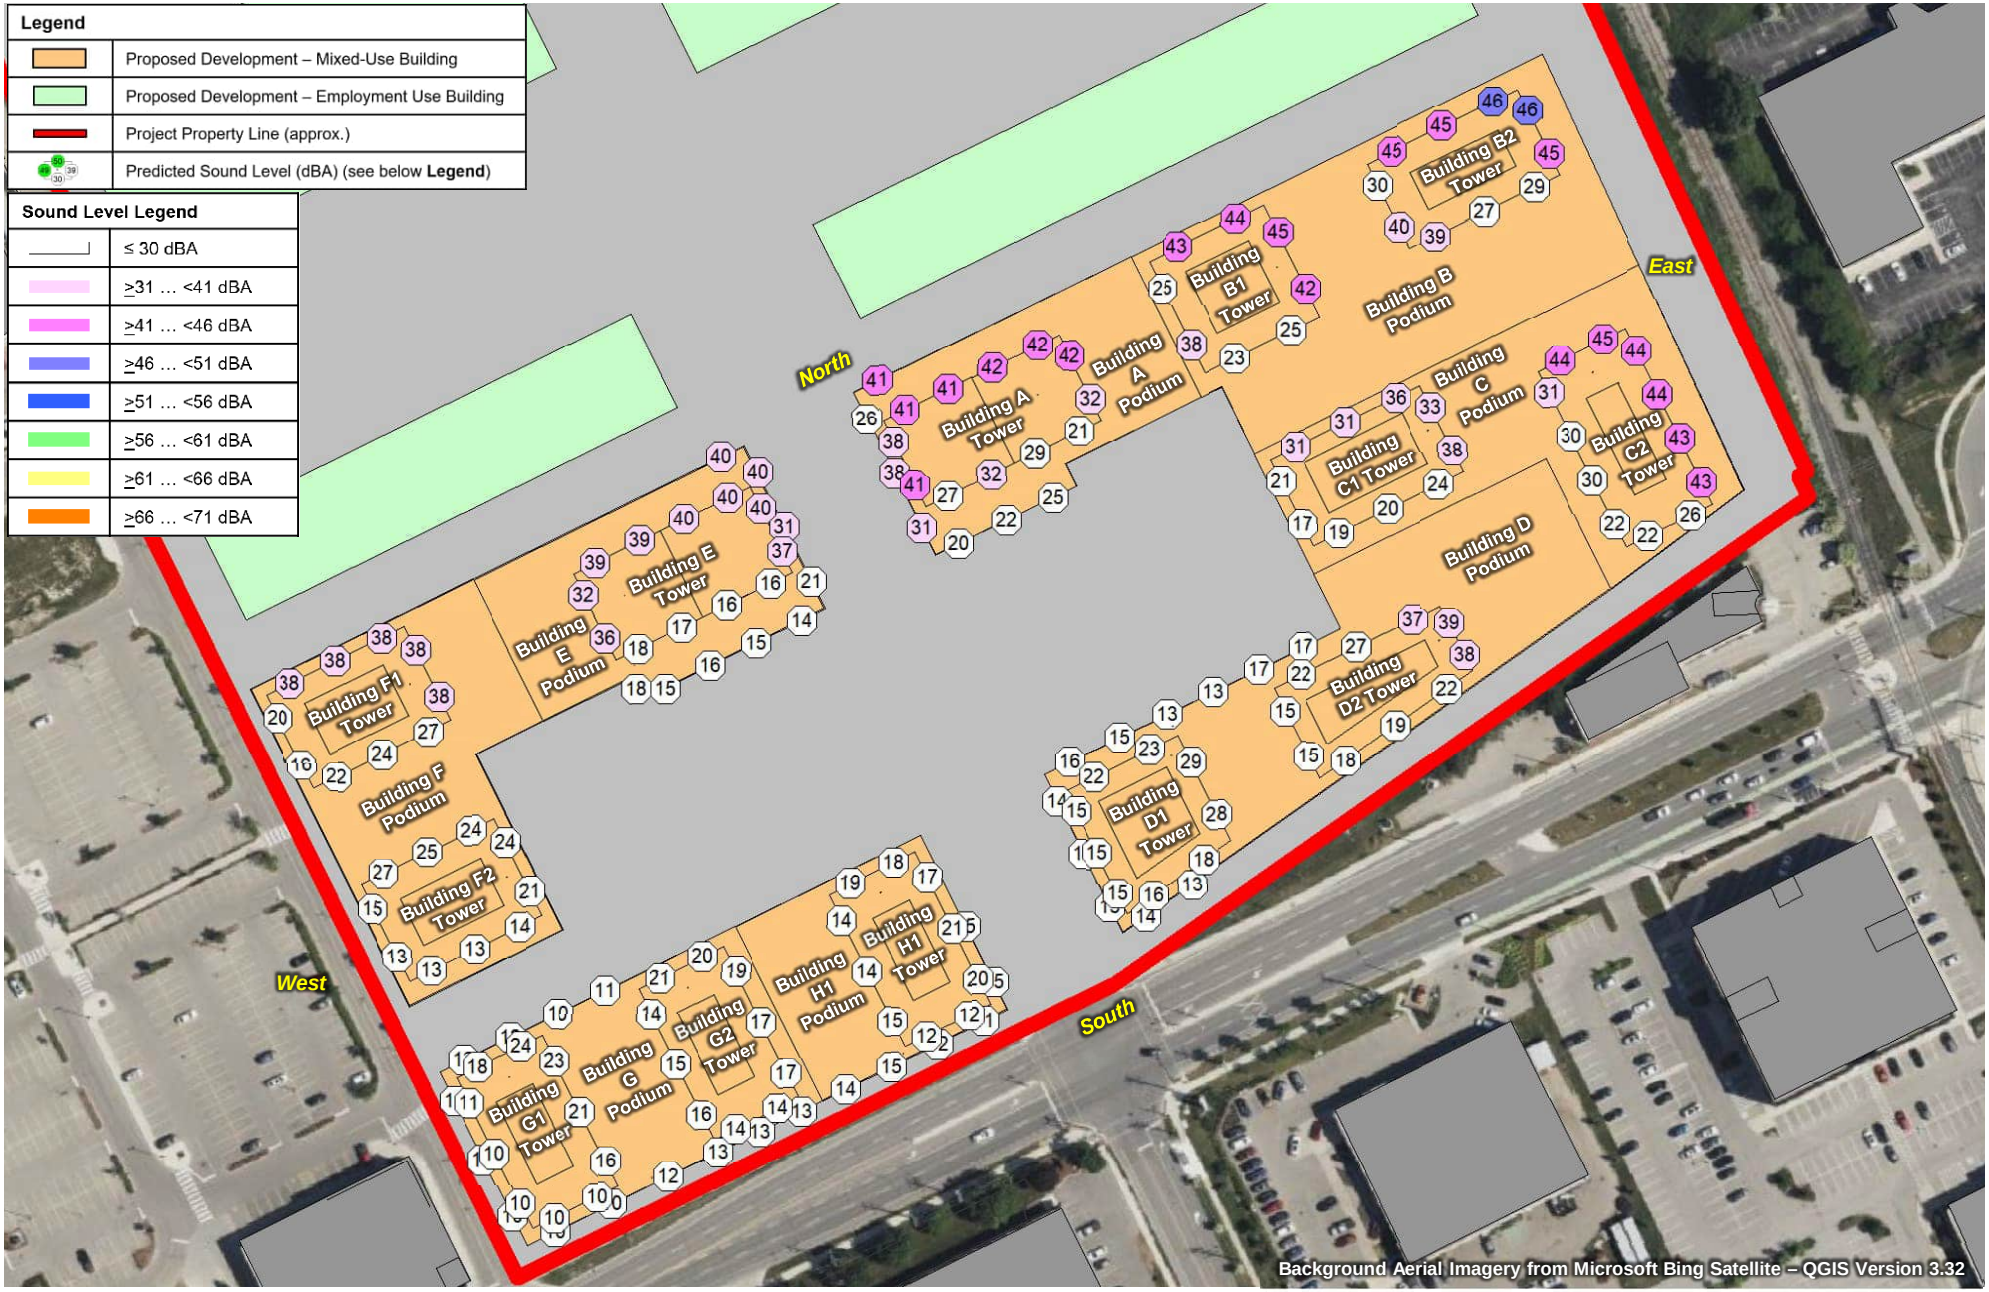


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **55**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ONWARD MANUFACTURING, 585 KUMPF DRIVE – DAYTIME		Project No. 241.030968.00001	

SLR

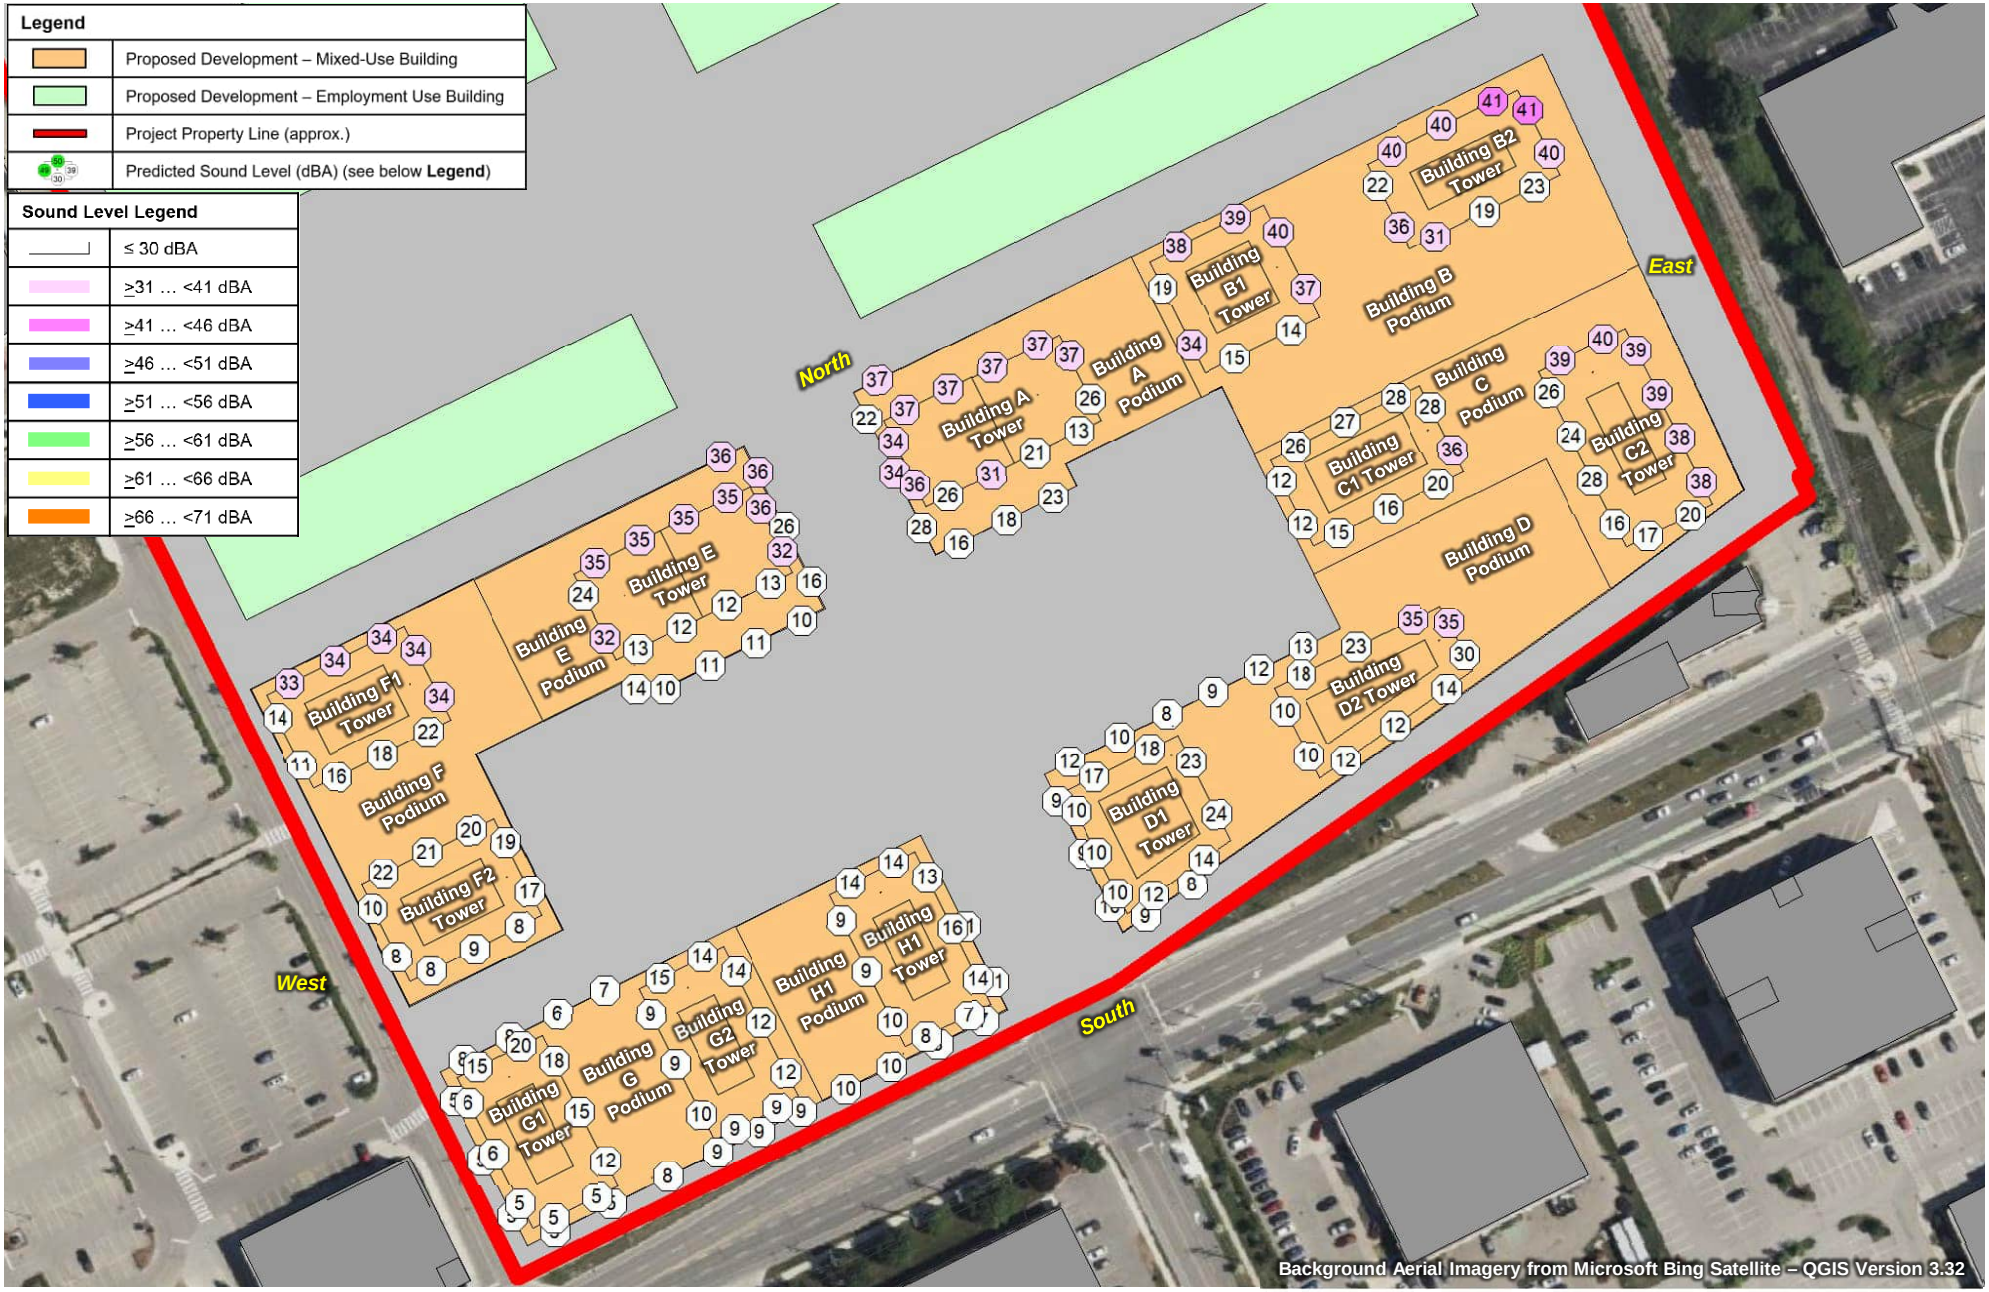


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **56**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ONWARD MANUFACTURING, 585 KUMPF DRIVE – EVENING		Project No. 241.030968.00001	

SLR

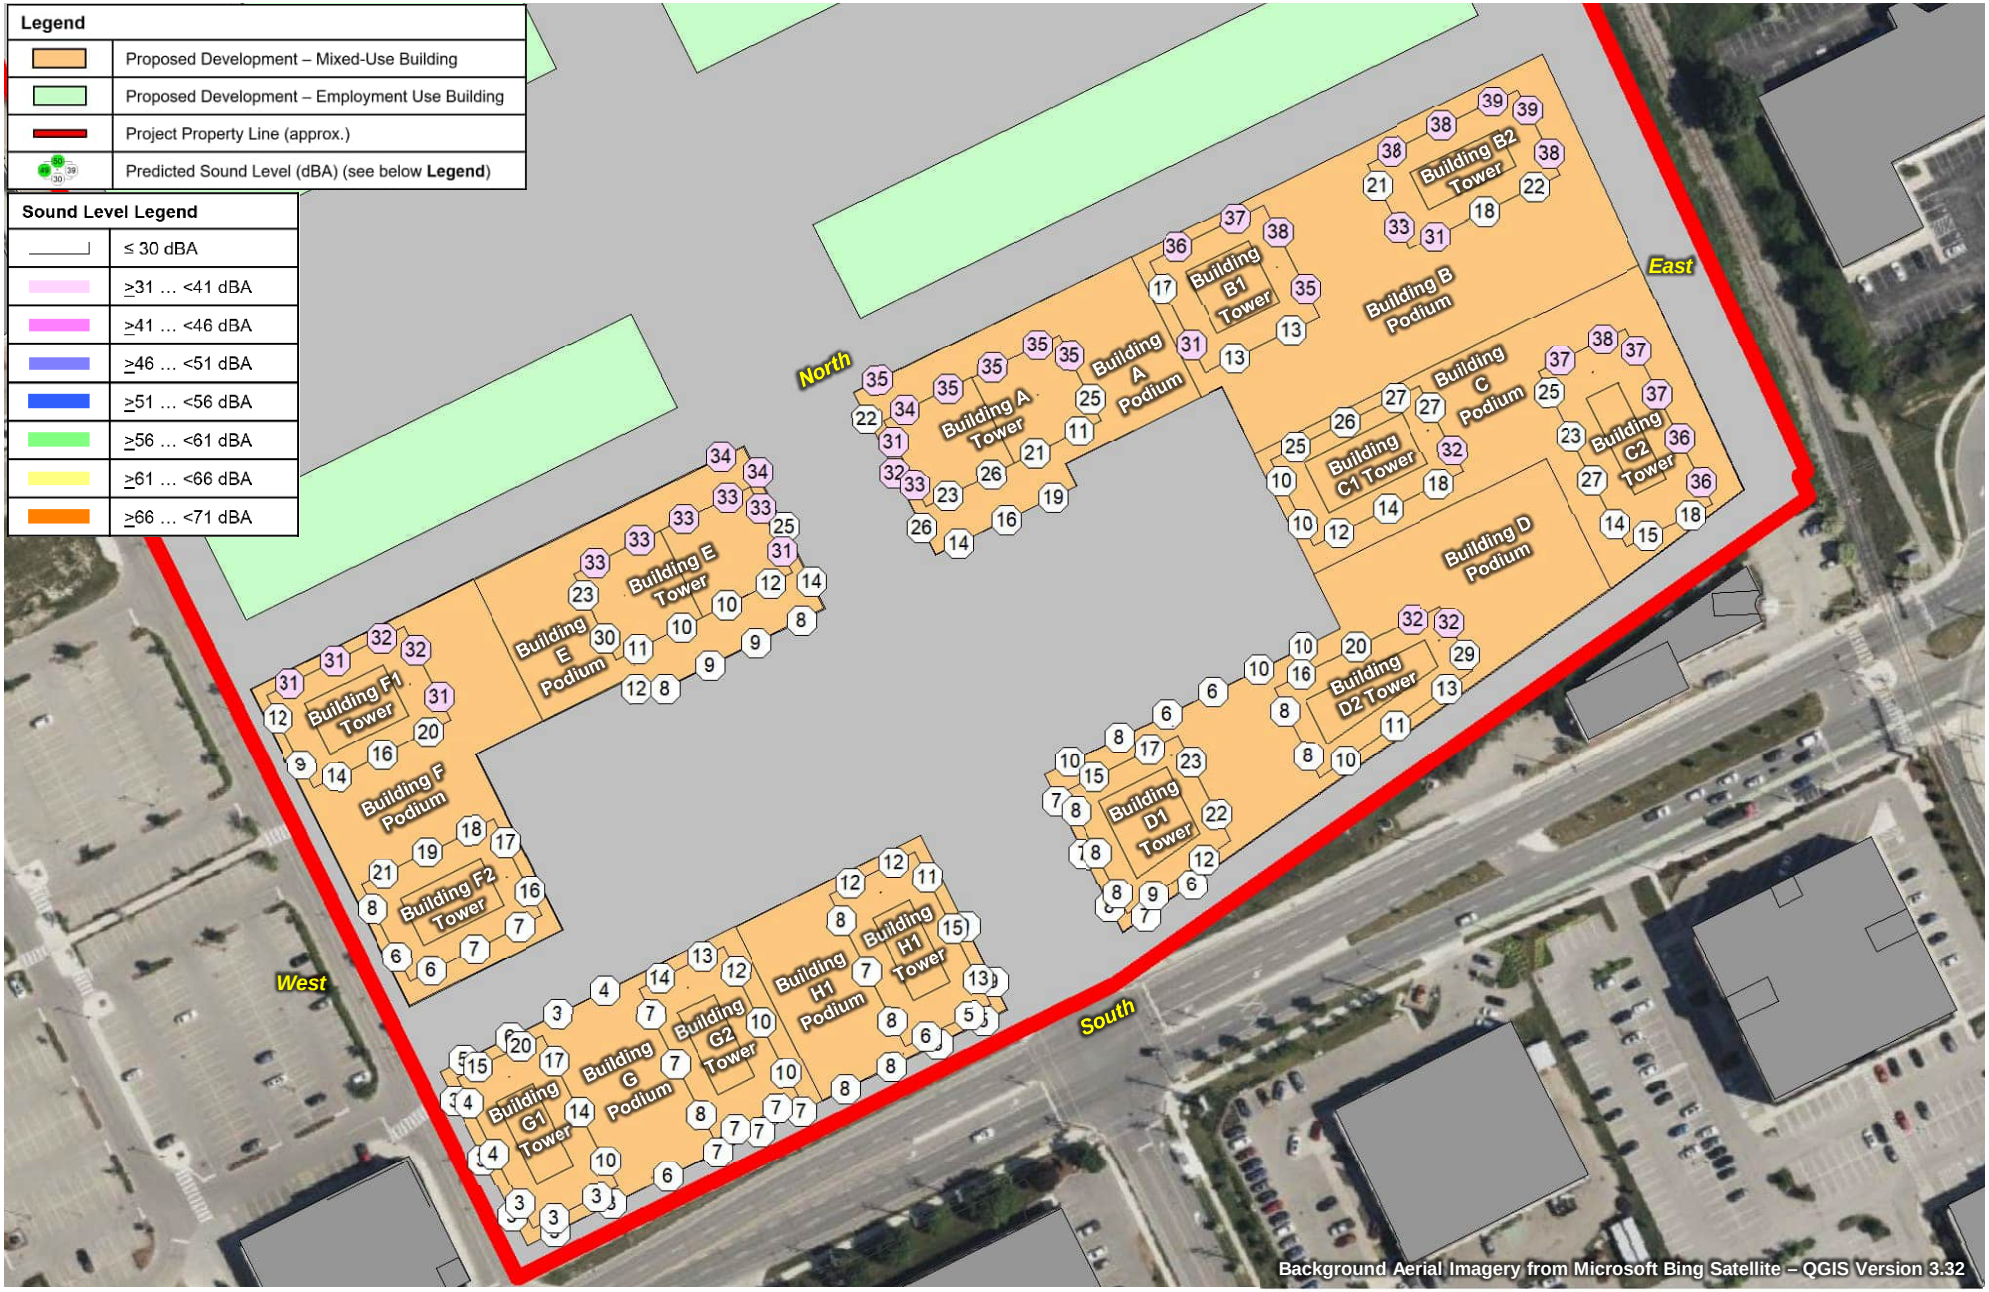

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **57**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ONWARD MANUFACTURING, 585 KUMPF DRIVE – NIGHT-TIME		Project No. 241.030968.00001	

SLR

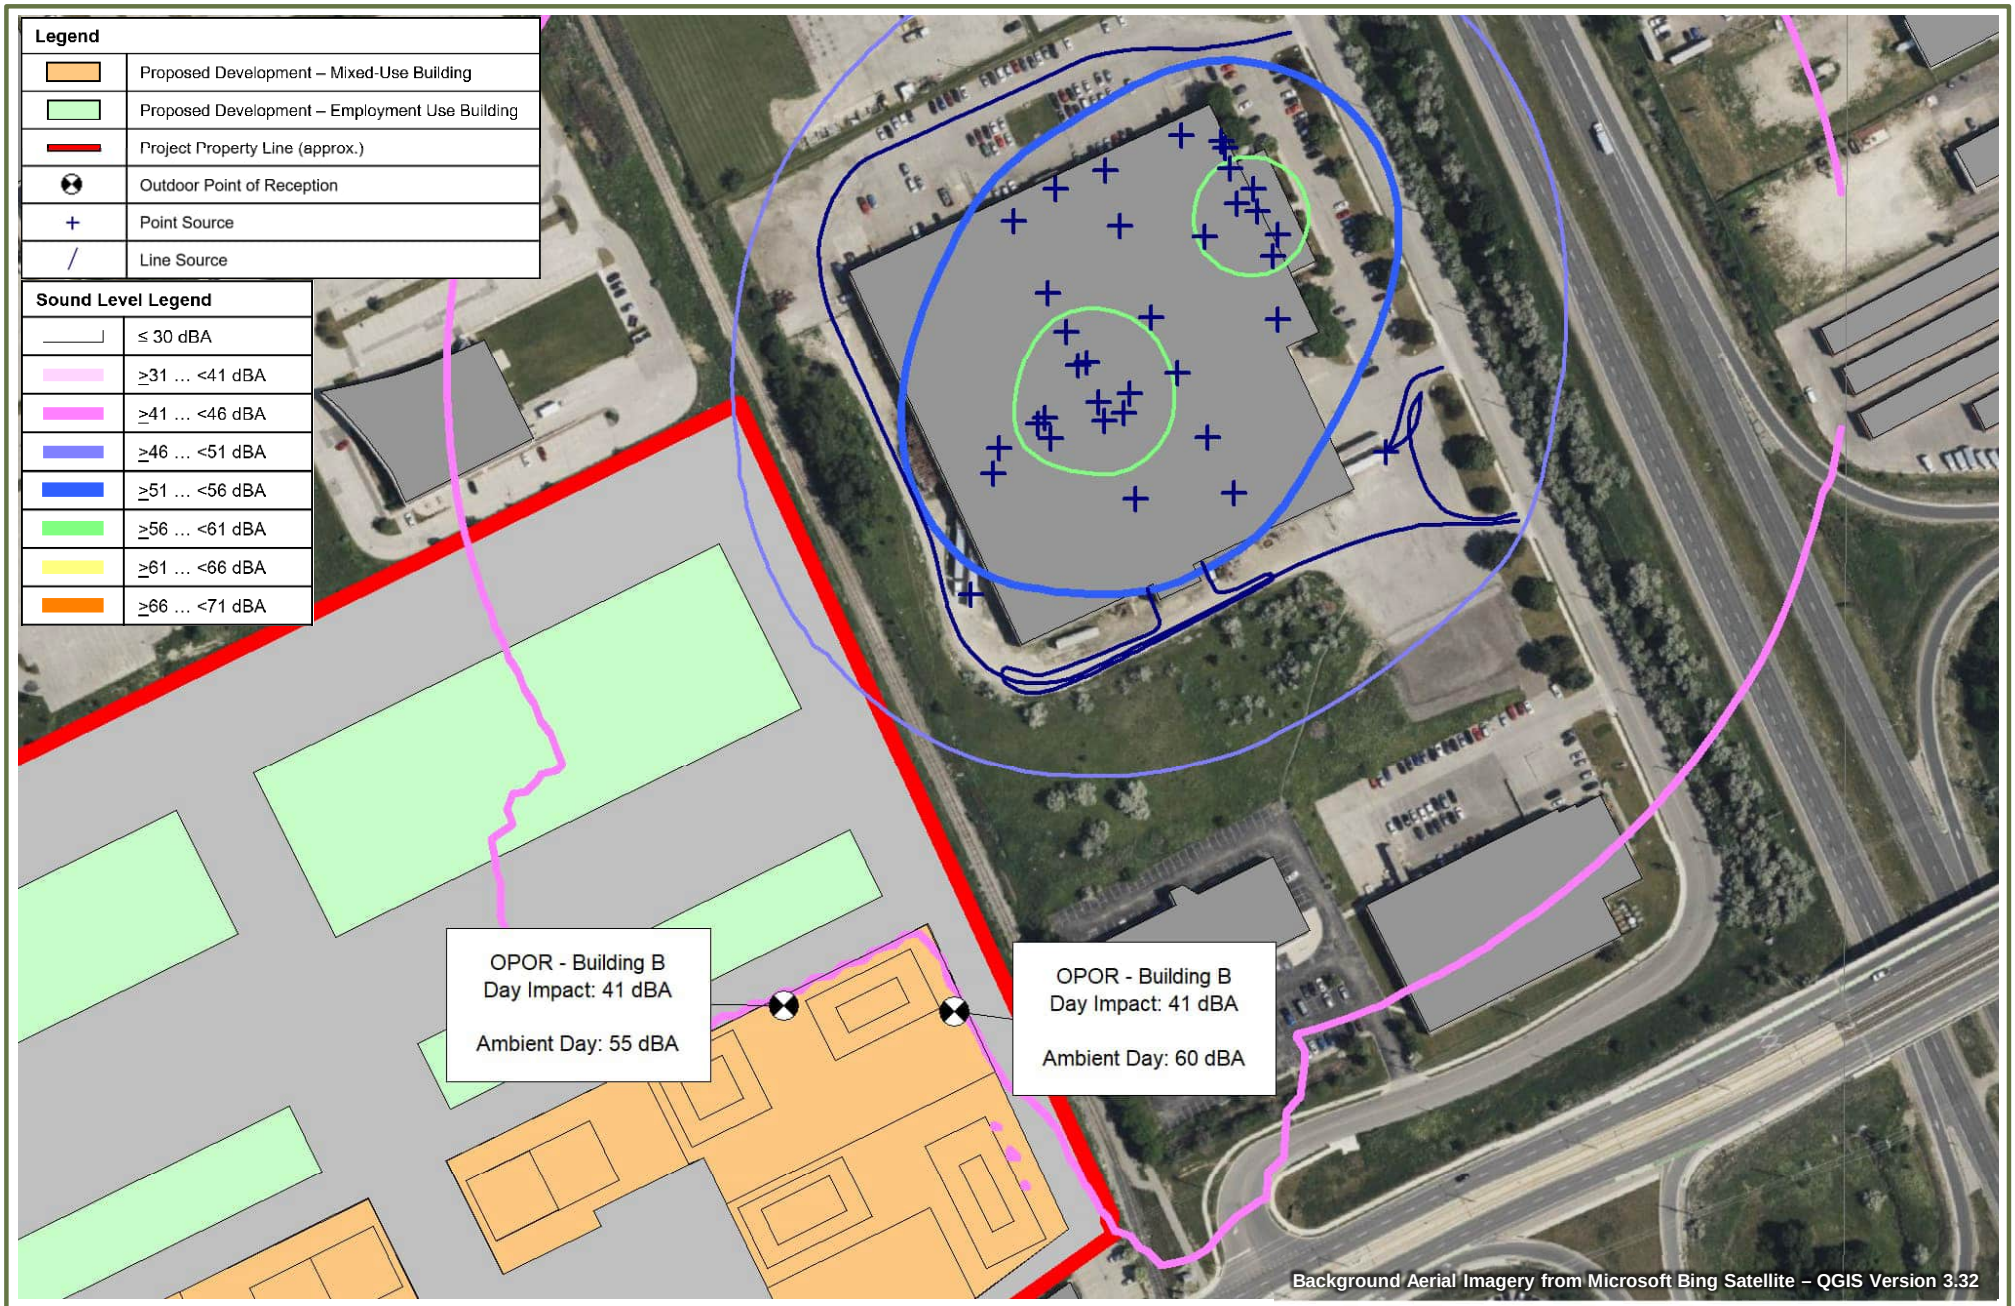

FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – ONWARD MANUFACTURING, 585 KUMPF DRIVE – DAYTIME

True North

Scale: 1:2,500


METRES

Date: March 14, 2024 Rev 1.0

Project No. 241.030968.00001


Figure No. **58**

SLR

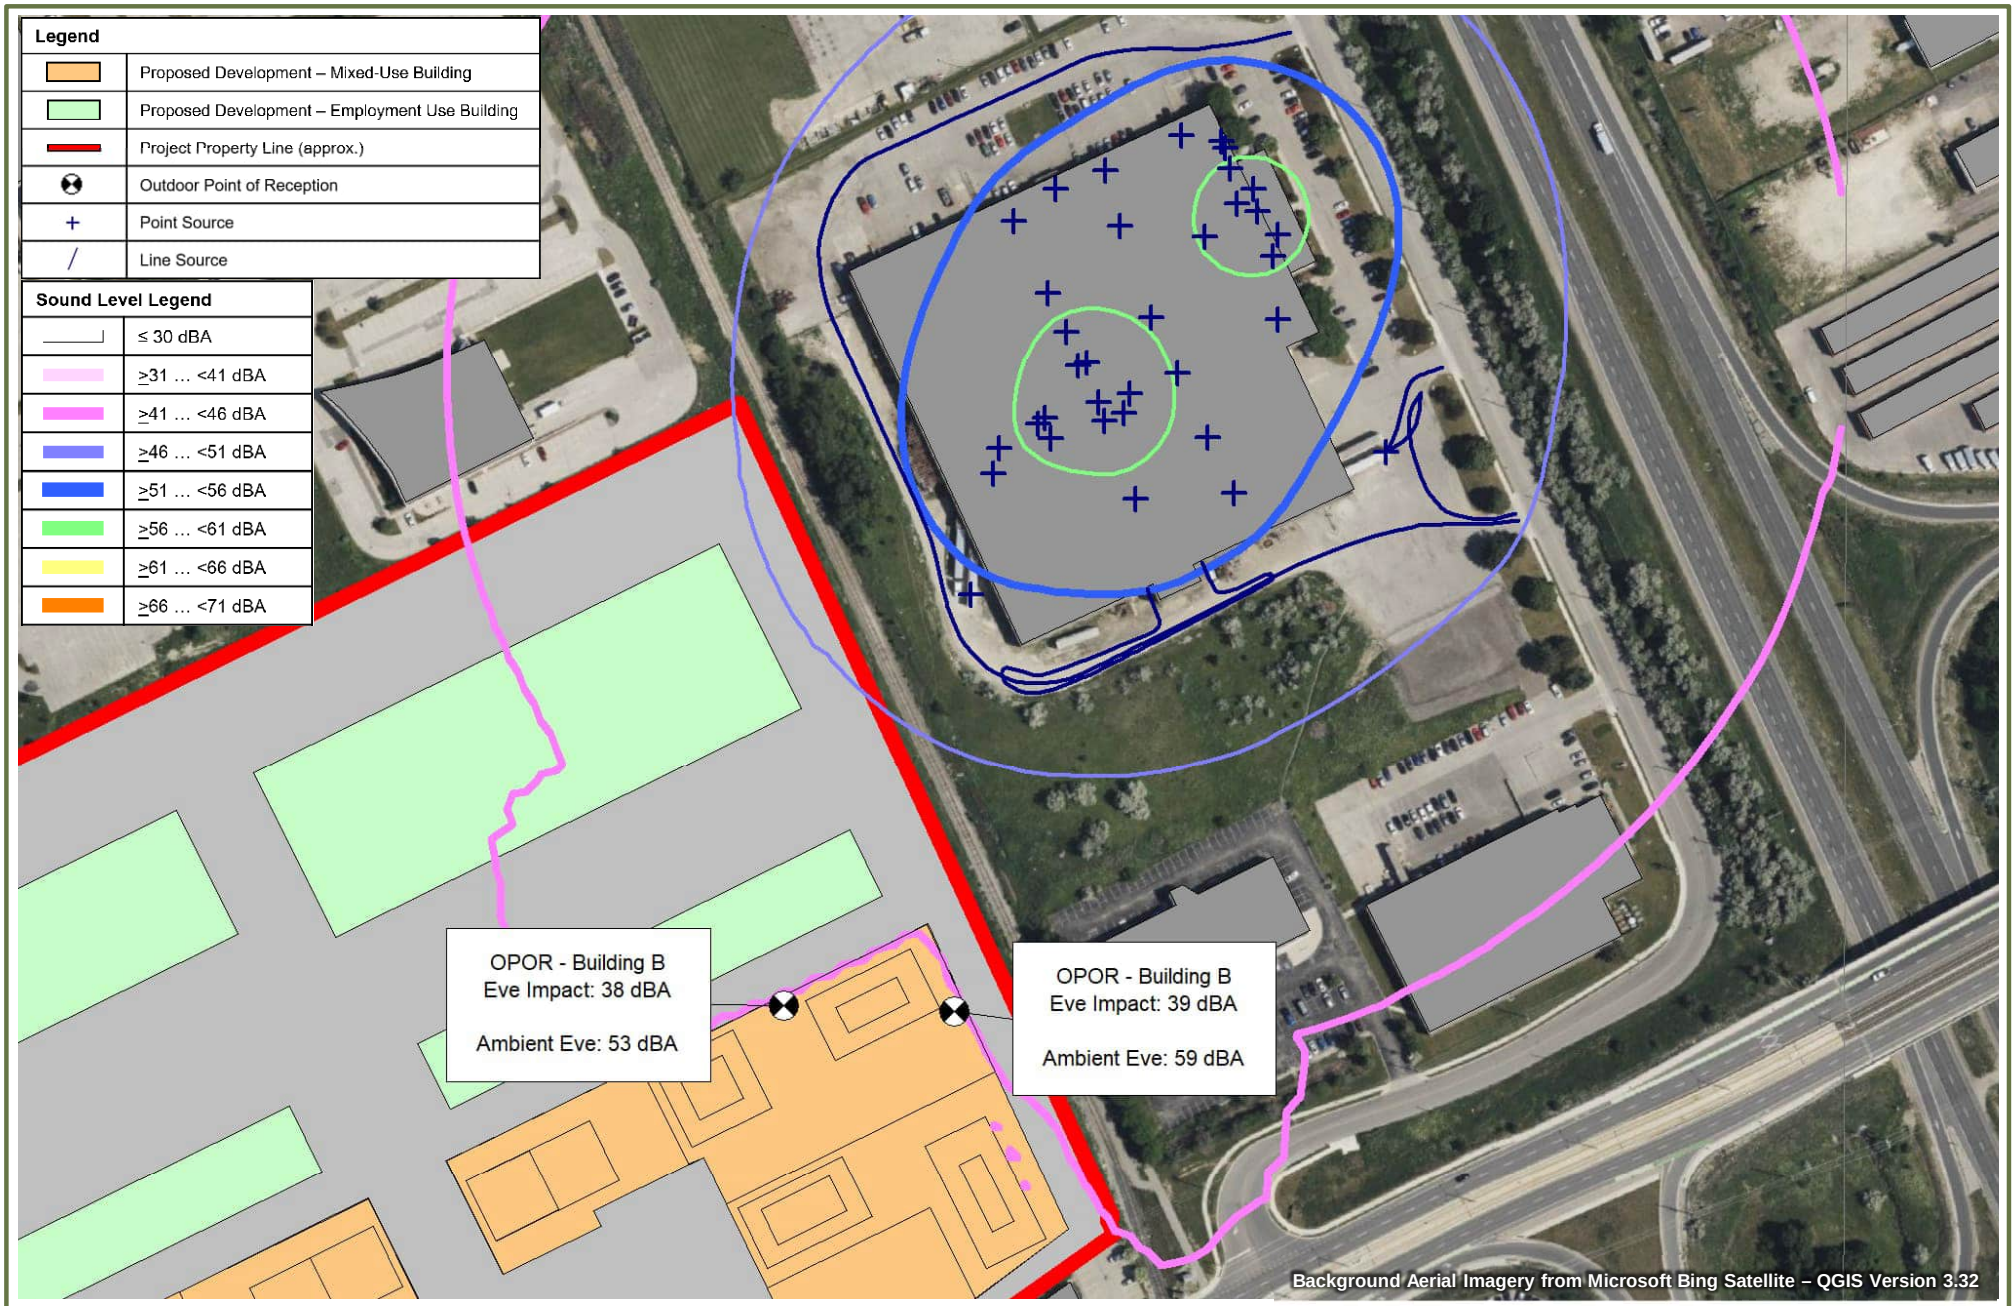


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **59**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – ONWARD MANUFACTURING, 585 KUMPF DRIVE – EVENING		Project No. 241.030968.00001	

SLR

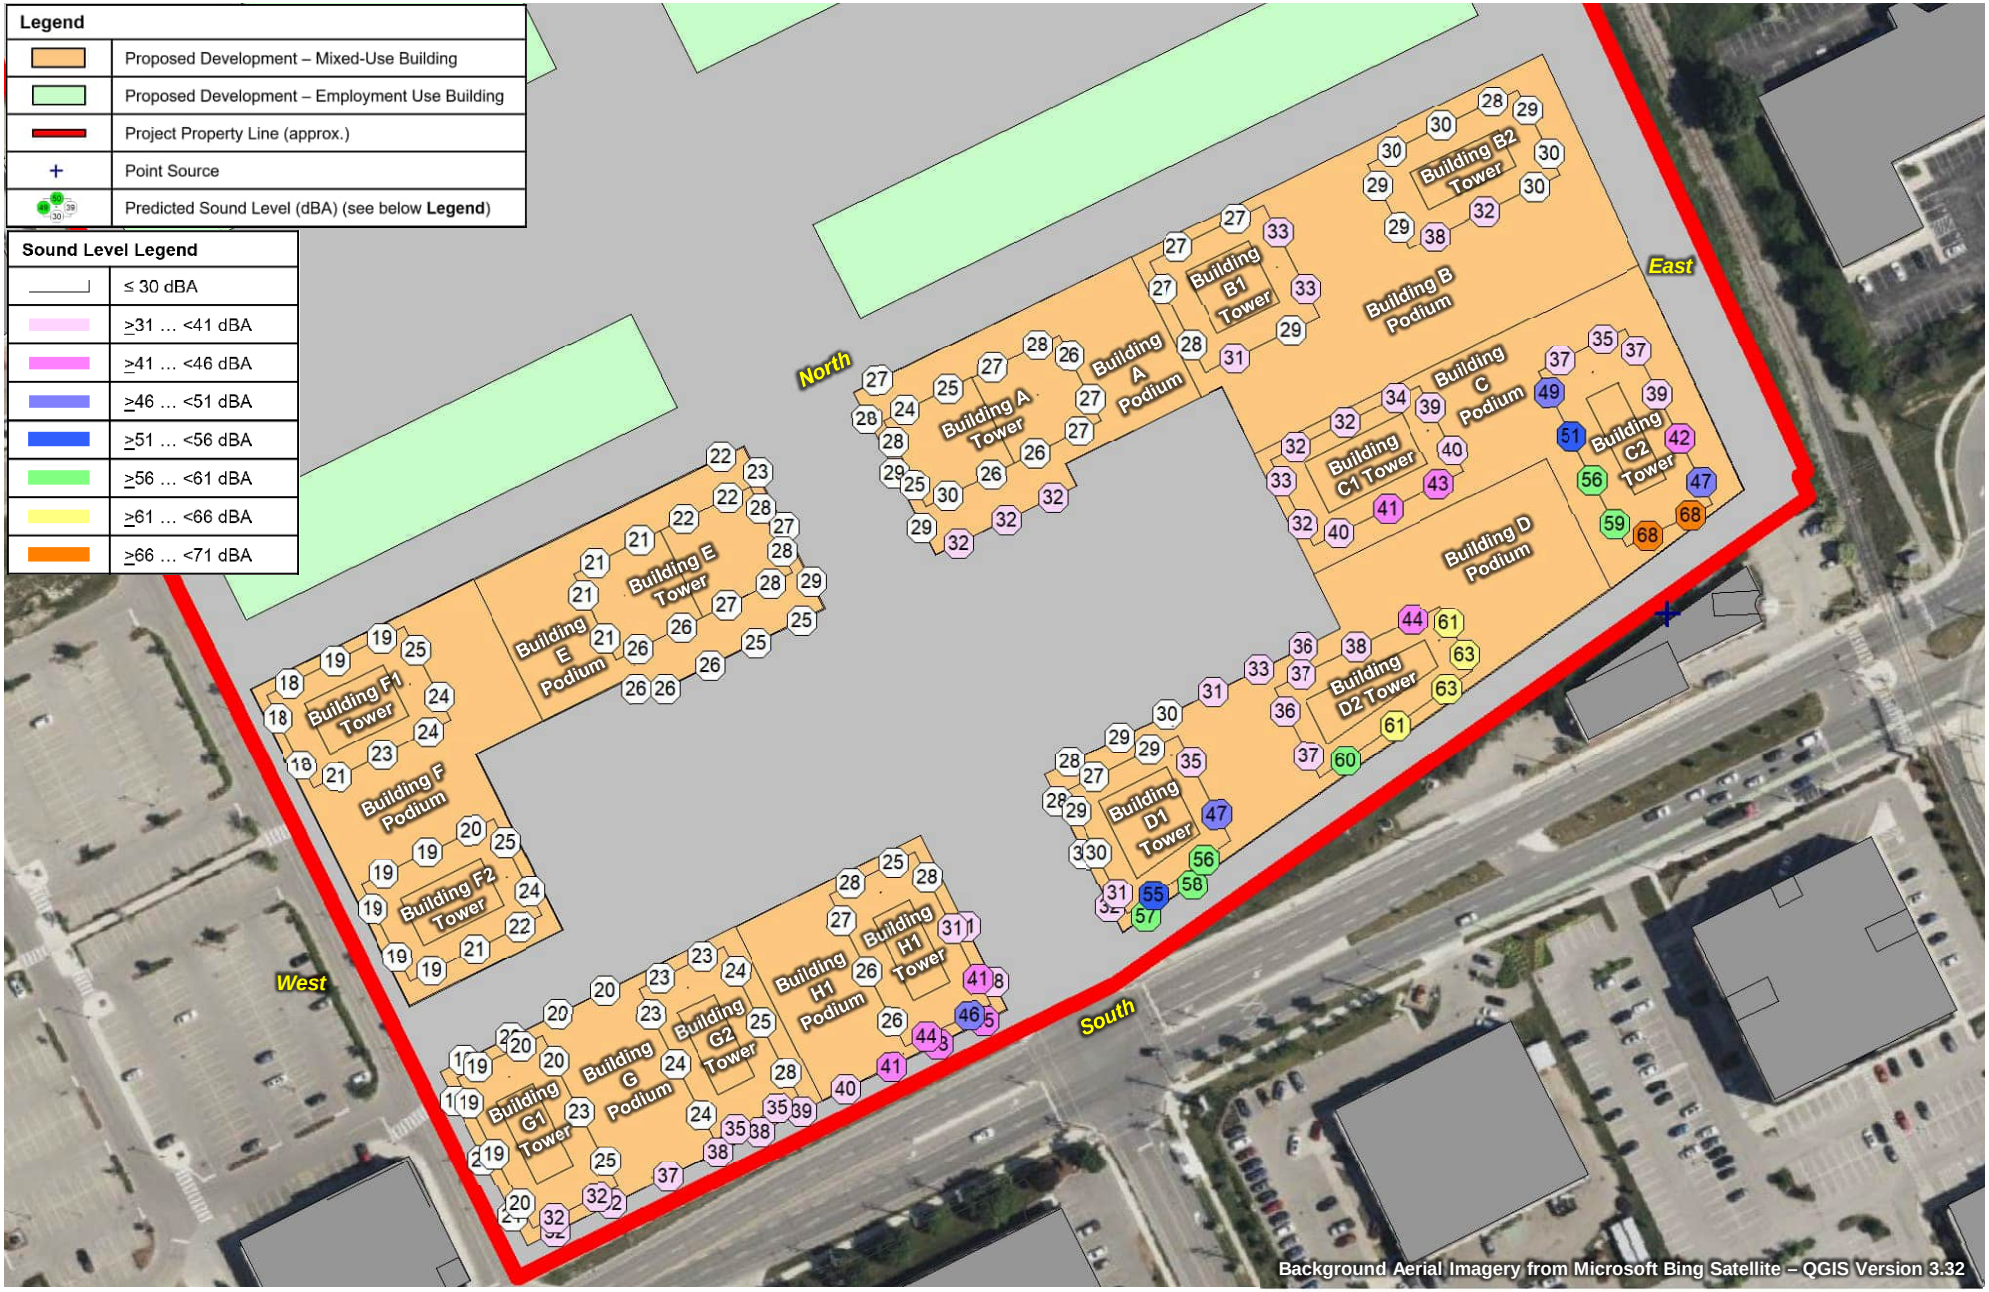


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **60**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – DAYTIME – EMERGENCY GENERATOR TESTING		Project No. 241.030968.00001	

SLR

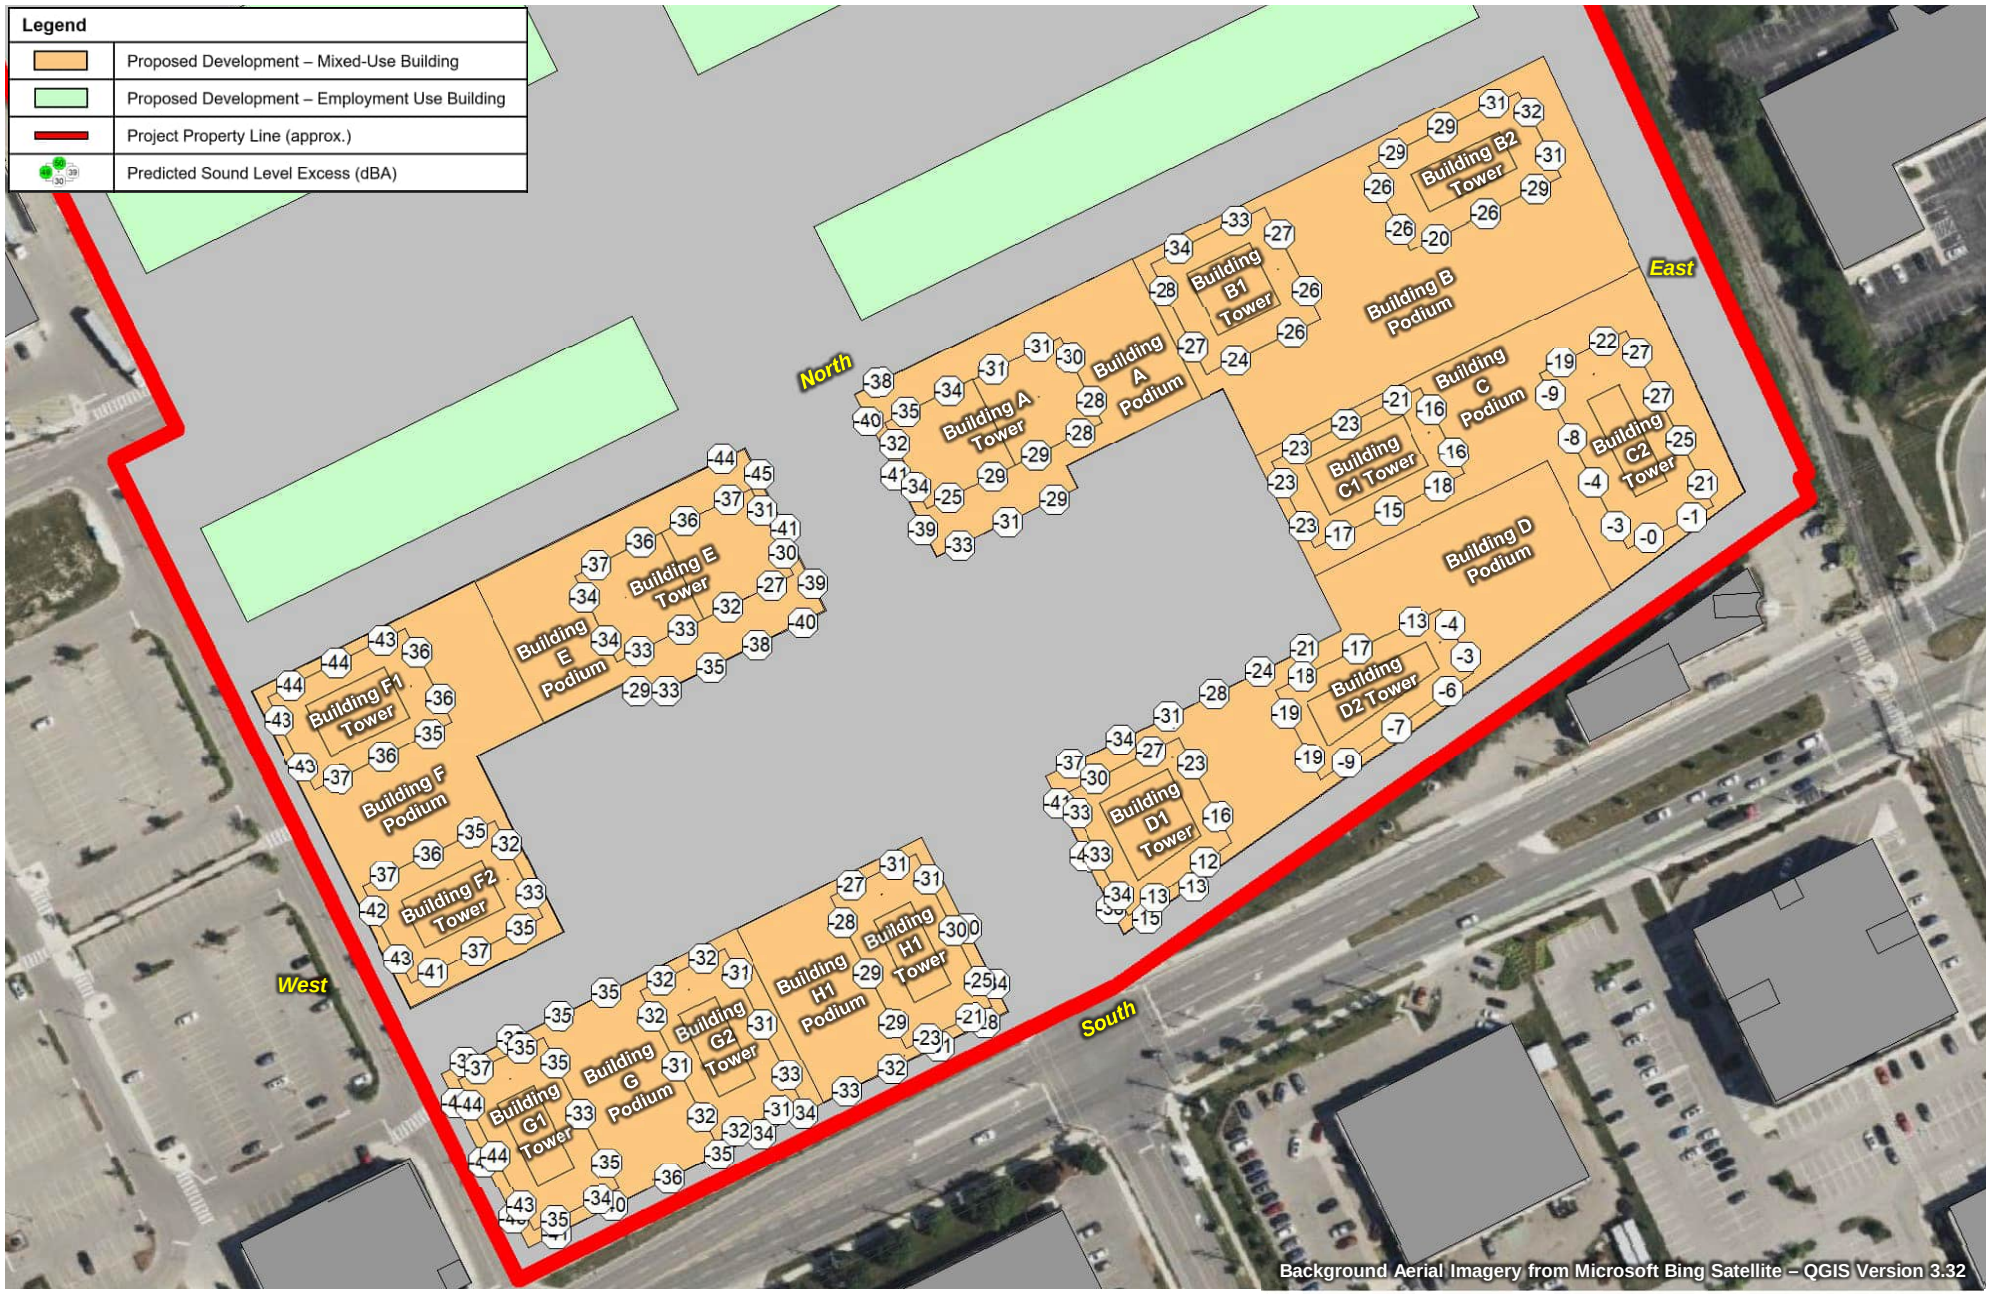


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **61**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – DAYTIME – EMERGENCY GENERATOR TESTING		Project No. 241.030968.00001	

SLR

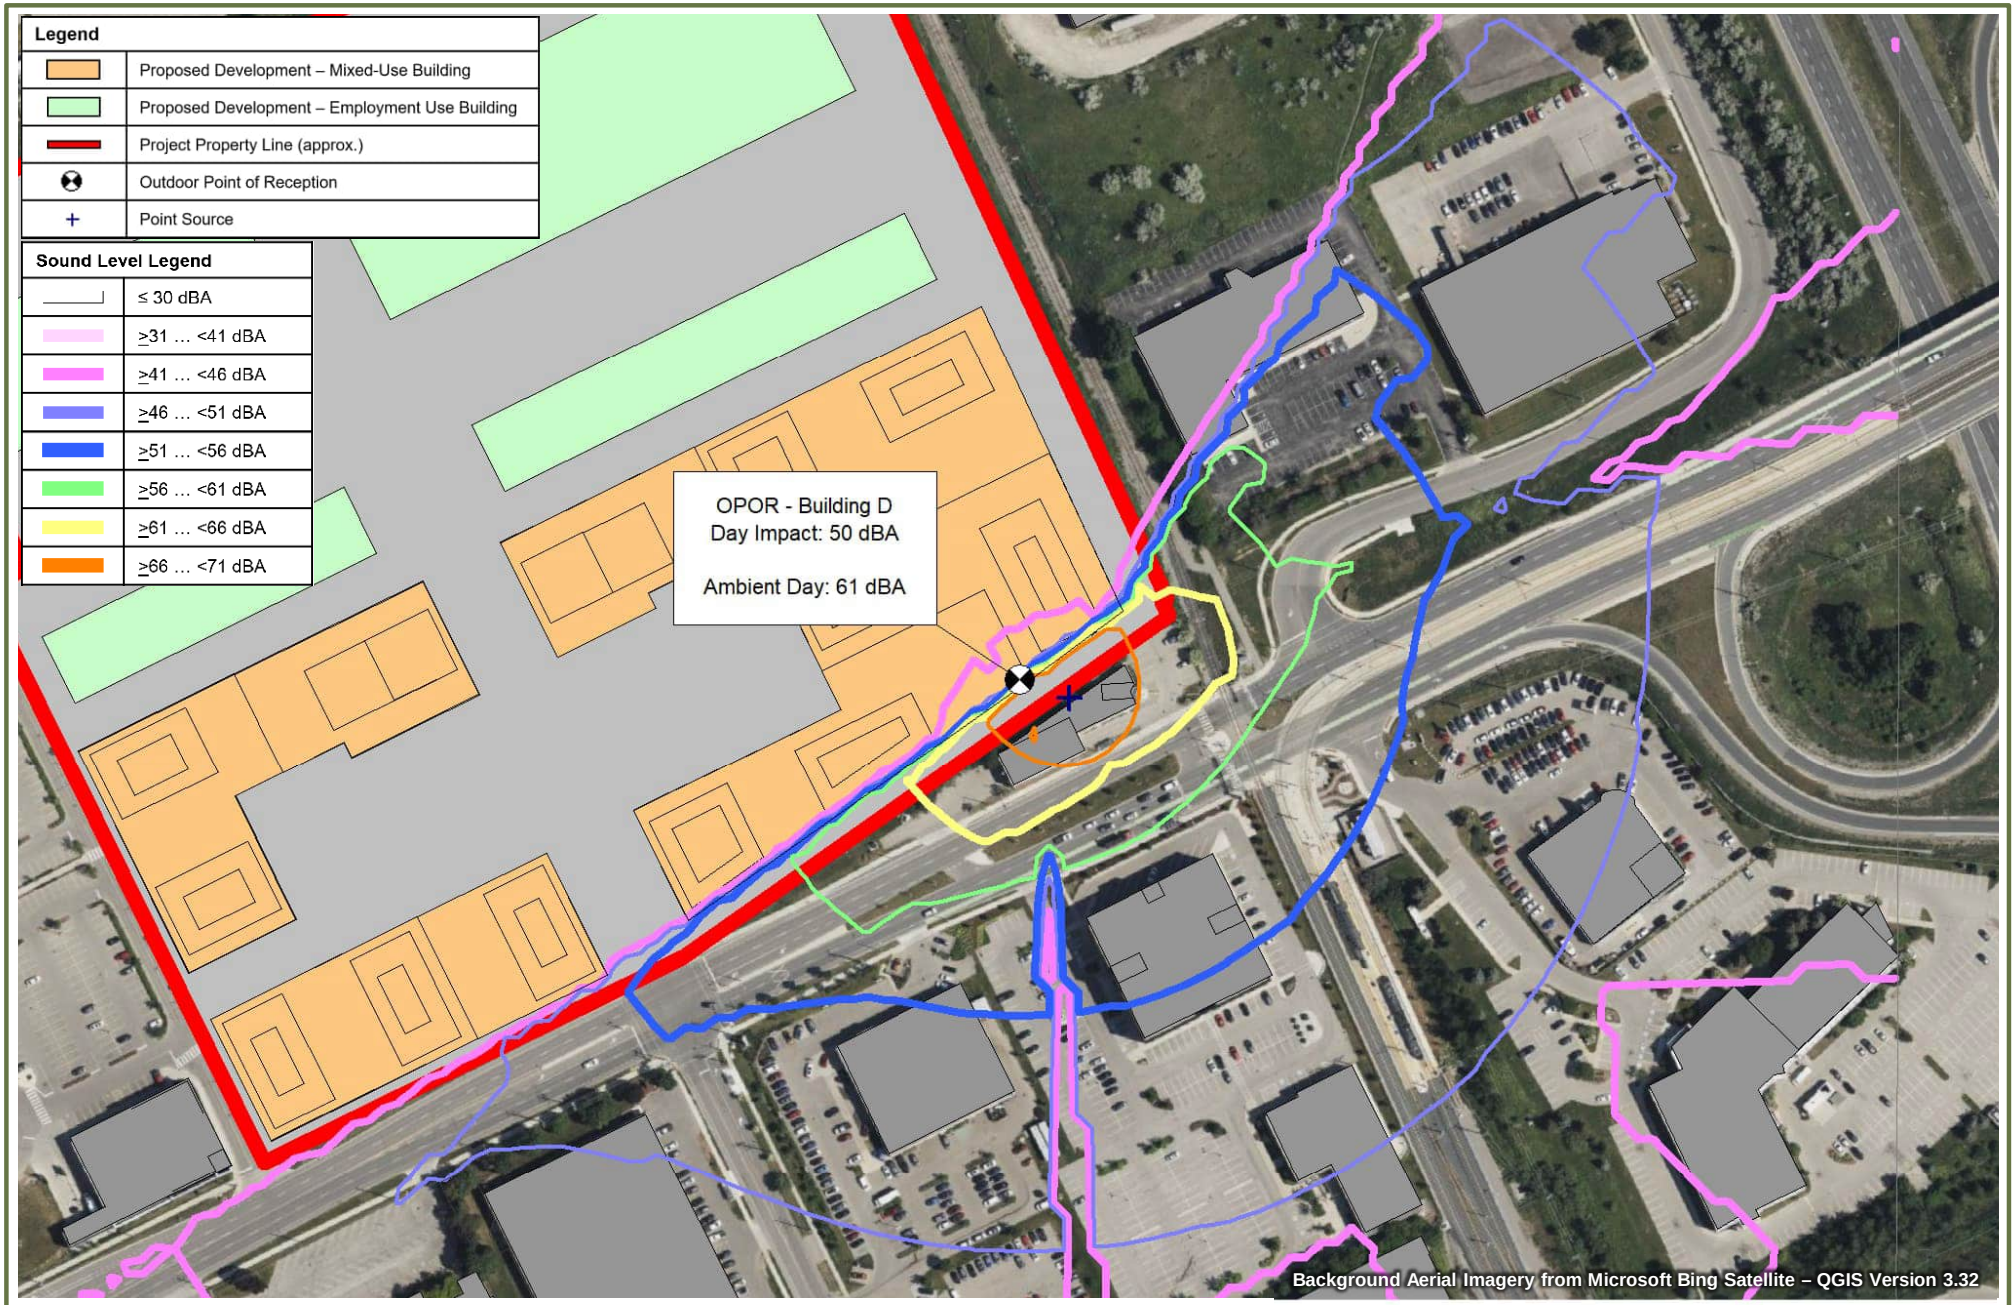


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,500	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **62**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – EMERGENCY GENERATOR TESTING - DAYTIME		Project No. 241.030968.00001	

SLR

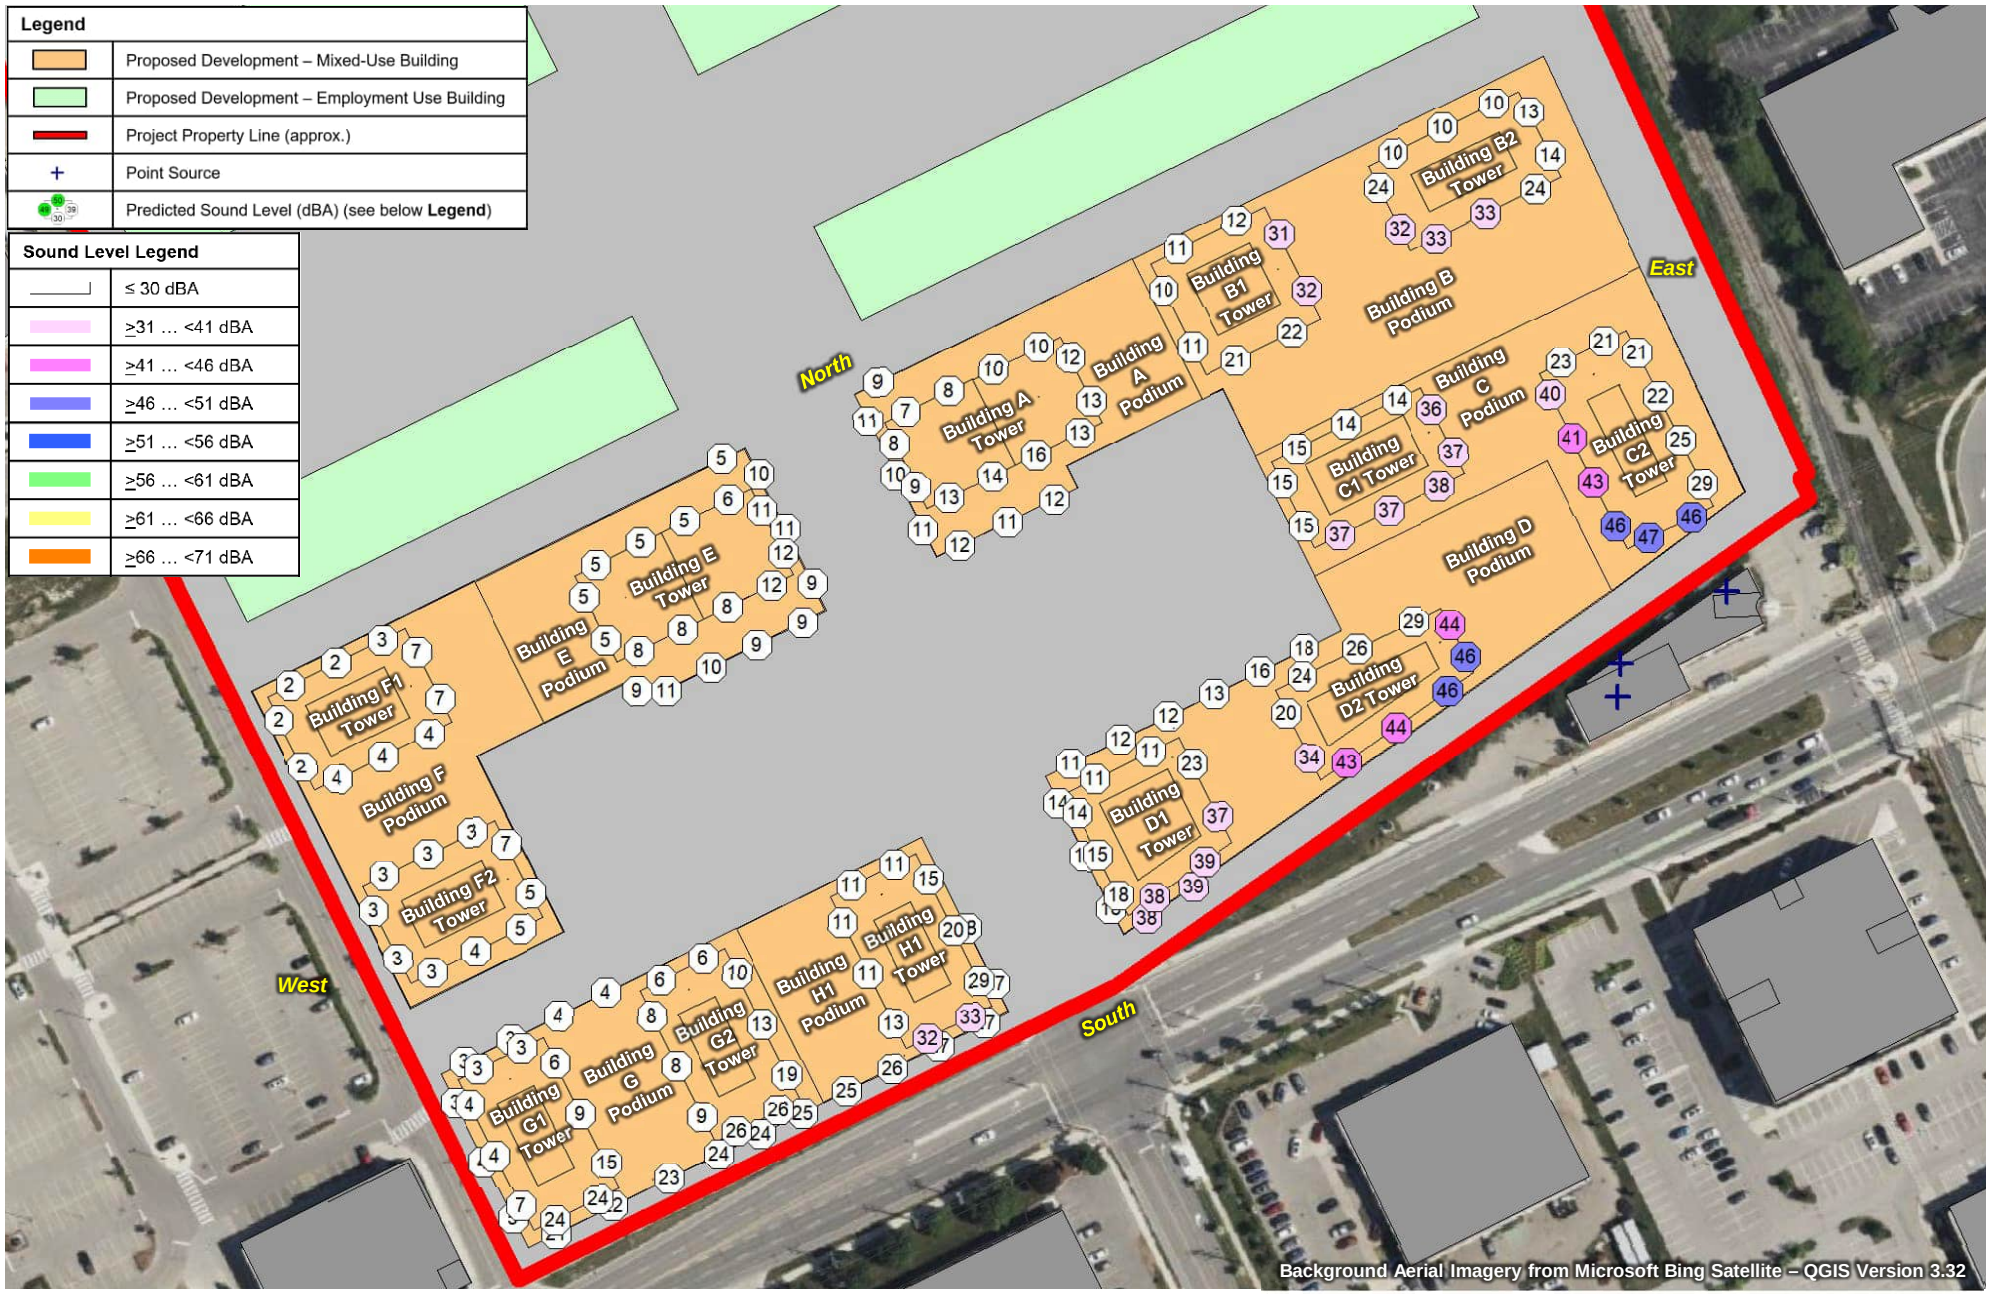


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **63**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – DAYTIME/EVENING – CONTINUOUS SOURCES		Project No. 241.030968.00001	

SLR

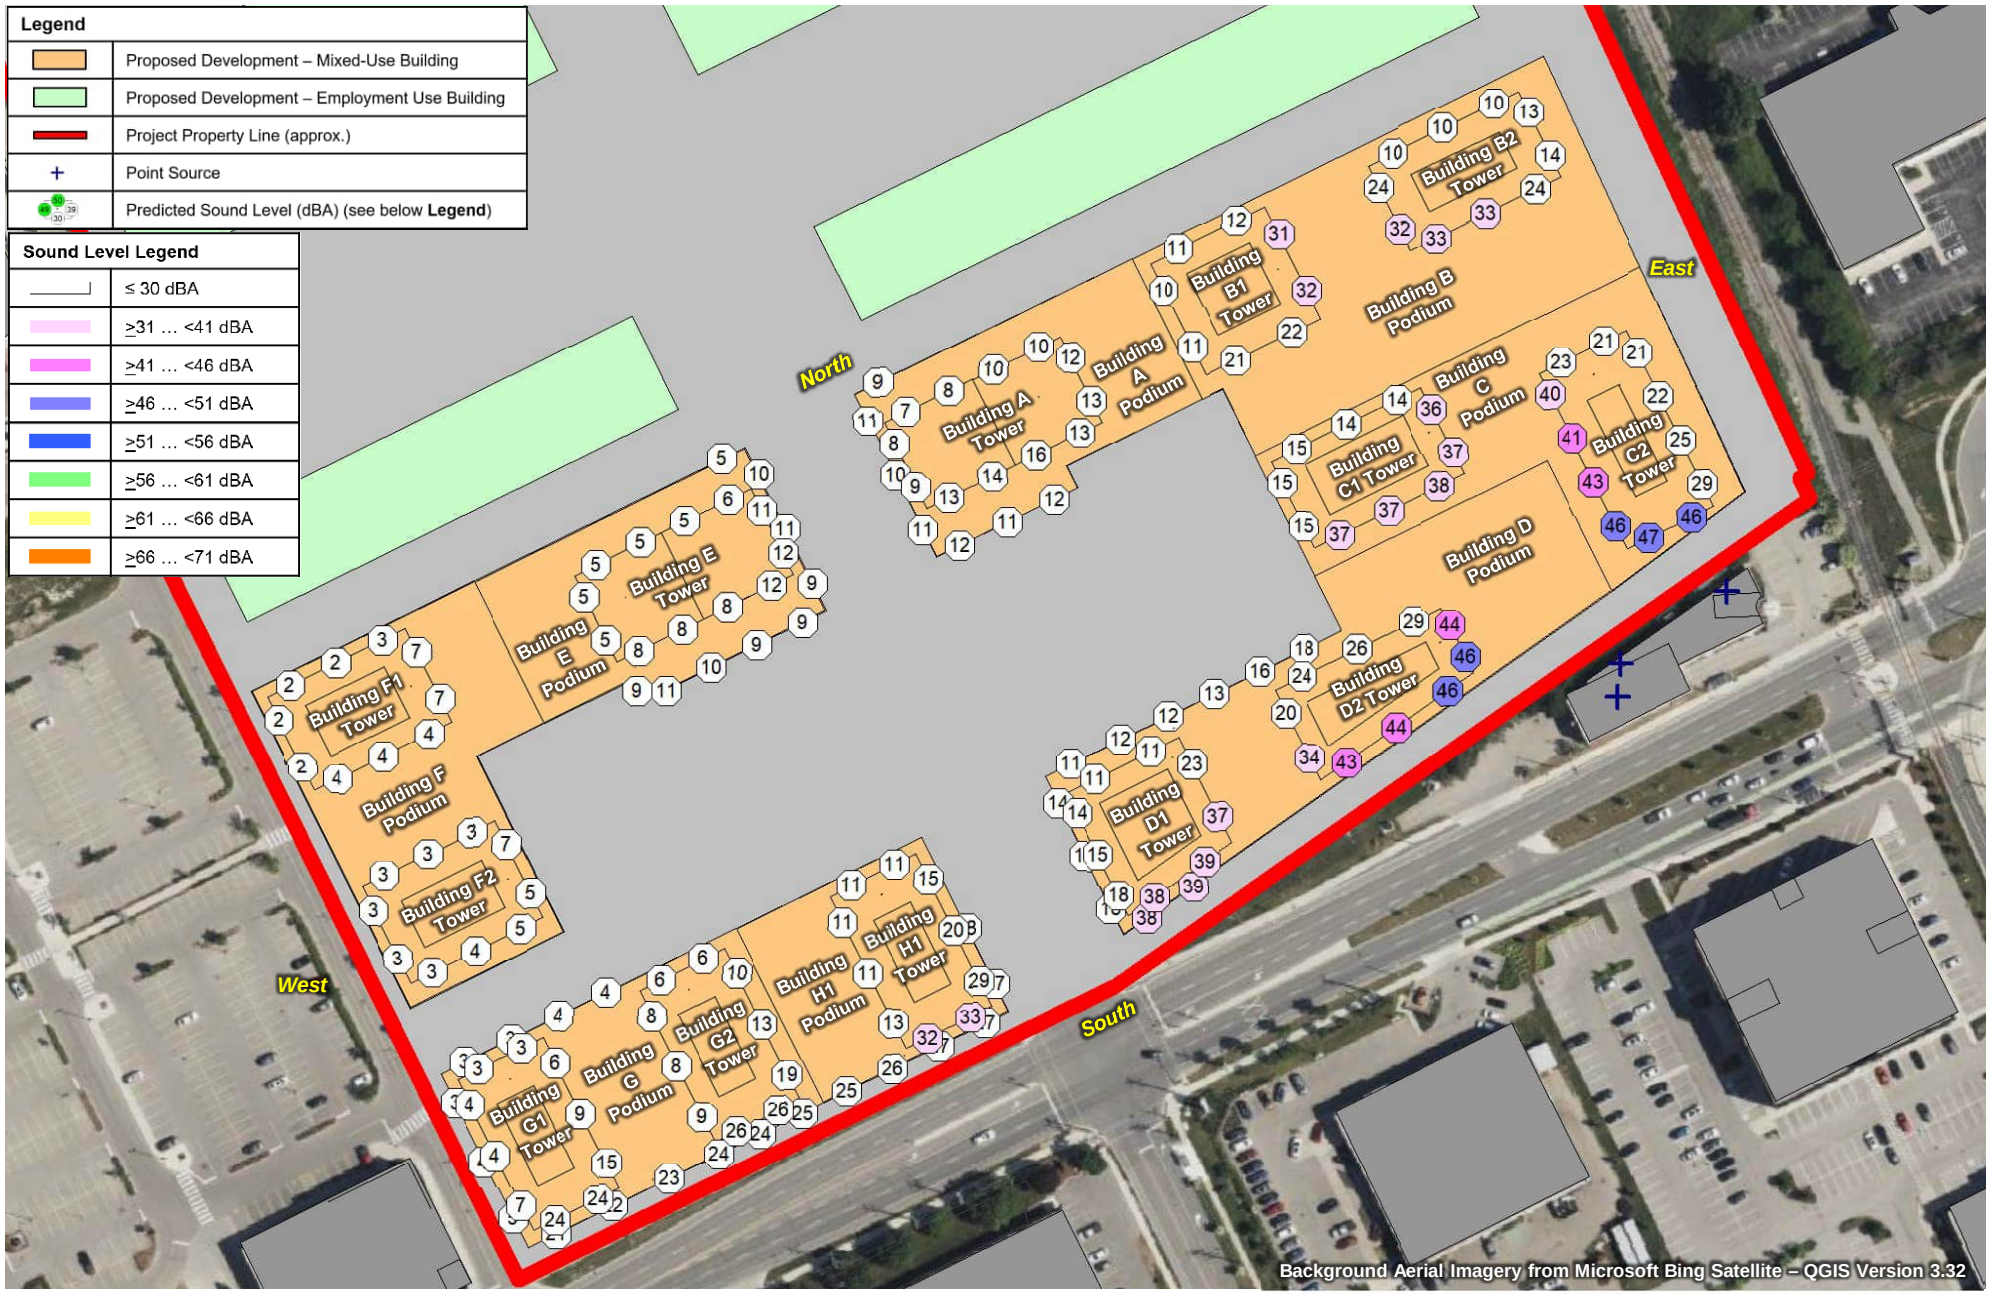


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **64**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – NIGHT-TIME – CONTINUOUS SOURCES		Project No. 241.030968.00001	

SLR

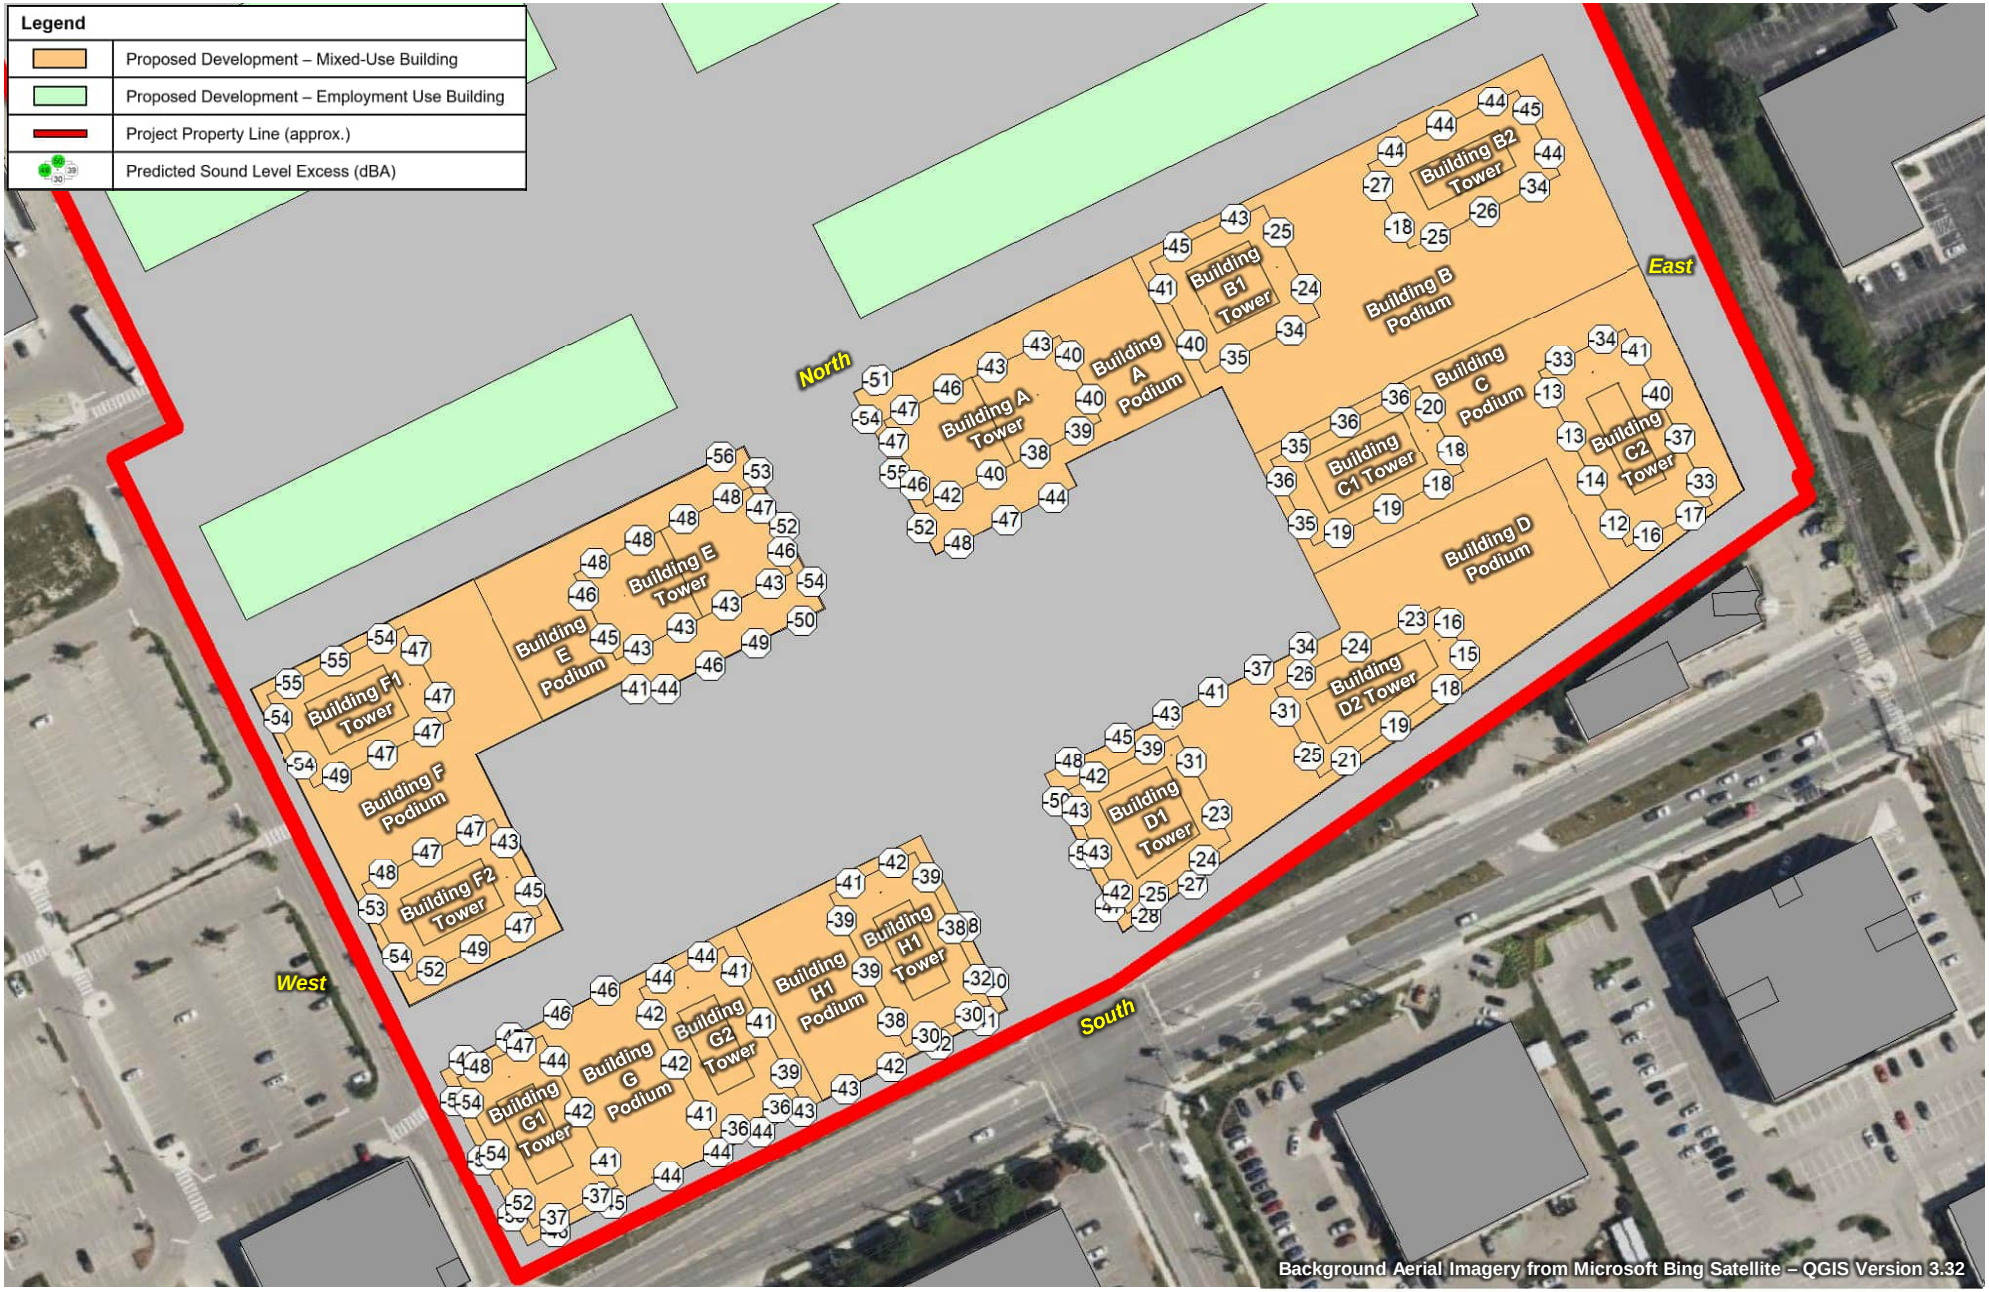


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **65**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – DAYTIME – CONTINUOUS		Project No. 241.030968.00001	

SLR

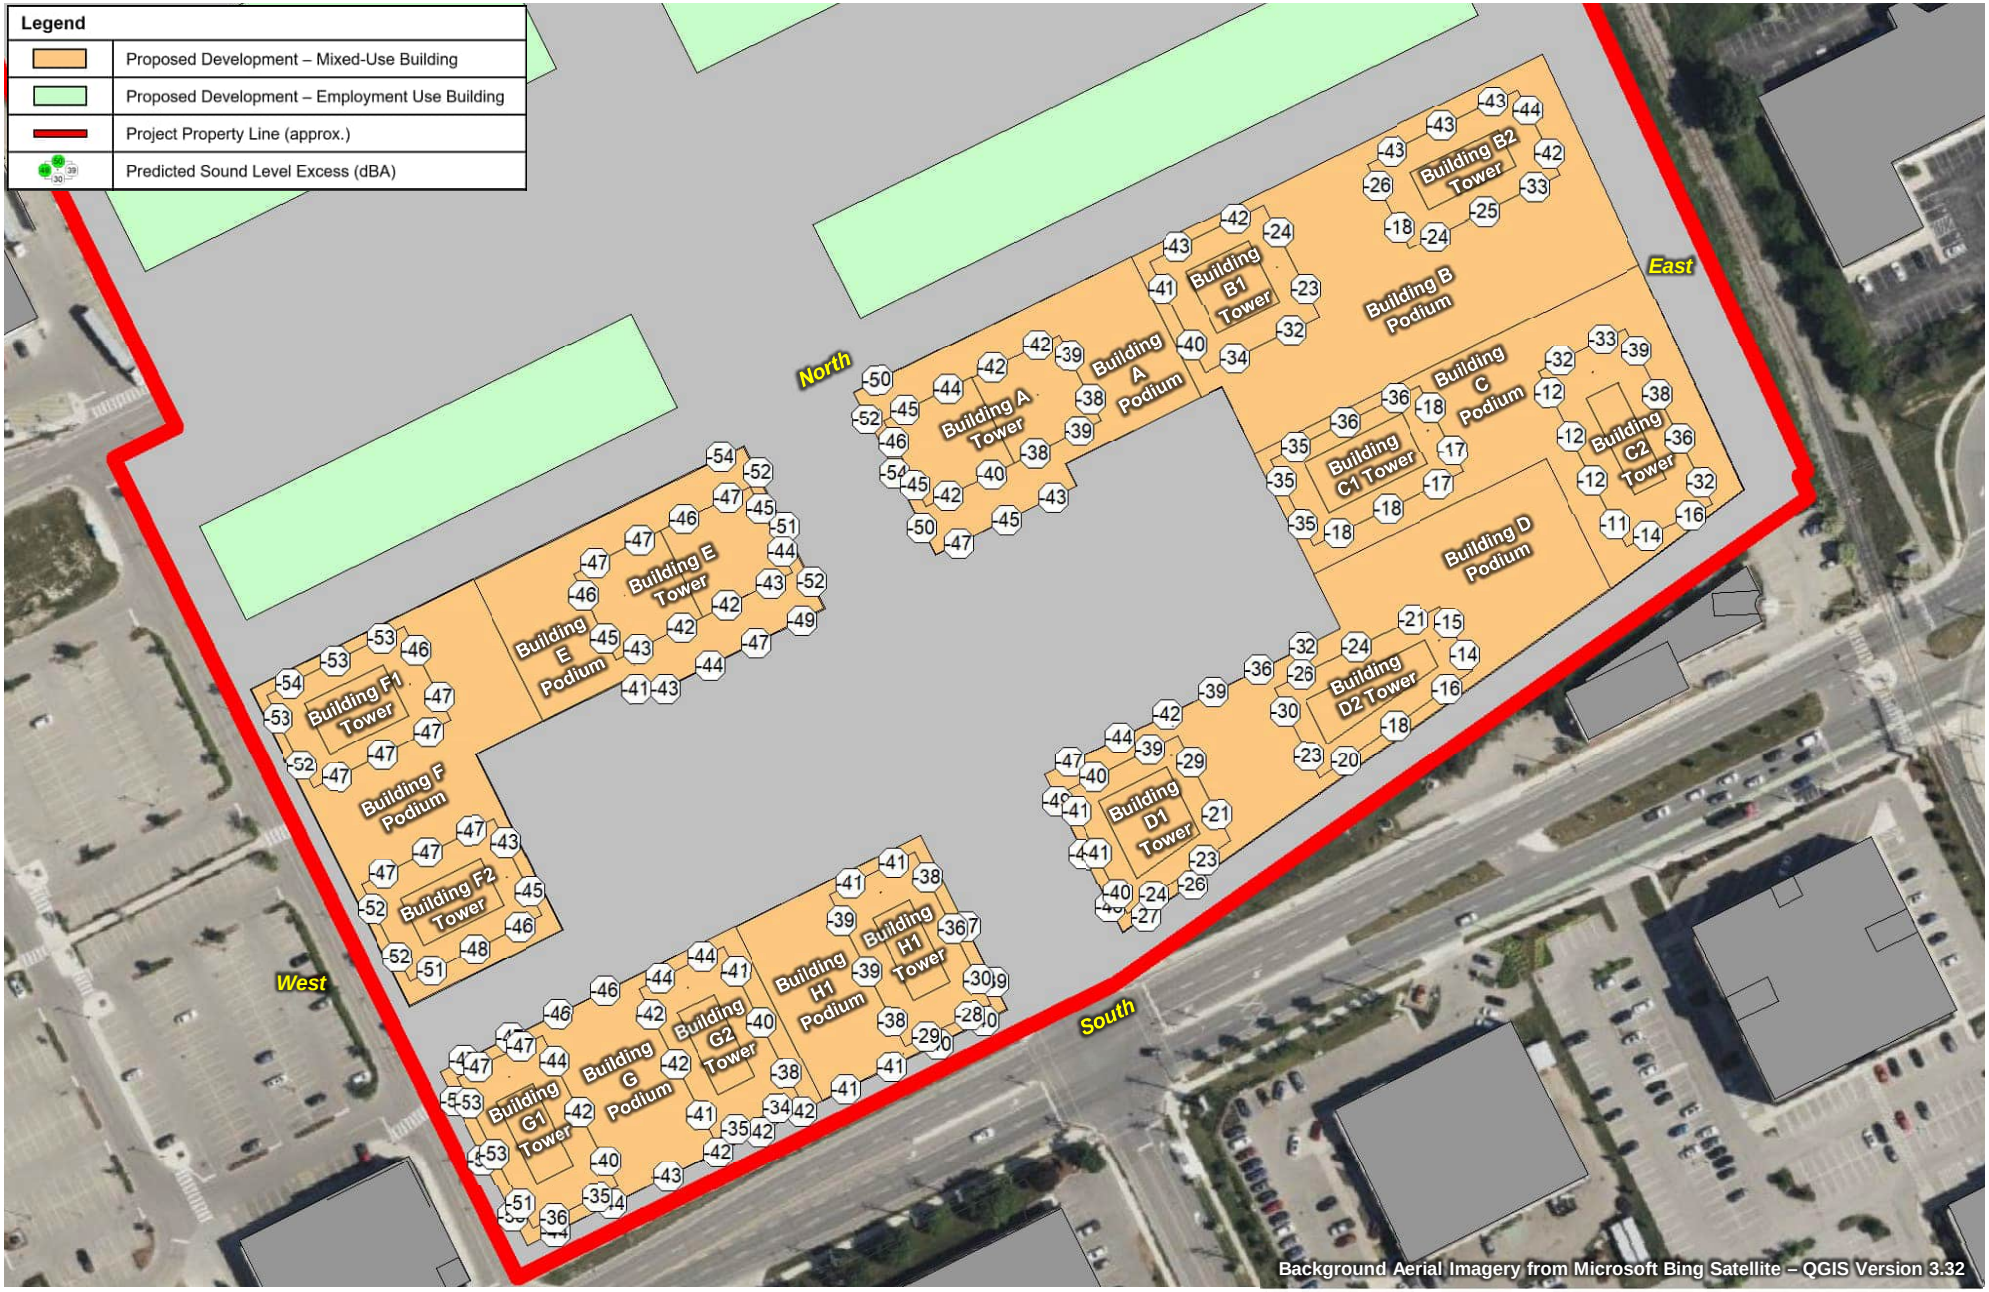


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **66**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – EVENING – CONTINUOUS		Project No. 241.030968.00001	

SLR

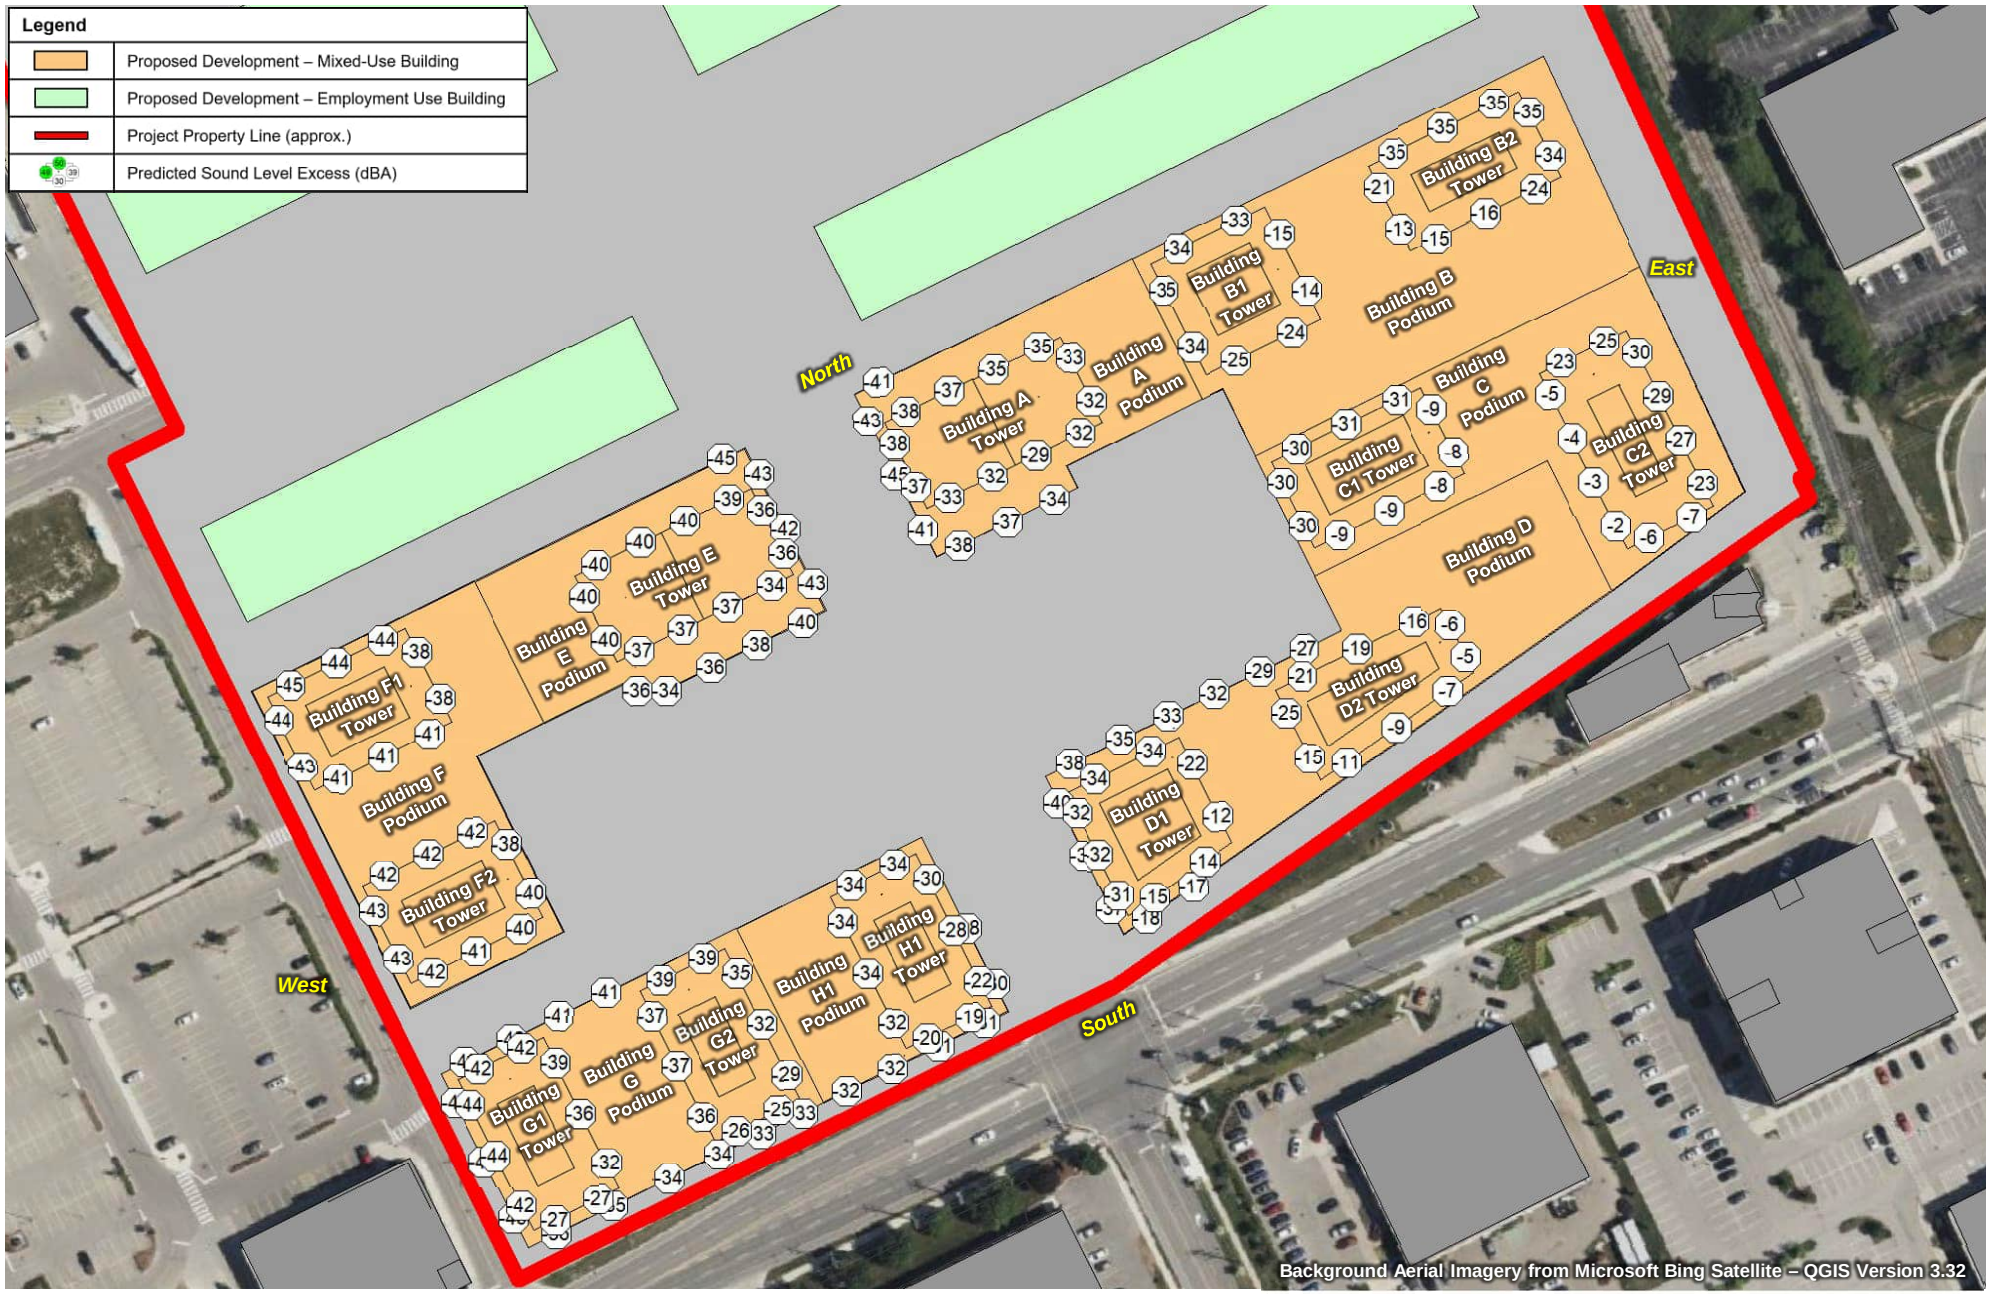


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **67**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – NIGHT-TIME – CONTINUOUS		Project No. 241.030968.00001	

SLR

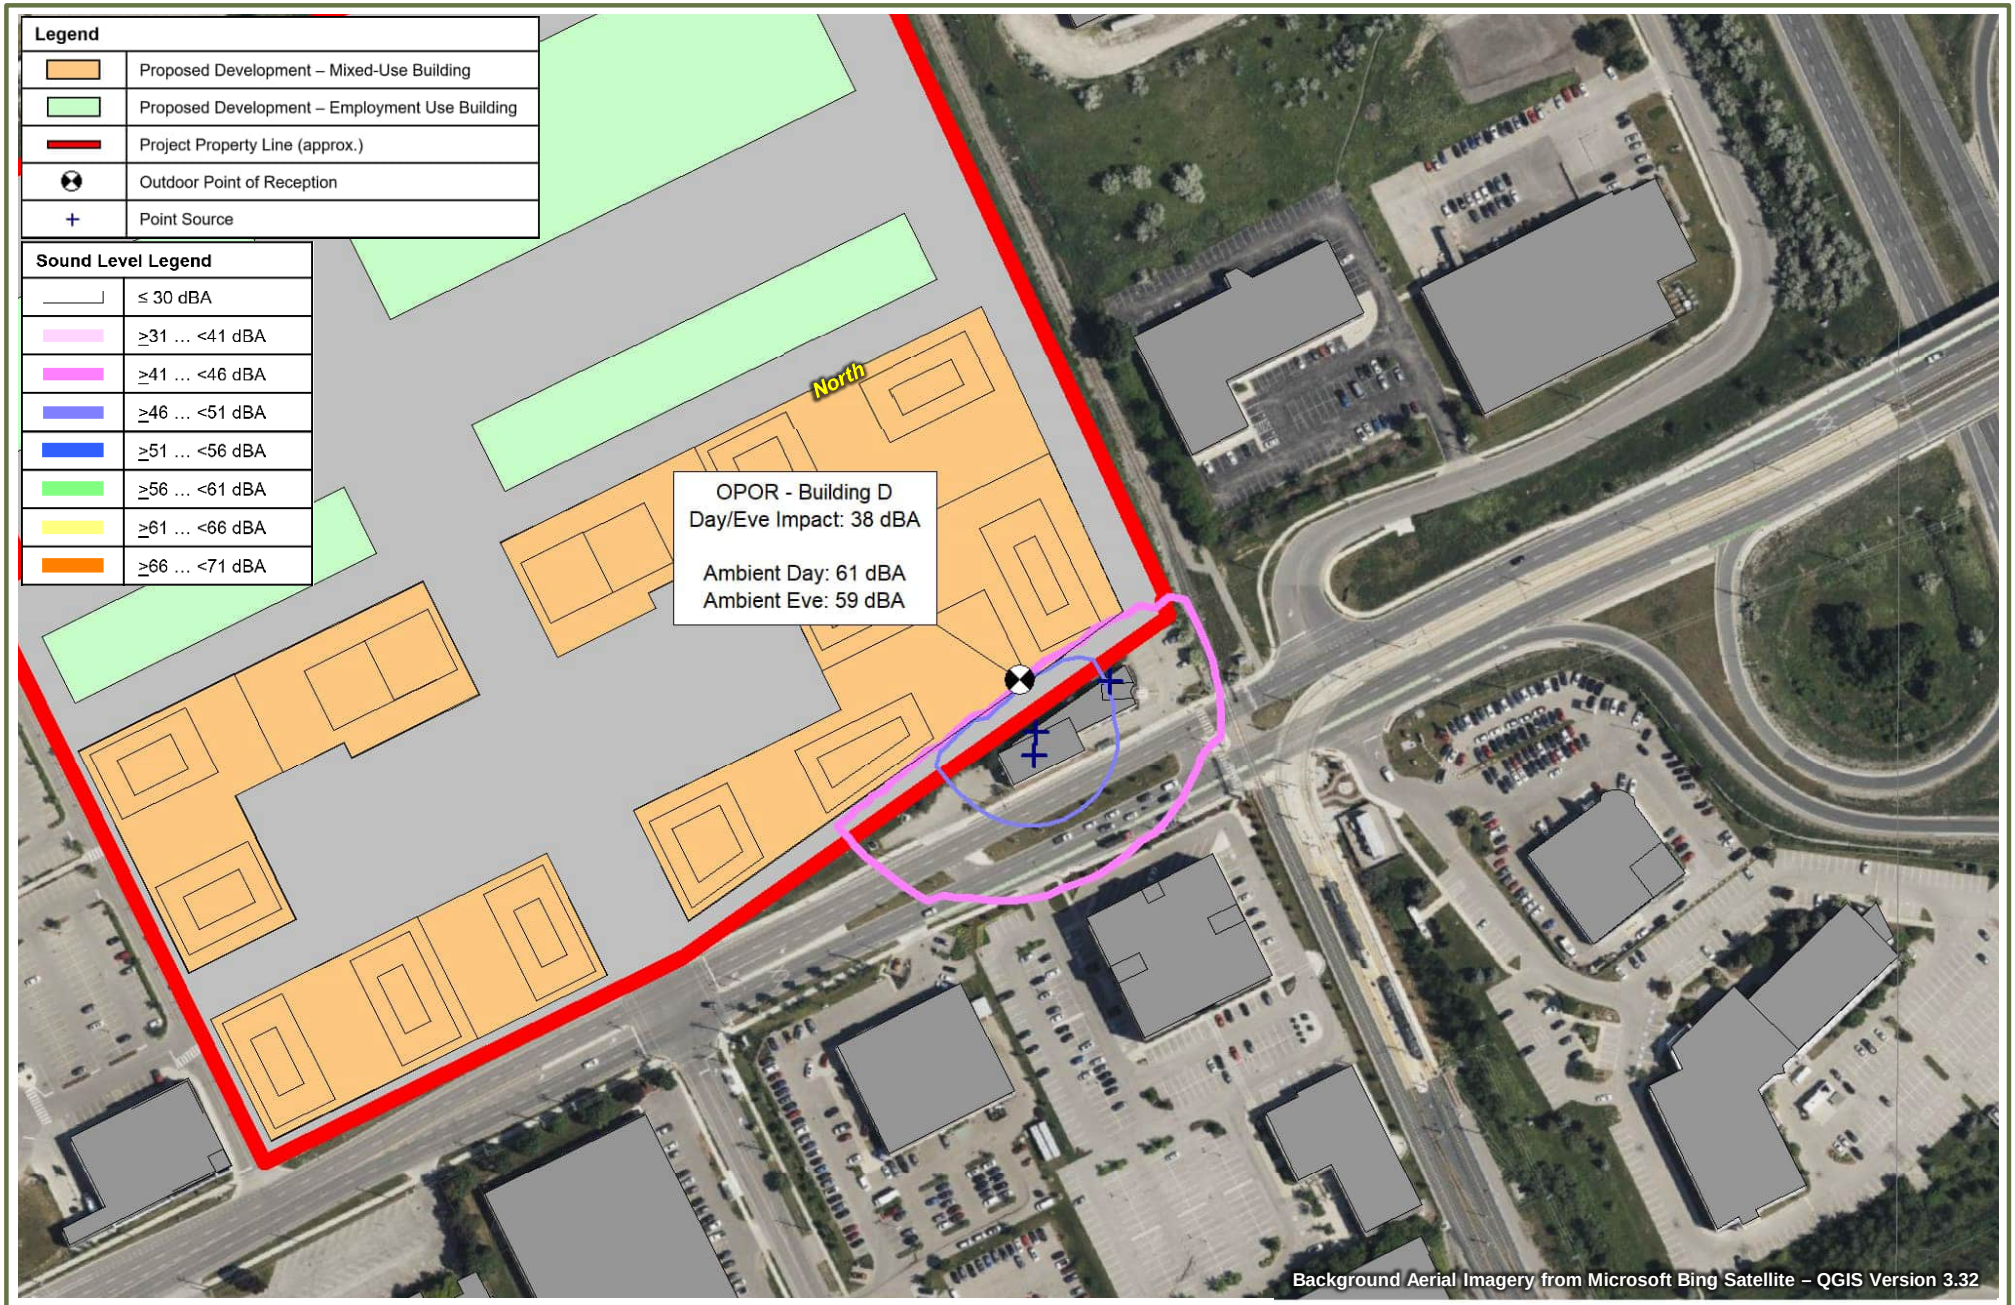


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **68**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – FIRE STATION 3, 150 NORTHFIELD DRIVE WEST – CONTINUOUS – DAYTIME/EVENING		Project No. 241.030968.00001	

SLR

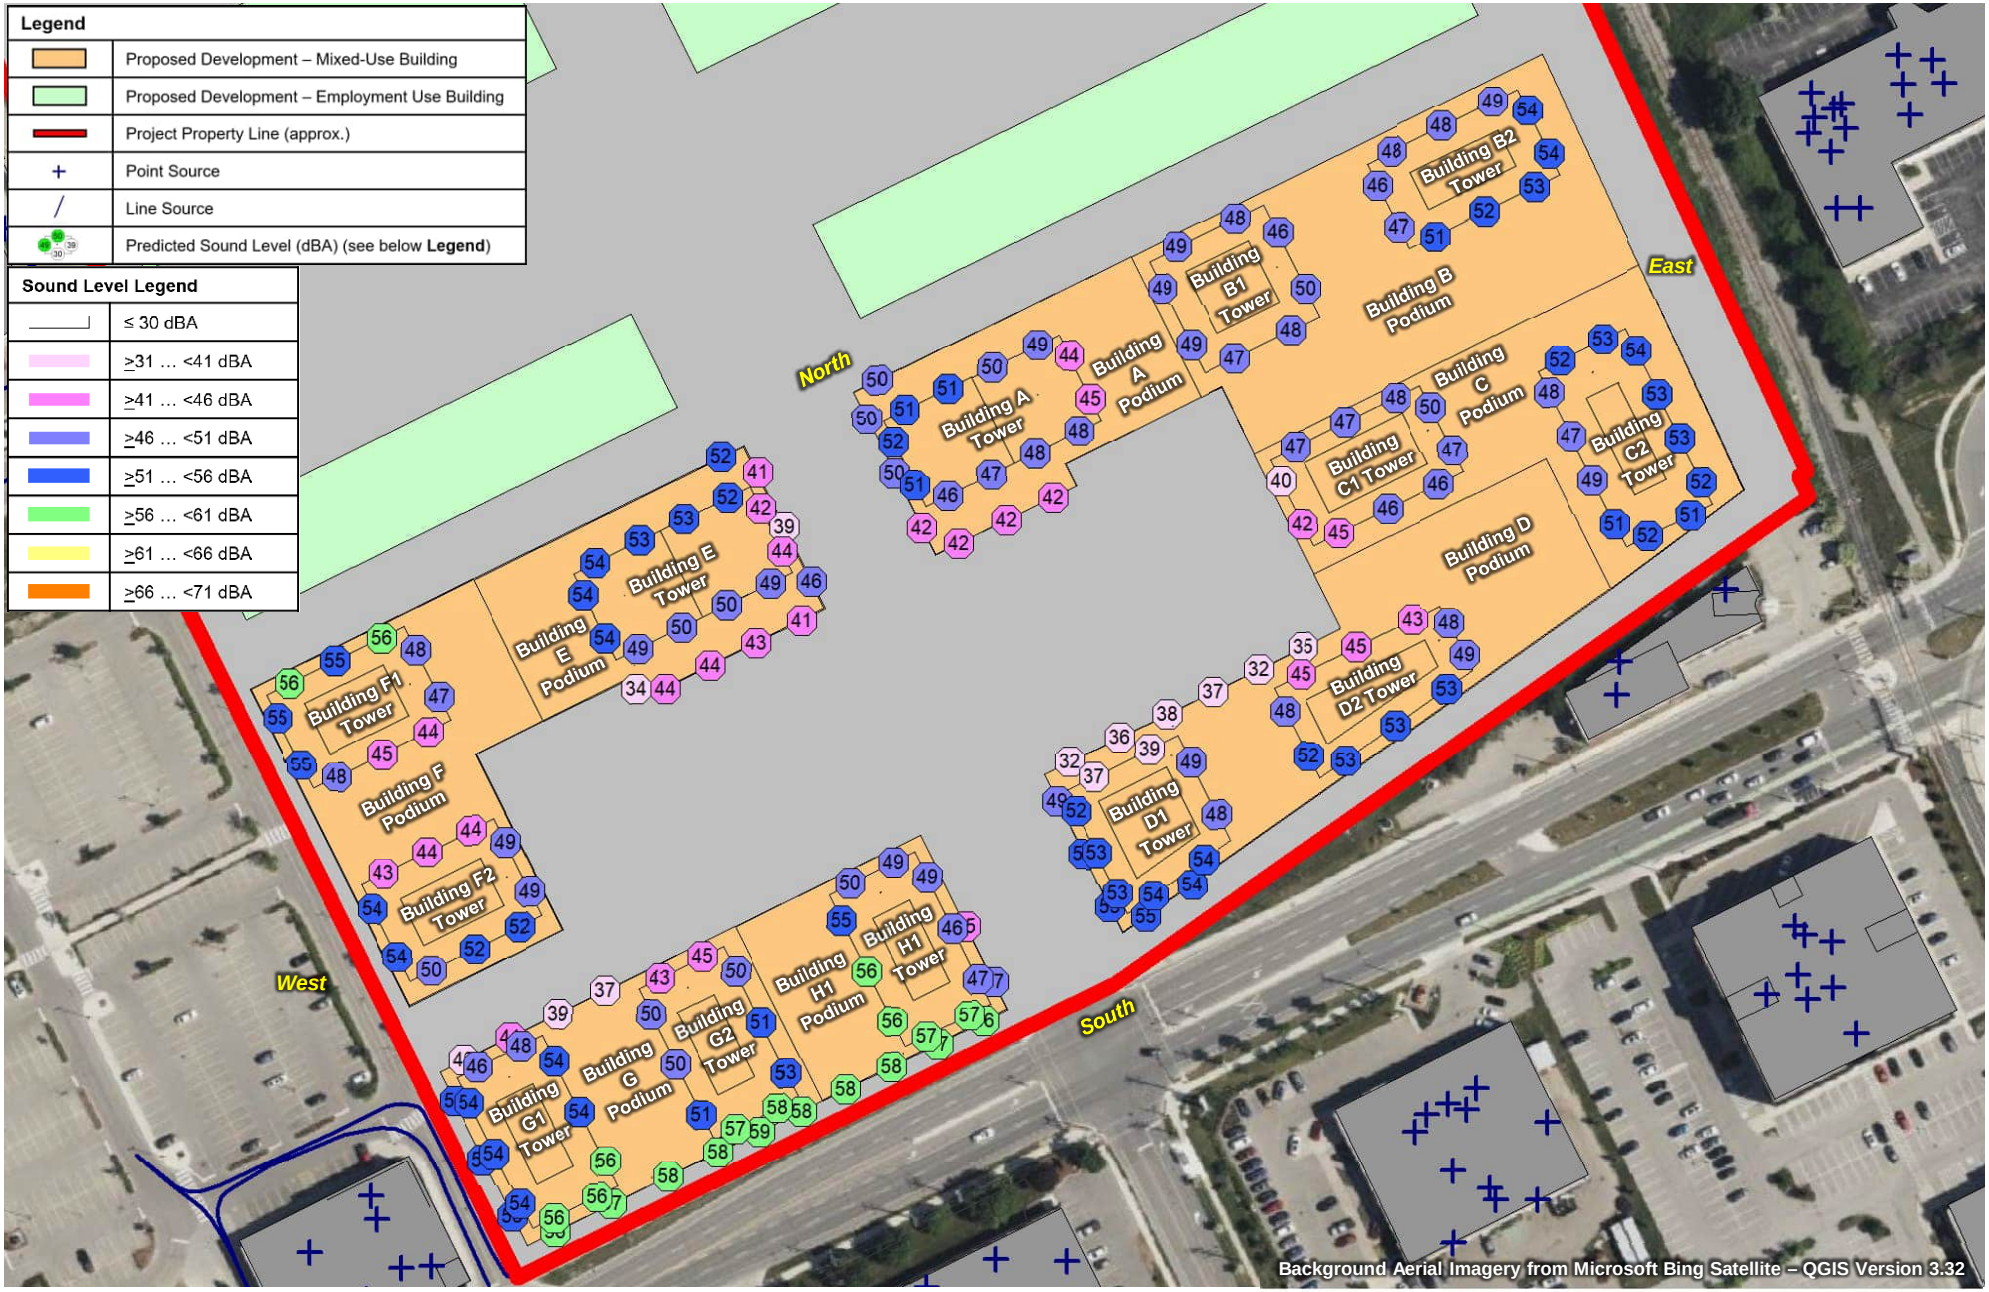


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **69**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ALL SOURCES – DAYTIME		Project No. 241.030968.00001	

SLR

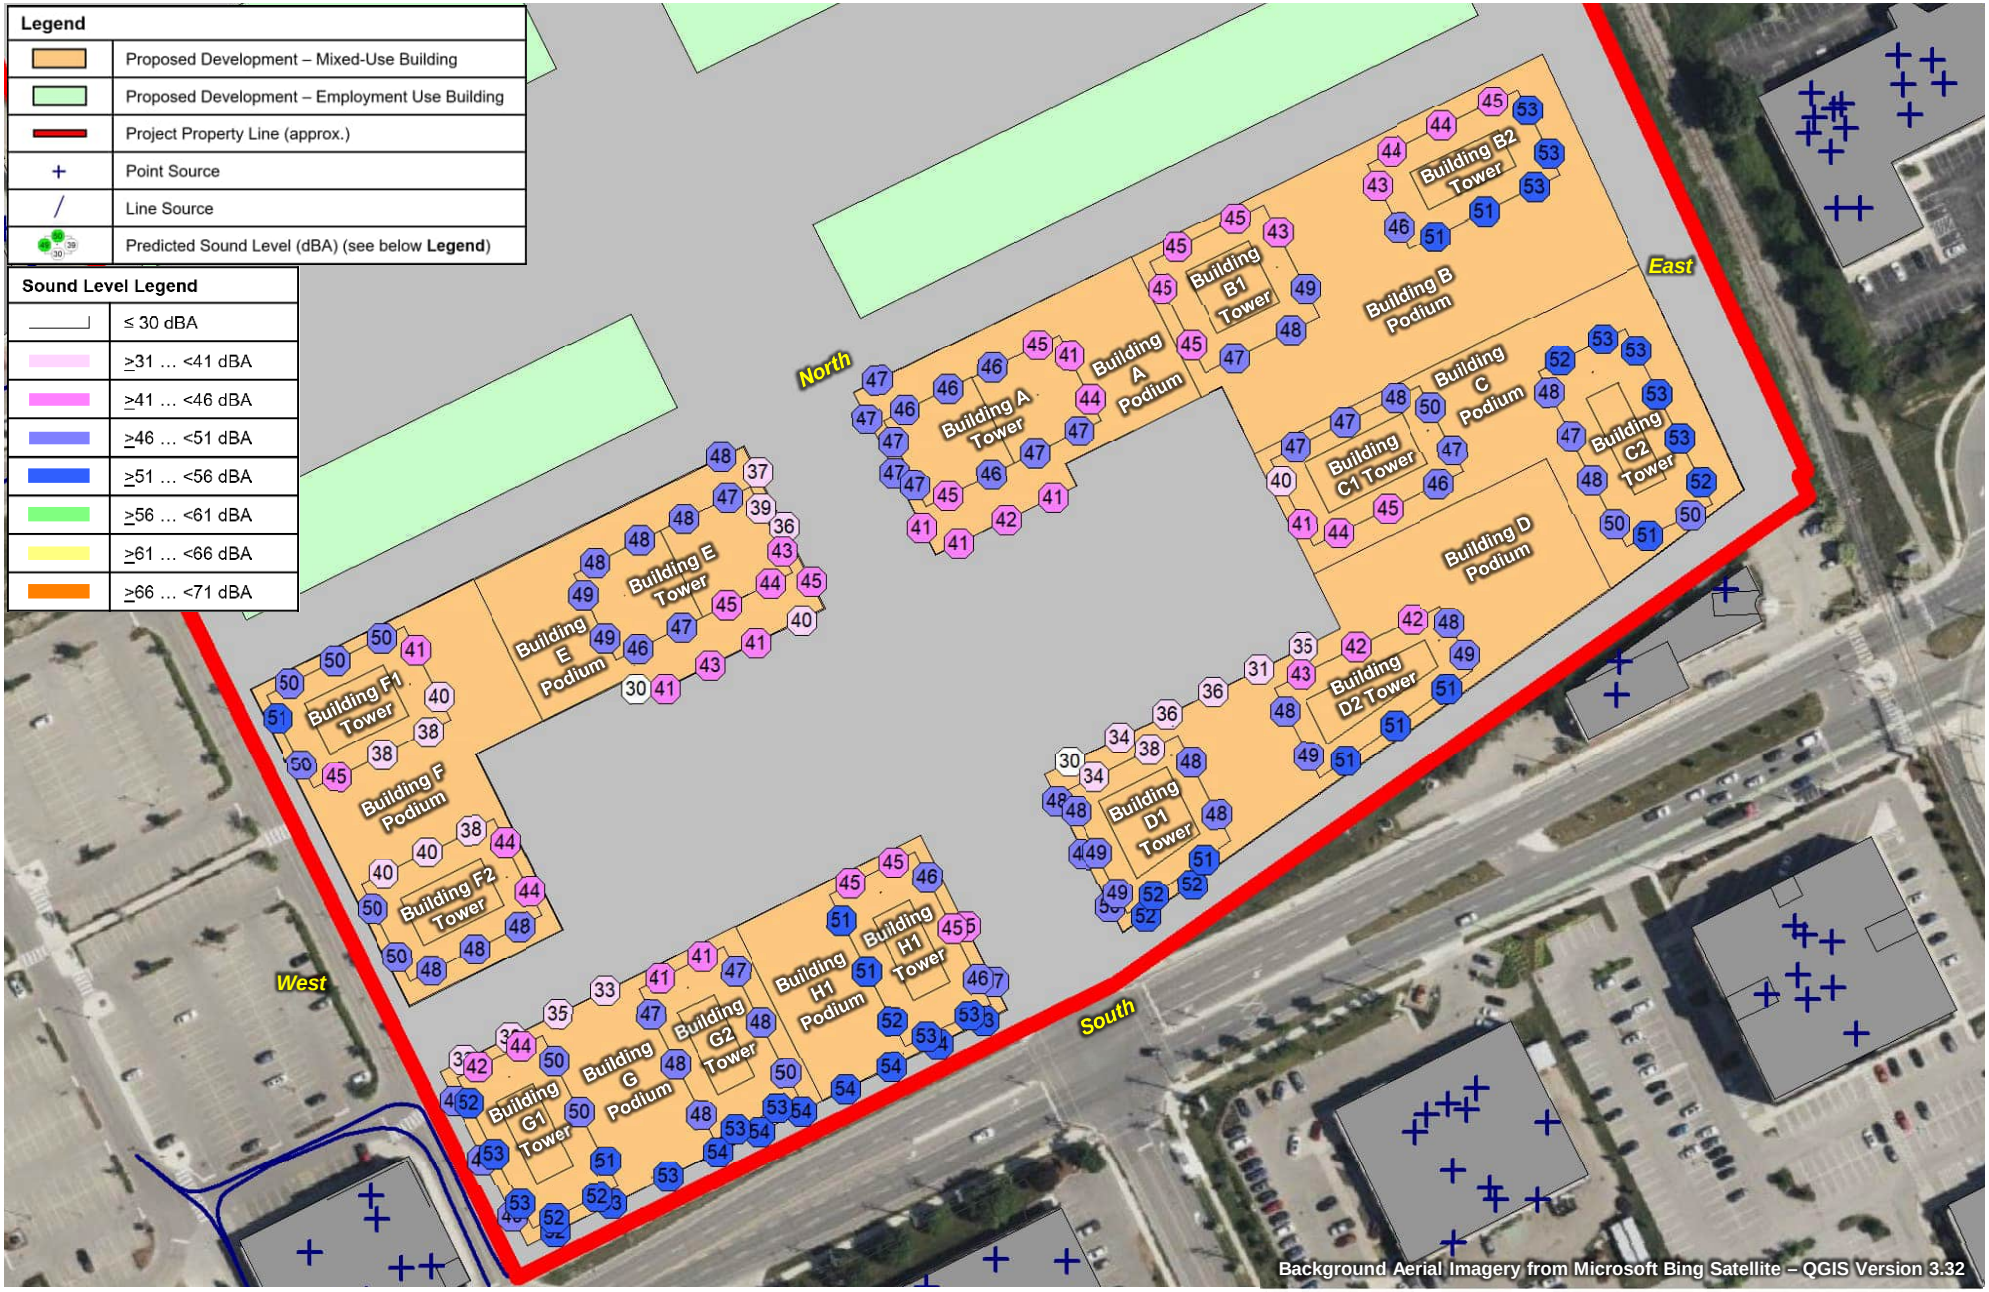


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **70**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ALL SOURCES – EVENING		Project No. 241.030968.00001	

SLR

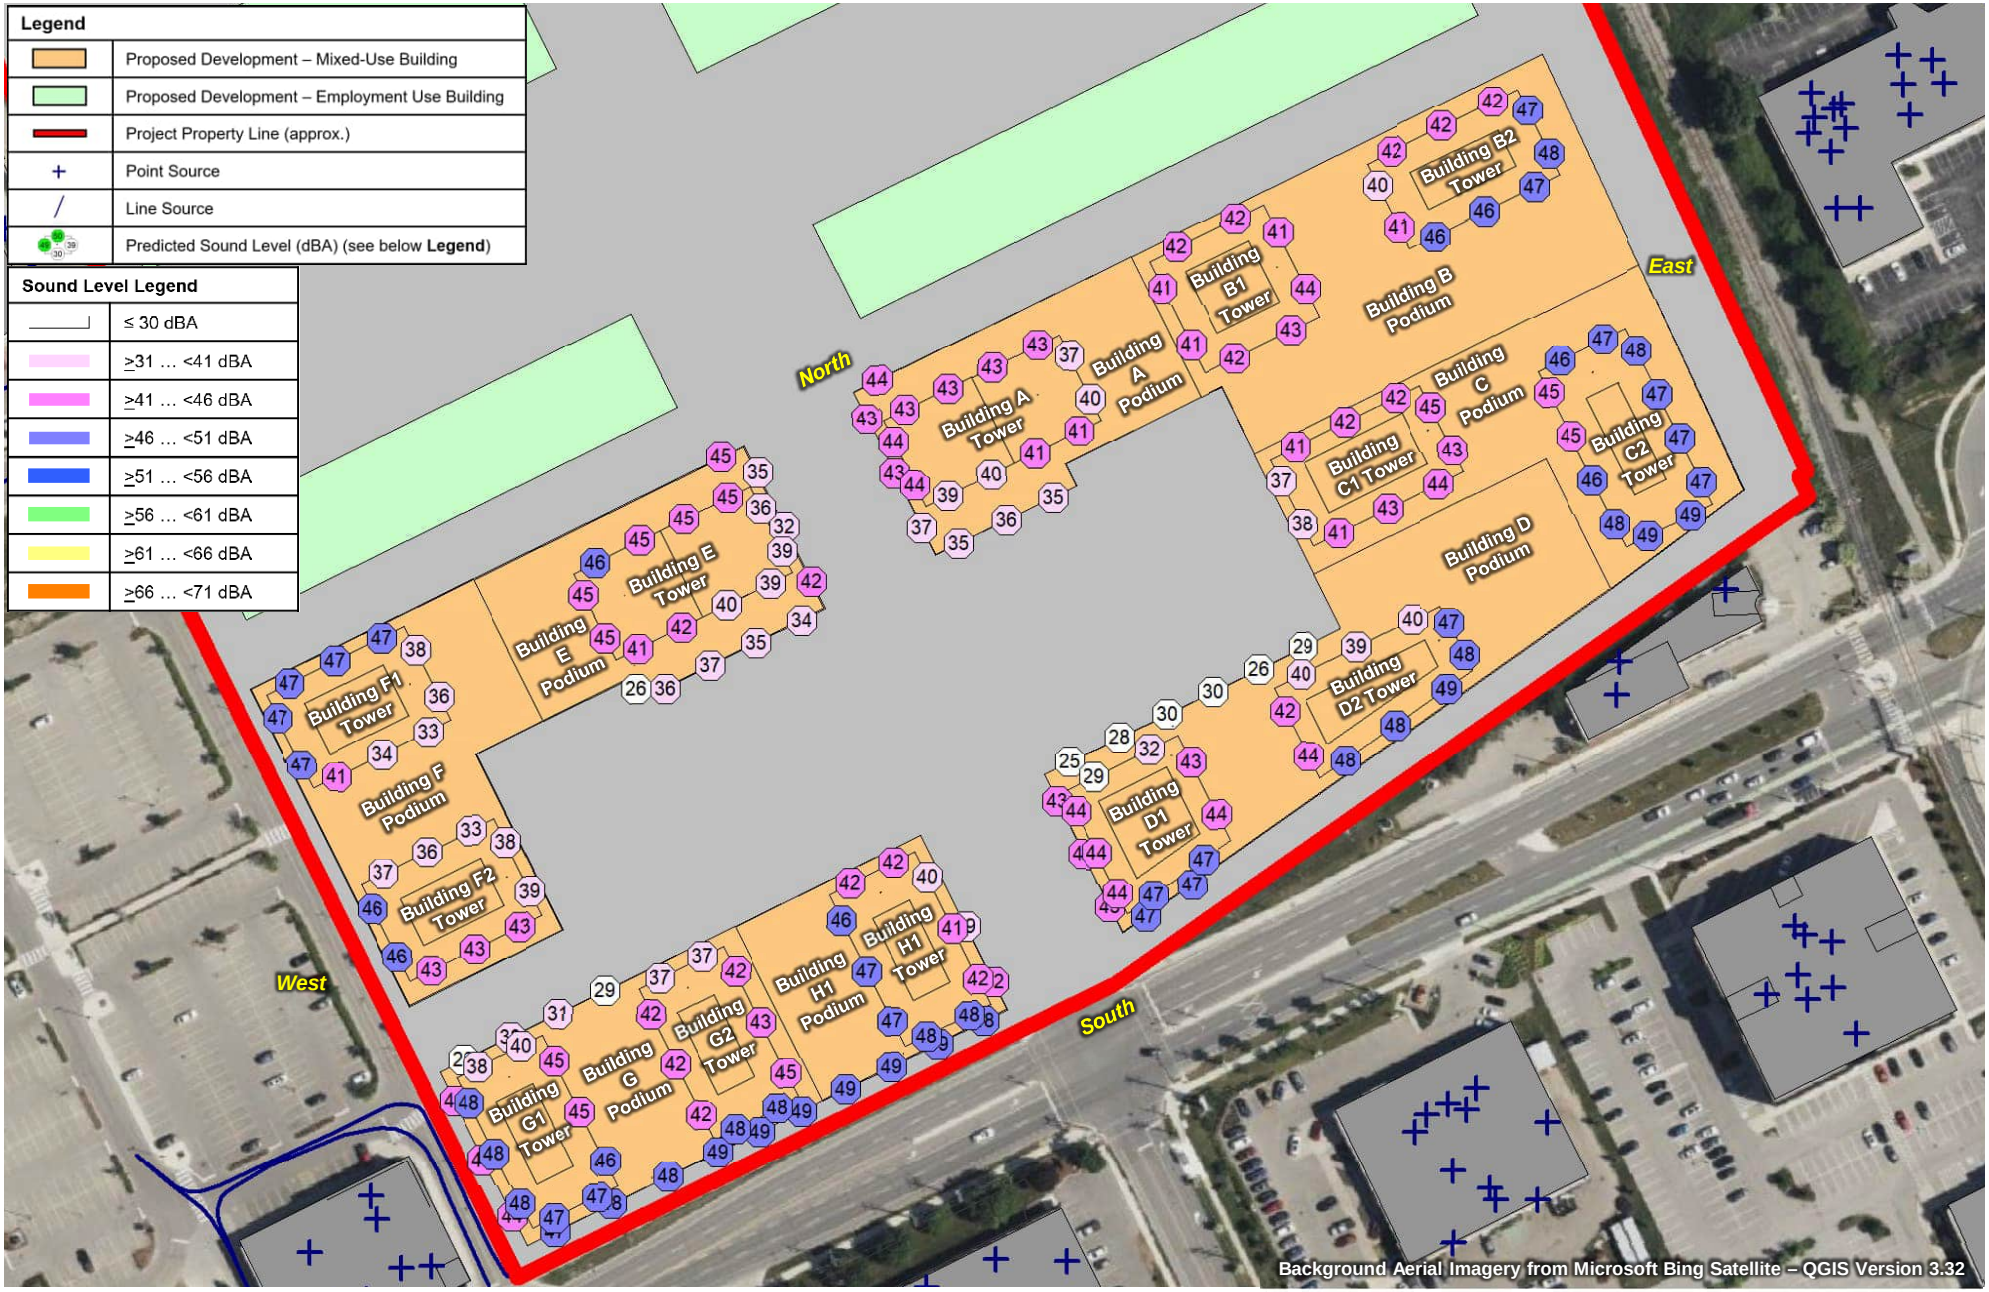


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **71**
PREDICTED FAÇADE SOUND LEVELS – STATIONARY SOURCES – ALL SOURCES – NIGHT-TIME		Project No. 241.030968.00001	

SLR

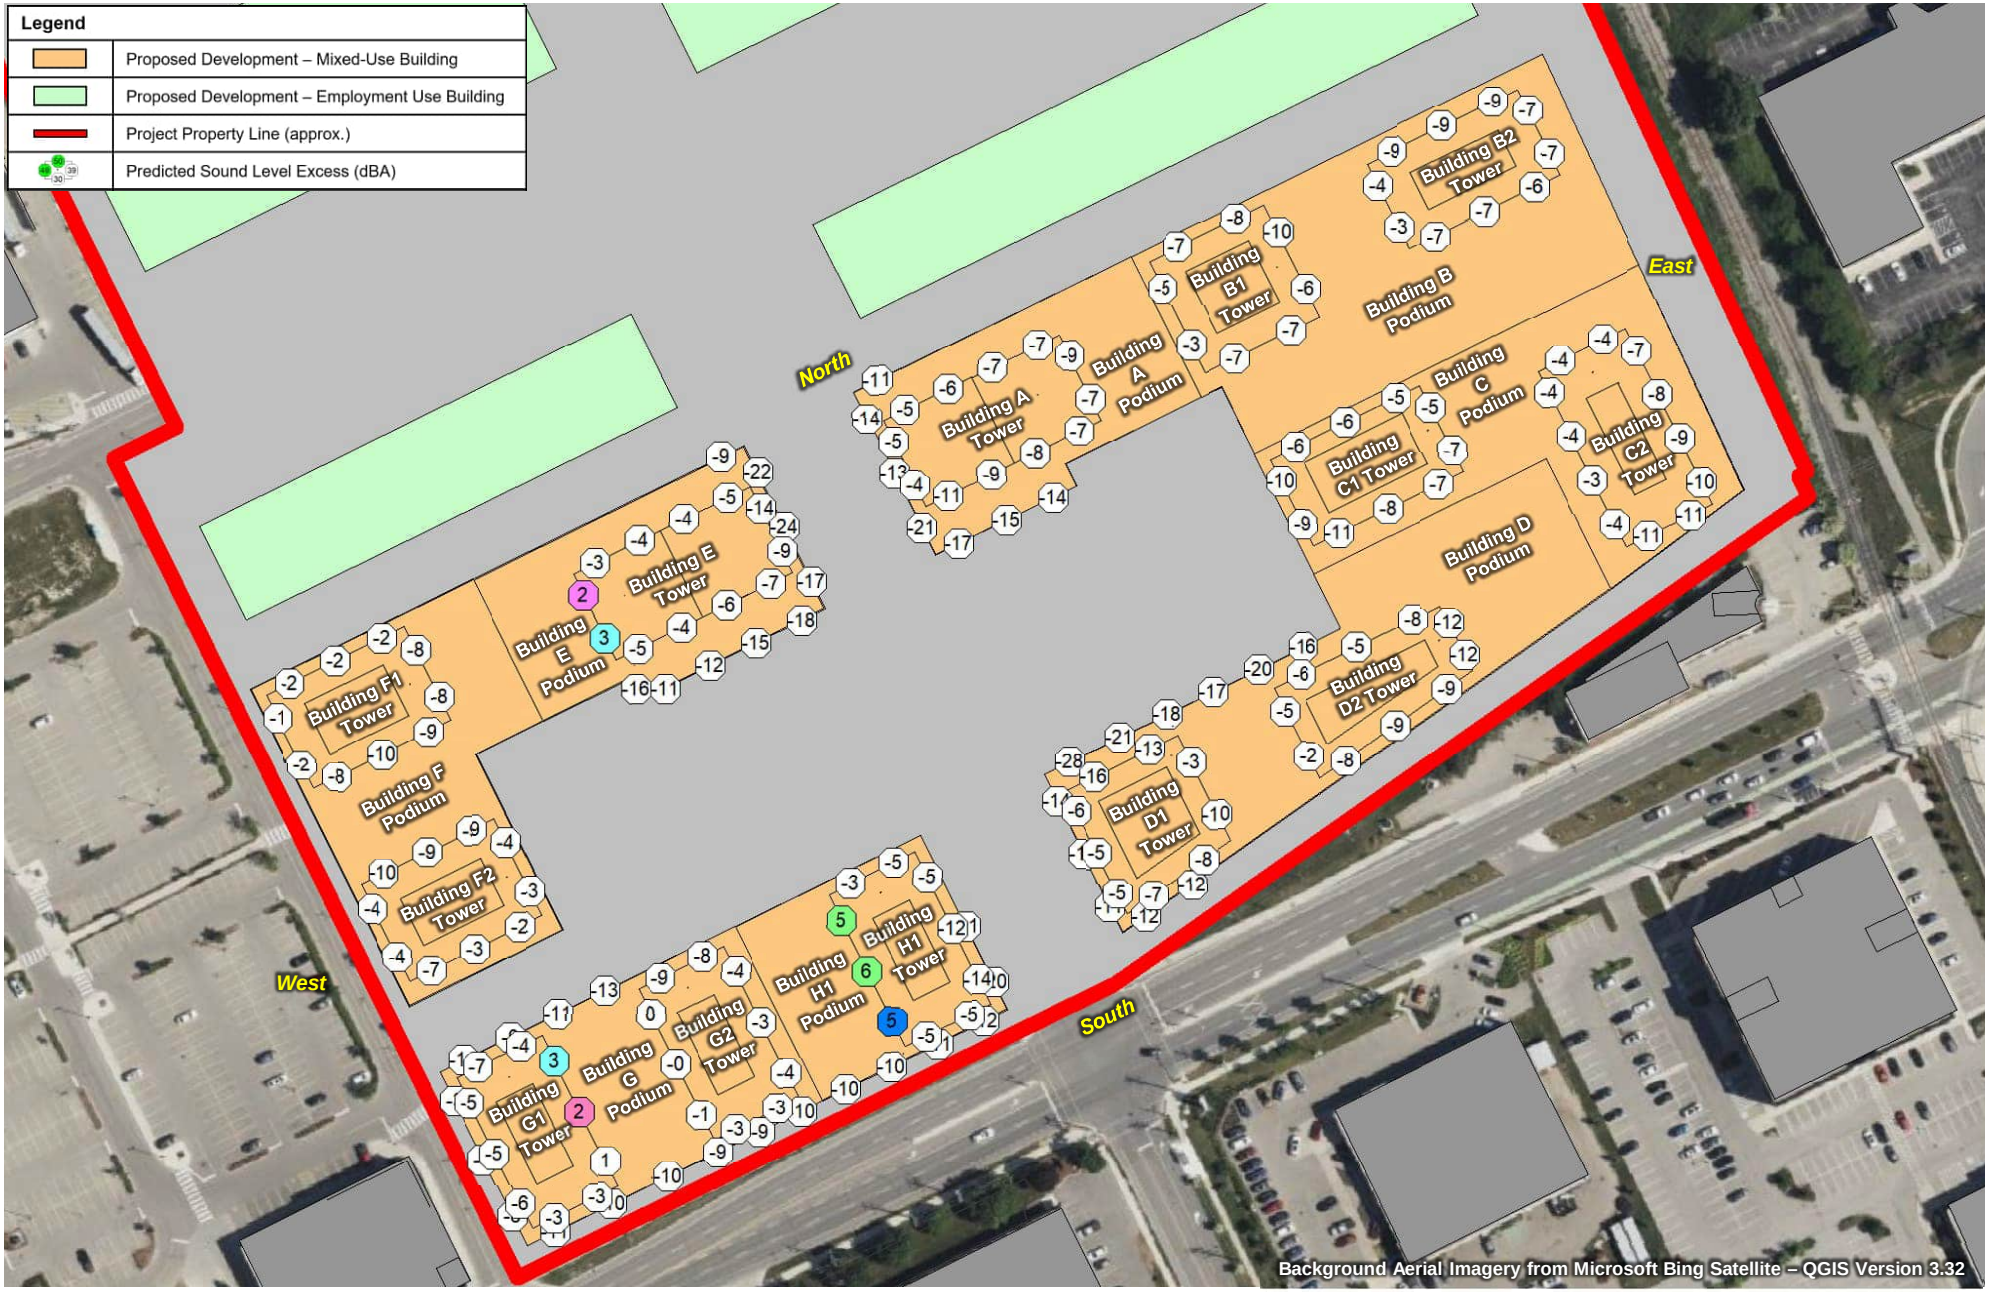


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **72**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – ALL SOURCES – DAYTIME		Project No. 241.030968.00001	

SLR

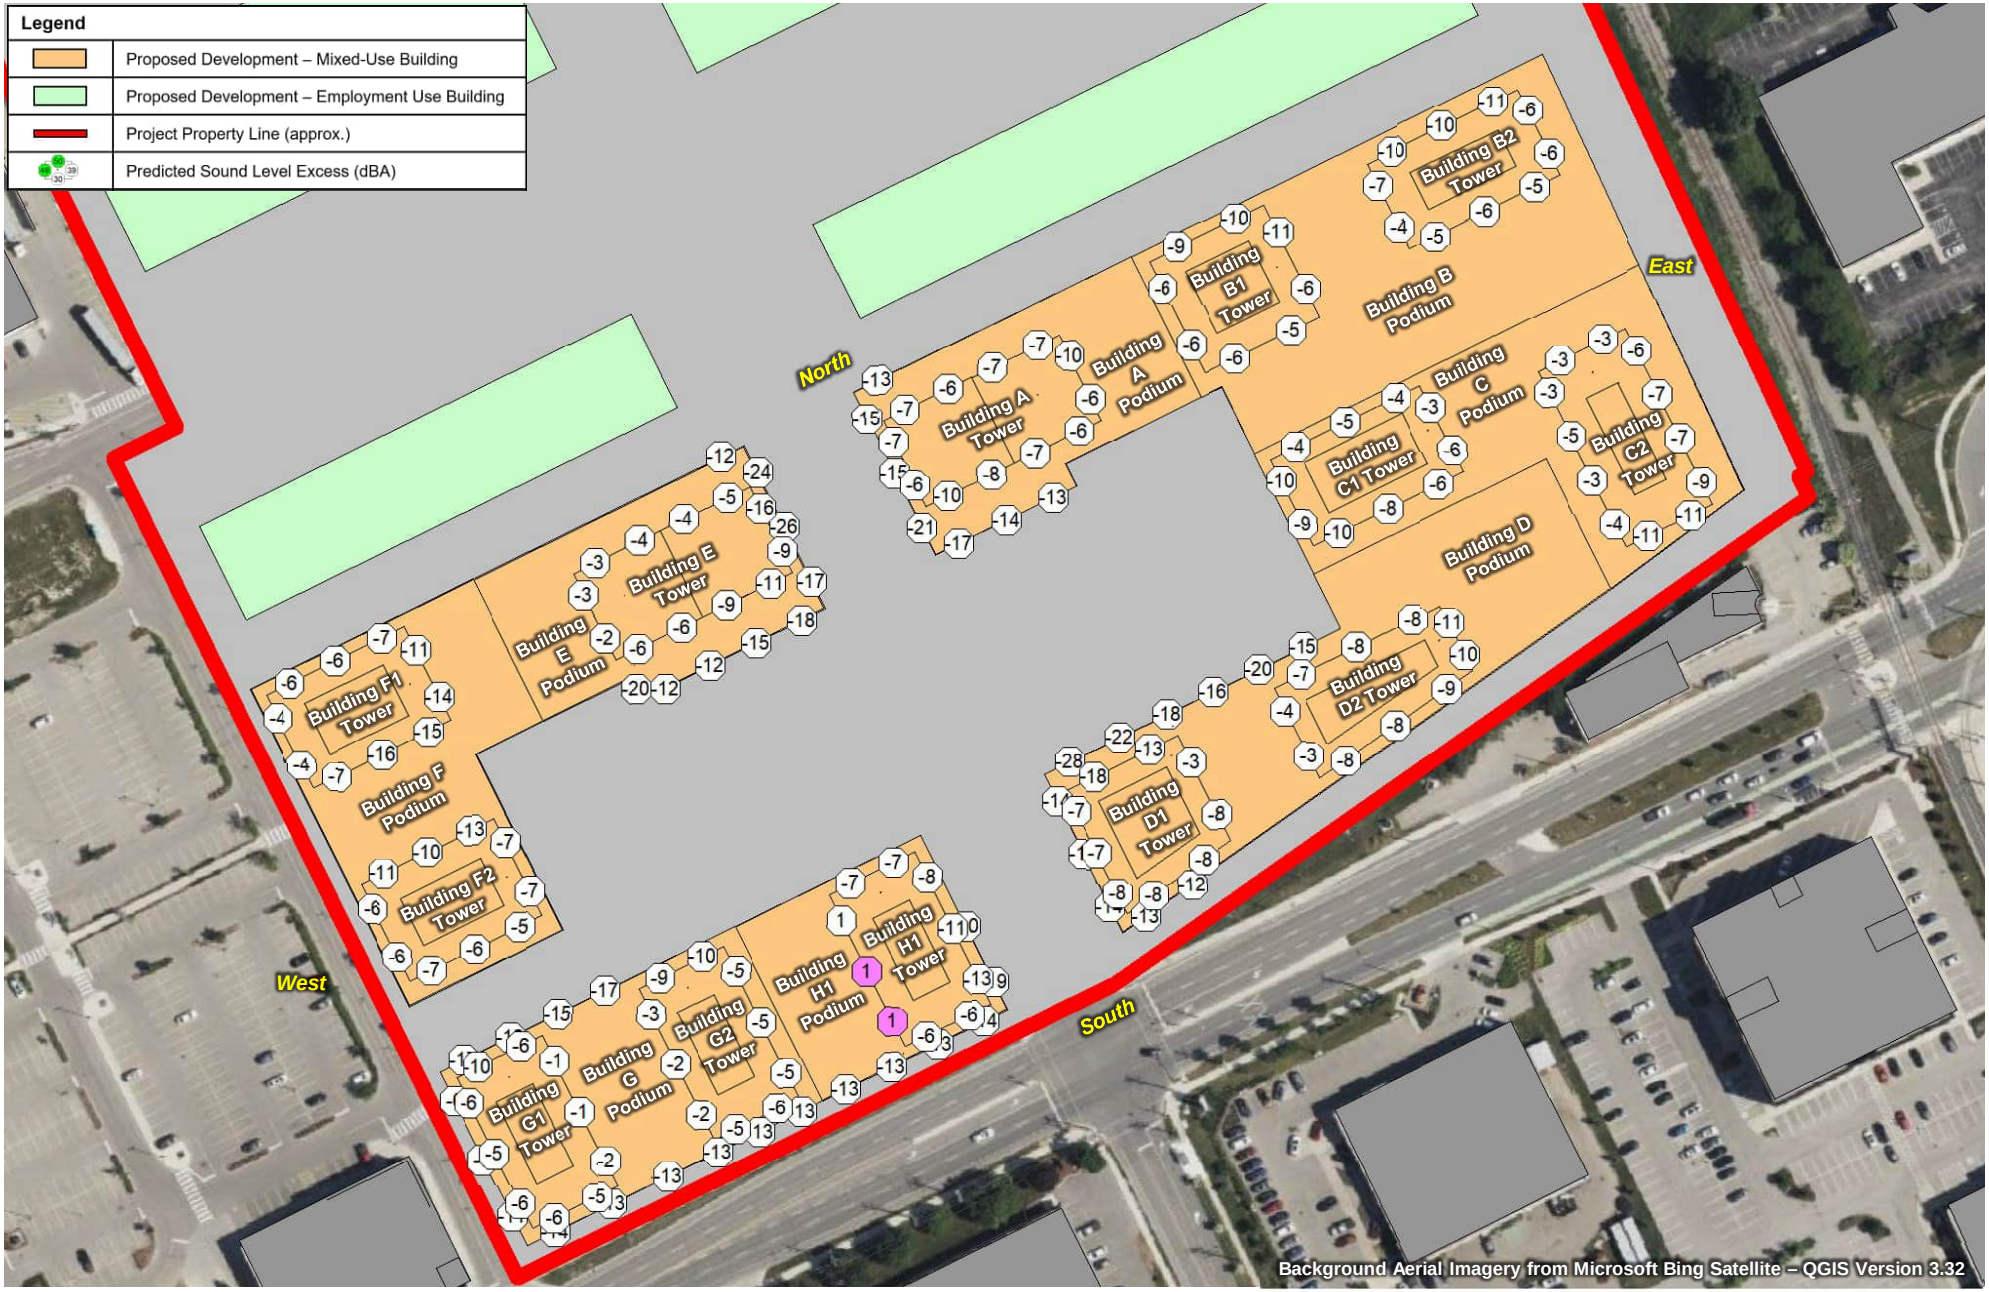


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **73**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – ALL SOURCES – EVENING		Project No. 241.030968.00001	

SLR

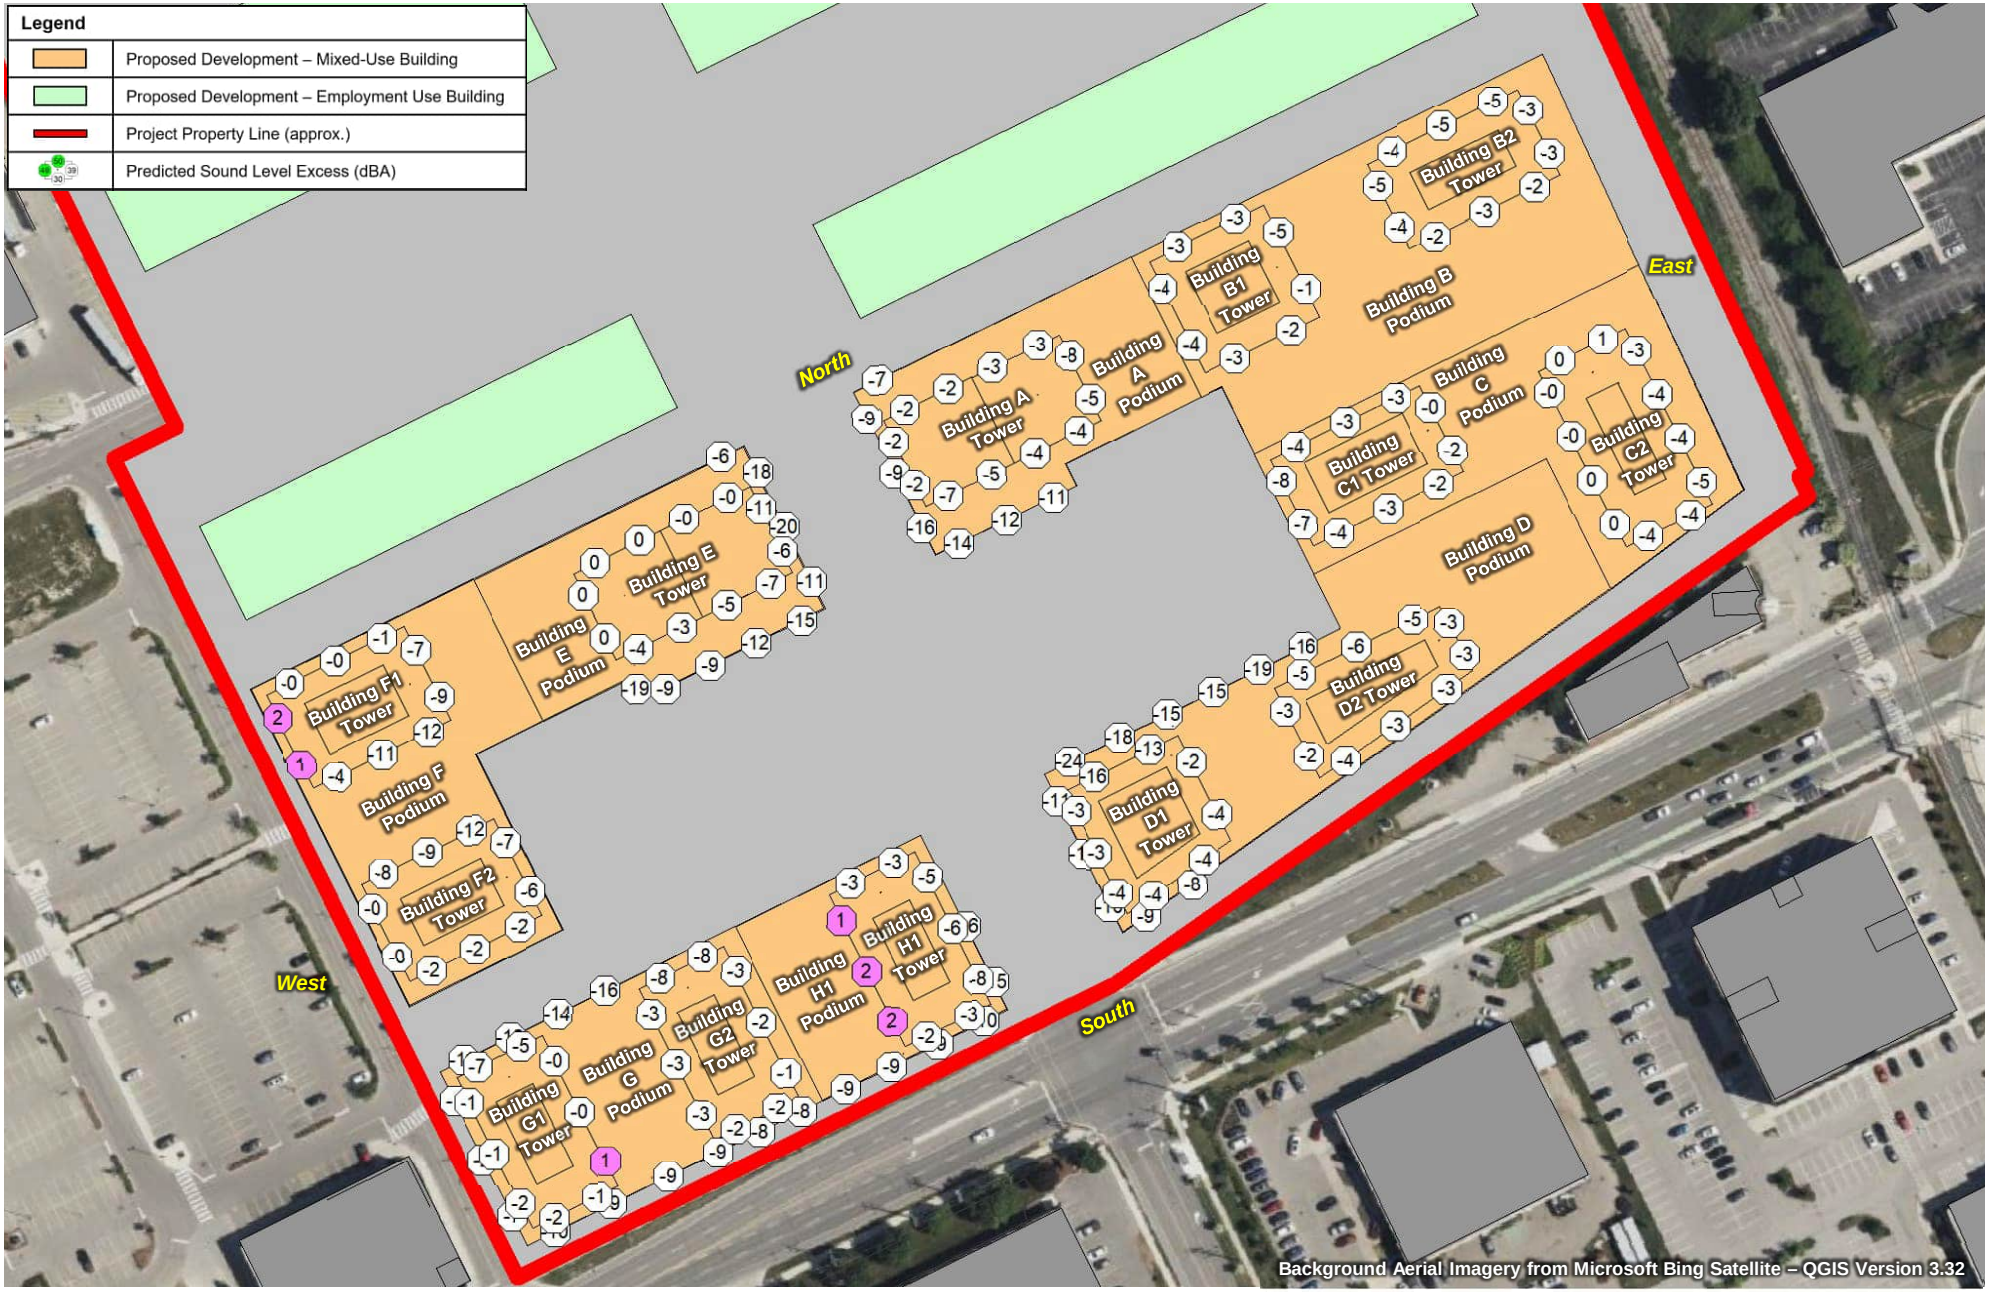


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **74**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – ALL SOURCES – NIGHT-TIME		Project No. 241.030968.00001	

SLR

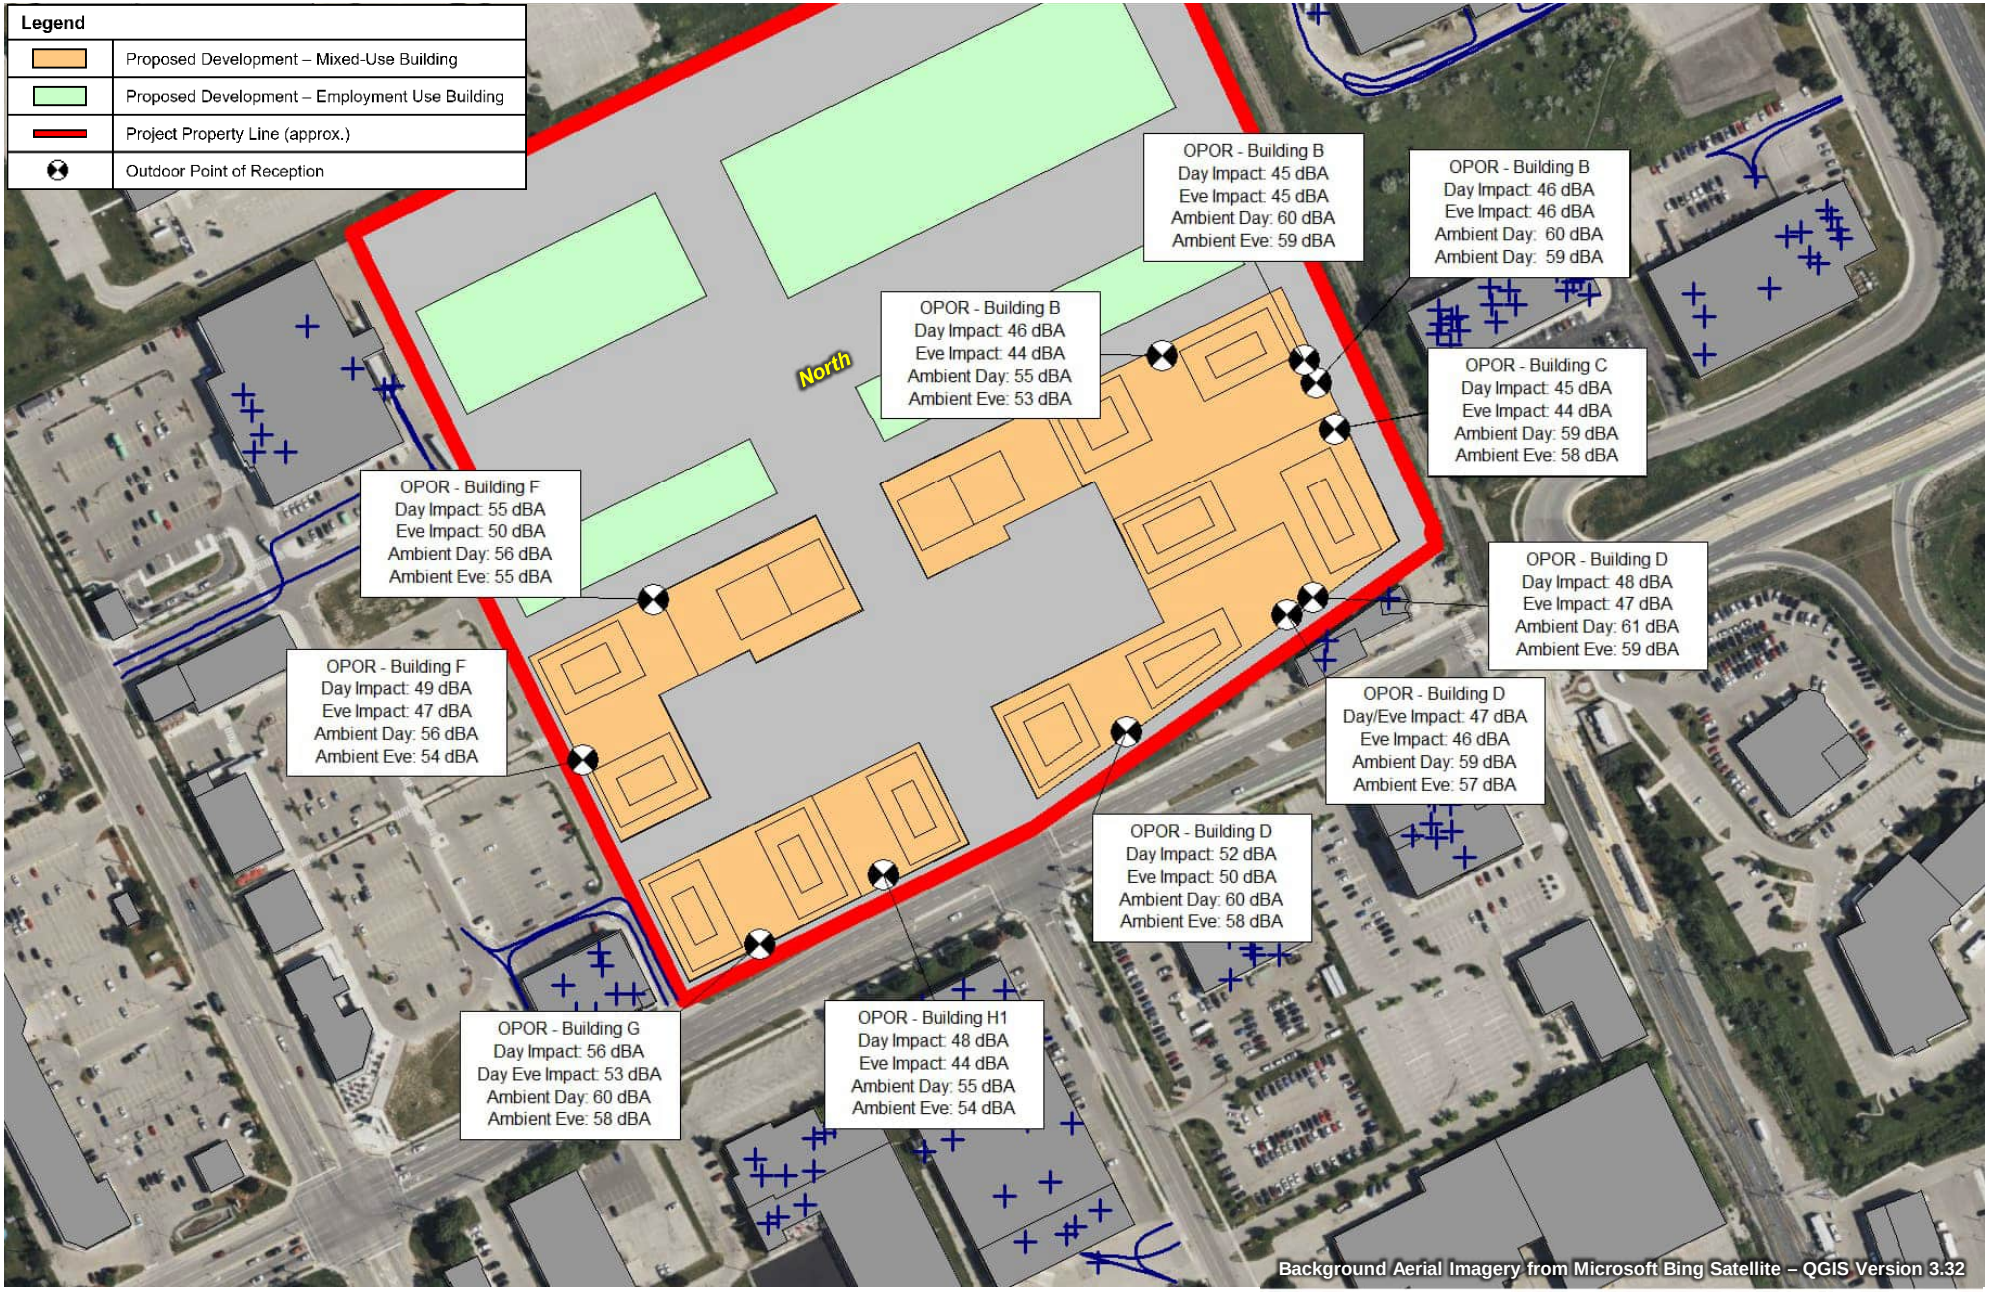

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:3,000	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **75**
PREDICTED OPOR SOUND LEVELS – STATIONARY SOURCES – ALL SOURCES – DAYTIME/EVENING		Project No. 241.030968.00001	SLR

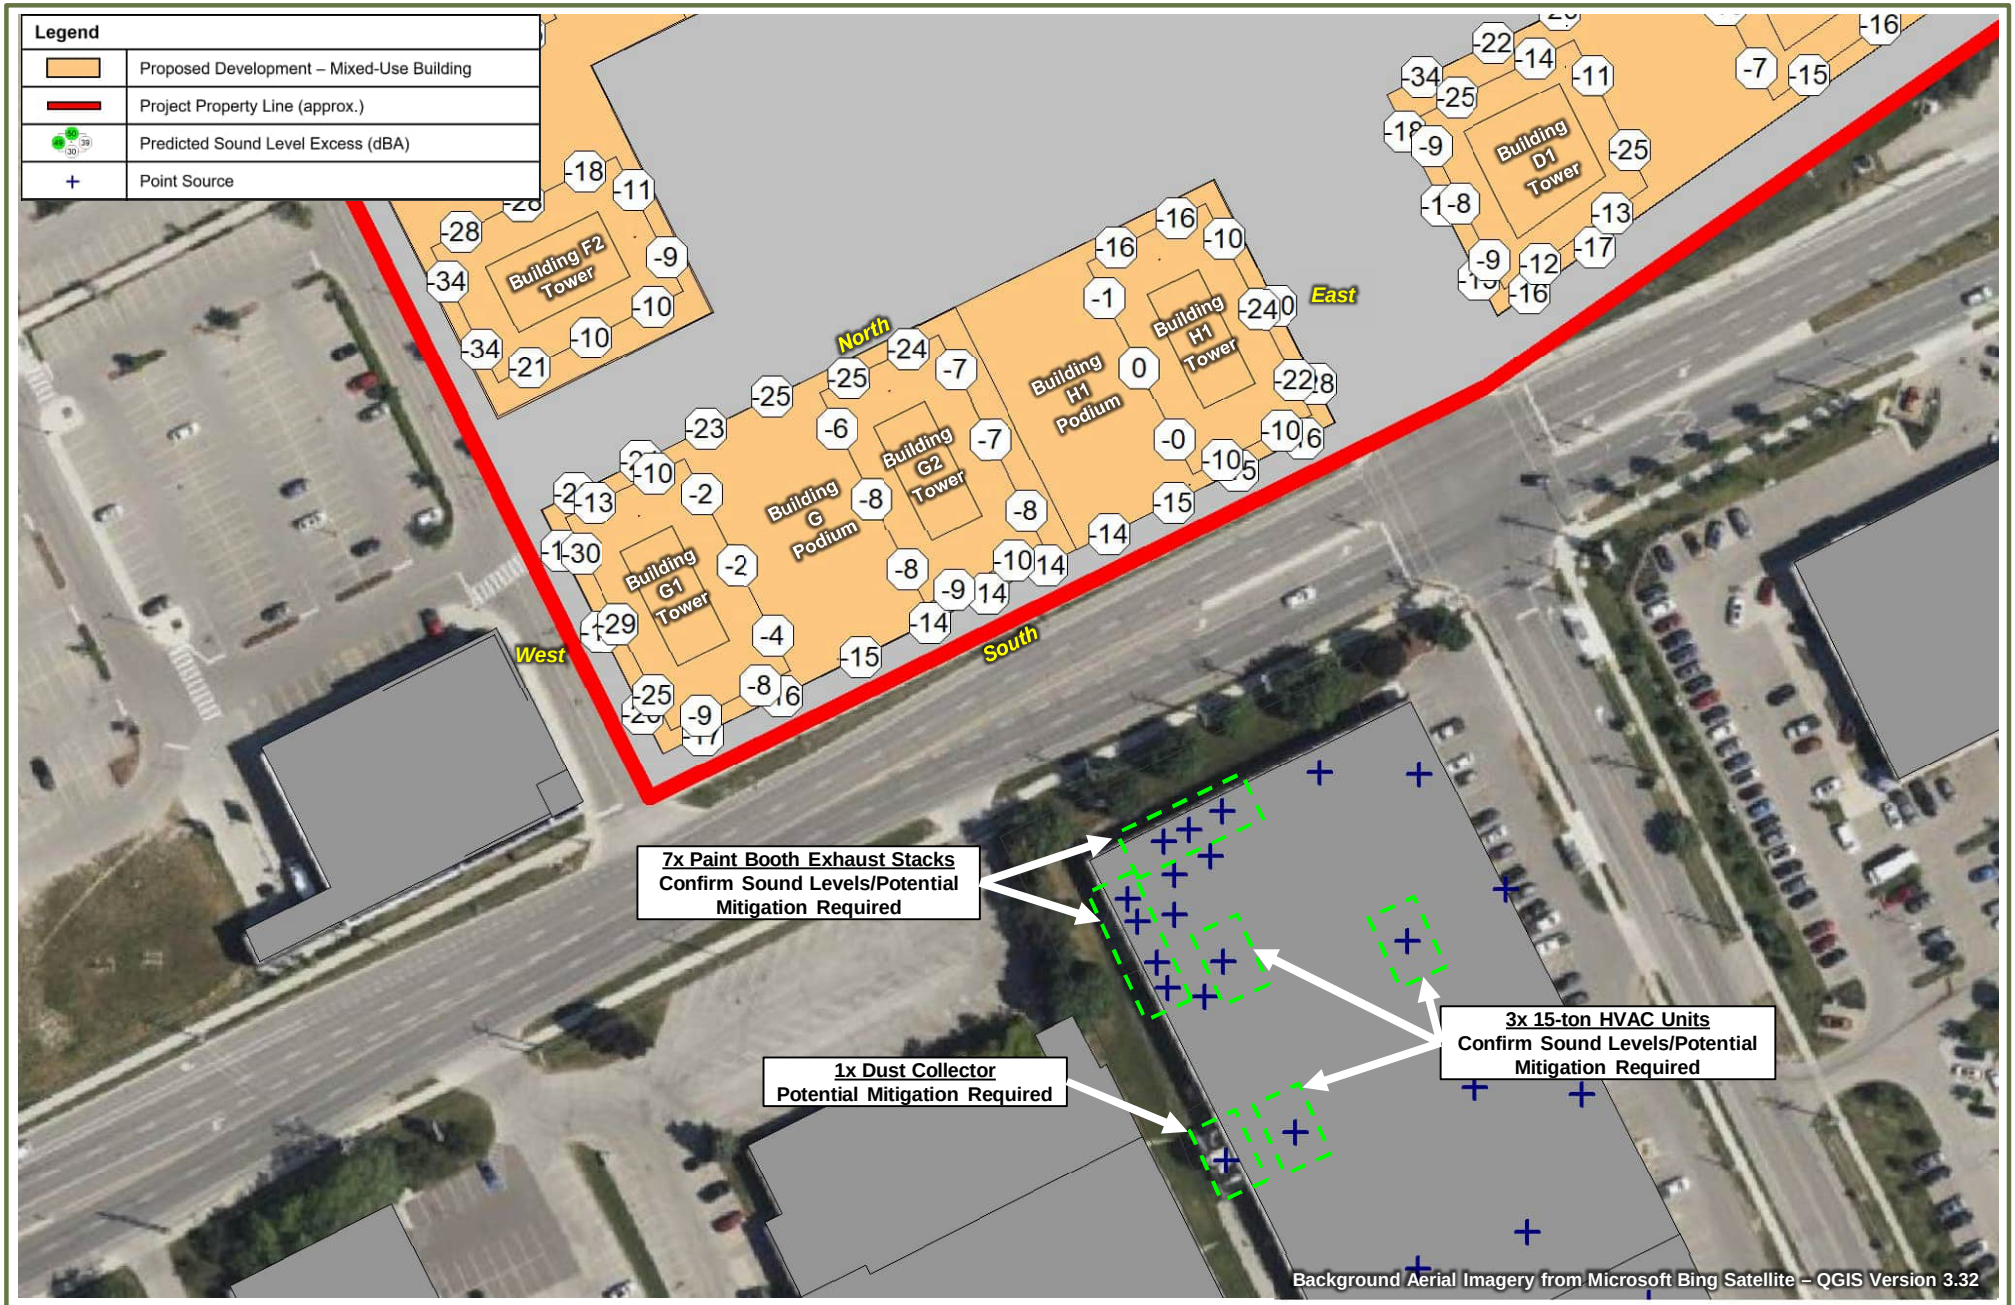

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev 1.0	Figure No. **76**
PREDICTED FAÇADE SOUND LEVEL EXCESSES – STATIONARY SOURCES – HEFFNER CABINETRY & WOODWORKING, 145 NORTHFIELD DRIVE WEST – DAYTIME – MITIGATION		Project No. 241.030968.00001	

Appendix A Declaration Statements

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

CANADA	)	In the Matter of the
	)	Environmental Protection
PROVINCE OF ONTARIO	)	Act and the Planning Act
	)	
	)	And in the Matter of 170 Northfield
	)	Drive West in the City of Waterloo
	)	in the Regional Municipality
	)	of Waterloo

I, R. L. Scott Penton, P.Eng., of the City of St. John's, in the Region of Avalon, in the Province of Newfoundland and Labrador, SOLEMNLY DECLARE THAT:

1. I am a Professional Engineer employed by SLR Consulting (Canada) Ltd., which holds a Certificate of Authorization from the Association of Professional Engineers of Ontario and have personal knowledge of the matters set out below.
2. I was retained or employed as the principal consultant to undertake the assessment of noise impacts and recommendation of noise mitigation measures for the property described as 170 Northfield Drive West in Waterloo, Ontario.
3. I have the expertise required to perform these services. Any assessment activities or recommendations requiring the application of engineering principles have been undertaken or supervised by an engineer qualified to perform such services.
4. The information used in the study entitled:

   "Environmental Noise & Vibration Assessment, 170 Northfield Drive West, Waterloo", SLR Project No: 241.030968.00001"

   and dated March 14, 2024 is based on the best information available as of the date of the study.
5. The noise level calculations, the interpretation of noise attenuation requirements, and the recommended measures are in accordance with Ministry of Environment guidelines, Regional Municipality of Waterloo policies, and any applicable policy or guidelines of the Area Municipality, and any other applicable policy or guideline.
6. The physical noise attenuation measures proposed in this study are feasible to implement and will provide the level of attenuation indicated in the study.
7. I acknowledge that this study may be subject to a peer review conducted at my cost.
8. I acknowledge that public authorities and future owners, occupants and others may rely on this statement.

AND I make this solemn Declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

DECLARED before me at the City	)	
of Guelph, in the County of	)	
Wellington,	)	_____
this 12 day of March, 2024.	)	

WANDA-LEE HARRIS NOTARY PUBLIC ONTARIO

Wanda-Lee Harris, Notary Public,
County of Wellington, limited to the attestation of instruments and the taking of affidavits, for SLR Consulting (Canada) Ltd. and Novus Environmental.
Expires January 14, 2026

March 12/24

CANADA	)	In the Matter of the
	)	Environmental Protection
PROVINCE OF ONTARIO	)	Act and the Planning Act
	)	
	)	And in the Matter of 170 Northfield
	)	Drive West in the City of Waterloo
	)	in the Regional Municipality
	)	of Waterloo

I, _____Sheldon Dobsi_____, of the City of Toronto_____, in the

County of ____Ontario_____, SOLEMNLY DECLARE THAT:

1. I am the owner of the property, or the owner's agent, and that I understand and agree with the noise attenuation measures proposed in the study:

   "Environmental Noise & Vibration Assessment, 170 Northfield Drive West, Waterloo", SLR Project No: 241.030968.00001"

   and dated March 14, 2024

2. The application has been designed to avoid the use of berms or walls as noise attenuation features where feasible. Where berms or walls are recommended, the Noise Study provides economic, planning and engineering justification.

3. If the application is changed in a way that may affect the noise level calculations, I will have a revised noise study submitted to the Region.

AND I make this solemn Declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

DECLARED before me at the City	)	
	)	
of __Toronto_____, in the	)	
	)	
County of __Ontario_____,		
	)	
this _19th_____ day of __March_____, 2024__.	)	Sheldon Dobsi

Appendix B Development Drawings


Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

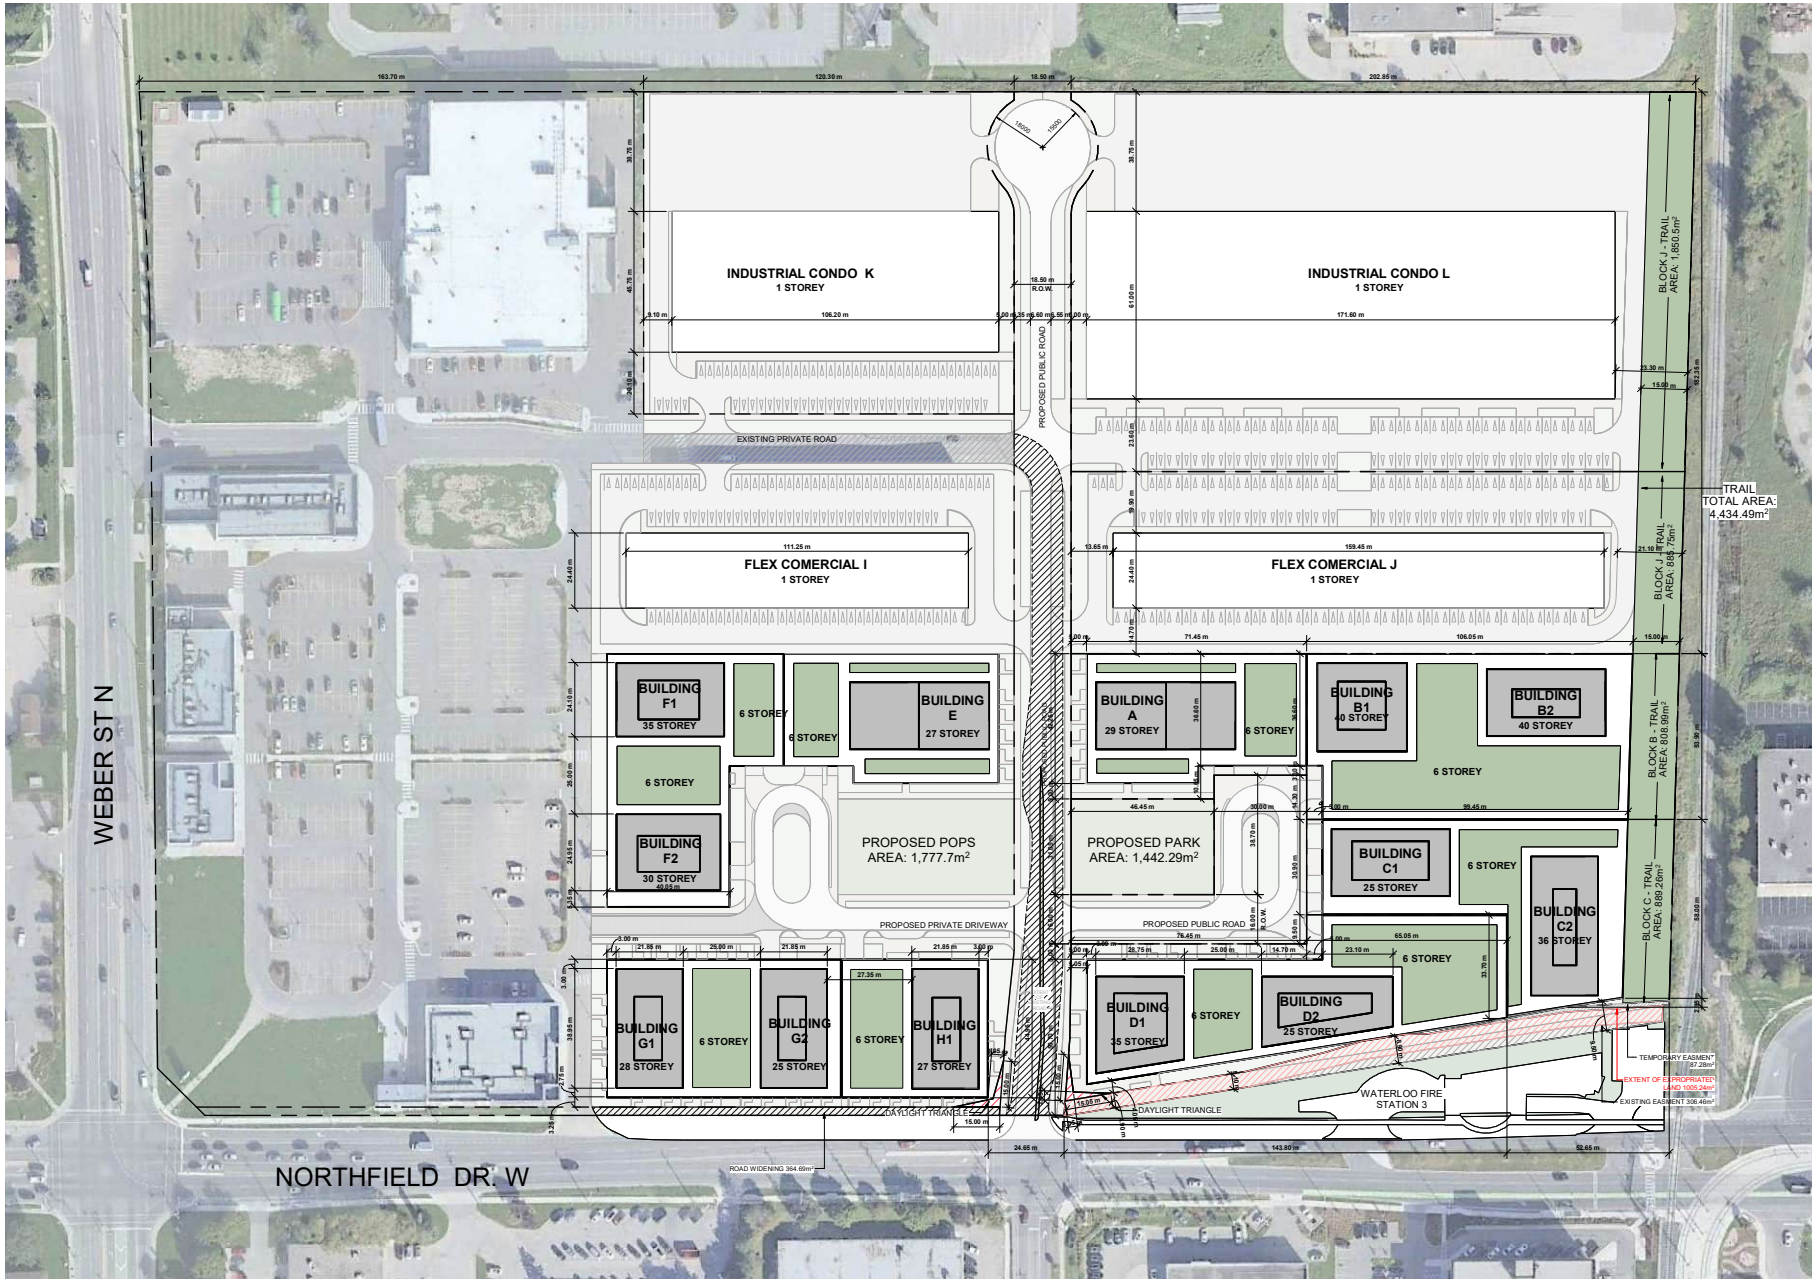

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify all conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Contractor must confirm/verify all dimensions on site before commencing with any shop drawings or fabrication. Any work proceeding from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo


170 Northfield Drive West, Waterloo, Ontario

DRAWING
OVERALL SITE PLAN

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1:750

DRAWING NO. RZ005 REV.

2024-01-30 4:31:09 PM

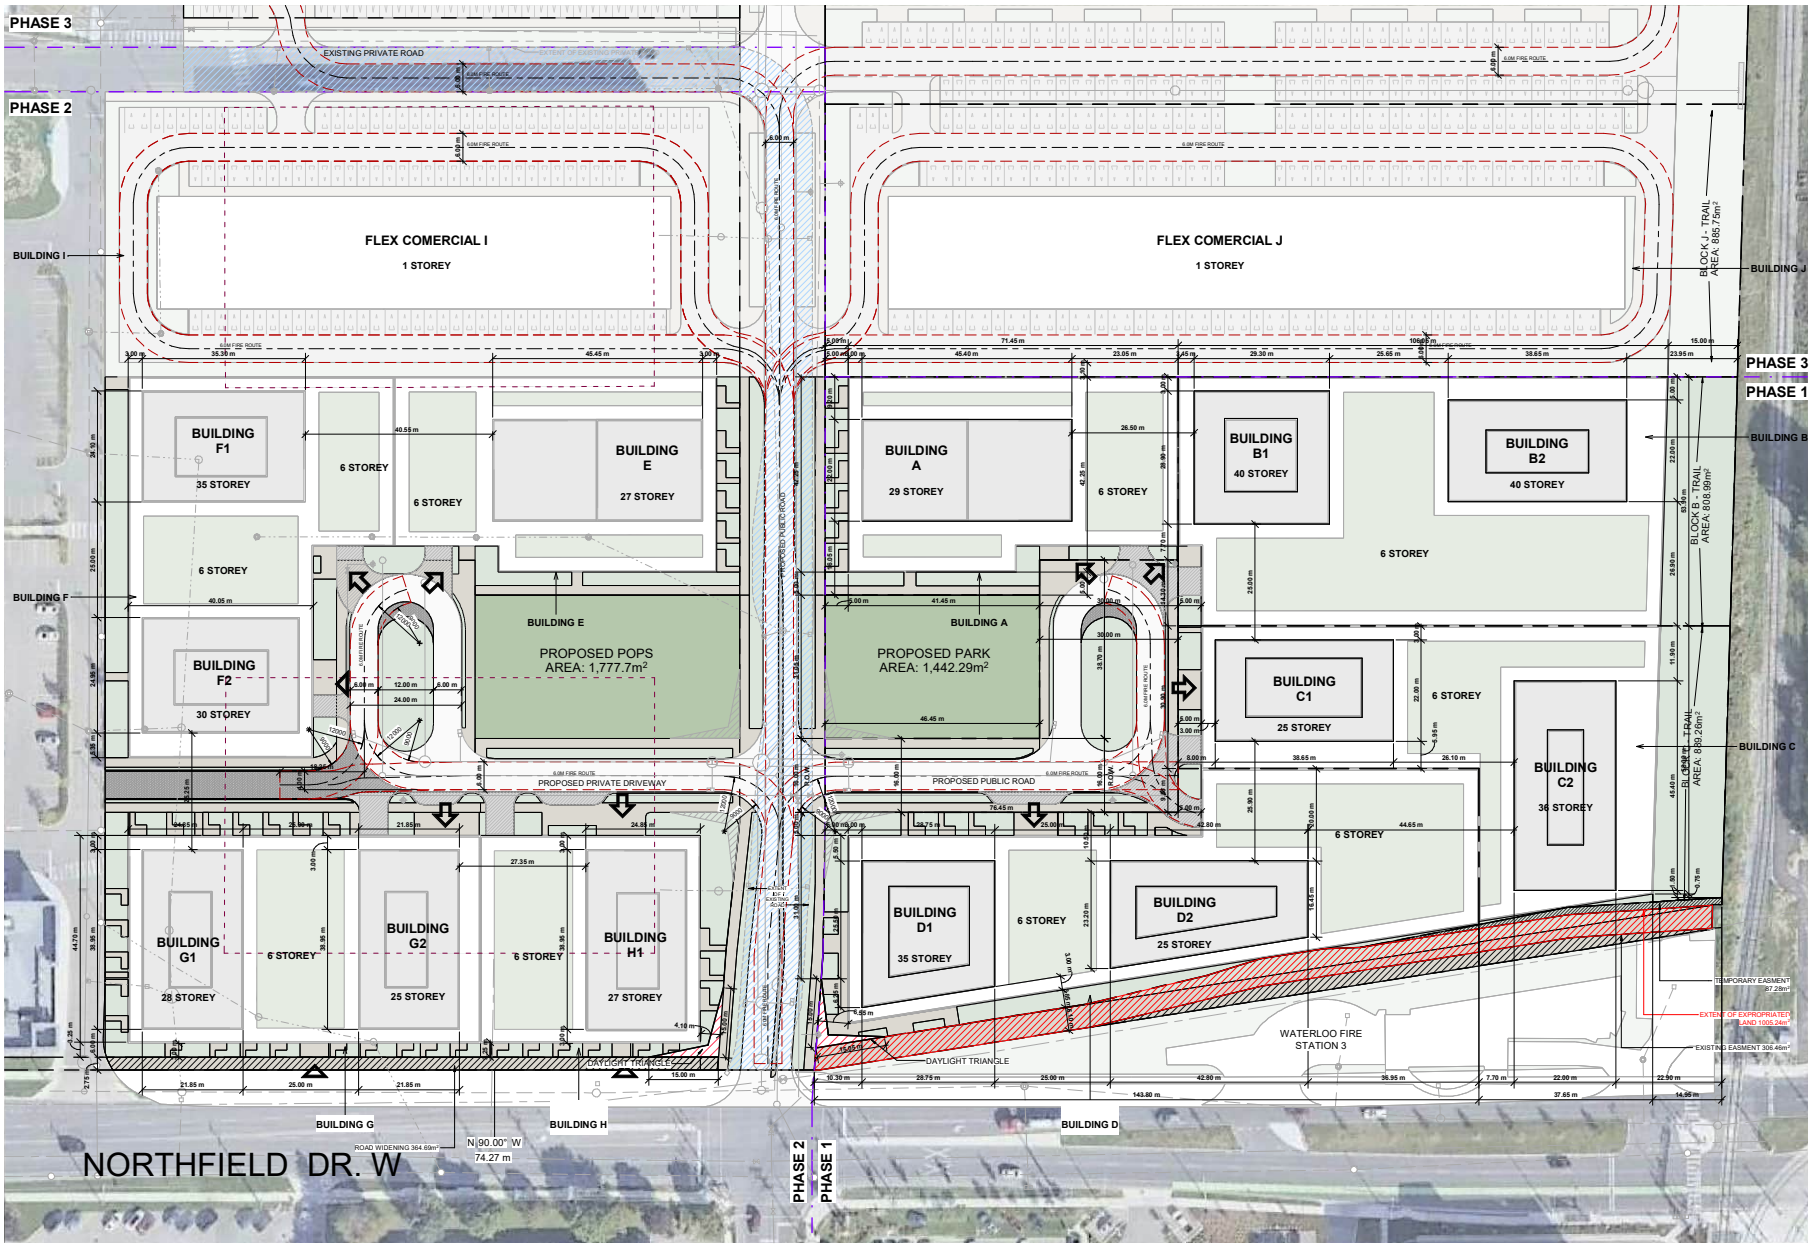

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All contractors shall verify all conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must coordinate all work between trades and shall review and approve shop drawings prior to submission. Any shop drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- CONVEX MIRROR
- TRANSFORMER WITH CLEARANCES
- FIRE ROUTE SIGN
- 000.00 SPOT ELEVATION
- GAS/HYDRO METER


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	Date 2	ISSUED FOR REZONING	
1	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo
170 Northfield Drive West, Waterloo, Ontario

DRAWING
SITE PLAN / ROOF PLAN - RESIDENTIAL

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ006 REV. 2

2024-01-30 4:31:14 PM

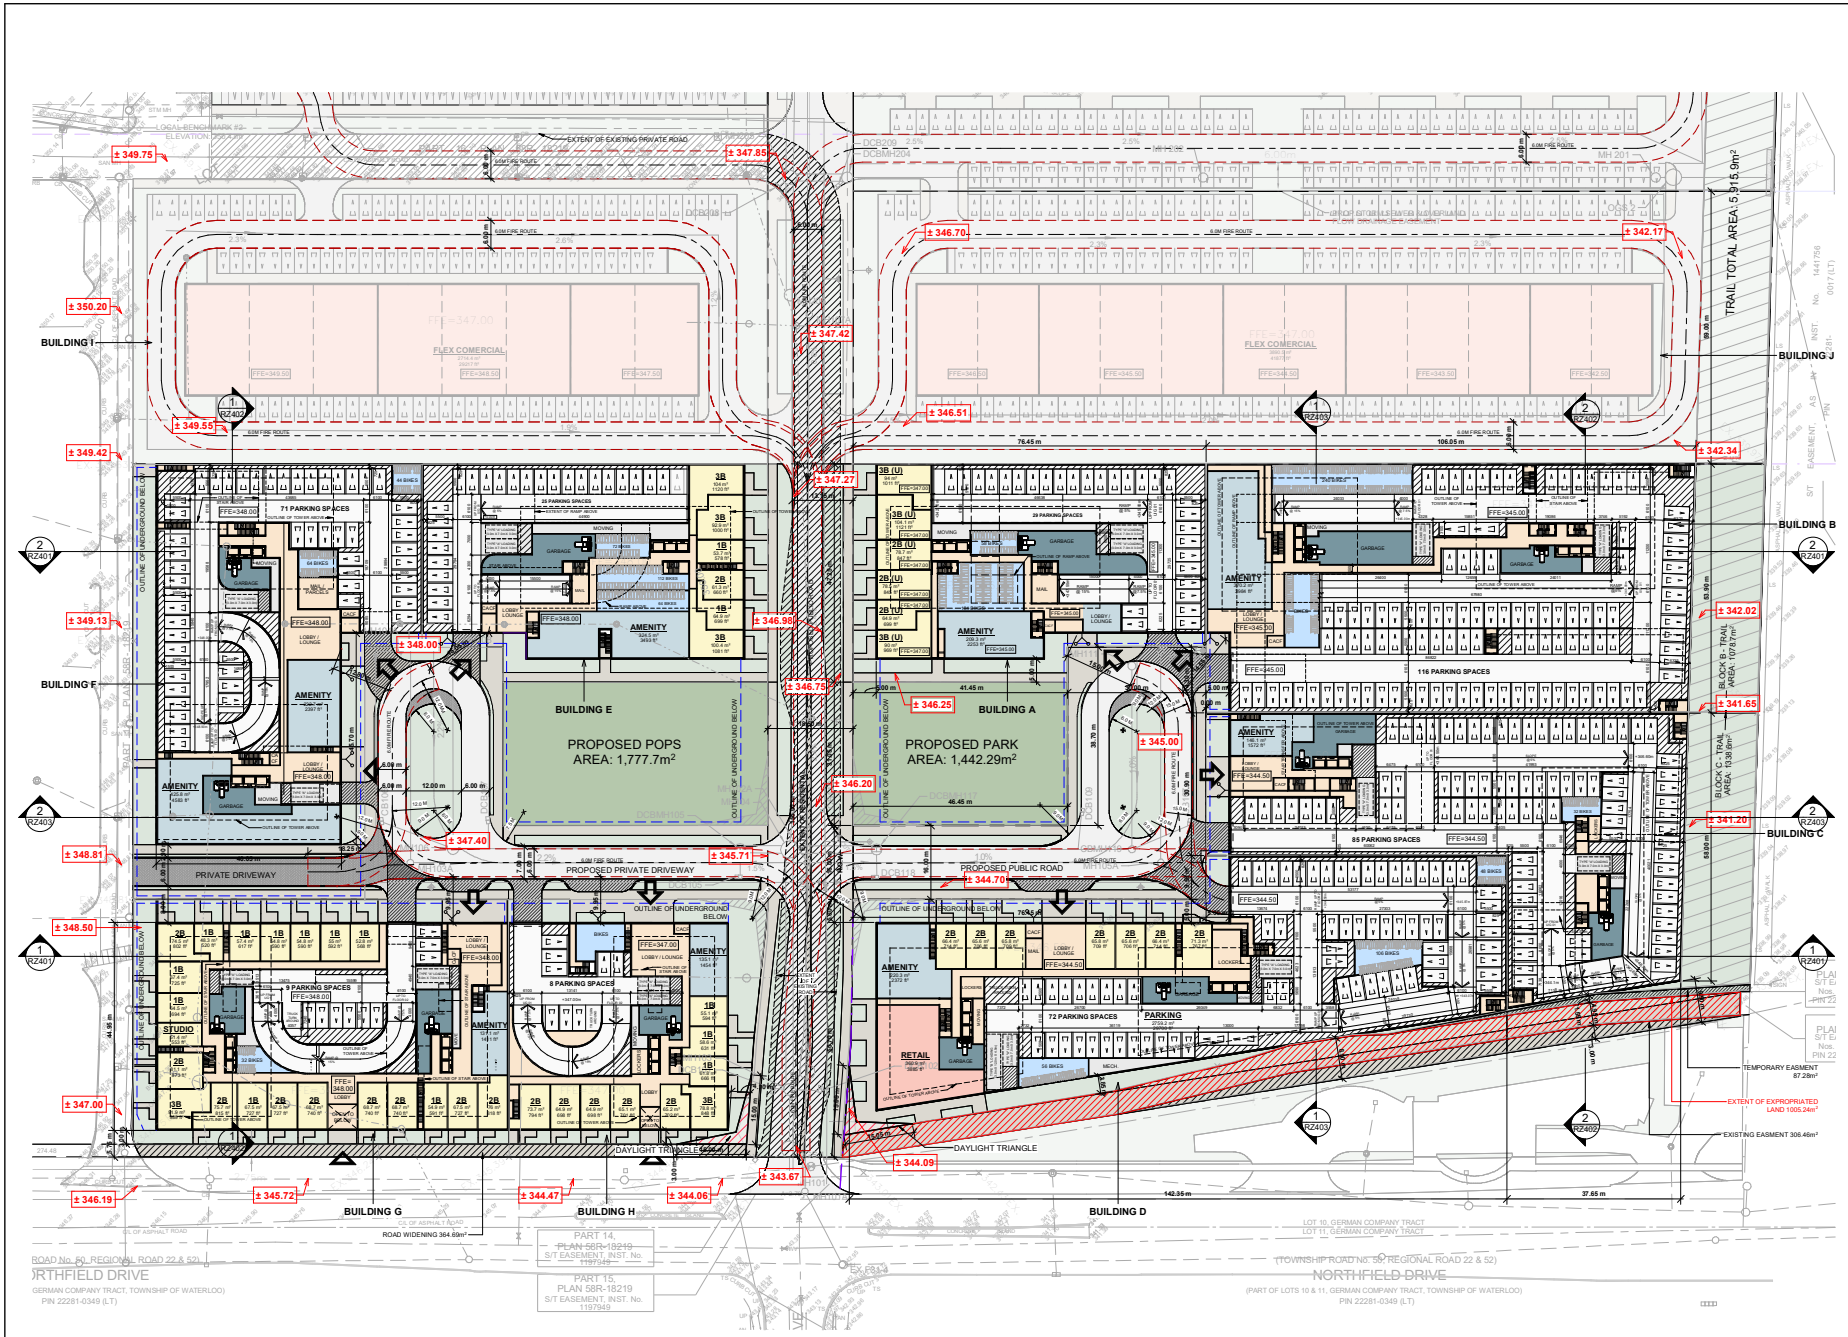

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructed materials/forms are to be verified by the appropriate consultant. Shop drawings, and any other drawings not specifically drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- CONVEX MIRROR
- TRANSFORMER WITH CLEARANCES
- FIRE ROUTE SIGN
- 000.00 SPOT ELEVATION
- GAS/HYDRO METER

PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE: MIN 2.8 x 5.5 x 2.0m HIGH

TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH

#	DATE	DESCRIPTION	BY

PROJECT

170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario


DRAWING

FLOOR 01

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ151 REV.

2024-01-30 4:31:23 PM

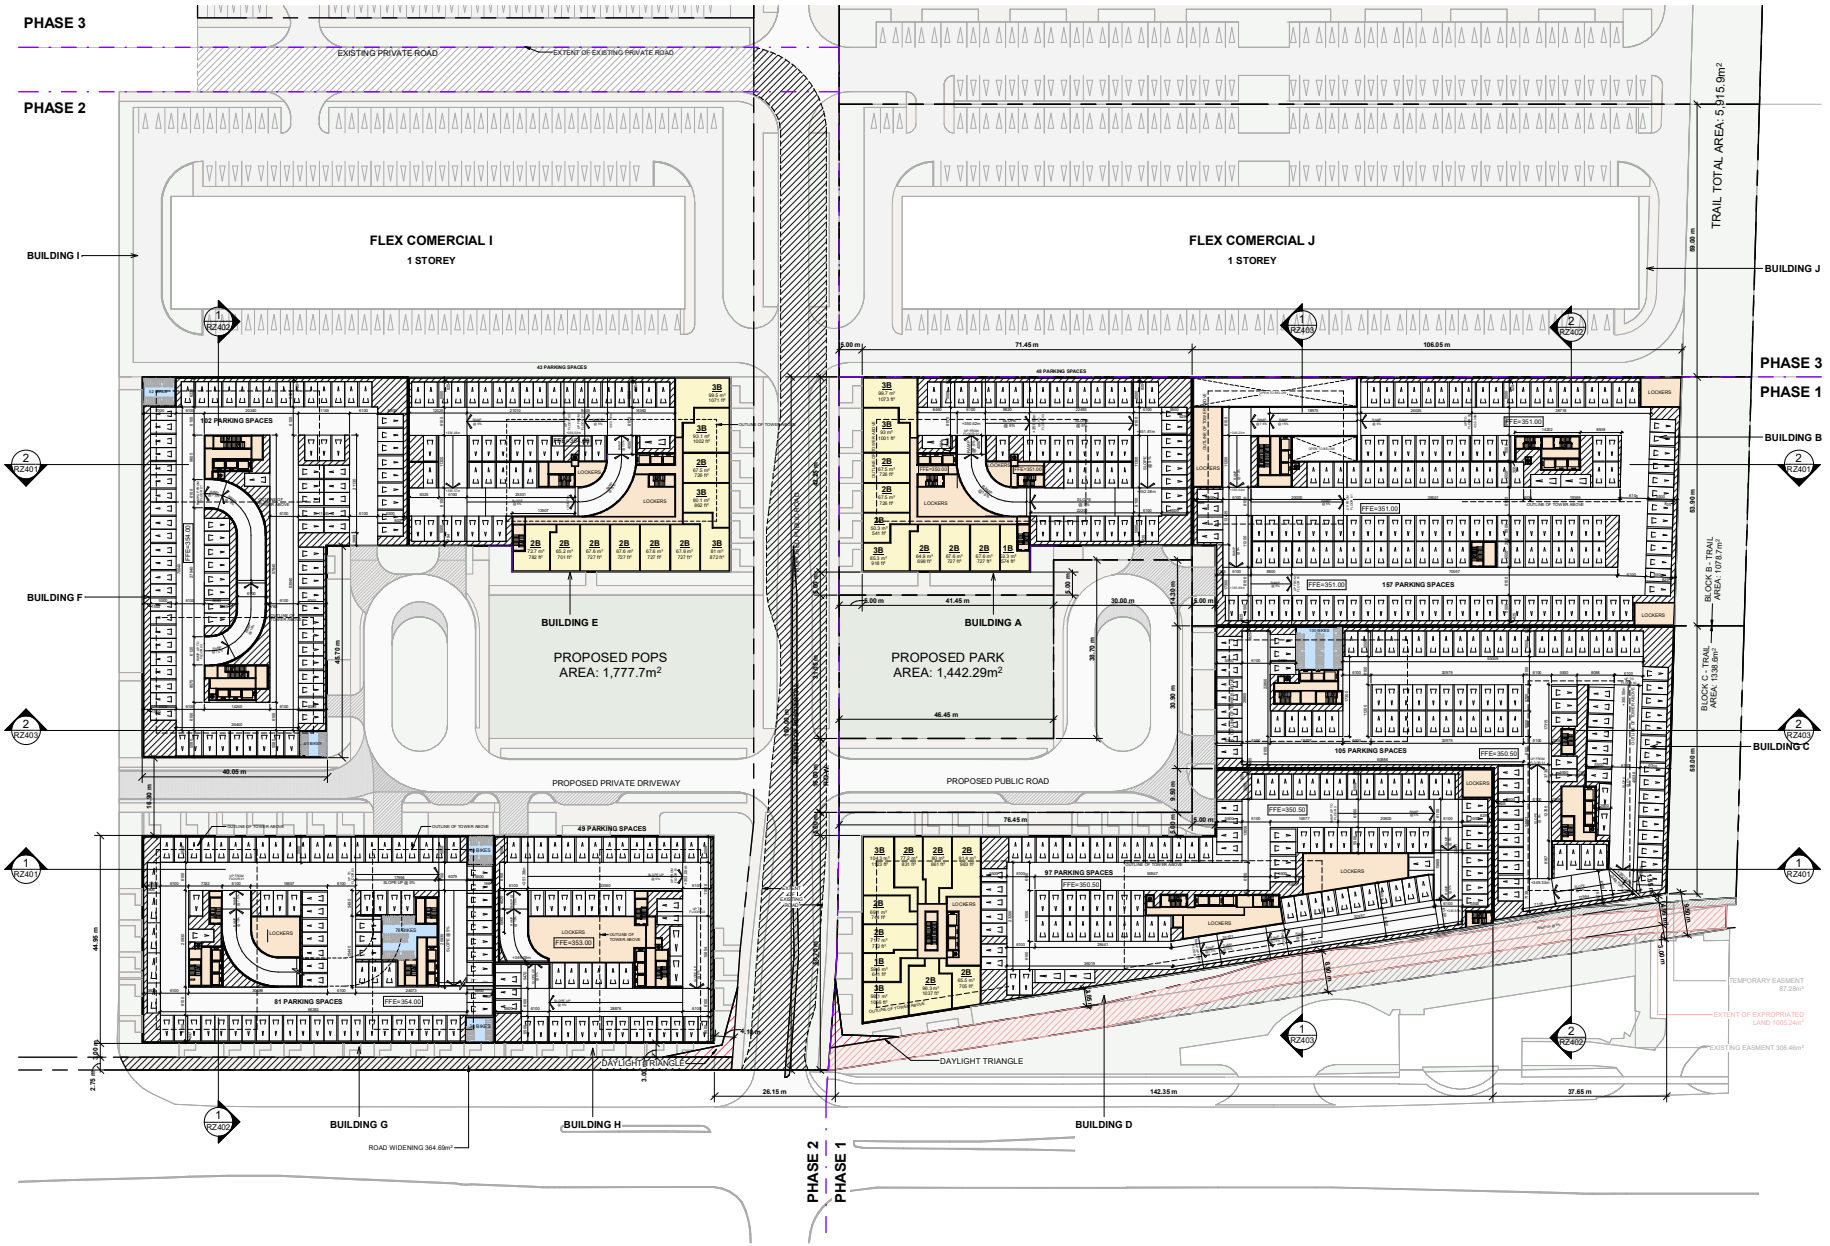

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor/ contractor/firm/s are responsible for all dimensions and conditions on the job and this office must be informed of any variations. Only drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo
170 Northfield Drive West, Waterloo, Ontario

DRAWING
FLOOR 02

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ152
REV.

2024-01-30 4:31:28 PM

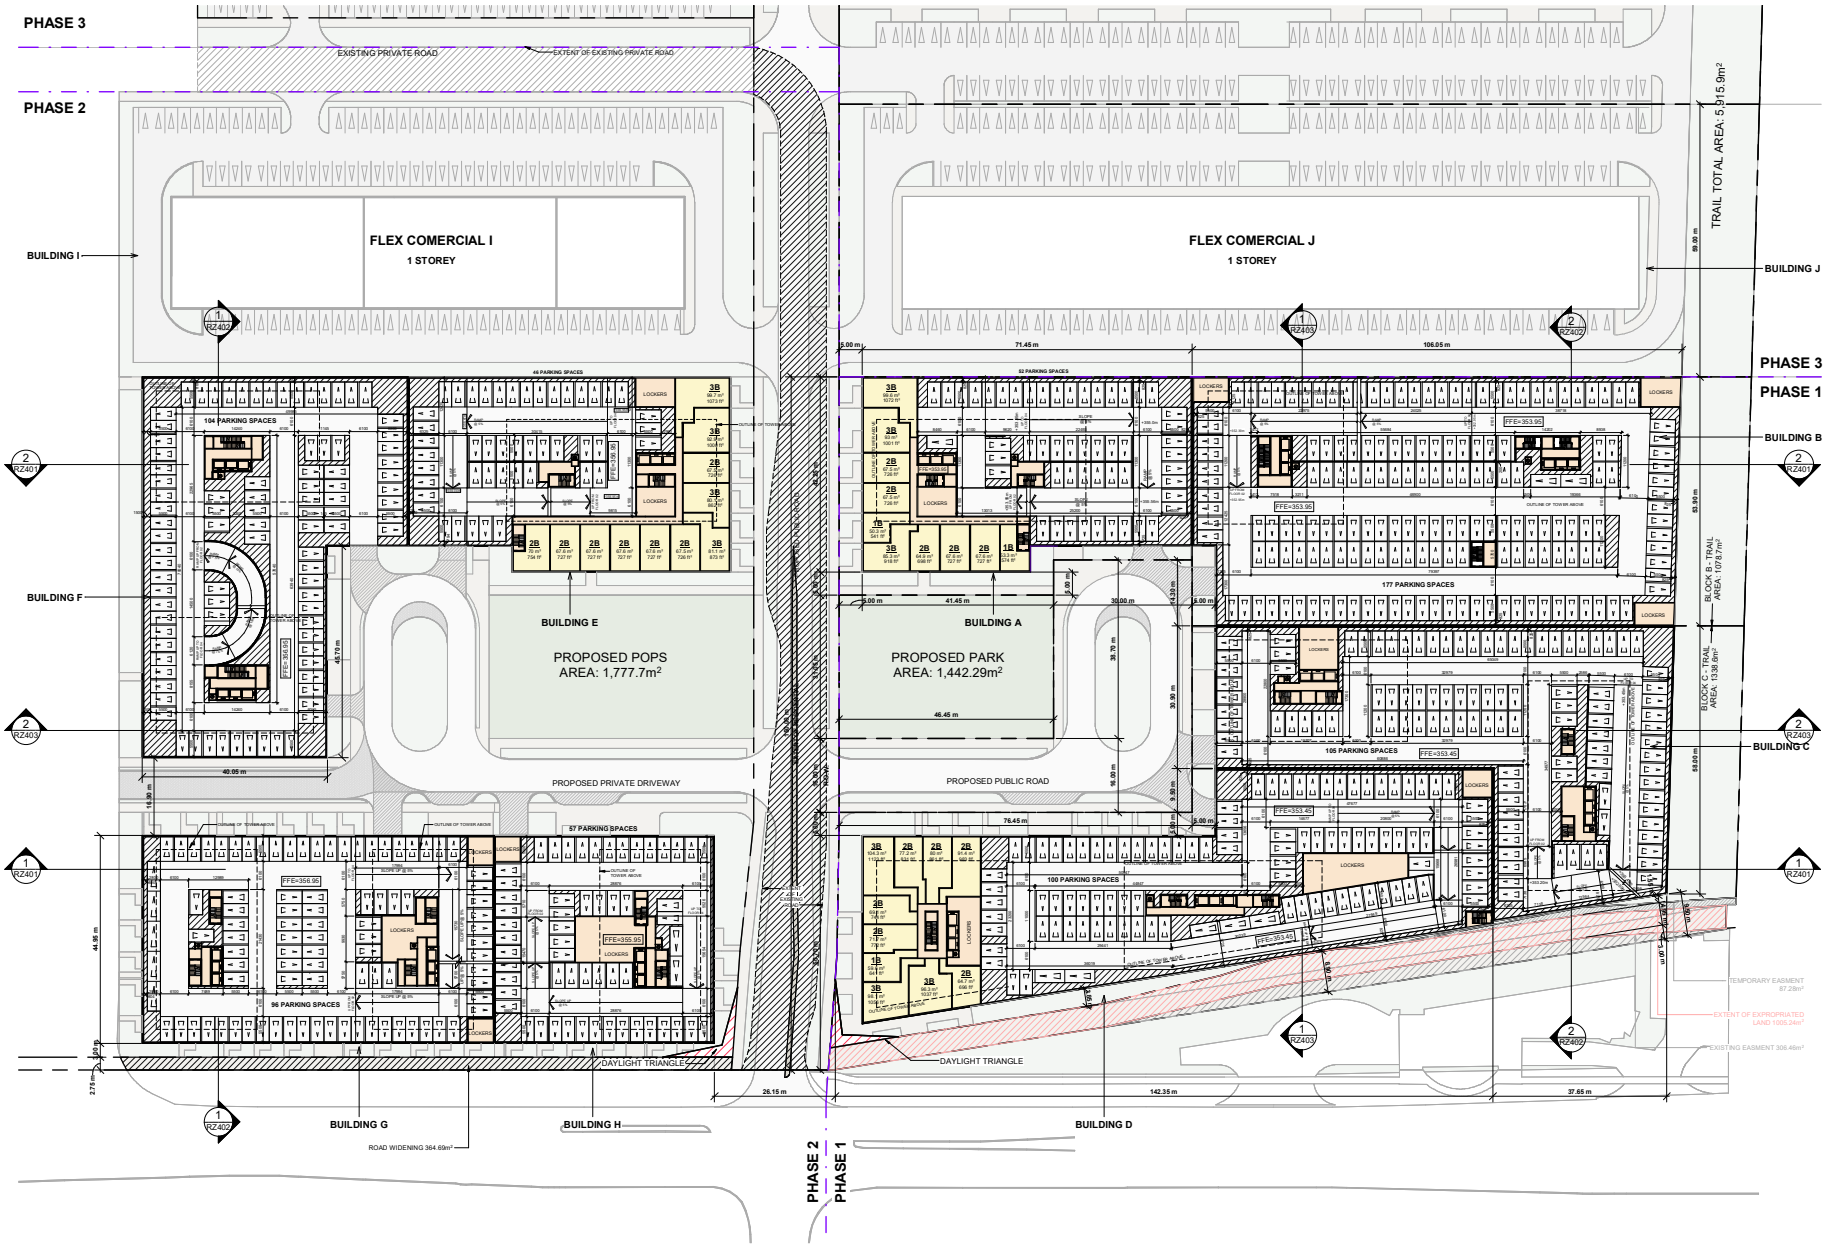

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All dimensions must be verified on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Contractor must confirm to all applicable codes and regulations and coordinate all trades. Contractor using or relying upon drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo


170 Northfield Drive West, Waterloo, Ontario

DRAWING
FLOOR 03

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ153 REV.

2024-01-30 4:31:32 PM

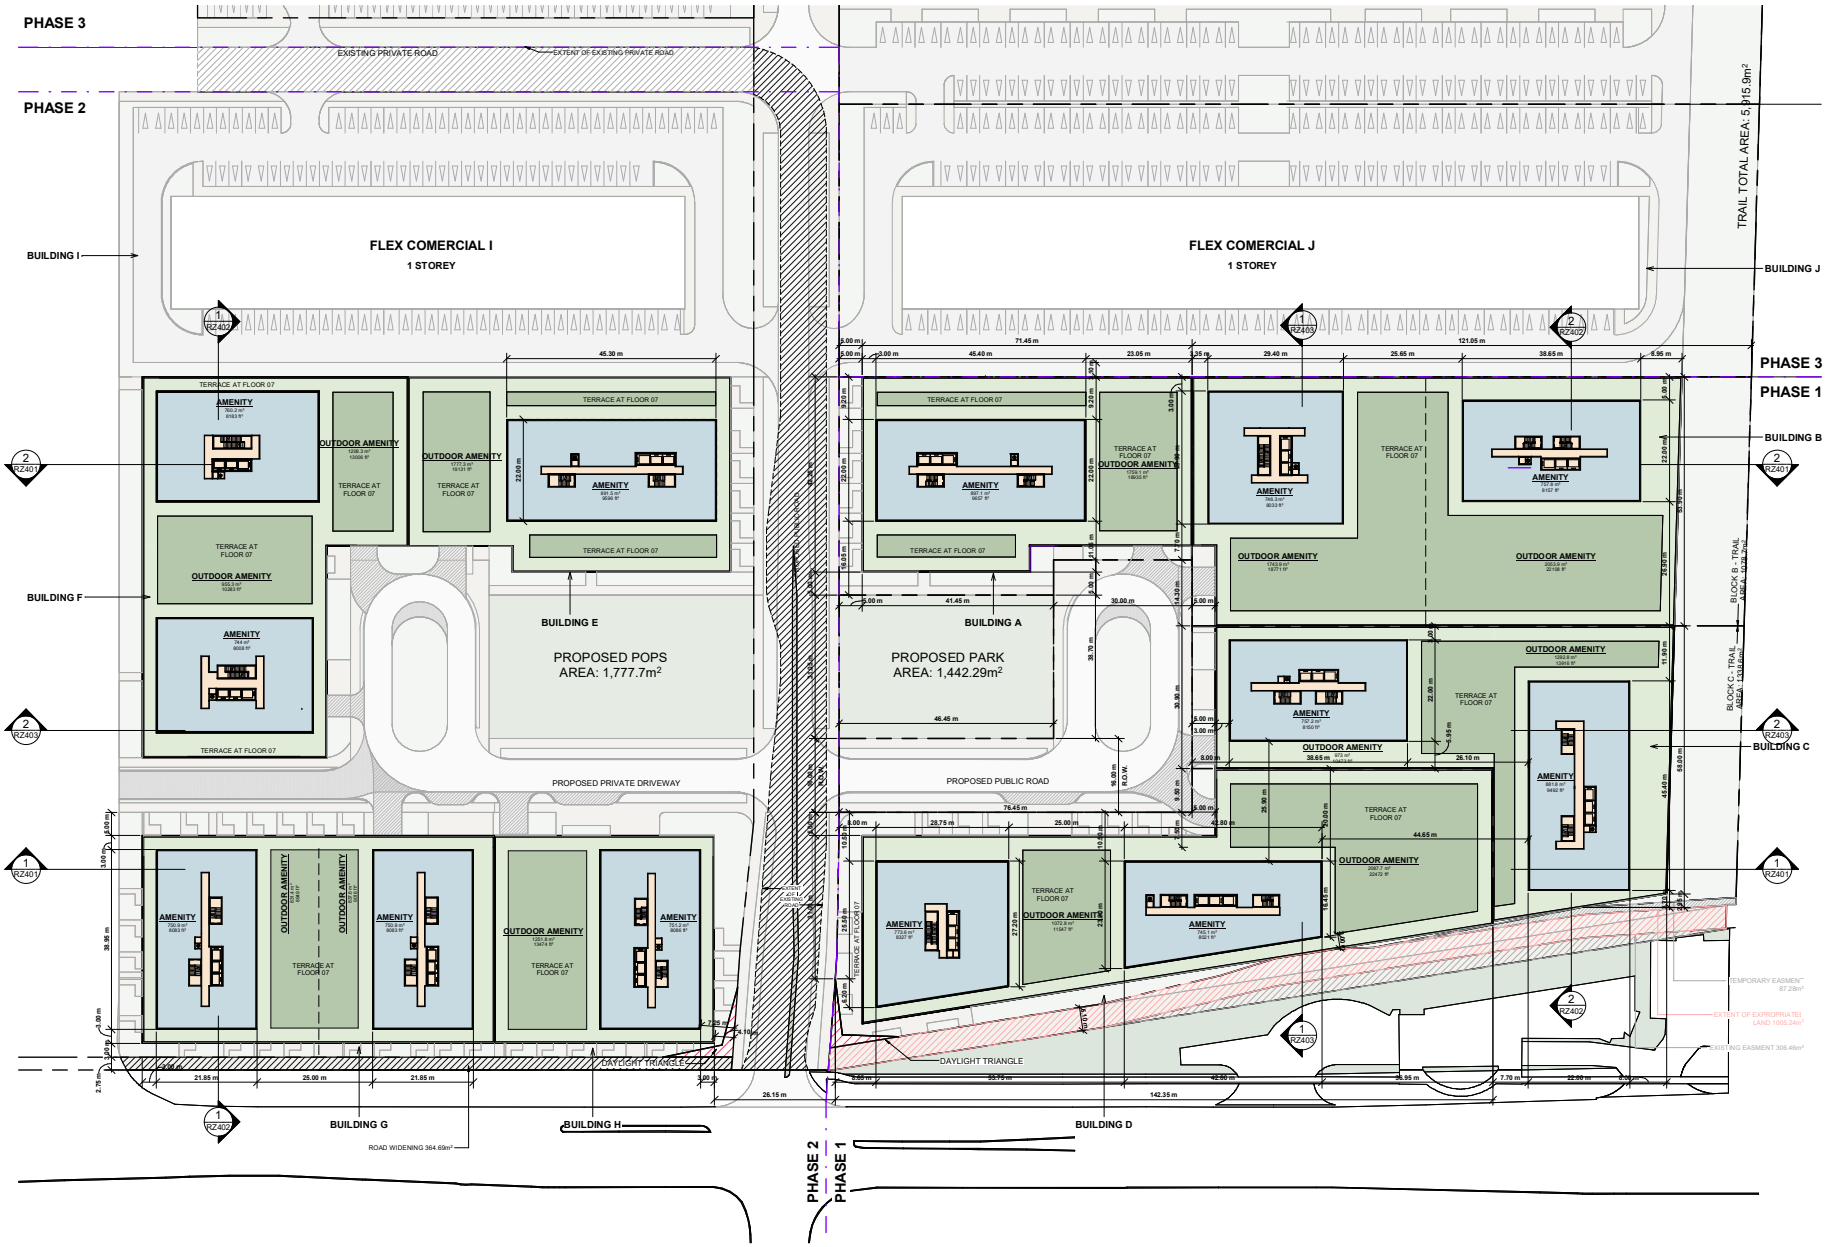

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify all dimensions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Contractor must confirm/verify all dimensions and conditions on the job and must report any discrepancies to the architect before proceeding with the work. Any drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY

PROJECT

170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING


FLOOR 07 (AMENITY)

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ154

REV.

2024-01-30 4:31:35 PM

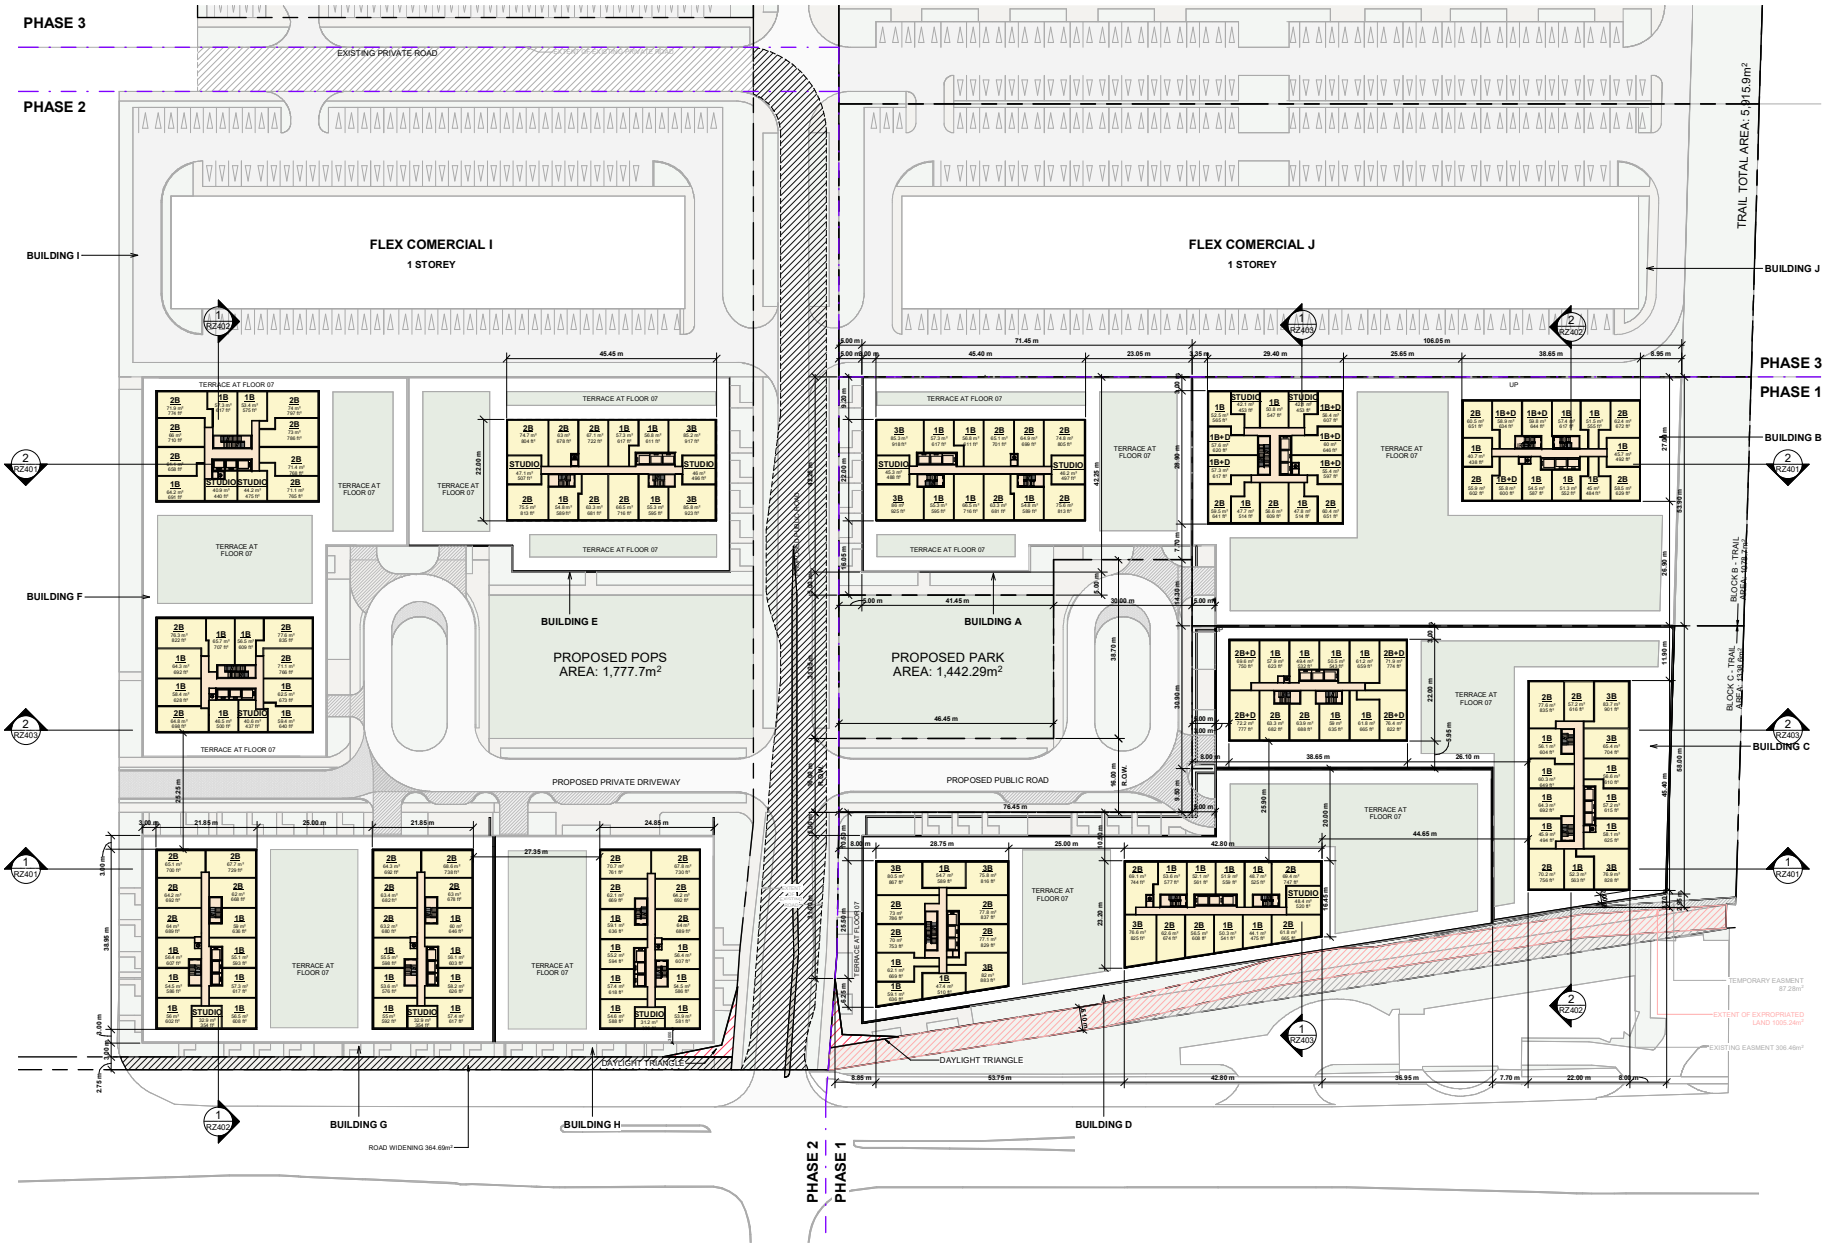

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify all conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor/ contractor/trades are responsible for shop drawings and for coordination of the work of all trades. Any construction based on drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo


170 Northfield Drive West, Waterloo, Ontario

DRAWING
FLOOR 08 (TYPICAL)

PROJECT NO.: 22.237P01
PROJECT DATE:
DRAWN BY: DVI
CHECKED BY: RMM
SCALE: 1 : 500

DRAWING NO.: RZ155
REV.:

2024-01-30 4:31:39 PM

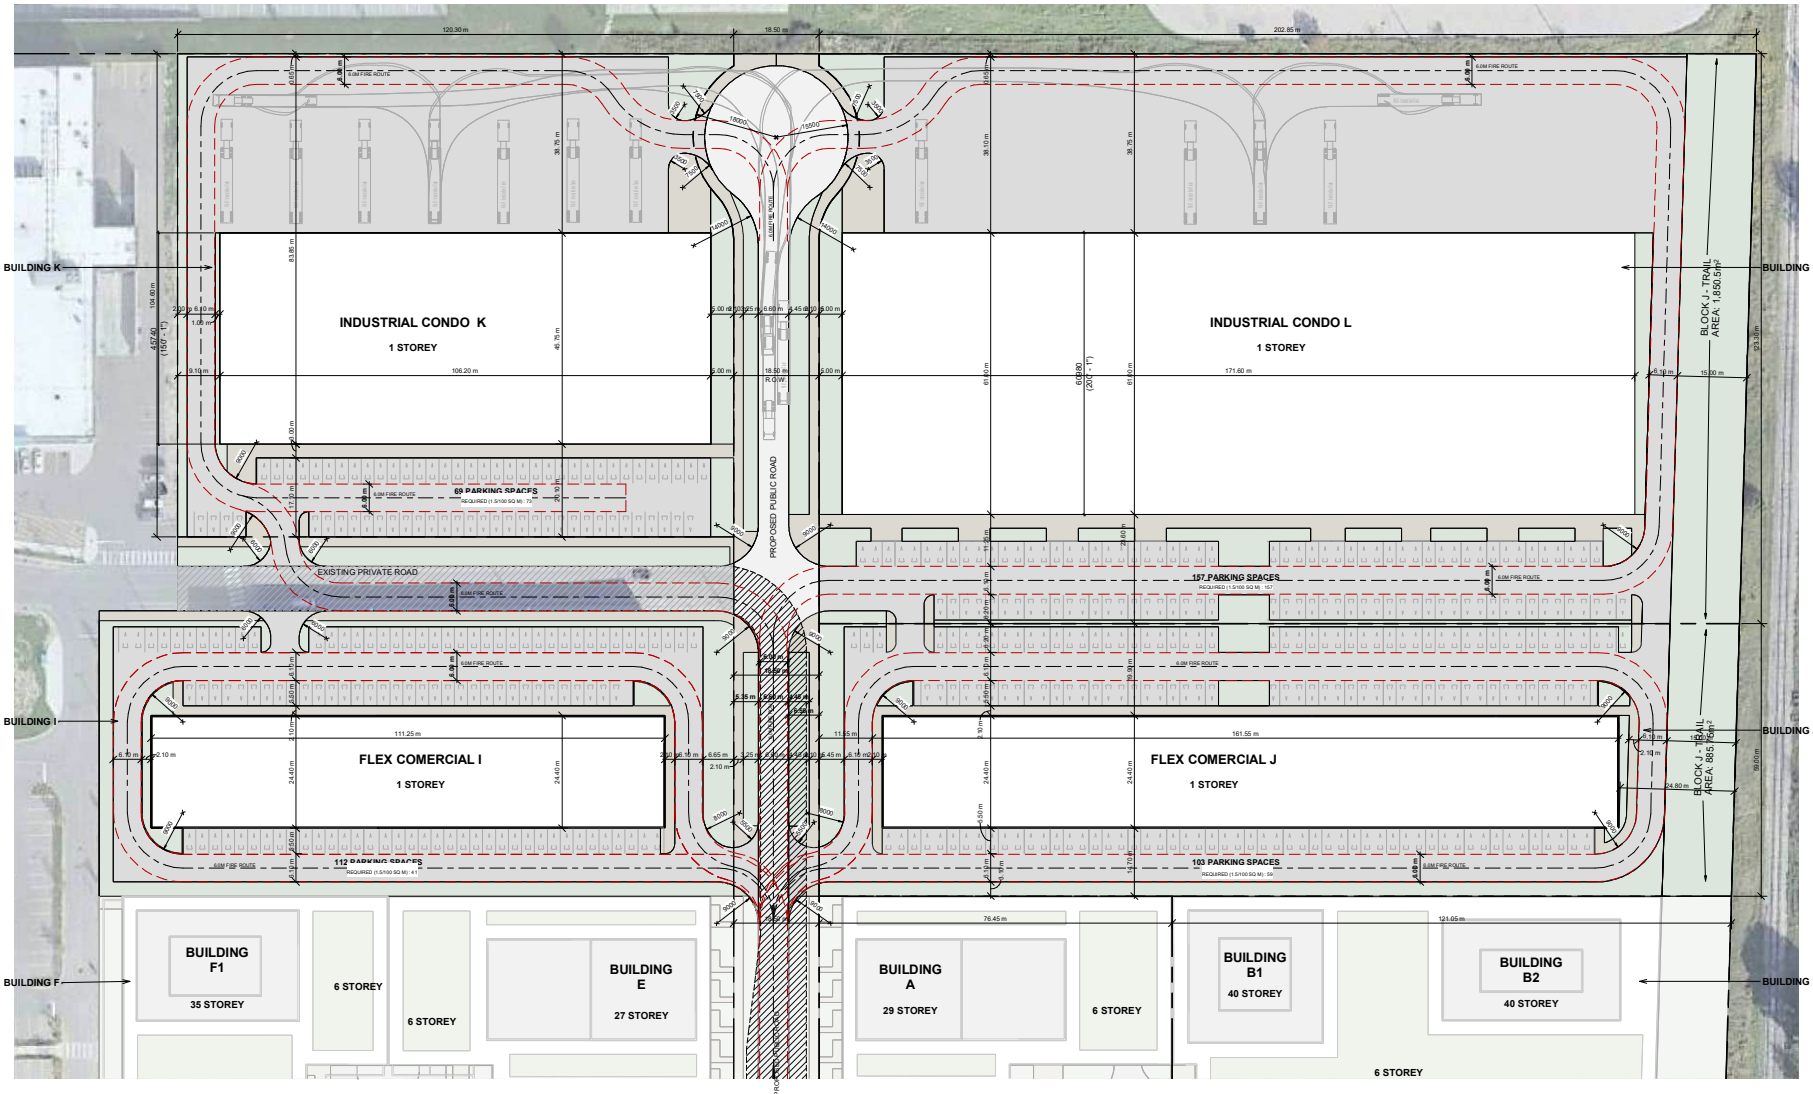

1 SITE PLAN - PHASE 2
RZ161 1 : 500

2024-01-30 4:31:42 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify all conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must confirm to all applicable codes and regulations and coordinate all trades involved in the work. Contractor must ensure drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING
SITE PLAN / ROOF PLAN - COMMERCIAL

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ161 REV.

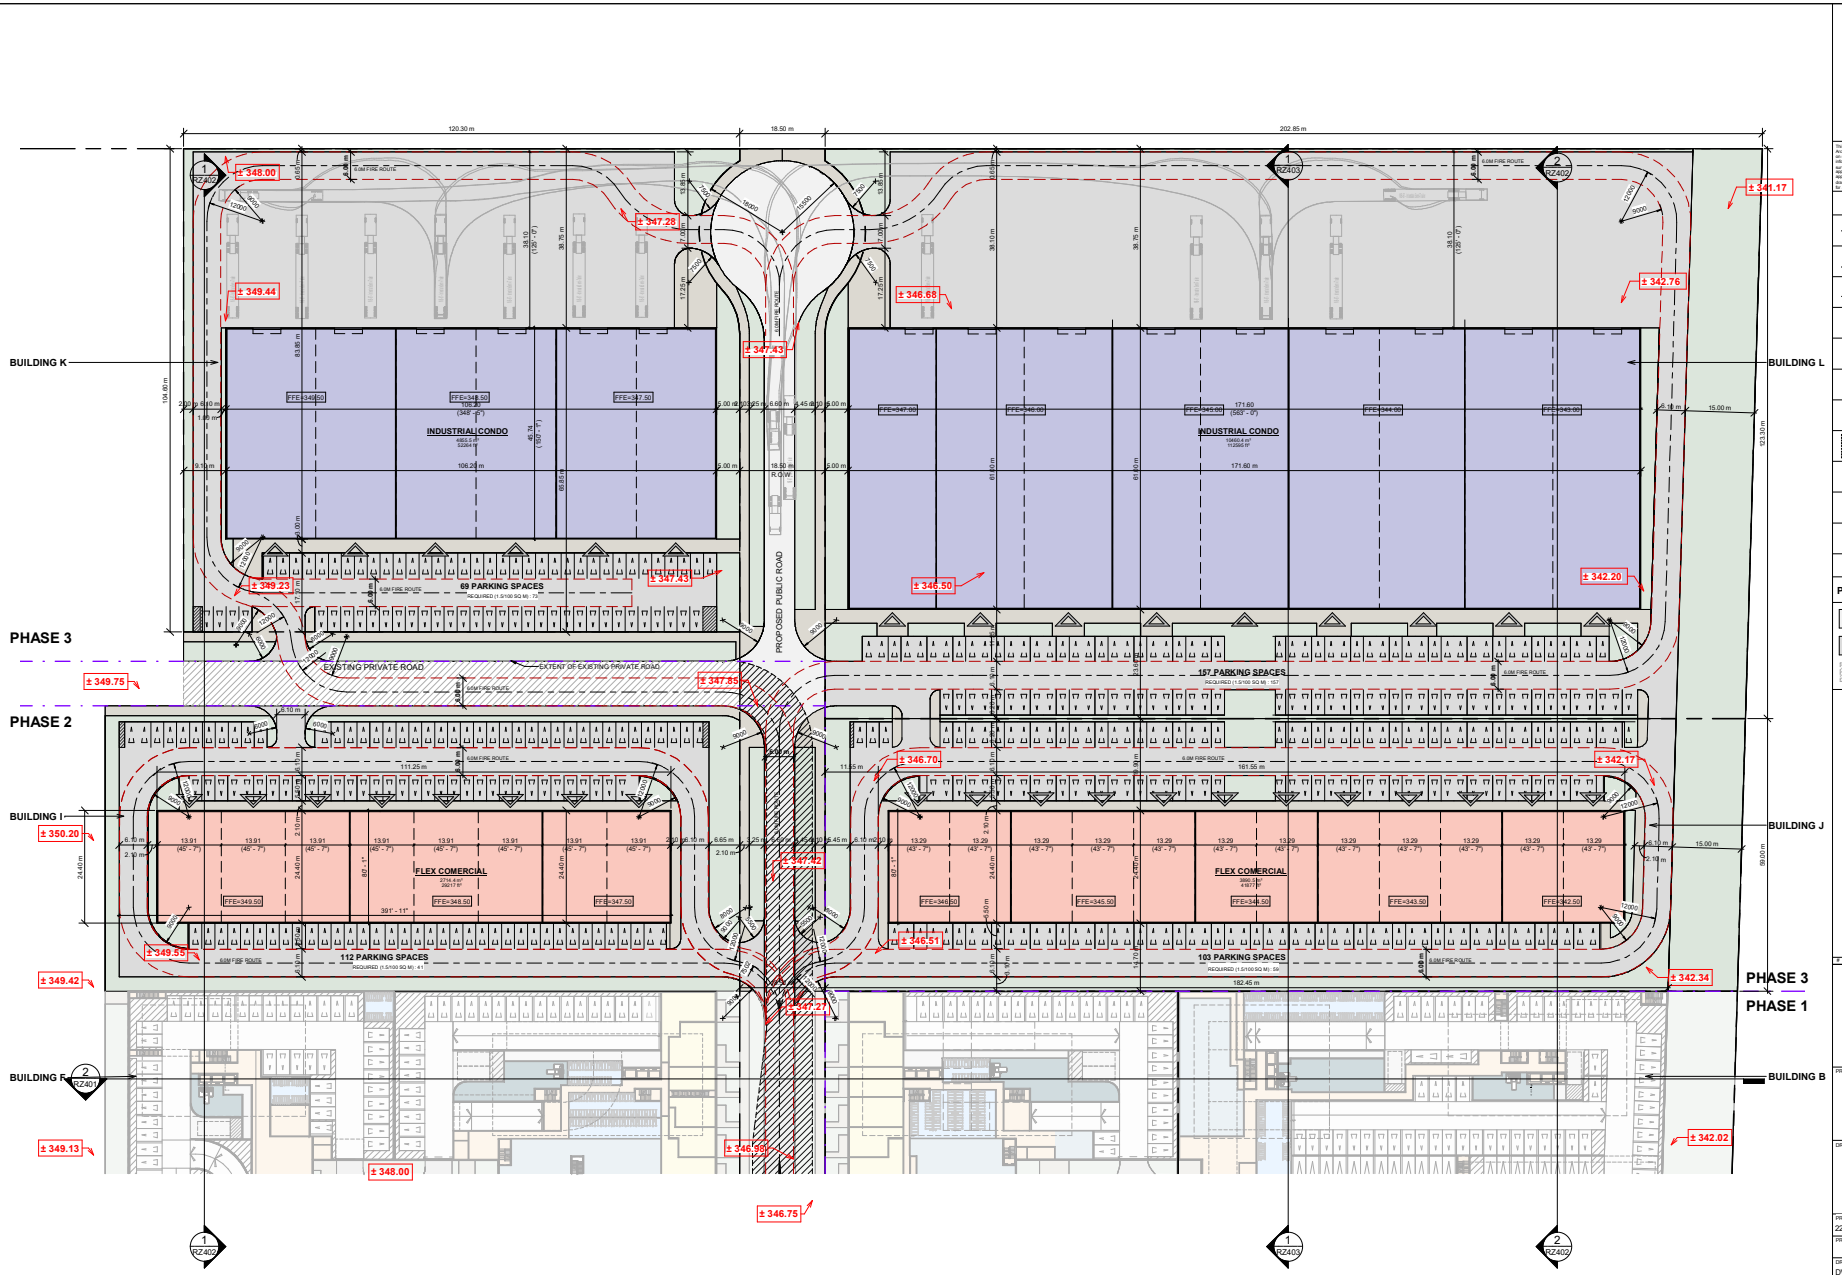

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All rights are reserved. Contractor shall verify conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must coordinate all dimensions and conditions and report any discrepancies before proceeding with the work. Contractors using drawings not specifically marked "For Construction" must assume full responsibility and bear costs for any corrections or damages resulting from his work.

LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- CONVEX MIRROR
- TRANSFORMER WITH CLEARANCES
- FIRE ROUTE SIGN
- 000.00 SPOT ELEVATION
- GAS/HYDRO METER

PUBLIC & PRIVATE ROAD LEGEND

- PUBLIC ROAD
- PRIVATE ROAD
- OUTLINE OF EXISTING ROAD

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH

TYPICAL BARRIER FREE SPACE:

MIN 3.7 x 5.5 x 2.1m HIGH

#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo


170 Northfield Drive West, Waterloo, Ontario

DRAWING
FLOOR 01 - COMMERCIAL


PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ162 REV.

2024-01-30 4:31:46 PM

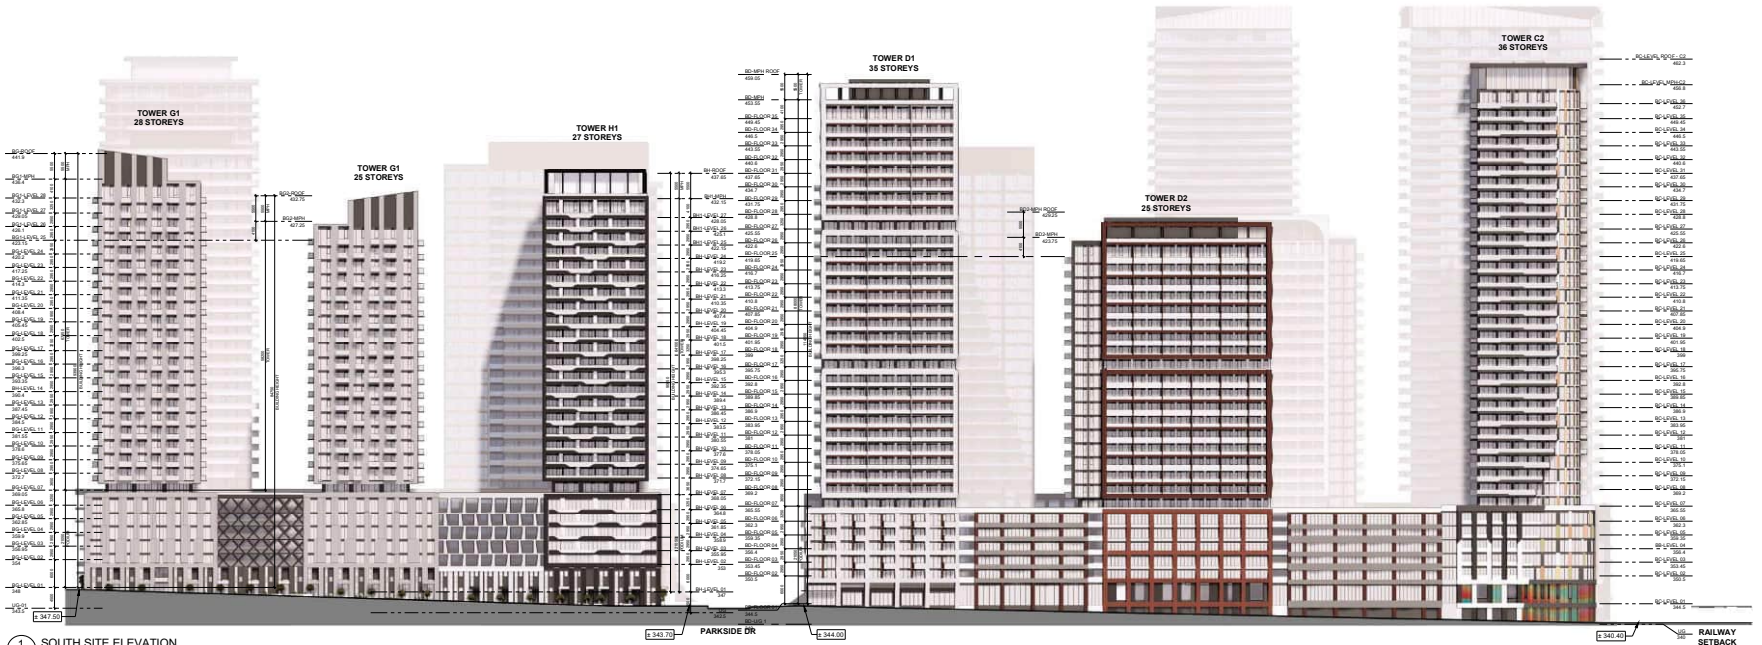

1 SOUTH SITE ELEVATION
RZ301 1 : 500

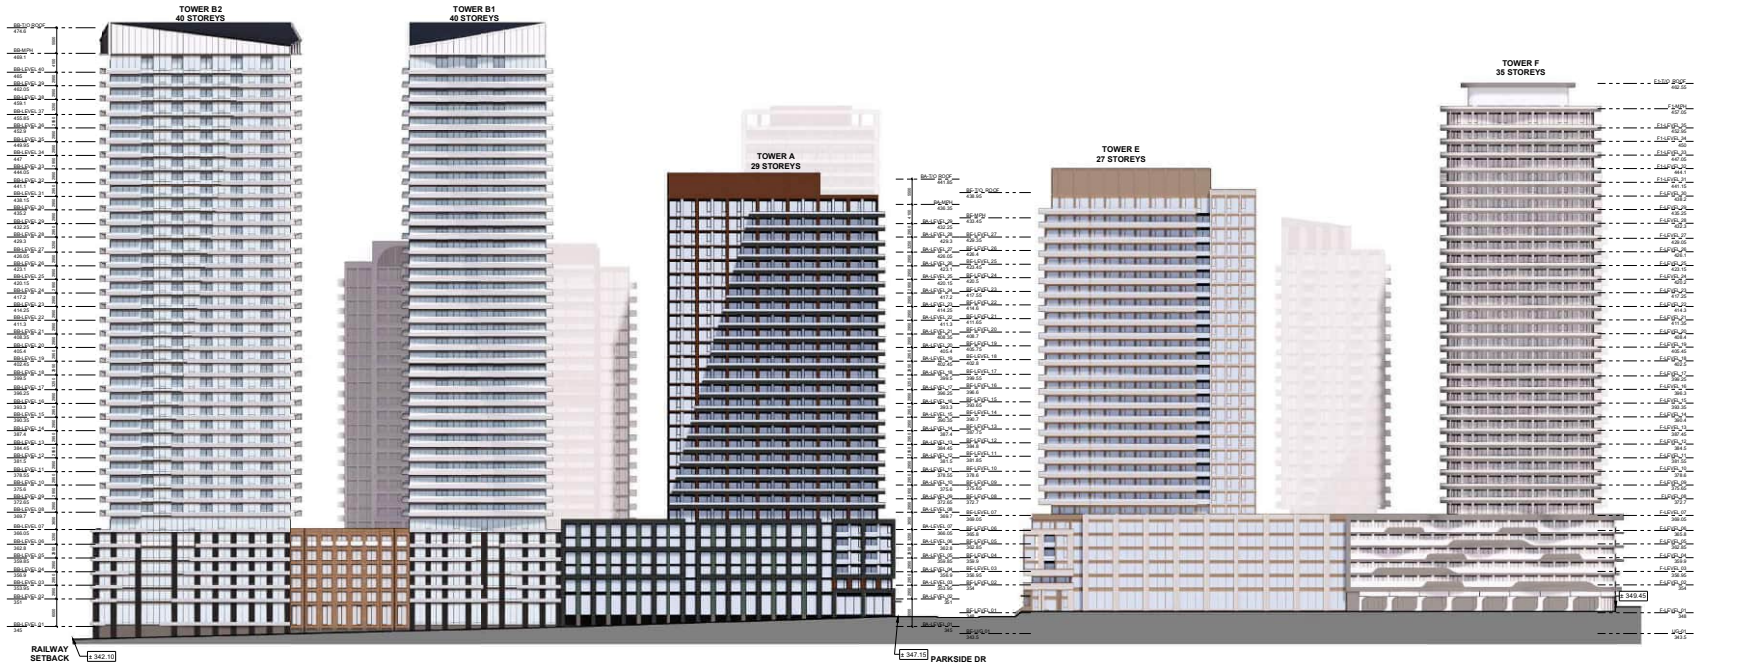

2 NORTH SITE ELEVATION
RZ301 1 : 500

2024-01-30 4:31:55 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructed reactions/forces at connections to existing structure are approximate only. Contractor to verify. Any construction using drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING
ELEVATIONS

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500

DRAWING NO. RZ301 REV.

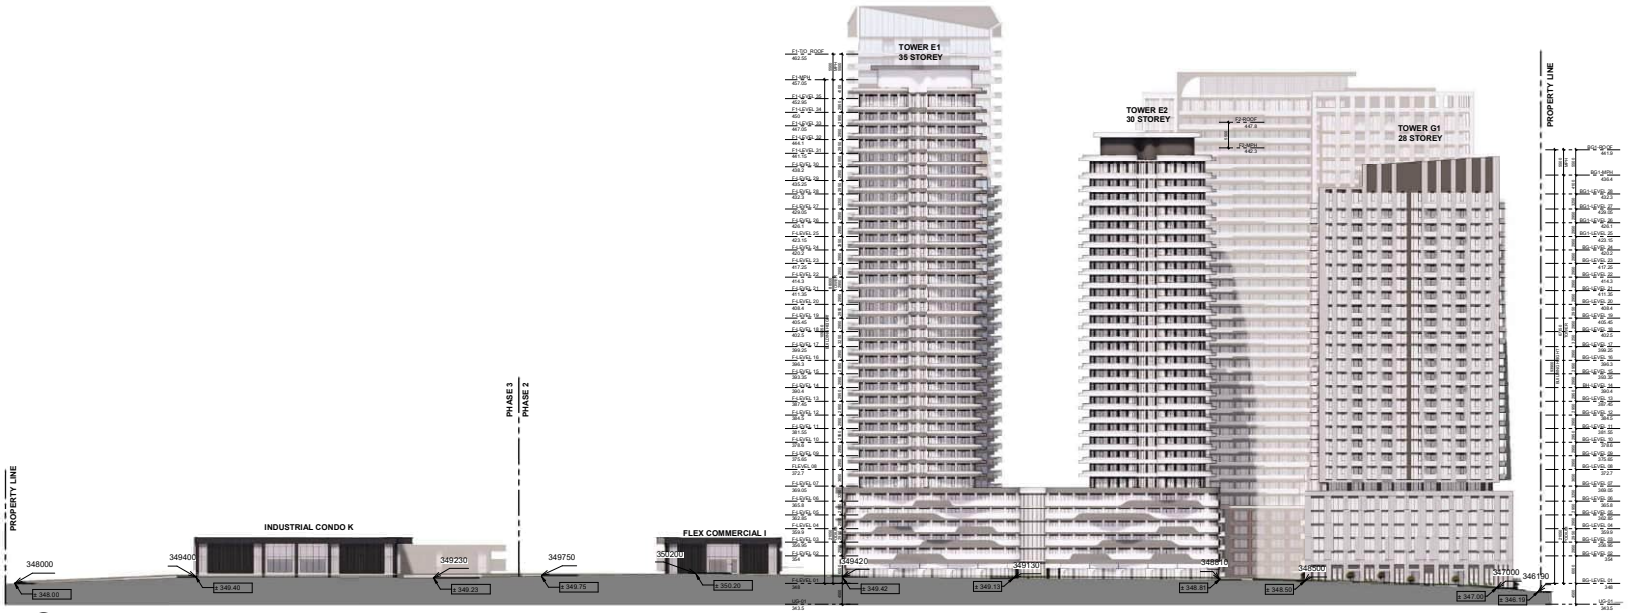

1 RZ302 WEST SITE ELEVATION
1 : 500



2 RZ302 EAST SITE ELEVATION
1 : 500

2024-01-30 4:32:04 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must confirm to all applicable codes and regulations governing the construction work. Any person using these drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING
ELEVATIONS

22.237P01
PROJECT DATE

DRAWN BY
DVI

CHECKED BY
Checker

SCALE
1 : 500

DRAWING NO.
RZ302

REV.



1 RZ303 WEST INTERIOR SITE ELEVATION
1 : 500



2 RZ303 EAST INTERIOR SITE ELEVATION
1 : 500

2024-01-30 4:32:13 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must confirm to all applicable codes and regulations governing the work shown on this drawing. Only drawings specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING
ELEVATIONS

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500

DRAWING NO. RZ303 REV.

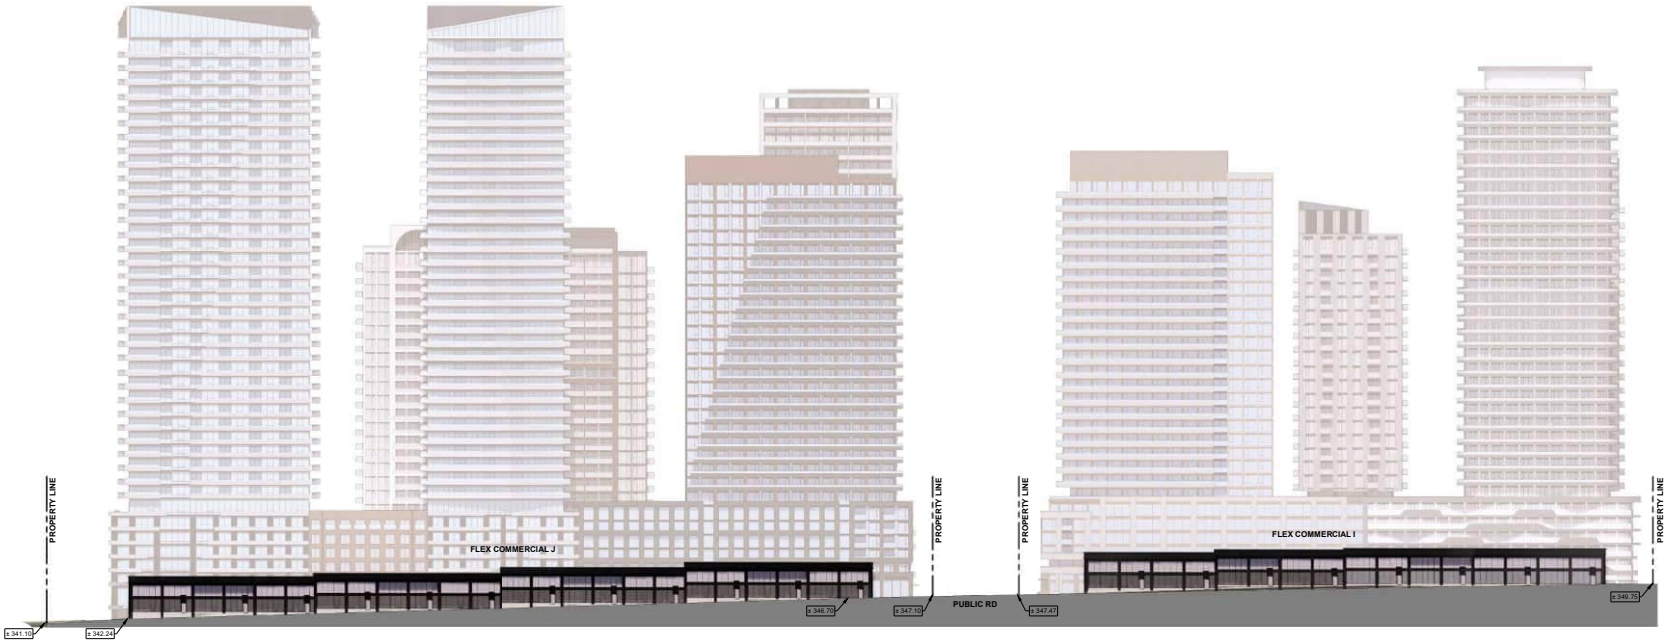

1 RZ304 NORTH INTERNAL COMERCIAL SITE ELEVATION
1 : 500



2 RZ304 SOUTH INTERNAL COMERCIAL SITE ELEVATION
1 : 500

2024-01-30 4:32:16 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. and may not be used without our permission. All dimensions must be verified on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Contractor must coordinate all dimensions between consultant's drawings and shop drawings. Contractor must verify and accept shop drawings not specifically marked 'For Construction' and assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY

PROJECT

170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario


DRAWING

ELEVATIONS


PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500

DRAWING NO. RZ304

REV.

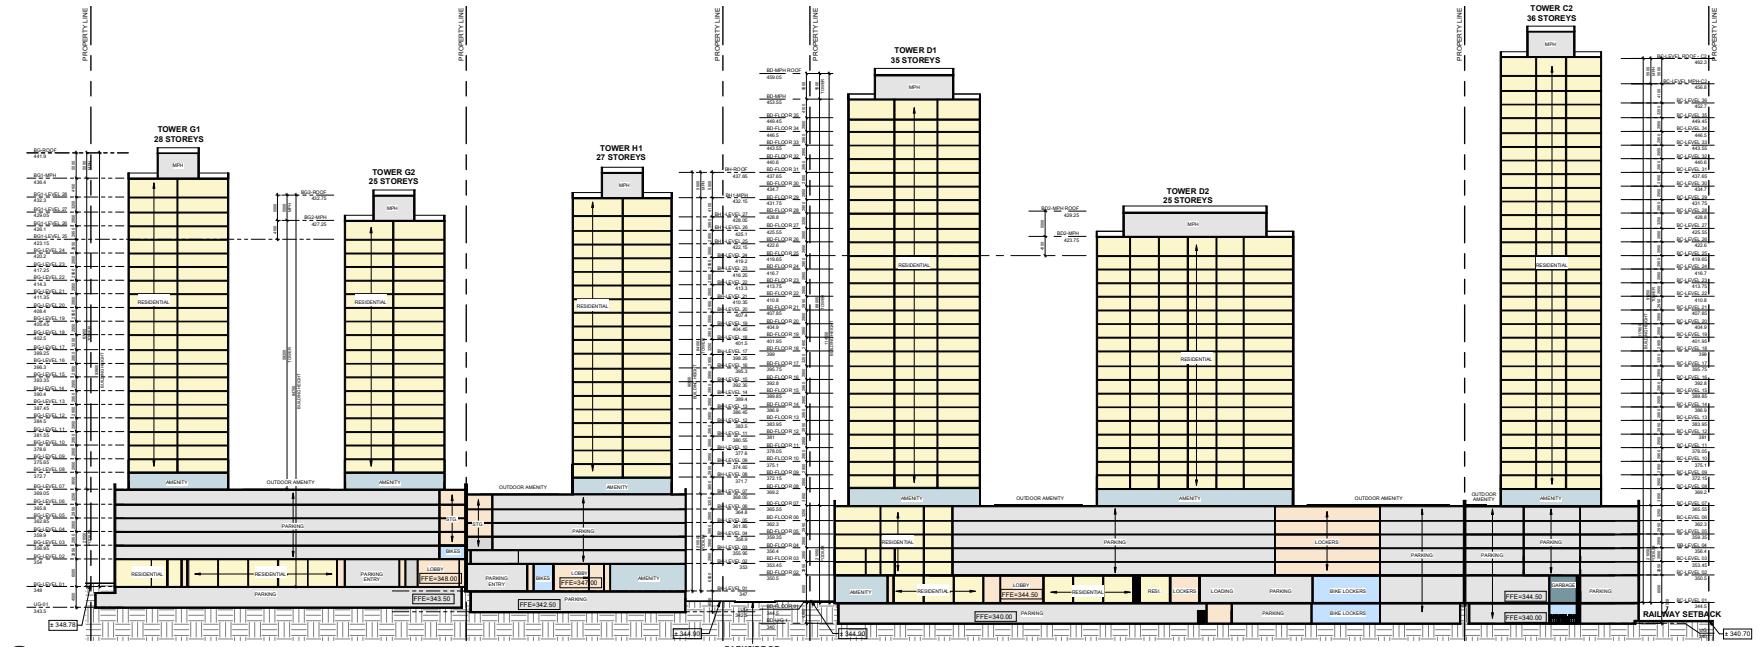

1 SITE SECTION EW1
RZ401 1 : 500

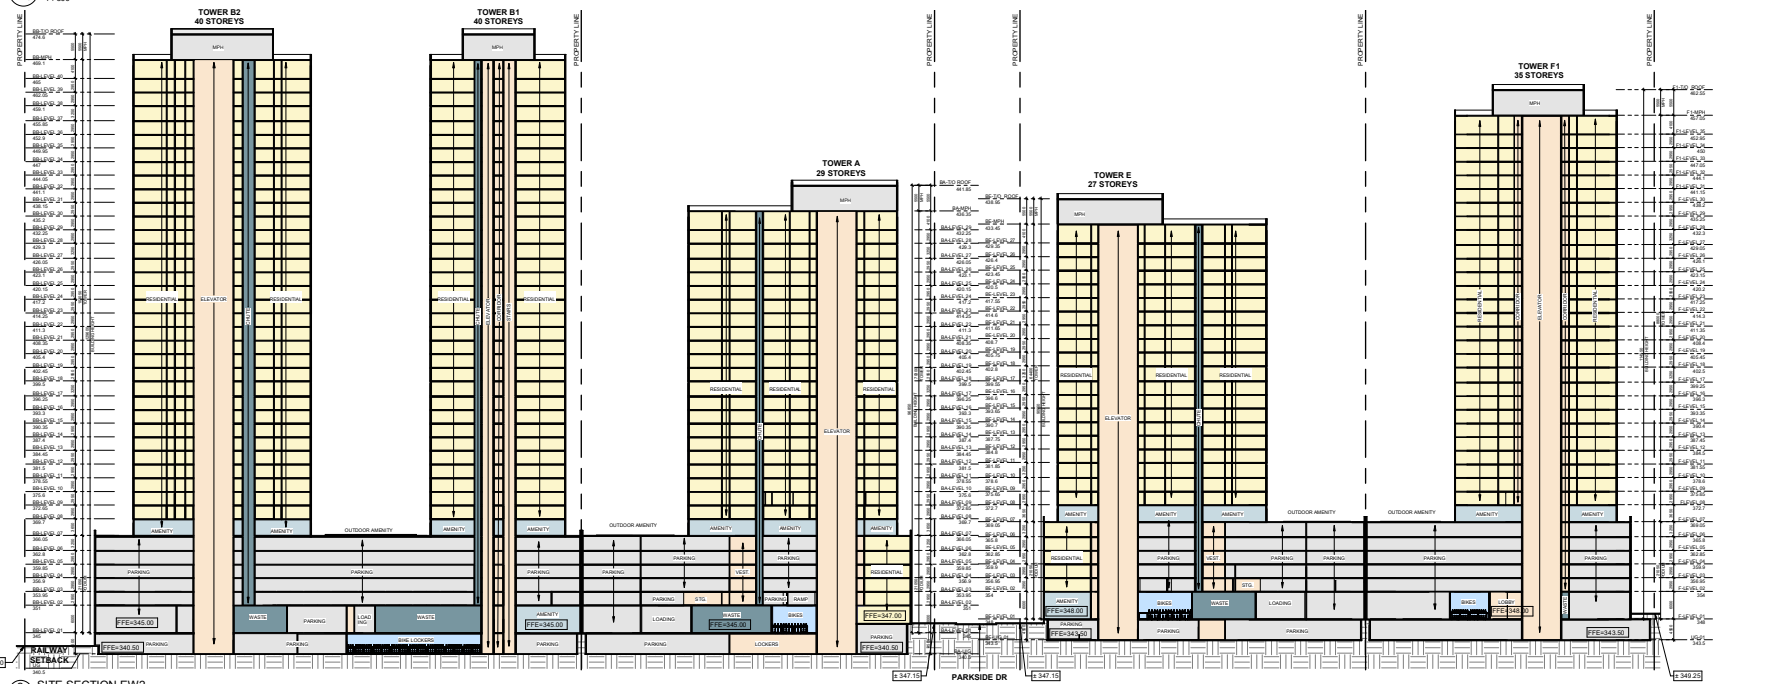

2 SITE SECTION EW2
RZ401 1 : 500

2024-01-30 4:32:22 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must coordinate all services information between consultants' drawings and shop drawings. Any use of this drawing non-specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo


170 Northfield Drive West, Waterloo, Ontario

DRAWING
BUILDING SECTIONS

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500
DRAWING NO.	RZ401
REV.	

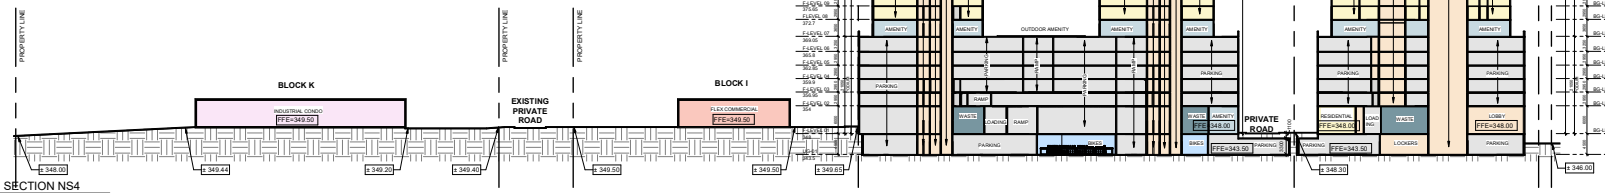

1 SITE SECTION NS4
RZ402 1 : 500

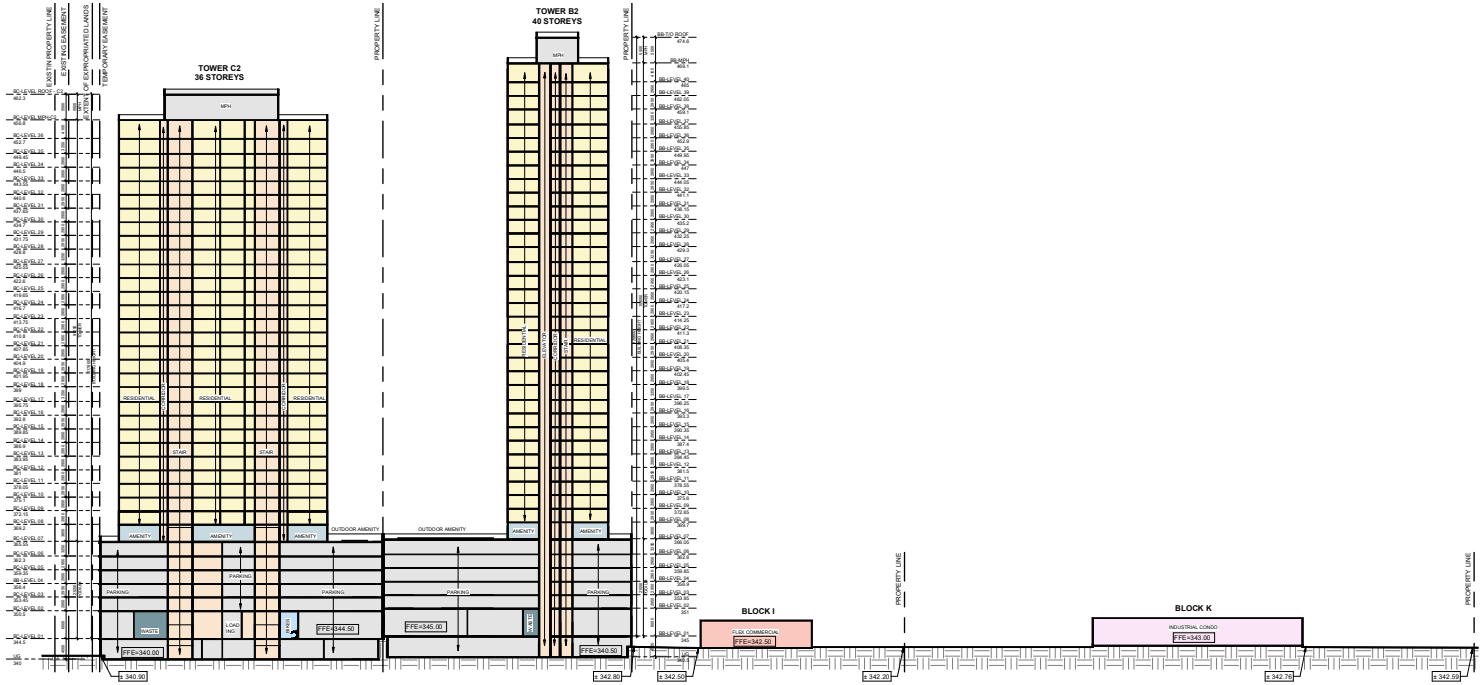

2 SITE SECTION NS5
RZ402 1 : 500

2024-01-30 4:32:24 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Constructor must coordinate all work between trades and shall report any discrepancies before beginning work. Any copies of this drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY


PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario


DRAWING
BUILDING SECTIONS

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500

DRAWING NO. RZ402 REV.

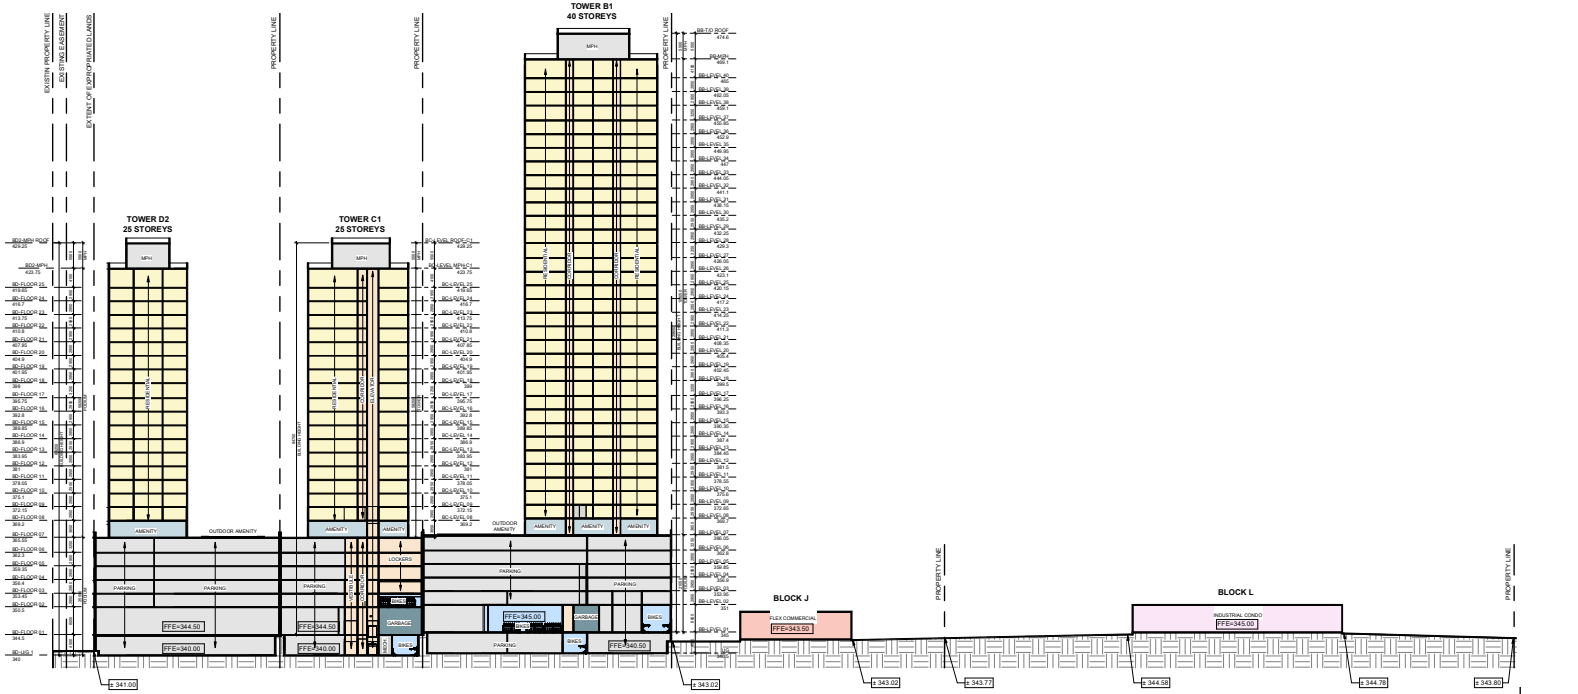

1 SITE SECTION NS1
RZ403 1 : 500

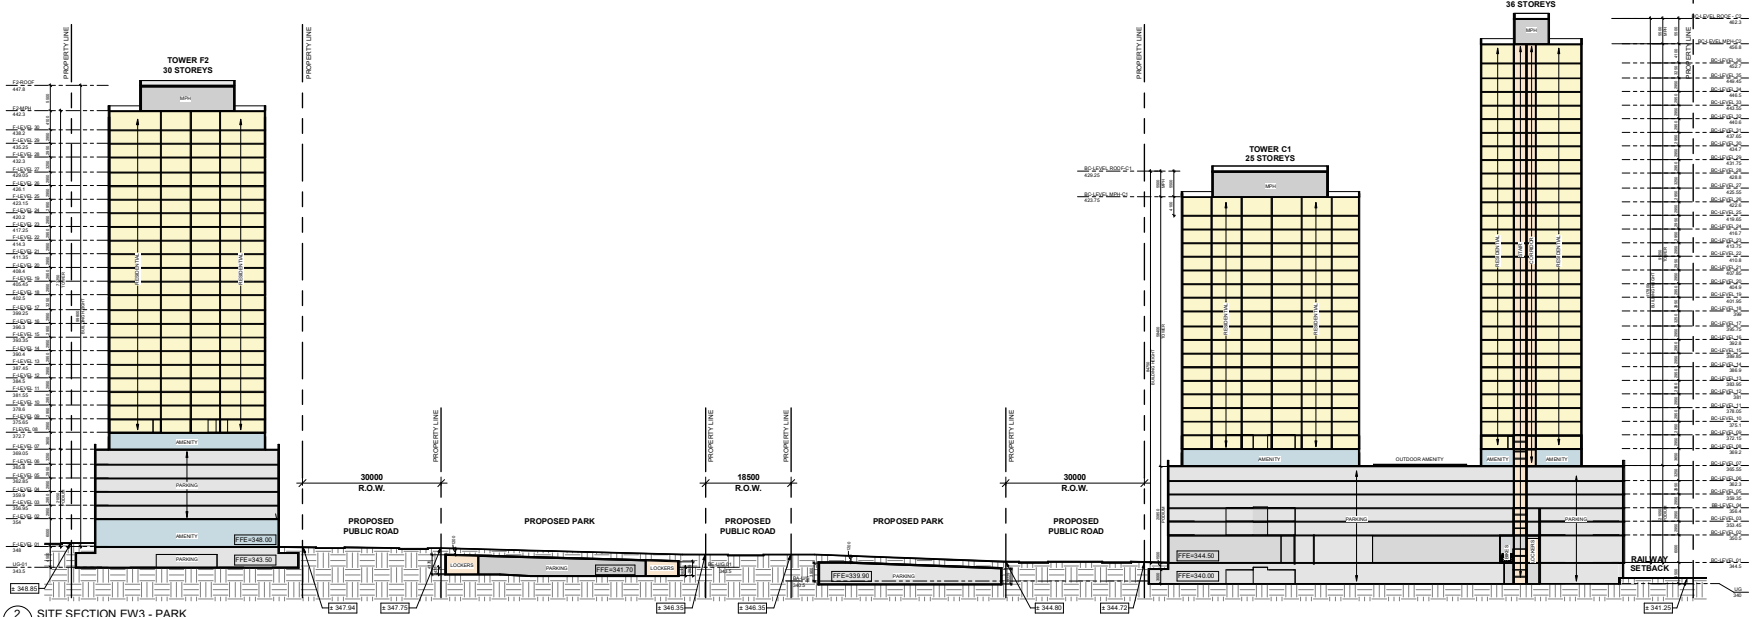

2 SITE SECTION EW3 - PARK
RZ403 1 : 500

2024-01-30 4:32:28 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.
67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The Contractor shall verify and be responsible for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of survey, structural, mechanical, electrical, etc., information shown on this drawing. Refer to the appropriate consultant's drawings before proceeding with the work. Contractors' must confirm to all applicable codes and regulations governing the work. Contractors' must ensure that only drawings non-specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY

PROJECT
170 Northfield Drive West, Waterloo

170 Northfield Drive West, Waterloo, Ontario

DRAWING
BUILDING SECTIONS

PROJECT NO.	22.237P01
PROJECT DATE	
DRAWN BY	DVI
CHECKED BY	Checker
SCALE	1 : 500

DRAWING NO. RZ403 REV.

Appendix C Traffic Data and Calculations

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

Region of Waterloo AADT Forecast for Noise Studies

1. Development/Location

170 Northfield Dr W, Waterloo

2. Current AADT (2024)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,400	2,200	28,100	13,300

3. Forecast AADT (2034)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,600	2,500	32,700	15,500

4. Commercial Vehicle Rates

	Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
% Medium Trucks	3%	2%	1%	2%
% Heavy Trucks	6%	6%	2%	3%

5. Posted Speed Limit

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
50 km/h	20 km/h	60 km/h	60 km/h

6. Day/Night Splits

Regional Standard 90/10 Day/Night Split

7. Expiry

Dec 31 2024

8. Notes

This forecast is intended for the purpose of carrying out a noise study for the above mentioned location only.

As Kumpf Dr and Parkside Dr are not under the jurisdiction of Region of Waterloo, City of Waterloo should verify these forecasts.

Please note this location is within distance of interest of the ION LRT.

This forecast remains valid up to the date indicated above. The Region of Waterloo should be contacted for an updated forecast if there are plans to use this forecast beyond the above validity period.

Keni Mallinen

From: Haydn Kocznur <Haydn.Kocznur@waterloo.ca>
Sent: February 15, 2024 2:15 PM
To: Keni Mallinen
Subject: RE: Request Confirmation of RMOW Traffic Data Forecasts
Attachments: Cedarbrae Ave @ Parkside Dr 2018.JPG; Kumpf Dr btwn Northfield Dr W & Randall Dr 2023.xlsx; Kumph Dr @ Randall Dr 2020.JPG; Bearinger Rd @ Parkside Dr 2023.JPG

You don't often get email from haydn.kocznur@waterloo.ca. Learn why this is important

Good afternoon Keni,

Christine has retired and Bob Henderson is our new director. Unfortunately, I unable to verify the forecasted AADTs however I can provide data from our actual counts. Please see below and the attached files. Please note that Parkside Drive is 50 km/h.

- Kumpf Dr btwn end of street & Randall Dr, 2018, No class data, AADT: 726
- Kumpf Dr at Randall Dr, 2020, Major AADT: 1309, Minor AADT: 744
- Cedarbrae Ave at Parkside Dr, 2018, Major AADT: 8537, Minor AADT: 1890
- Bearinger Rd @ Parkside Dr, 2023, Major AADT: 9009, Minor AADT: 6248
- Parkside Dr btwn Bearinger Rd & Cedarbrae Ave, 2021, No class data, AADT: 3124

Regards,

Haydn Kocznur, C. Tech
Traffic Operations Technician
Transportation Engineering Section
Integrated Planning & Public Works, City of Waterloo
265 Lexington Court
PO Box 337 Station Waterloo
Waterloo, ON N2J 4A8
P: 1.519.886.2310 ext. 30293
E: haydn.kocznur@waterloo.ca

From: Keni Mallinen <kmallinen@slrconsulting.com>
Sent: Thursday, February 15, 2024 1:23 PM
To: christine.koehler@waterloo.ca; Haydn Kocznur <Haydn.Kocznur@waterloo.ca>
Subject: [EXTERNAL] Request Confirmation of RMOW Traffic Data Forecasts

Hi Christine and Haydn,

SLR Consulting is working on an environmental noise assessment for a proposed development in the City of Waterloo.

We received the following traffic forecasts from the Region for the transportation noise study:

	Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2. Current AADT (2024)	2,400	2,200	28,100	

	Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
3. Forecast AADT (2034)	2,600	2,500	32,700	

4. Commercial Vehicle Rates	Kumpf Drive	Parkside Dr	Northfield Dr W
% Medium Trucks	3%	2%	1%
% Heavy Trucks	6%	6%	2%

	Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
5. Posted Speed Limit	50 km/h	20 km/h	60 km/h	60 km/h

6. Day/Night Splits	Regional Standard 90/10 Day/Night Split
7. Expiry	Dec 31 2024
8. Notes	This forecast is intended for the purpose of carrying out a noise study for the above mentioned location only. As Kumpf Dr and Parkside Dr are not under the jurisdiction of Region of Waterloo, City o Waterloo should verify these forecasts.

The dataset indicated forecasts for Kumpf Drive and Parkside Drive should be verified by the City of Waterloo as they're not under the Region's jurisdiction. Are you able to provide comment on or confirmation of these volumes. Alternatively, do you have contact information for someone who may be able to do so?

Please let me know if you have any questions regarding this request.

Thank you,
Keni


Keni Mallinen M.A.Sc., P.Eng.
Senior Acoustics Engineer

O +1 226 706 8080
M +1 226 203 7385
E kmallinen@slrconsulting.com

SLR Consulting (Canada) Ltd.
100 Stone Road West, Suite 201, Guelph ON Canada N1G 5L3

Road Traffic Data – Highway 85


North of Northfield Drive West

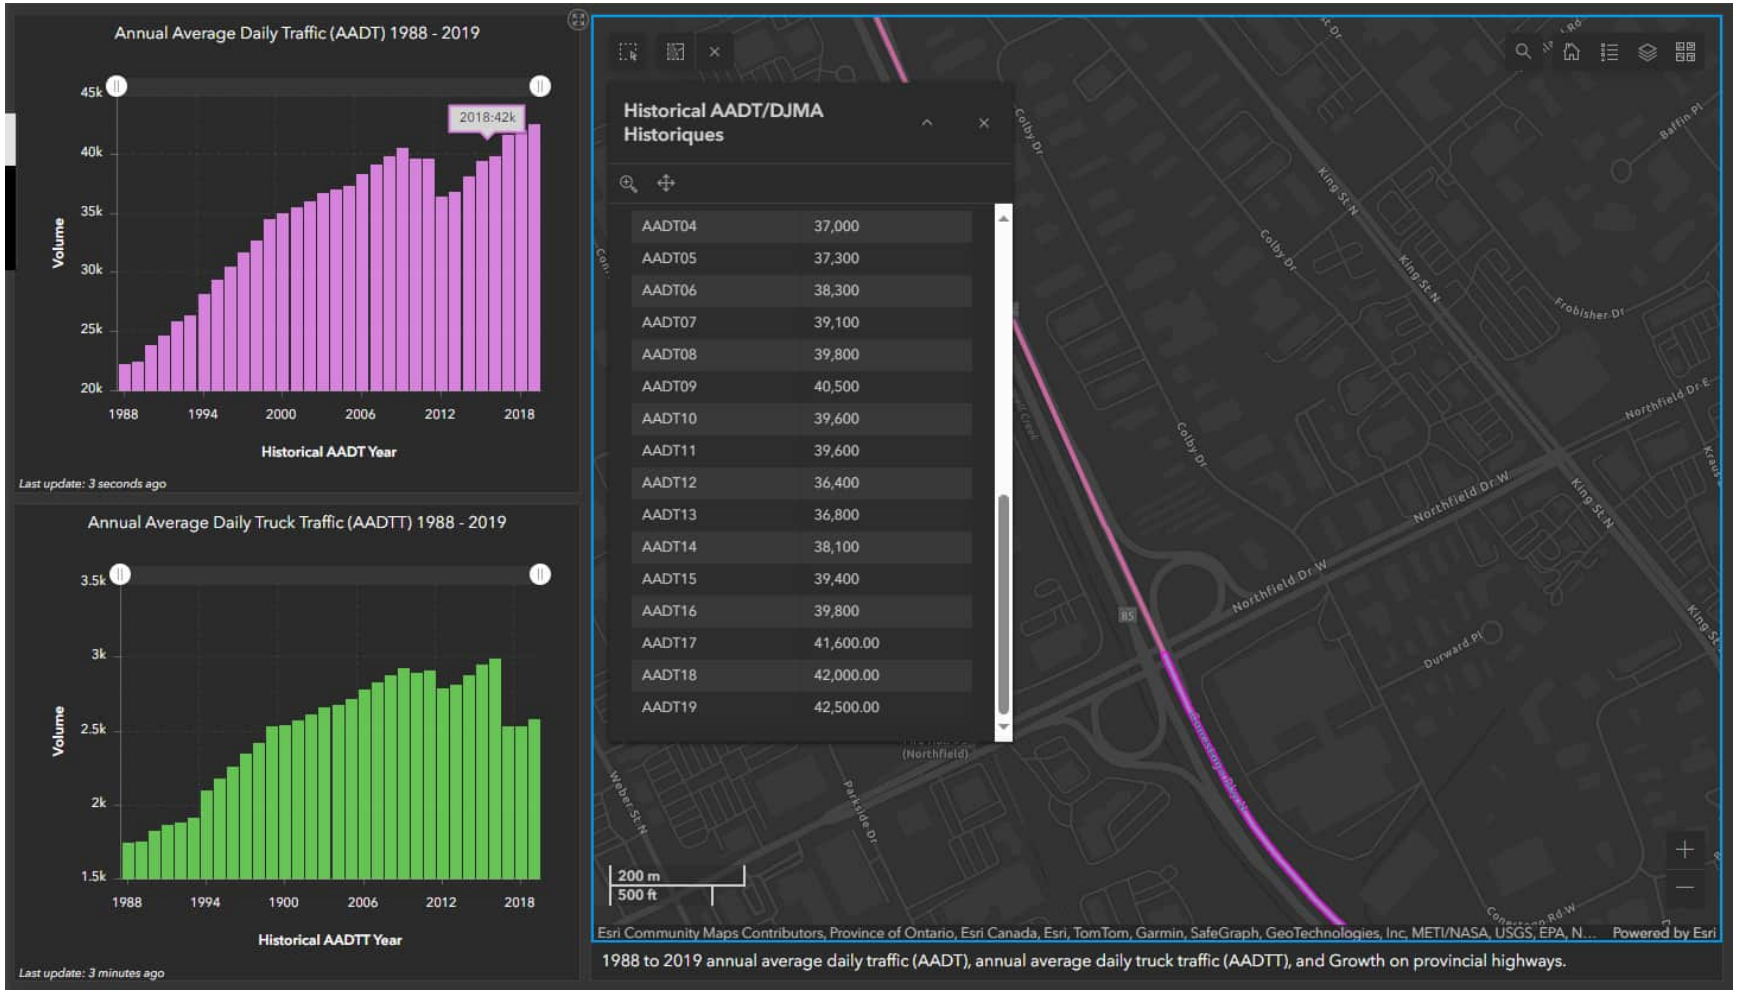

Source: https://icorridor-mto-on-ca.hub.arcgis.com/apps/4f4b6a27ee0a4a4e86ab9a94597475f3/explore

Road Traffic Data – Highway 85

North of Northfield Drive West

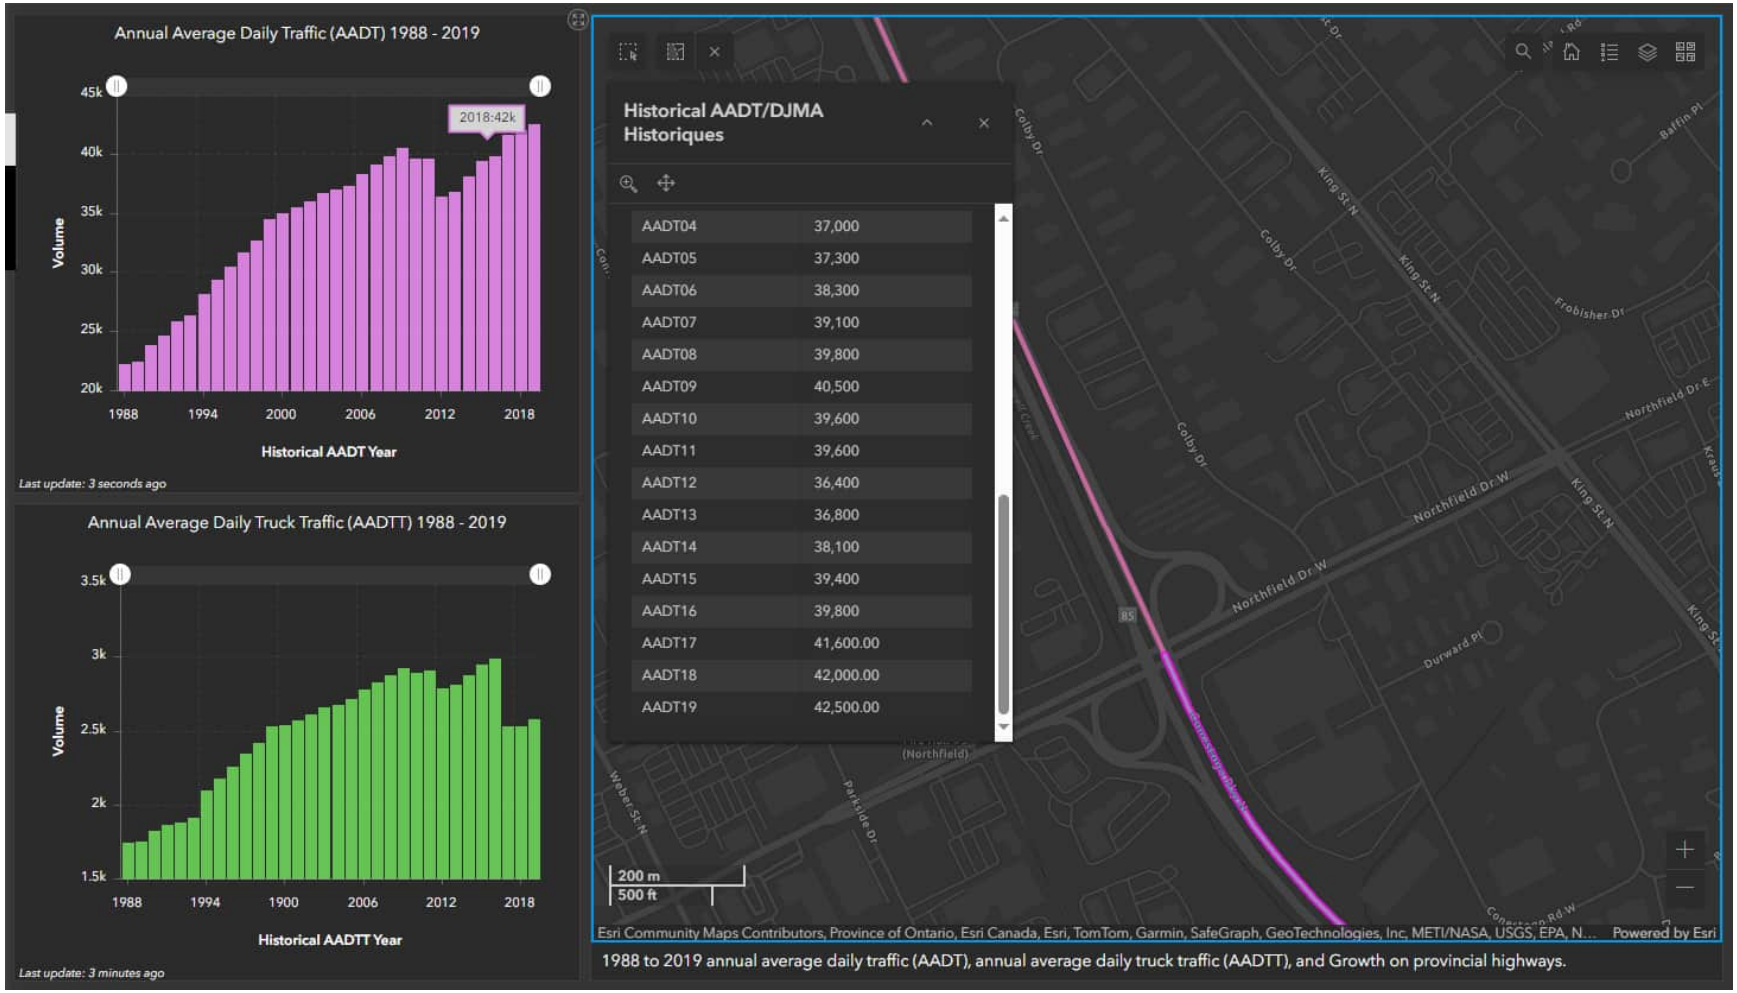

Source: https://icorridor-mto-on-ca.hub.arcgis.com/apps/4f4b6a27ee0a4a4e86ab9a94597475f3/explore

O R N A M E N T - Sound Power Emissions & Source Heights

Ontario Road Noise Analysis Method for Environment and Transportation

Future Forecast

Road Segment ID	AADT	Percent Traffic In Period	Period (h)	Total Traffic Volumes (Period)	Speed (kph)	Auto %	Med %	Hvy %	Auto	Med	Heavy	Road Gradient (%)	PWL (dBA)	Source Height, s (m)	Reference Leq (dBA)
Daytime															
Kumpf Drive	2600	90%	16	2340	50	91.0%	3.0%	6.0%	2129	70	140	0.0	**75.9**	**1.6**	**60.8**
Parkside Drive	10142	90%	16	9128	50	92.0%	2.0%	6.0%	8398	183	548	0.0	**81.7**	**1.6**	**66.6**
Weber Street North	15500	90%	16	13950	60	95.0%	2.0%	3.0%	13253	279	419	0.0	**83.1**	**1.3**	**68.0**
Northfield Drive - Westbound	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Westbound - Downhill	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Eastbound	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Eastbound - Uphill	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	2.1	**83.1**	**1.2**	**68.1**
Highway 85 - Northbound - N of Northfield Dr. W.	14167	85%	16	12042	90	87.1%	3.2%	9.7%	10483	390	1169	0.0	**89.1**	**1.8**	**74.0**
Highway 85 - Southbound - N of Northfield Dr. W.	14167	85%	16	12042	90	87.1%	3.2%	9.7%	10483	390	1169	0.0	**89.1**	**1.8**	**74.0**
Highway 85 - Northbound - S of Northfield Dr. W.	26178	85%	16	22251	90	93.0%	1.8%	5.3%	20685	392	1175	0.0	**90.0**	**1.5**	**74.9**
Highway 85 - Southbound - S of Northfield Dr. W.	26178	85%	16	22251	90	93.0%	1.8%	5.3%	20685	392	1175	0.0	**90.0**	**1.5**	**74.9**
Night-time															
Kumpf Drive	2600	10%	8	260	50	91.0%	3.0%	6.0%	237	8	16	0.0	**69.4**	**1.6**	**54.3**
Parkside Drive	10142	10%	8	1014	50	92.0%	2.0%	6.0%	933	20	61	0.0	**75.2**	**1.6**	**60.1**
Weber Street North	15500	10%	8	1550	60	95.0%	2.0%	3.0%	1473	31	47	0.0	**76.6**	**1.3**	**61.5**
Northfield Drive - Westbound	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Westbound - Downhill	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Eastbound	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Eastbound - Uphill	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	2.1	**76.6**	**1.2**	**61.5**
Highway 85 - Northbound - N of Northfield Dr. W.	14167	15%	8	2125	90	87.1%	3.2%	9.7%	1850	69	206	0.0	**84.6**	**1.8**	**69.5**
Highway 85 - Southbound - N of Northfield Dr. W.	14167	15%	8	2125	90	87.1%	3.2%	9.7%	1850	69	206	0.0	**84.6**	**1.8**	**69.5**
Highway 85 - Northbound - S of Northfield Dr. W.	26178	15%	8	3927	90	93.0%	1.8%	5.3%	3650	69	207	0.0	**85.4**	**1.5**	**70.4**
Highway 85 - Southbound - S of Northfield Dr. W.	26178	15%	8	3927	90	93.0%	1.8%	5.3%	3650	69	207	0.0	**85.4**	**1.5**	**70.4**

Keni Mallinen

From: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Sent: January 23, 2024 11:40 AM
To: Jason Dorssers
Cc: jenny.setterfield@waterloo.ca; Keni Mallinen
Subject: RE: Noise Assessment Requests Id: NA240116-xblg5x

Some people who received this message don't often get email from nwennyk@regionofwaterloo.ca. Learn why this is important

Hi Jason,

Not sure if you have had contact with anyone - Sorry for the delay.

Please see the below table for the ultimate ION LRT headway for each time period, based on the Baseline Service Plan 2 (2021-24) contained within Rapid Transit's Project Agreement (exact timetable is subject to change).

Time period (weekdays)	Headway
Early morning (05:00 – 07:30)	15 minutes
AM Peak (07:30 – 09:30)	8 minutes
Midday (09:30 – 14:30)	10 minutes
PM Peak (14:30 – 18:30)	7.5 minutes
Evening (18:30 – 01:00 next day)	15 minutes

Thank you,

Natalie Wennyk
Engineering Intern | Transportation Planning
Transportation Division | Region of Waterloo
150 Frederick Street, Kitchener, ON
519-501-0691

From: Jason Dorssers <jdorssers@slrconsulting.com>
Sent: January 18, 2024 10:45 AM
To: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Cc: jenny.setterfield@waterloo.ca; Keni Mallinen <kmallinen@slrconsulting.com>
Subject: RE: Noise Assessment Requests Id: NA240116-xblg5x

****EXTERNAL ALERT** This email originated from outside the Region of Waterloo.**

Natalie,

Thank you kindly for getting to this request so quickly. It is really appreciated.

Any idea who to speak to on the ION LRT?

Best,
Jason

Jason Dorssers B.Eng., EIT

Acoustics Consultant

O +1 226 706 8080
M 519-362-0958
E jdorssers@slrconsulting.com

SLR Consulting (Canada) Ltd
100 Stone Road West, Suite 201, Guelph ON Canada N1G 5L3



Confidentiality Notice and Disclaimer
This communication and any attachment(s) contain information which is confidential and may also be legally privileged. It is intended for the exclusive use of the recipient(s) to whom it is addressed. If you have received this communication in error, please e-mail us by return e-mail and then delete the e-mail from your systen together with any copies of it. Any views or opinions are solely those of the author and do not represent those of SLR Management Ltd, or any of its subsidiaries, u specifically stated.

From: Region of Waterloo Road Permits <no-reply-permits@regionofwaterloo.ca>
Sent: January 18, 2024 10:37 AM
To: Jason Dorssers <jdorssers@slrconsulting.com>
Cc: nwennyk@regionofwaterloo.ca
Subject: Noise Assessment Requests Id: NA240116-xblg5x

> You don't often get email from no-reply-permits@regionofwaterloo.ca. Learn why this is important

Hi Jason,

Please follow this link to your traffic forecast for 170 Northfield Dr W, Waterloo:
https://rmow.permitcentral.ca/Permit/PermitApplicationView/NA240116-xblg5x

Please note Kumpf Dr and Parkside Dr are not under Region of Waterloo jurisdiction. As such, I recommend connecting with Jenny at City of Waterloo to verify these forecasts at Jenny.Setterfield@waterloo.ca.

Best,
Natalie Wennyk
nwennyk@regionofwaterloo.ca

Railway Company	Region	Province	Access	Jurisdiction	Mile	Subdivision	Spur Mile Point	Spur Name	Location	Latitude	Longitude	Road Authority	Protection	Accident	Fatality	Injury	Total Trains Daily	Vehicles Daily	Train Max Speed (mph)	Road Speed (km/h)	Lanes	Tracks	IsUrban
MUNI	ONT	ON	Public	P	62.5	Guelph - GO	4.73	Waterloo	Northfld Dr (Reg 50)	43.498	-80.5436	Waterloo (ON)	Active - FLB	0	0	0	2	20040	15	60	6	1	N

Source: https://tc.canada.ca/en/rail-transportation/grade-crossings/grade-crossings-inventory

Name	M.	ID	Lw' Day (dBA)	Lw' Night (dBA)	Train Class	Correct. Track (dB)	Vmax (km/h)	Height A (m)	E (m)	A_att	E_Att	Length (m)	Train Type 1 Type	No. Day	No. Night	Speed (km/h)	Throttle (1 to 8)
CN Freight - Locomotive		CNfreight_loco	-81	42.9	(local)	0		0.6		r		1821	FRA_CONV_FRE_CAR	0	12	24	8
ION LRT - NB/EB		ION_wheel	53.5	48.7	(local)	5		0.6		r		1299	FTA_COMM_CAR	67	11	50	0
ION LRT - SB/WB		ION_wheel	53.5	48.7	(local)	5		0.6		r		1312	FTA_COMM_CAR	67	11	50	0
CN Freight - Locomotive		CNfreight_wheel	-81	45.6	(local)	0		0.6		r		1821	FTA_COMM_CAR	0	75	24	0

Appendix D STAMSON Output File

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

STAMSON 5.0 NORMAL REPORT Date: 16-02-2024 16:31:35
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: st5.te Time Period: 16 hours
Description: STAMSON Validation - Sample Calculation

Road data, segment # 1: NorthfieldWB

Car traffic volume : 14274 veh/TimePeriod
Medium truck volume : 147 veh/TimePeriod
Heavy truck volume : 294 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: NorthfieldWB

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 16.80 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Road data, segment # 2: NorthfieldEB

Car traffic volume : 14274 veh/TimePeriod
Medium truck volume : 147 veh/TimePeriod
Heavy truck volume : 294 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 2: NorthfieldEB

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 23.70 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Road data, segment # 3: WeberStreetN

Car traffic volume : 13253 veh/TimePeriod
Medium truck volume : 279 veh/TimePeriod
Heavy truck volume : 419 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

```
Data for Segment # 3: WeberStreetN
----------------------------------
Angle1   Angle2           : -22.00 deg   0.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 167.00 m
Receiver height           :   2.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Road data, segment # 4: ParksideDr
----------------------------------
Car traffic volume  :  8398 veh/TimePeriod
Medium truck volume :   183 veh/TimePeriod
Heavy truck volume  :   548 veh/TimePeriod
Posted speed limit  :    50 km/h
Road gradient       :     0 %
Road pavement       :     1 (Typical asphalt or concrete)

Data for Segment # 4: ParksideDr
----------------------------------
Angle1   Angle2           :  -3.00 deg   24.00 deg
Wood depth                :      0       (No woods.)
No of house rows          :      0
Surface                   :      2       (Reflective ground surface)
Receiver source distance  : 130.50 m
Receiver height           :   2.00 m
Topography                :      1       (Flat/gentle slope; no barrier)
Reference angle           :   0.00

Results segment # 1: NorthfieldWB
----------------------------------

Source height = 1.19 m

ROAD (0.00 + 66.66 + 0.00) = 66.66 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj SubLeq
-------------------------------------------------------------------------------
   -90     90   0.00  67.15   0.00  -0.49   0.00   0.00   0.00   0.00  66.66
-------------------------------------------------------------------------------

Segment Leq : 66.66 dBA

Results segment # 2: NorthfieldEB
----------------------------------

Source height = 1.19 m

ROAD (0.00 + 65.16 + 0.00) = 65.16 dBA
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj SubLeq
-------------------------------------------------------------------------------
   -90     90   0.00  67.15   0.00  -1.99   0.00   0.00   0.00   0.00  65.16
-------------------------------------------------------------------------------

Segment Leq : 65.16 dBA
```

Results segment # 3: WeberStreetN

Source height = 1.32 m

ROAD (0.00 + 48.44 + 0.00) = 48.44 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-22	0	0.00	68.03	0.00	-10.47	-9.13	0.00	0.00	0.00	48.44

Segment Leq : 48.44 dBA

Results segment # 4: ParksideDr

Source height = 1.57 m


ROAD (0.00 + 48.99 + 0.00) = 48.99 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-3	24	0.00	66.63	0.00	-9.40	-8.24	0.00	0.00	0.00	48.99

Segment Leq : 48.99 dBA

Total Leq All Segments: 69.07 dBA

TOTAL Leq FROM ALL SOURCES: 69.07

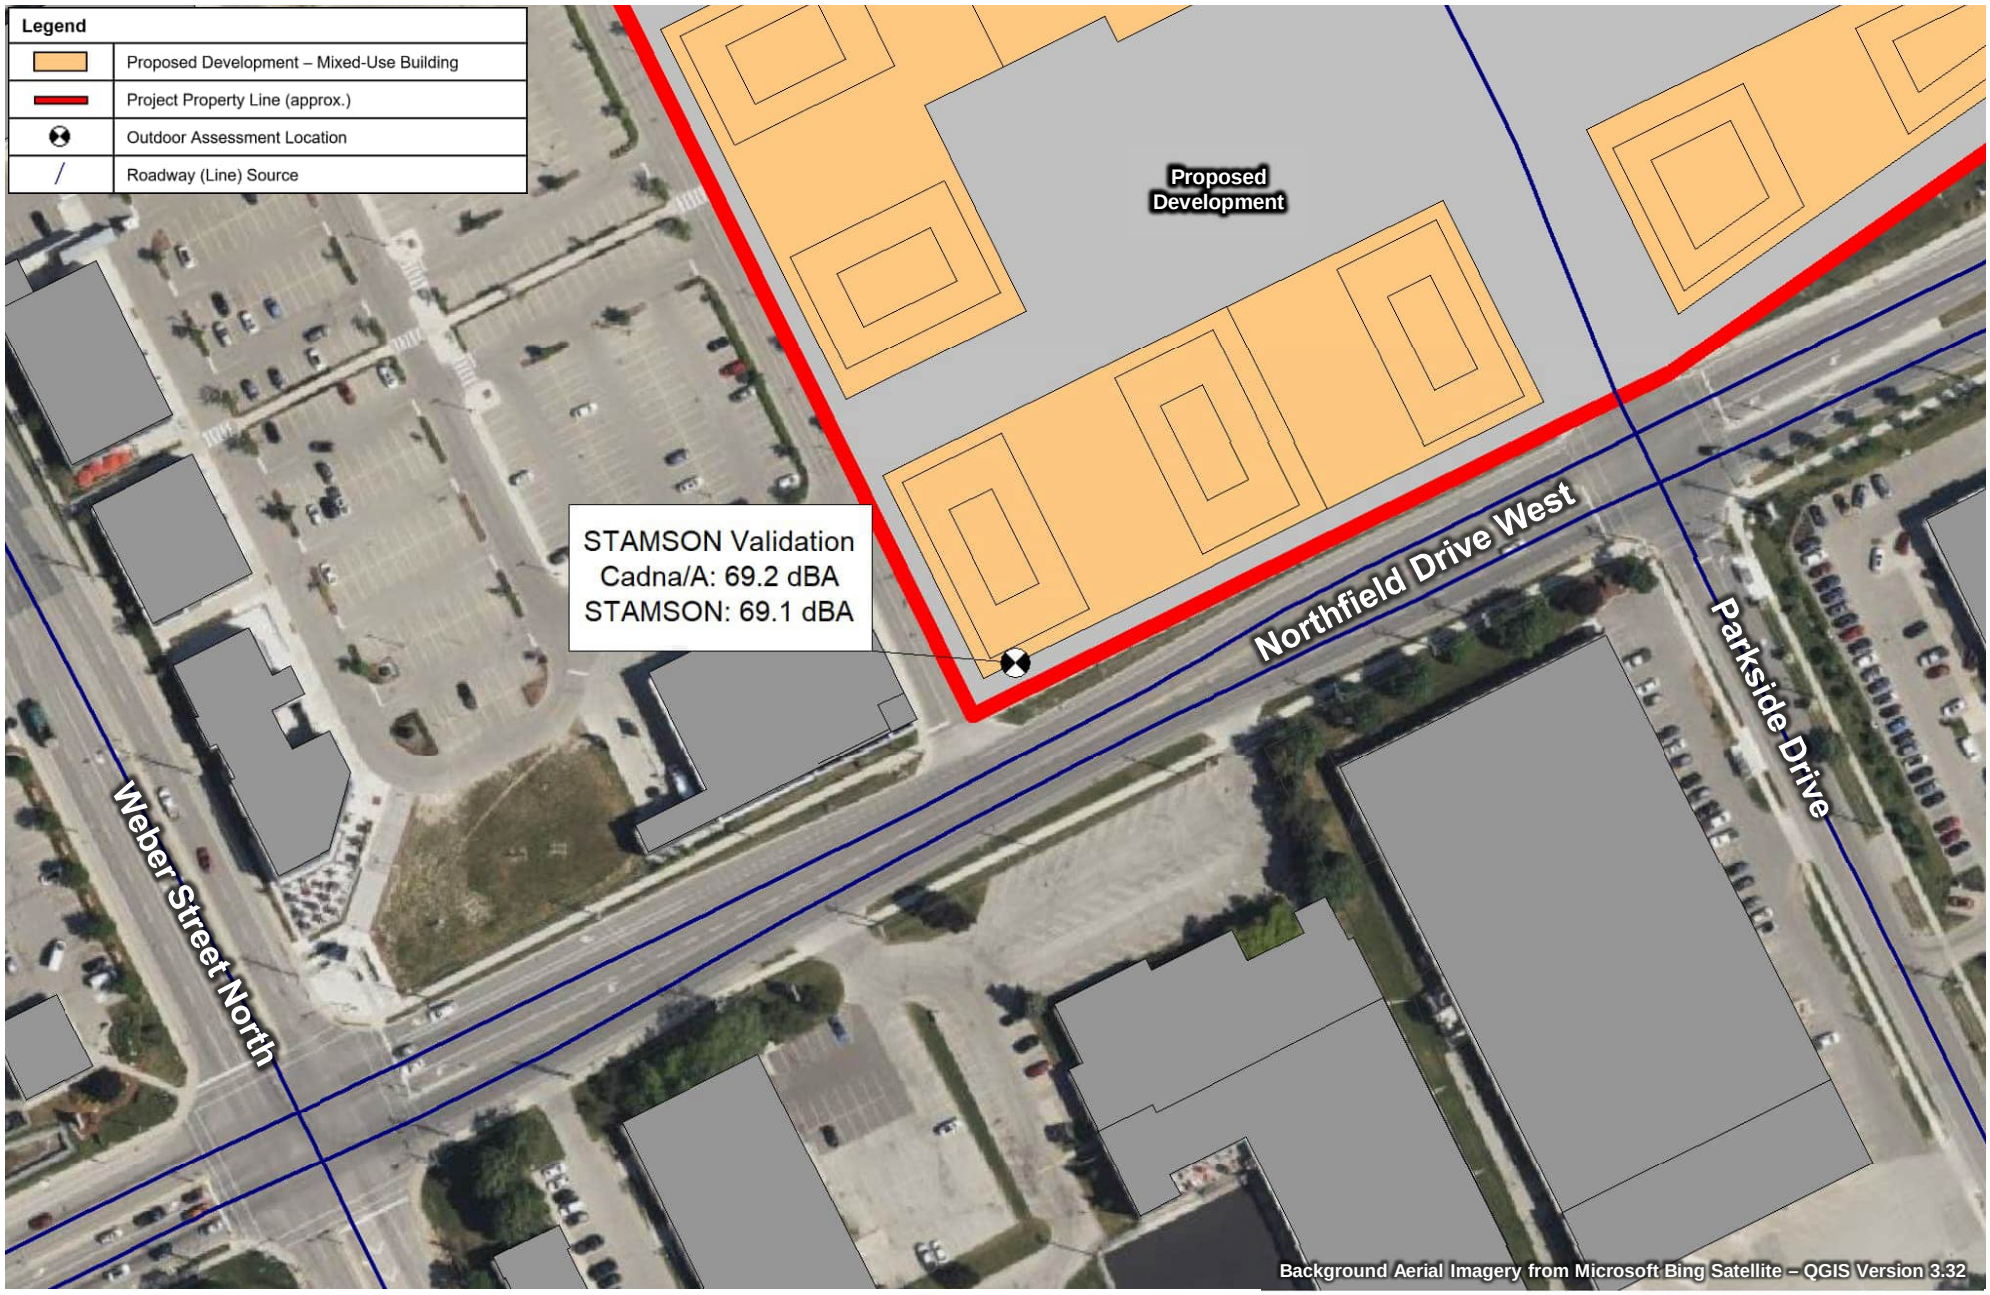

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev. A	Figure No. **D1**
COMPARISON OF CADNA/A AND STAMSON – ROAD TRAFFIC NOISE		Project No. 241.030968.00001	

SLR

Appendix E Ventilation, Warning Clause and Mitigation Summary

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

Appendix E Ventilation, Warning Clause and Mitigation Summary

The following warning clauses are recommended for inclusion in agreements registered on Title for the residential units and included in all agreements of purchase and sale or lease, and all rental agreements.

A summary of the warning clause, ventilation and mitigation requirements is included in **Table E.1**.

MECP Type A: “Purchasers/tenants are advised that sound levels due to increasing road and rail traffic may occasionally interfere with some activities of the dwelling occupants as the sound levels exceed the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type C: “This dwelling unit has been designed with the provision for adding central air conditioning at the occupant’s discretion. Installation of central air conditioning by the occupant will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type D: “This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type E: “Purchasers/tenants are advised that due to the proximity of near employment lands (industries, commercial and retail uses), noise from industries, commercial and retail uses may at times be audible.”

Table E.1: Summary of Ventilation, Warning Clause and Mitigation Requirements

Proposed Development Location/Building	Barrier Required?	Ventilation Requirement [1]	Warning Clause Requirement(s)
Building A Podium	-	Central AC	Type D, Type E
Building A Tower	-	Provision for AC	Type C, Type E
Building B1 Tower	-	Provision for AC	Type A, Type C, Type E
Building B2 Tower	-	Provision for AC	Type A, Type C, Type E
Building C1 Tower	-	Provision for AC	Type A, Type C, Type E
Building C2 Tower	-	Central AC	Type A, Type D, Type E
Building D Podium	-	Central AC	Type D, Type E
Building D1 Tower	-	Central AC	Type D, Type E
Building D2 Tower	-	Central AC	Type D, Type E
Building E Podium	-	Central AC	Type D, Type E
Building E Tower	-	Provision for AC	Type C, Type E
Building F1 Tower	-	Provision for AC	Type C, Type E
Building F2 Tower	-	Provision for AC	Type C, Type E
Building G Podium	-	Central AC	Type D, Type E
Building G1 Tower	-	Central AC	Type D, Type E
Building G2 Tower	-	Central AC	Type D, Type E
Building H1 Podium	-	Central AC	Type D, Type E
Building H1 Tower	-	Central AC	Type D, Type E
7th Floor Amenity Terraces (All Buildings)	1.1 m Parapet Wall included in design	-	-
Notes: [1] AC = air conditioning			

Appendix F Ambient Road Traffic Sound Levels

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001


March 14, 2024

O R N A M E N T - Sound Power Emissions & Source Heights

Ontario Road Noise Analysis Method for Environment and Transportation

Ambient Road Traffic

Road Segment ID	AADT	Percent Traffic In Period	Period (h)	Total Traffic Volumes (Period)	Speed (kph)	Auto %	Med %	Hvy %	Auto	Med	Heavy	Road Gradient (%)	PWL (dBA)	Source Height, s (m)	Reference Leq (dBA)
Daytime Ambient															
Kumpf Drive	2400	4.3%	1	103	50	91.0%	3.0%	6.0%	94	3	6	0.0	**74.4**	**1.6**	**59.3**
Parkside Drive	9009	4.3%	1	387	50	92.0%	2.0%	6.0%	356	8	23	0.0	**80.0**	**1.6**	**64.9**
Weber Street North	13300	4.3%	1	572	60	95.0%	2.0%	3.0%	543	11	17	0.0	**81.3**	**1.3**	**66.2**
Northfield Drive - Westbound	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Westbound - Downhill	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Eastbound	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Eastbound - Uphill	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	2.1	**81.3**	**1.2**	**66.2**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	4.3%	1	495	90	87.1%	3.2%	9.7%	431	16	48	0.0	**87.3**	**1.8**	**72.2**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	4.3%	1	495	90	87.1%	3.2%	9.7%	431	16	48	0.0	**87.3**	**1.8**	**72.2**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	4.3%	1	914	90	93.0%	1.8%	5.3%	849	16	48	0.0	**88.1**	**1.5**	**73.1**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	4.3%	1	914	90	93.0%	1.8%	5.3%	849	16	48	0.0	**88.1**	**1.5**	**73.1**
Evening Ambient															
Kumpf Drive	2400	3.1%	1	74	50	91.0%	3.0%	6.0%	68	2	4	0.0	**73.0**	**1.6**	**57.9**
Parkside Drive	9009	3.1%	1	279	50	92.0%	2.0%	6.0%	257	6	17	0.0	**78.6**	**1.6**	**63.5**
Weber Street North	13300	3.1%	1	412	60	95.0%	2.0%	3.0%	392	8	12	0.0	**79.8**	**1.3**	**64.8**
Northfield Drive - Westbound	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Westbound - Downhill	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Eastbound	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Eastbound - Uphill	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	2.1	**79.9**	**1.2**	**64.8**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	3.1%	1	357	90	87.1%	3.2%	9.7%	310	12	35	0.0	**85.9**	**1.8**	**70.8**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	3.1%	1	357	90	87.1%	3.2%	9.7%	310	12	35	0.0	**85.9**	**1.8**	**70.8**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	3.1%	1	659	90	93.0%	1.8%	5.3%	612	12	35	0.0	**86.7**	**1.5**	**71.7**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	3.1%	1	659	90	93.0%	1.8%	5.3%	612	12	35	0.0	**86.7**	**1.5**	**71.7**
Night-time Ambient															
Kumpf Drive	2400	0.4%	1	10	50	91.0%	3.0%	6.0%	9	0	1	0.0	**64.1**	**1.6**	**49.0**
Parkside Drive	9009	0.4%	1	36	50	92.0%	2.0%	6.0%	33	1	2	0.0	**69.7**	**1.6**	**54.6**
Weber Street North	13300	0.4%	1	53	60	95.0%	2.0%	3.0%	51	1	2	0.0	**71.0**	**1.3**	**55.9**
Northfield Drive - Westbound	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Westbound - Downhill	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Eastbound	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Eastbound - Uphill	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	2.1	**71.0**	**1.2**	**55.9**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	0.4%	1	46	90	87.1%	3.2%	9.7%	40	1	4	0.0	**77.0**	**1.8**	**61.9**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	0.4%	1	46	90	87.1%	3.2%	9.7%	40	1	4	0.0	**77.0**	**1.8**	**61.9**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	0.4%	1	85	90	93.0%	1.8%	5.3%	79	1	4	0.0	**77.8**	**1.5**	**62.8**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	0.4%	1	85	90	93.0%	1.8%	5.3%	79	1	4	0.0	**77.8**	**1.5**	**62.8**

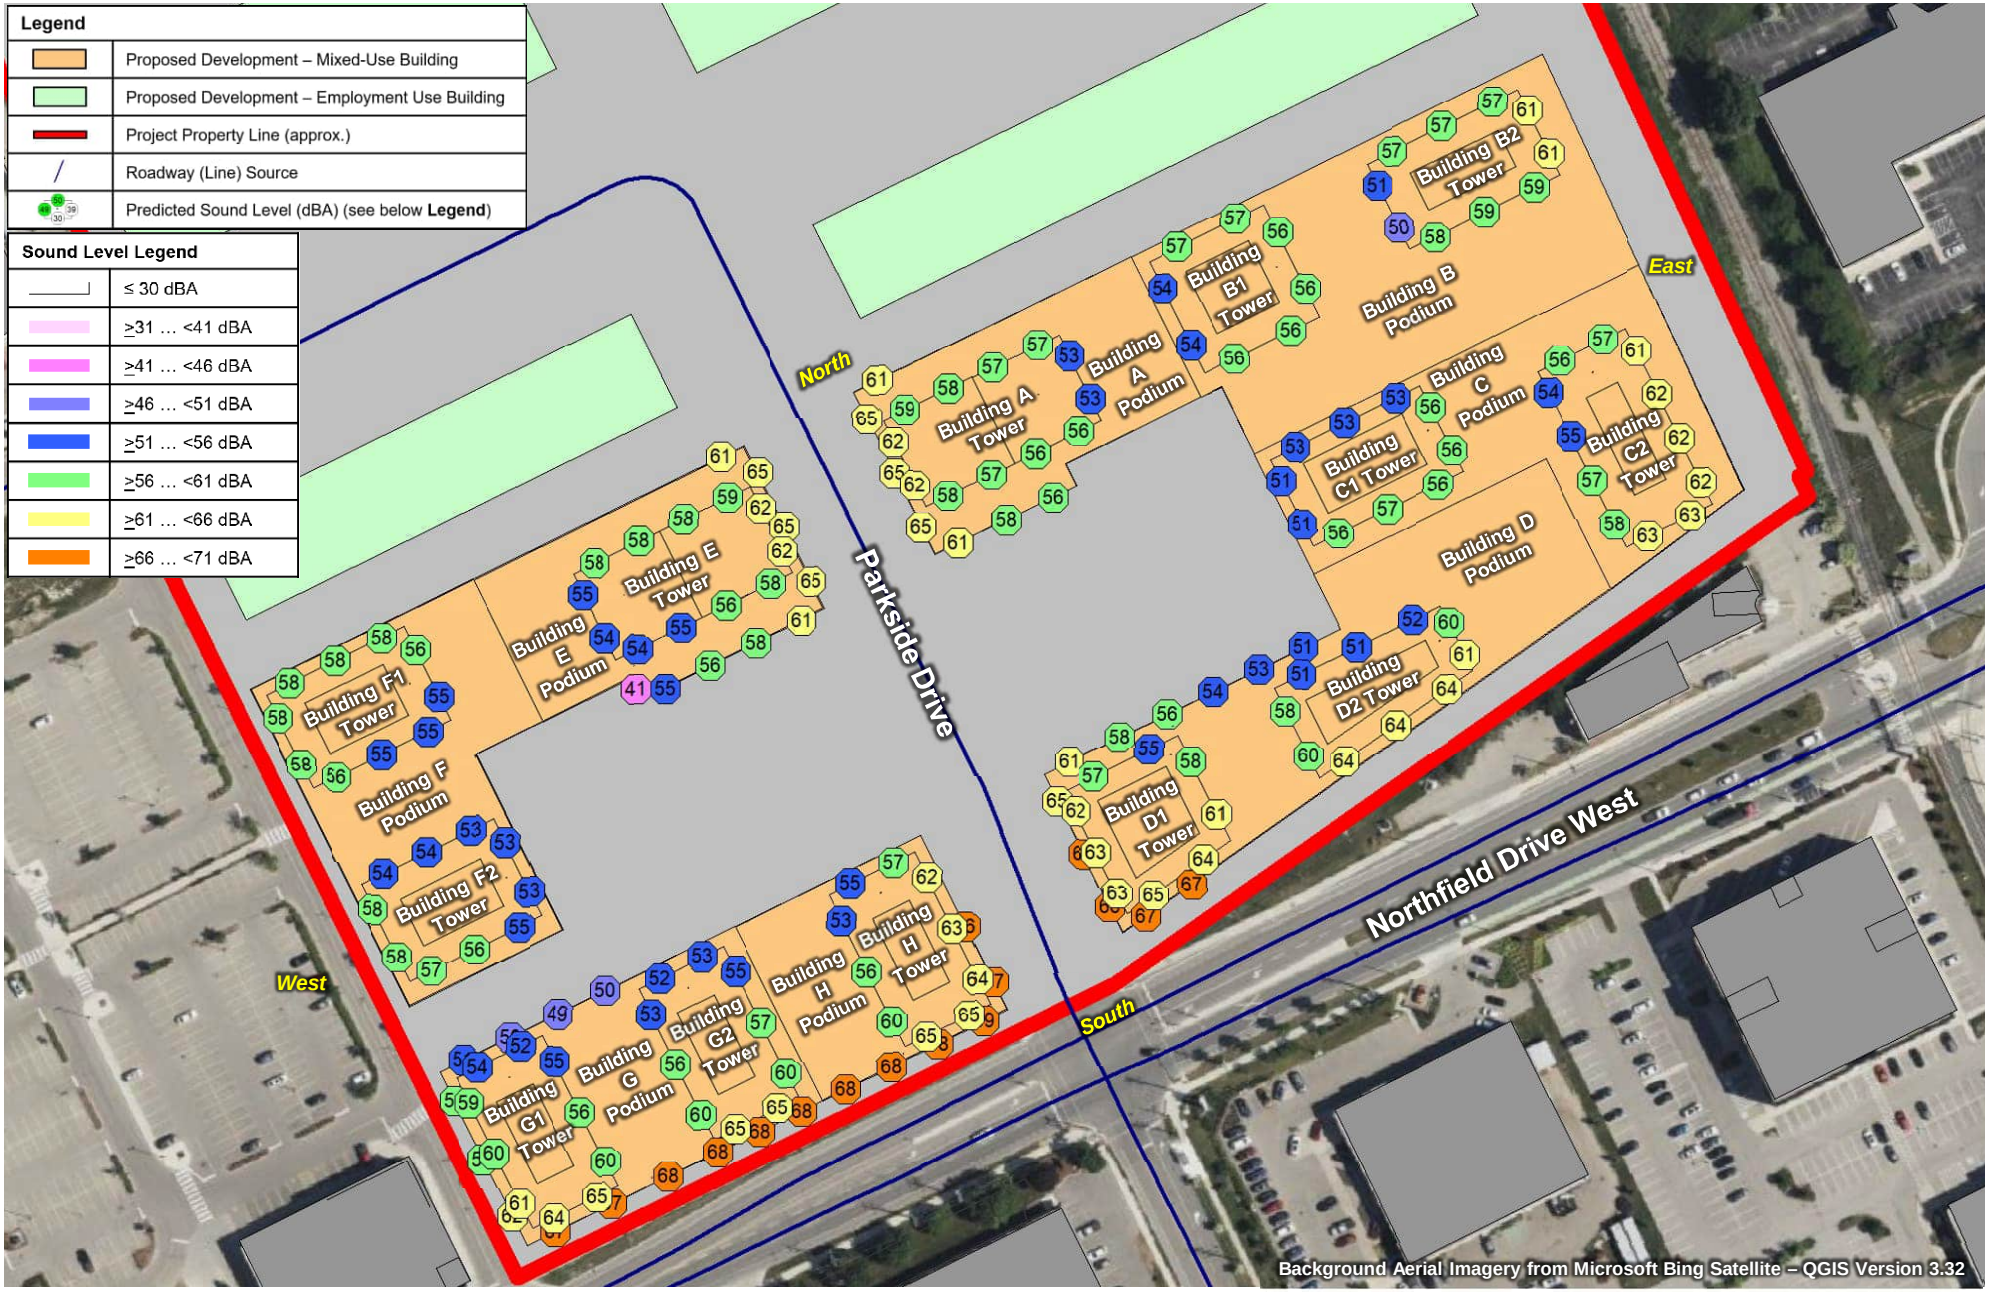

FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM DAYTIME HOUR

True North

Scale: 1:1,250


METRES

Date: March 14, 2024 Rev. A

Project No. 241.030968.00001


Figure No. **F1**

SLR

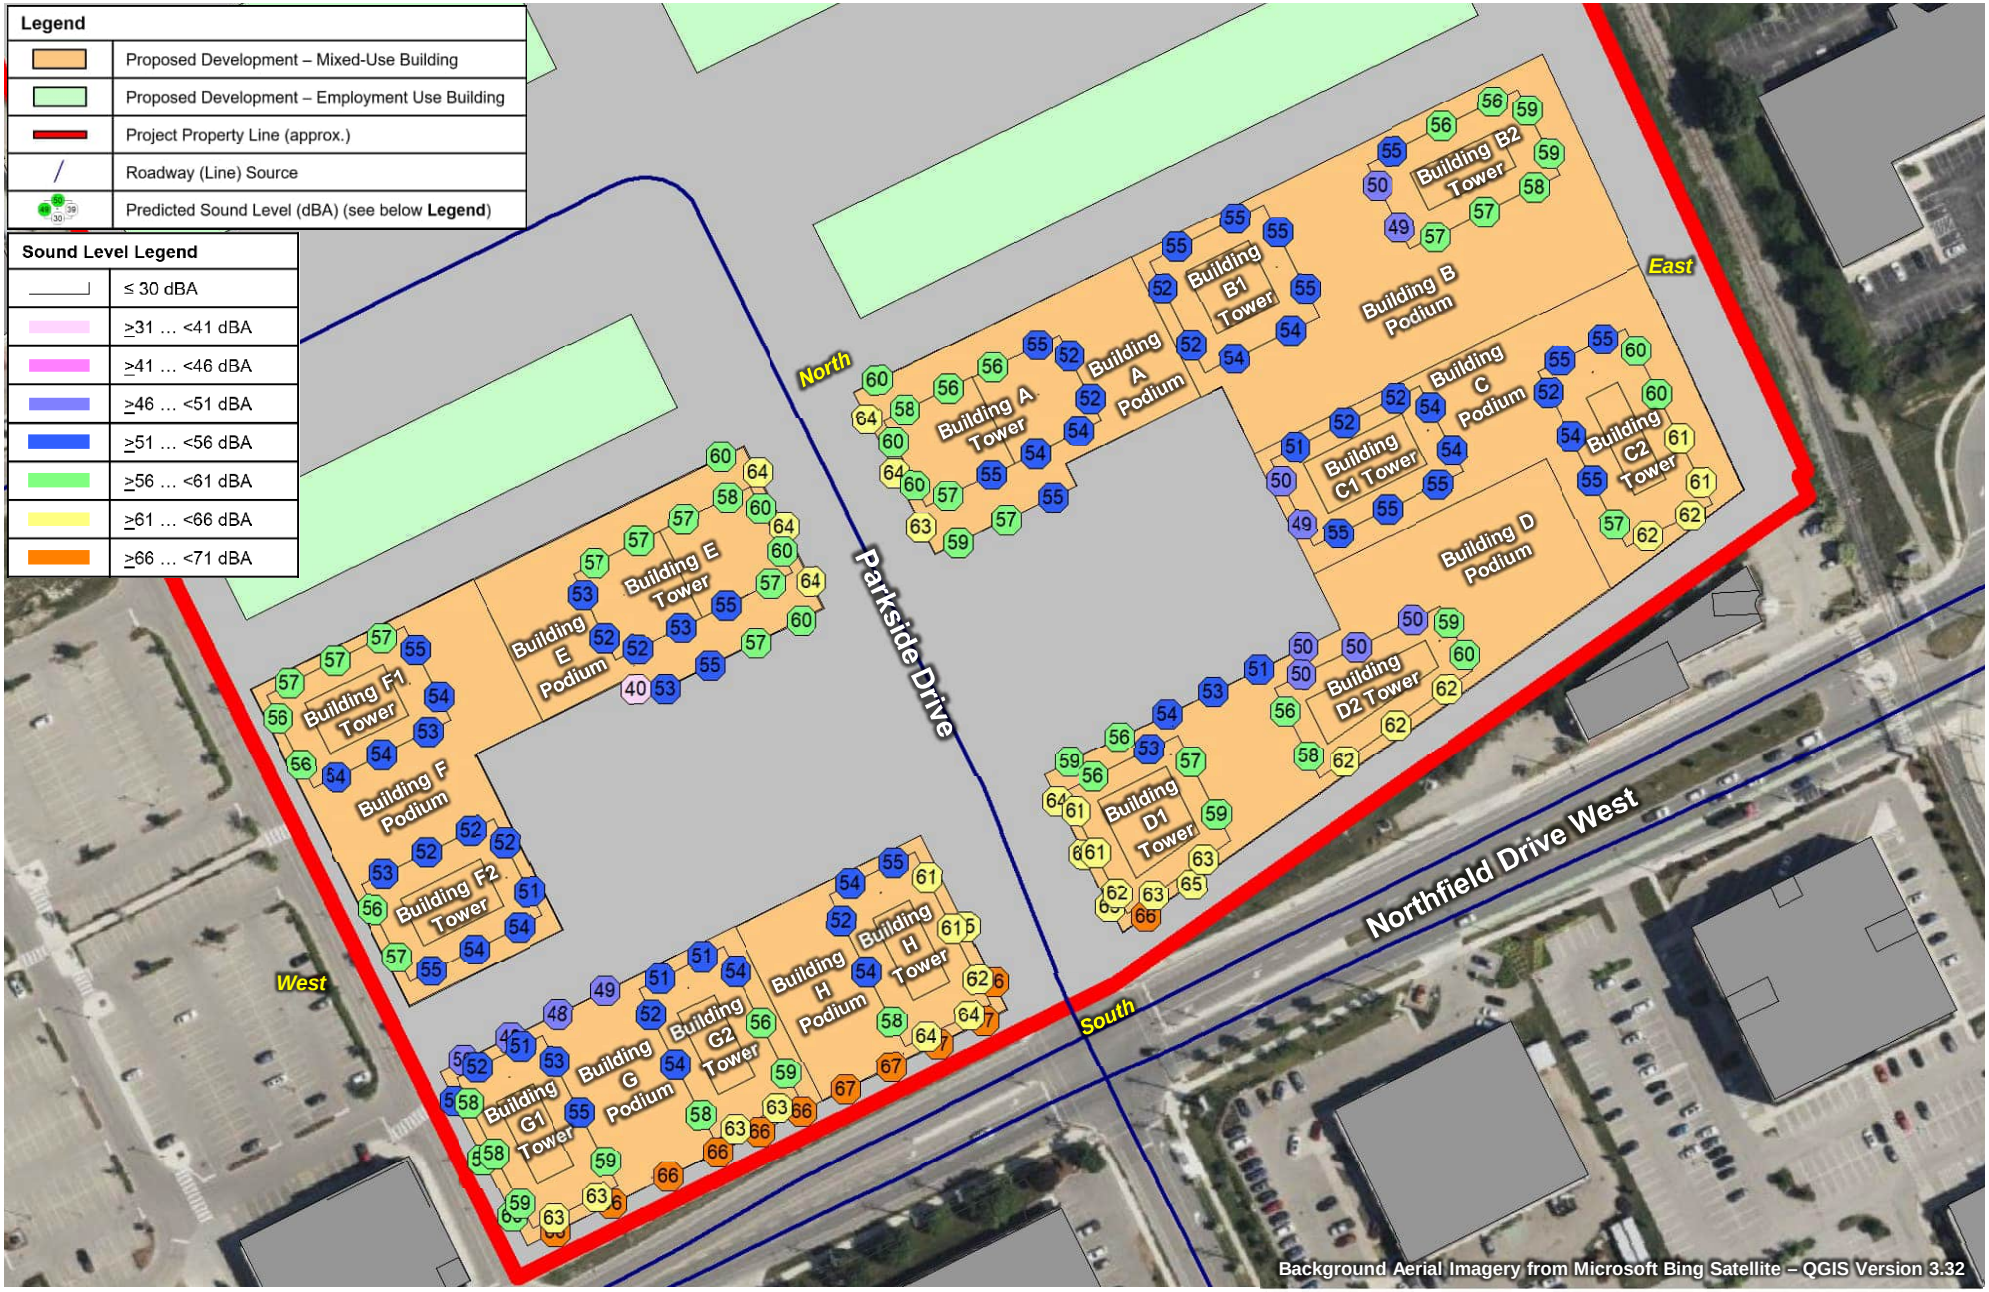

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev. A	Figure No. **F2**
PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM EVENING HOUR		Project No. 241.030968.00001	

SLR

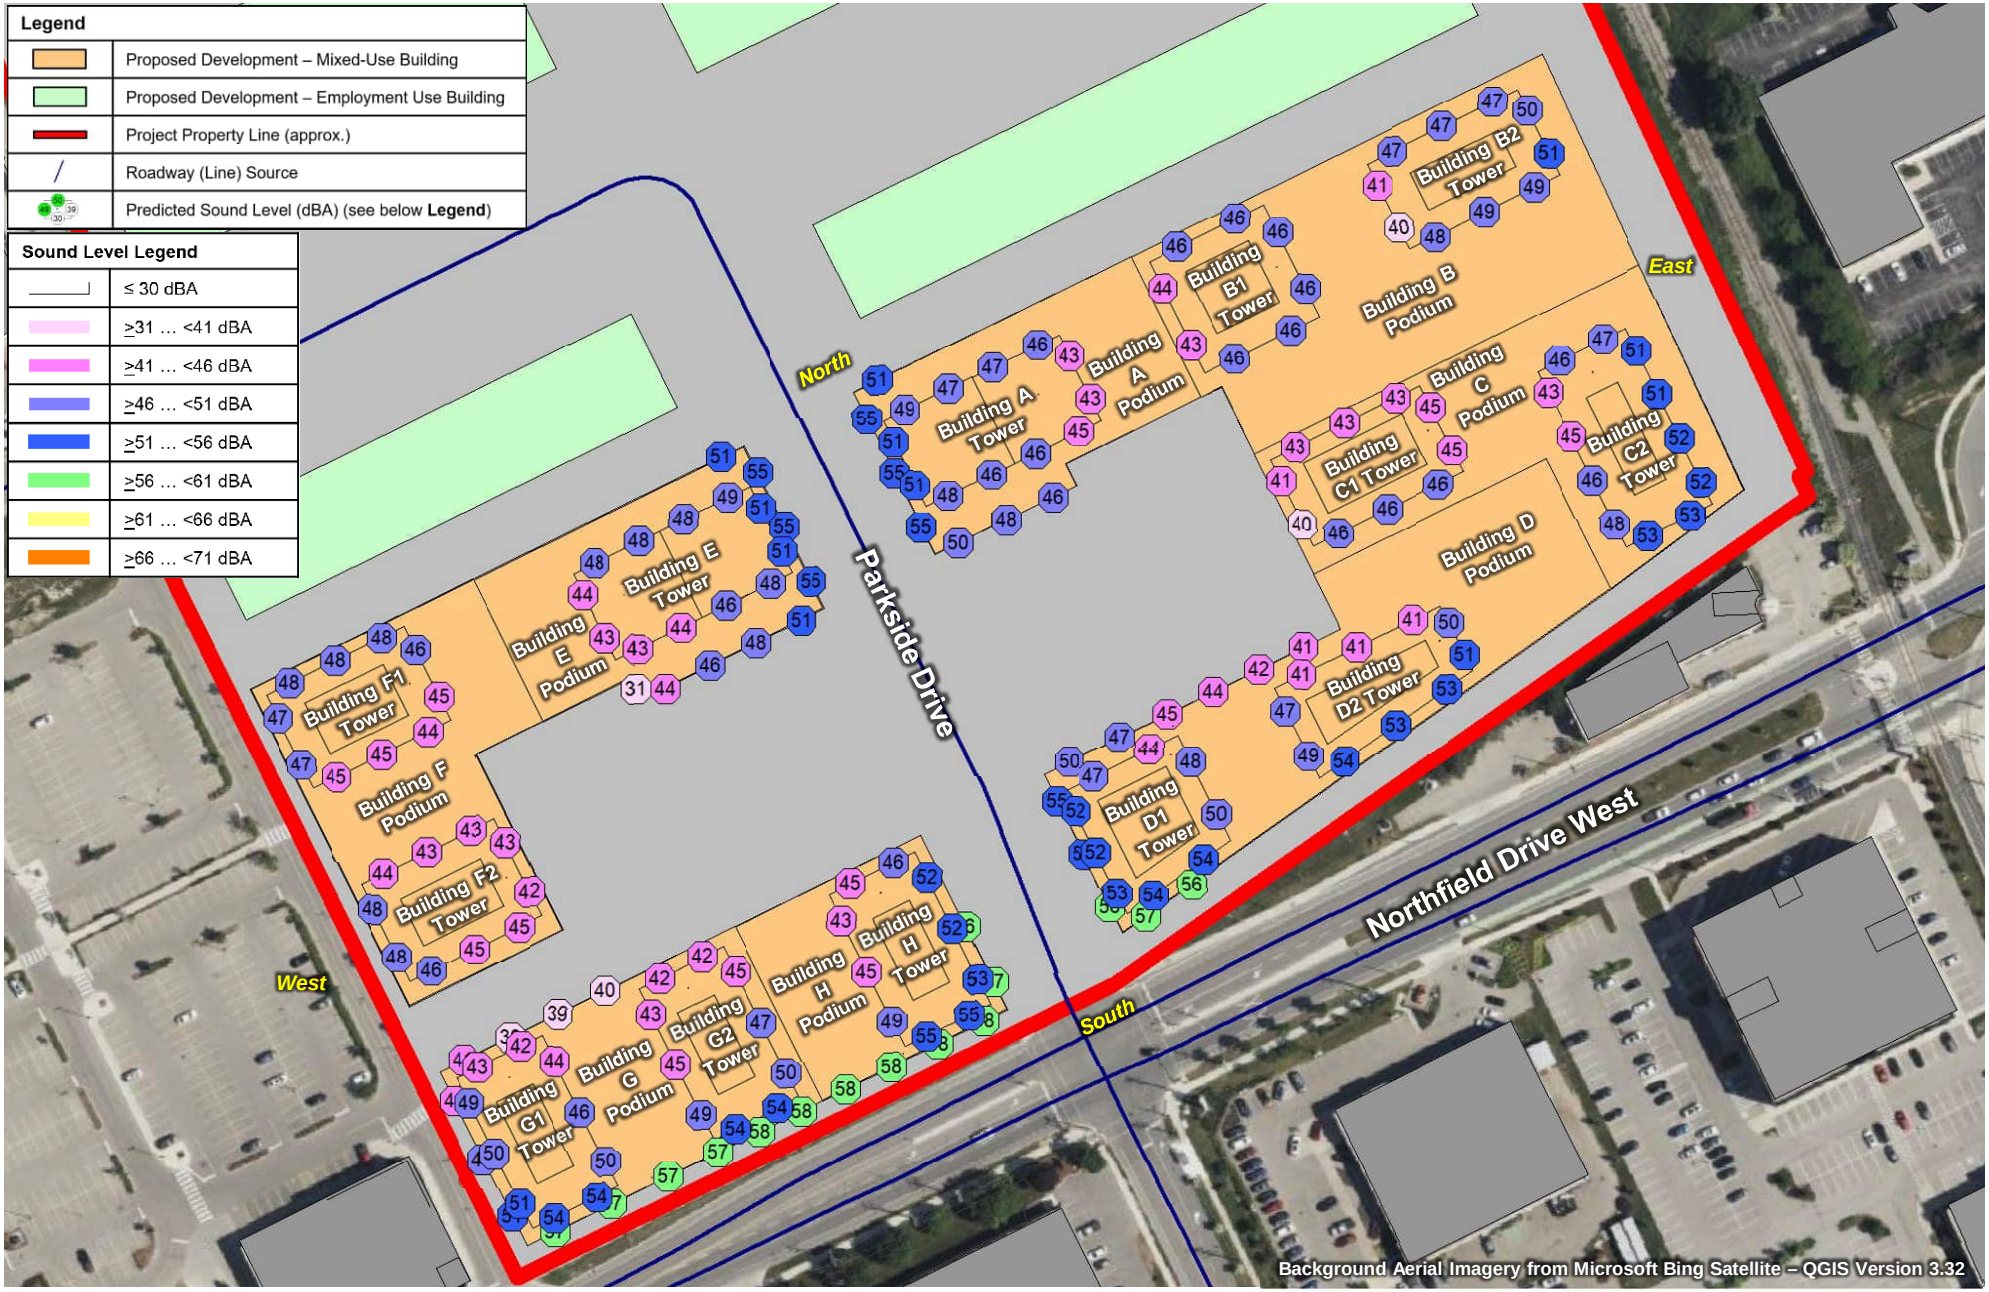

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: March 14, 2024 Rev. A	Figure No. **F3**
PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM NIGHT-TIME HOUR		Project No. 241.030968.00001	

SLR

Appendix G Surrounding Stationary Sources – Facility Review

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

Appendix G Inventory of Surrounding Stationary Sources/Facilities

The following facilities within 300 m of the noise sensitive portions of the proposed development were reviewed. No Class III industries with respect to noise were identified or audible at the Project site.

Table G1: Review of Surrounding Stationary Sources/Facilities

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
Office Building – 565 Kumpf Drive		Multi-tenant office building	9:00 AM to 5:00 PM	---	Modelled in detail. See Report Section 4.5.1.
Teledyne DALSA – 575 Kumpf Drive		Manufacturer of technology products (drones)	9:00 AM to 5:00 PM	---	Modelled in detail. See Report Section 4.5.2.
Office/Commercial Building – 101-139 Northfield Drive West		Multi-tenant office/commercial building	Varies, 8:30 AM to 5:00 AM	---	Modelled in detail. See Report Section 4.5.3.
Waterloo Nissan – 141 Northfield Drive West		Vehicle dealership and service centre	9:00 AM to 8:00 PM	---	Modelled in detail. See Report Section 4.5.4.
Heffner Cabinetry & Woodworking – 145 Northfield Drive West		Manufacturer of cabinetry and wood products	8:00 AM to 4:30 PM	5843-77LM2Z, 10/18/2007 [1]	Modelled in detail. See Report Section 4.5.5.
Greystone Club – 155 Northfield Drive West		Health and wellness club (gym facilities)	5:30 AM to 10:00 PM	---	Modelled in detail. See Report Section 4.5.6.
Shoppers Drug Mart – 190 Northfield Drive West		Pharmacy (retail)	8:00 AM to 10:00 PM	---	Modelled in detail. See Report Section 4.5.7.
Sobeys – 640 Parkside Drive		Grocery store	7:00 AM to 11:00 PM	---	Modelled in detail. See Report Section 4.5.8.
Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive		Manufacturer of barbecues	8:30 AM to 4:30 PM	---	Modelled in detail. See Report Section 4.5.9.
Waterloo Fire Station 3 – 150 Northfield Drive West		Fire station with emergency generator	24 hours per day	8495-7HMQZ5, 08/19/2008 (standby generator)	Modelled in detail. See Report Section 4.5.10a and 4.5.10b.

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
1	Northfield Centre Plaza – 585 Weber Street North	Multi-tenant commercial/retail/gym	24 hours per day	---	Class I Light Industry, > 70 m from proposed development.
2	Starbucks – 590 Weber Street North	Coffee Shop	6:00 AM to 9:30 PM	---	Class I Light Industry, > 70 m from proposed development.
3	Waterloo Corporate Campus – Building – 655 Parkside Drive	Multi-tenant commercial/retail building	Varies, 9:00 AM to 10:00 PM	---	Class I Light Industry, > 70 m from proposed development.
4	Waterloo Corporate Campus – Building – 584 Weber street North	Multi-tenant commercial/retail building	Varies, 7:00 AM to 9:00 PM	---	Class I Light Industry, > 70 m from proposed development.
5	Pet Valu – 585 Weber Street North	Pet Store	9:00 AM to 9:00 PM	---	Class I Light Industry, > 70 m from proposed development.
6	State & Main – 578 Weber Street North	Restaurant	11:00 AM to 12:00 AM	---	Class I Light Industry, > 70 m from proposed development.
7	TD Canada Trust – 576 Weber Street North	Bank and ATM	9:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
8	Marsland Mall Business Centre – 572 Weber Street North	Multi-tenant office/commercial building	Varies, 8:00 AM to 7:00 PM	---	Class I Light Industry, > 70 m from proposed development.
9	Marsland Mall Business Centre – 564 Weber Street North	Multi-tenant office/commercial building	Varies, 7:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
10	Imagine Fibreglass Pools – 560 Weber Street North	Swimming pool contractor	9:30 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
10	Johnsonite (Canada) Inc. |Tarkett – 560 Weber Street North	Vinyl flooring manufacturer	Unavailable	3482-8ESR5L, 03/30/2011	Class II Medium Industry, source located closer to/more exposed to existing points of reception on west side of Weber Street North
10	L'air Camper Co – 560 Weber Street North	Camping store	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
11	555 Parkside Drive	Formerly Terra Bioplastics Inc. (plastics manufacturer) – current tenant unknown	Unavailable	---	Class I Light Industry, > 70 m from proposed development.
12	Bo-De Factory Outlet – 551 Parkside Drive	Wholesale grocer	9:00 AM to 7:00 PM	---	Class I Light Industry, > 70 m from proposed development.
13	Cineplex Digital Media – 137 Northfield Drive West	Corporate office	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
14	Planitar Inc. – 560 Parkside Drive	Mapping services office	Unavailable	---	Class I Light Industry, > 70 m from proposed development.
14	KA Imaging Inc. – 560 Parkside Drive	Manufacturer, imaging technologies	9:00 AM to 5:30 PM	---	Class I Light Industry, > 70 m from proposed development.
14	Crunch Fitness – Waterloo, Physiomed Waterloo – 560 Parkside Drive	Fitness center, physiotherapist	Open 24 hours	---	Class I Light Industry, > 70 m from proposed development.
15	Emerge2 Digital – 554 Parkside Drive	E-commerce services	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
15	Atletica Sport Systems Inc. – 554 Parkside Drive	Manufacturer, sports equipment	8:00 AM to 4:30 PM	---	Class I Light Industry, > 70 m from proposed development.
16	Forbes Waterloo Mazda – 115 Northfield Drive West	Vehicle dealership and service centre	9:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
17	Ontario Teachers Insurance Plan (OTIP) – 125 Northfield Drive West	Corporate office	8:00 AM to 5:00 PM	4579-AANLM9, 06/10/2016 (standby generator) 4579-AANLM9, 06/10/2016	Class I Light Industry, > 70 m from the proposed development. Proposed development will not affect compliance status with existing approvals.
18	Clearpath Robotics Waterloo Office – 97 Randall Drive	Corporate office	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
19	Office Building	Offices	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.
20	NDI – Northern Digital Inc.	Medical equipment supplier	8:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	DarwinAI – 600 Weber Street North	Software company office	8:30 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	Aquanty – 600 Weber Street North	Corporate office	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	Sun Life – 600 Weber Street North	Corporate office	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.
22	ION LRT Operation Maintenance/Storage Facility – 518 Dutton Drive	Maintenance/storage facility for Grand River Transit LRT	Unavailable	3478-9YWNHR, 05/07/2016	Class II Medium Industry, ~300 m from the proposed development. Facility was not audible from Project site during January 25, 2024 or February 1, 2024 site visits by SLR personnel. Proposed development not expected affect compliance status with existing environmental approvals. South facades of proposed development most exposed to facility experience high ambient sound levels due to road traffic from Northfield Drive West, Highway 85.
Notes:	[1] ECA/CofA shown as 'Approved' on MECP Access Environment. Issued for different business name/entity, not reflective of current operations at facility.				

Appendix H Stationary Source Modelling Information

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
Office Building - 545 Kumpf Drive											
8x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
7x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
3x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
2x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
Teledyne DALSA - 565 Kumpf Drive											
6x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
4x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling during posted facility hours)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Office/Commercial Buildings - 101-139 Northfield Drive West											
5x Rooftop Exhaust Fans	-	-	88	83	81	74	68	64	60	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
2x Rooftop Make Up Air Units	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Fluid Cooler		100	97	96	91	87	85	84	83	94	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
Waterloo Nissan - 141 Northfield Drive West											
3x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
2x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours when facility is open
2x Rooftop Exhaust Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours when facility is open
Open Bay Door x 2 - Impact Wrench	83	78	82	76	79	78	86	85	85	91	Based on historical SLR data - Operates 1 minute per hour during daytime - +10 dB penalty for quasi-steady-state impulsive sound quality (total PWL = 101 dBA)
Open Bay Door x 2 - Compressed Air	101	101	96	89	86	86	84	85	81	92	Based on historical SLR data - Operates 10 minutes per hour during daytime - +5 dB penalty for tonal sound quality (total PWL = 97 dBA)
Heffner Cabinetry & Woodworking - 145 Northfield Drive West											
6x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
3x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
3x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
4x Rooftop Make Up Air Units	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Dust Collector	110	115	107	98	96	94	93	95	83	102	Based on SLR measurement from February 1, 2024 - Operates 60 minutes per hour during daytime hours (facility operating period)
7x Rooftop Paint Booth Exhaust Stacks	95	91	95	95	88	83	72	64	63	90	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Building-Side Exhaust Louvre	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling facility operating period)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (facility operating period), 10 km/hr travel speed
Greystone Club - 155 Northfield Drive West											
7x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 10-ton HVAC Unit	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 15-ton HVAC Unit	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
Shoppers Drug Mart - 190 Northfield Drive West											
2x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours)
4x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours)
1x Rooftop Refrigeration Unit	71	77	89	79	79	76	71	66	68	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Refrigeration Truck (Medium-Sized Truck)	104	107	98	100	97	91	87	84	78	98	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (restricted by City of Waterloo Noise By-Law 2010-073)
Truck Movement to Shipping Door	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (facility operating period), 10 km/hr travel speed (restricted by City of Waterloo Noise By-Law 2010-073)
Sobeys - 640 Parkside Drive											
2x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Packaged Chiller/Cooler Unit (4-fan)	-	101	101	97	98	96	91	85	82	100	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
1x Rooftop Air Cooled Chiller (8-fan)	-	99	105	99	95	91	86	80	71	97	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
2x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 60 minutes per daytime hour (restricted by City of Waterloo Noise By-Law 2010-073)

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
1x Idling Refrigeration Truck (Large-Sized Truck)	97	112	102	104	100	95	94	89	80	102	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (restricted by City of Waterloo Noise By-Law 2010-073)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Onward Manufacturing Company Limited/Broil King - 585 Kumpf Drive											
4x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied offices)
1x Rooftop 5-ton HVAC Unit	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours (above process/manufacturing area)
1x Rooftop 20-ton HVAC Units	89	92	93	93	92	90	86	82	76	95	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied offices)
12x Rooftop Exhaust Fans	-	-	88	83	81	74	68	64	60	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
5x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
5x Rooftop Process Exhaust Stacks/Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
5x Rooftop Process Exhaust Stacks/Fans	-	99	99	92	88	82	78	72	66	90	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
2x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling facility operating period)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 2 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Forkift Movements at South Doors	91	98	93	90	90	85	83	77	69	91	Based on historical SLR data - 5 forklift movement per daytime hour (posted facility hours), 10 km/hr travel speed
Waterloo Fire Station 3 - 150 Northfield Drive West											
1x Emergency Generator - 35 kW Natural Gas Unit		91	91	101	96	100	103	102	92	108	Based on historical SLR data - Operates 60 minutes per hour during daytime hour (typical testing schedule)
2x Rooftop Process Exhaust Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Rooftop Split-System Condenser Unit	-	68	66	58	57	54	54	44	39	60	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours

Appendix I Stationary Source Assessment Tables

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

Table I1: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Office Buildings – 565 Kump Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	26	26	20	≤ 61	≤ 60	≤ 51
	South	24	24	19	≤ 61	≤ 60	≤ 51
	West	20	20	14	≤ 65	≤ 64	≤ 55
Building A Tower	North	20	20	14	≤ 59	≤ 58	≤ 49
	East	36	36	30	≤ 53	≤ 52	45 [2]
	South	44	44	38	≤ 58	≤ 57	≤ 48
	West	28	28	24	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	23	23	17	≤ 57	≤ 55	≤ 46
	East	47	47	41	≤ 56	≤ 55	≤ 46
	South	47	47	41	≤ 56	≤ 54	≤ 46
	West	31	31	25	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	37	37	31	≤ 57	≤ 56	≤ 47
	East	53	53	47	≤ 61	≤ 59	≤ 51
	South	52	52	47	≤ 59	≤ 58	≤ 49
	West	44	44	38	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	48	48	42	≤ 53	≤ 52	45 [2]
	East	48	48	42	≤ 56	≤ 54	45 [2]
	South	21	21	15	≤ 57	≤ 55	≤ 46
	West	24	24	19	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	52	52	47	≤ 57	≤ 55	≤ 47
	East	53	53	47	≤ 62	≤ 61	≤ 52
	South	34	34	29	≤ 63	≤ 62	≤ 53
	West	45	45	39	≤ 58	≤ 57	≤ 48
Building D Podium	North	20	20	14	≤ 61	≤ 59	≤ 50
	South	19	19	13	≤ 67	≤ 66	≤ 57
	West	19	19	13	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	20	20	14	≤ 57	≤ 56	≤ 47
	East	25	25	19	≤ 61	≤ 59	≤ 50
	South	20	20	15	≤ 65	≤ 63	≤ 54



Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	18	18	12	≤ 63	≤ 62	≤ 53
Building D2 Tower	North	27	27	21	≤ 52	50 [2]	45 [2]
	East	26	26	21	≤ 61	≤ 60	≤ 51
	South	25	25	19	≤ 64	≤ 62	≤ 54
	West	20	20	14	≤ 60	≤ 58	≤ 49
Building E Podium	North	17	17	11	≤ 61	≤ 60	≤ 51
	East	18	18	13	≤ 65	≤ 64	≤ 55
	South	23	23	17	≤ 61	≤ 60	≤ 51
Building E Tower	North	17	17	11	≤ 59	≤ 58	≤ 49
	East	28	28	22	≤ 62	≤ 60	≤ 51
	South	37	37	32	≤ 58	≤ 57	≤ 48
	West	16	16	10	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	14	14	8	≤ 58	≤ 57	≤ 48
	East	24	24	19	≤ 56	≤ 55	≤ 46
	South	33	33	27	≤ 56	≤ 54	45 [2]
	West	13	13	7	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	34	34	28	≤ 54	≤ 53	45 [2]
	East	34	34	28	≤ 53	≤ 52	45 [2]
	South	18	18	12	≤ 57	≤ 55	≤ 46
	West	13	13	7	≤ 58	≤ 57	≤ 48
Building G Podium	North	13	13	7	≤ 51	50 [2]	45 [2]
	South	15	15	9	≤ 68	≤ 67	≤ 58
	West	12	12	6	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	23	23	17	≤ 54	≤ 52	45 [2]
	East	23	23	17	≤ 60	≤ 59	≤ 50
	South	13	13	7	≤ 65	≤ 63	≤ 54
	West	12	12	6	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	23	23	17	≤ 53	≤ 51	45 [2]
	East	20	20	14	≤ 60	≤ 59	≤ 50
	South	15	15	10	≤ 65	≤ 63	≤ 54
	West	15	15	9	≤ 60	≤ 58	≤ 49
	East	18	18	12	≤ 67	≤ 66	≤ 57

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Podium	South	17	17	11	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	24	24	18	≤ 57	≤ 55	≤ 46
	East	21	21	15	≤ 64	≤ 62	≤ 53
	South	16	16	10	≤ 65	≤ 64	≤ 55
	West	17	17	11	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I2: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Teledyne DALSA – 575 Kump Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	24	22	17	≤ 61	≤ 60	≤ 51
	South	25	25	19	≤ 61	≤ 60	≤ 51
	West	19	18	13	≤ 65	≤ 64	≤ 55
Building A Tower	North	13	13	7	≤ 59	≤ 58	≤ 49
	East	32	32	26	≤ 53	≤ 52	45 [2]
	South	37	37	31	≤ 58	≤ 57	≤ 48
	West	35	35	30	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	16	15	10	≤ 57	≤ 55	≤ 46
	East	39	39	33	≤ 56	≤ 55	≤ 46
	South	39	39	33	≤ 56	≤ 54	≤ 46
	West	34	34	28	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	29	28	22	≤ 57	≤ 56	≤ 47
	East	42	41	36	≤ 61	≤ 59	≤ 51
	South	41	41	35	≤ 59	≤ 58	≤ 49
	West	37	37	31	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	34	33	27	≤ 53	≤ 52	45 [2]
	East	37	36	31	≤ 56	≤ 54	45 [2]
	South	14	14	8	≤ 57	≤ 55	≤ 46
	West	14	14	8	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	37	35	30	≤ 57	≤ 55	≤ 47
	East	42	42	36	≤ 62	≤ 61	≤ 52
	South	34	34	28	≤ 63	≤ 62	≤ 53
	West	24	17	11	≤ 58	≤ 57	≤ 48
Building D Podium	North	10	10	4	≤ 61	≤ 59	≤ 50
	South	35	35	29	≤ 67	≤ 66	≤ 57
	West	14	14	8	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	12	11	6	≤ 57	≤ 56	≤ 47
	East	30	30	24	≤ 61	≤ 59	≤ 50
	South	35	35	29	≤ 65	≤ 63	≤ 54
	West	14	14	8	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	13	13	7	≤ 52	50 [2]	45 [2]
	East	33	33	27	≤ 61	≤ 60	≤ 51
	South	37	37	31	≤ 64	≤ 62	≤ 54
	West	16	16	10	≤ 60	≤ 58	≤ 49
Building E Podium	North	27	27	21	≤ 61	≤ 60	≤ 51
	East	27	27	21	≤ 65	≤ 64	≤ 55
	South	17	16	12	≤ 61	≤ 60	≤ 51
Building E Tower	North	11	10	5	≤ 59	≤ 58	≤ 49
	East	30	30	24	≤ 62	≤ 60	≤ 51
	South	34	34	28	≤ 58	≤ 57	≤ 48
	West	12	12	6	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	8	8	2	≤ 58	≤ 57	≤ 48
	East	29	29	23	≤ 56	≤ 55	≤ 46
	South	32	31	26	≤ 56	≤ 54	45 [2]
	West	9	9	3	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	22	18	13	≤ 54	≤ 53	45 [2]
	East	22	16	11	≤ 53	≤ 52	45 [2]
	South	7	6	0	≤ 57	≤ 55	≤ 46
	West	8	7	1	≤ 58	≤ 57	≤ 48
Building G Podium	North	6	5	0	≤ 51	50 [2]	45 [2]
	South	17	17	12	≤ 68	≤ 67	≤ 58
	West	7	7	1	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	10	8	2	≤ 54	≤ 52	45 [2]
	East	11	11	5	≤ 60	≤ 59	≤ 50
	South	14	14	8	≤ 65	≤ 63	≤ 54
	West	7	7	1	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	10	9	3	≤ 53	≤ 51	45 [2]
	East	13	13	7	≤ 60	≤ 59	≤ 50
	South	17	16	11	≤ 65	≤ 63	≤ 54
	West	10	10	4	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	19	19	13	≤ 67	≤ 66	≤ 57
	South	25	25	19	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	10	9	4	≤ 57	≤ 55	≤ 46
	East	20	20	14	≤ 64	≤ 62	≤ 53
	South	25	25	19	≤ 65	≤ 64	≤ 55
	West	12	12	6	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I3: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Office/Commercial Building – 101-139 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	11	11	10	≤ 61	≤ 60	≤ 51
	South	15	15	14	≤ 61	≤ 60	≤ 51
	West	15	15	15	≤ 65	≤ 64	≤ 55
Building A Tower	North	14	14	12	≤ 59	≤ 58	≤ 49
	East	19	19	17	≤ 53	≤ 52	45 [2]
	South	24	24	22	≤ 58	≤ 57	≤ 48
	West	18	18	16	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	18	18	16	≤ 57	≤ 55	≤ 46
	East	39	39	37	≤ 56	≤ 55	≤ 46
	South	40	40	38	≤ 56	≤ 54	≤ 46
	West	22	22	21	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	16	16	14	≤ 57	≤ 56	≤ 47
	East	22	22	20	≤ 61	≤ 59	≤ 51
	South	40	40	38	≤ 59	≤ 58	≤ 49
	West	35	35	33	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	21	21	20	≤ 53	≤ 52	45 [2]
	East	42	42	41	≤ 56	≤ 54	45 [2]
	South	44	44	42	≤ 57	≤ 55	≤ 46
	West	38	38	37	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	25	25	24	≤ 57	≤ 55	≤ 47
	East	36	36	35	≤ 62	≤ 61	≤ 52
	South	45	45	43	≤ 63	≤ 62	≤ 53
	West	45	45	43	≤ 58	≤ 57	≤ 48
Building D Podium	North	20	20	18	≤ 61	≤ 59	≤ 50
	South	43	43	41	≤ 67	≤ 66	≤ 57
	West	38	38	36	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	25	25	23	≤ 57	≤ 56	≤ 47
	East	43	43	41	≤ 61	≤ 59	≤ 50
	South	43	43	41	≤ 65	≤ 63	≤ 54
	West	39	39	37	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	40	40	38	≤ 52	50 [2]	45 [2]
	East	46	46	44	≤ 61	≤ 60	≤ 51
	South	45	45	44	≤ 64	≤ 62	≤ 54
	West	35	35	35	≤ 60	≤ 58	≤ 49
Building E Podium	North	10	10	8	≤ 61	≤ 60	≤ 51
	East	25	25	22	≤ 65	≤ 64	≤ 55
	South	18	18	16	≤ 61	≤ 60	≤ 51
Building E Tower	North	12	12	10	≤ 59	≤ 58	≤ 49
	East	37	37	34	≤ 62	≤ 60	≤ 51
	South	31	31	29	≤ 58	≤ 57	≤ 48
	West	14	14	12	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	12	12	11	≤ 58	≤ 57	≤ 48
	East	22	22	20	≤ 56	≤ 55	≤ 46
	South	17	17	15	≤ 56	≤ 54	45 [2]
	West	8	8	6	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	11	11	9	≤ 54	≤ 53	45 [2]
	East	18	18	16	≤ 53	≤ 52	45 [2]
	South	17	17	15	≤ 57	≤ 55	≤ 46
	West	10	10	8	≤ 58	≤ 57	≤ 48
Building G Podium	North	12	12	11	≤ 51	50 [2]	45 [2]
	South	38	38	36	≤ 68	≤ 67	≤ 58
	West	33	33	30	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	11	11	9	≤ 54	≤ 52	45 [2]
	East	37	37	35	≤ 60	≤ 59	≤ 50
	South	37	37	35	≤ 65	≤ 63	≤ 54
	West	17	17	15	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	24	24	23	≤ 53	≤ 51	45 [2]
	East	38	38	36	≤ 60	≤ 59	≤ 50
	South	38	38	36	≤ 65	≤ 63	≤ 54
	West	24	24	23	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	40	40	39	≤ 67	≤ 66	≤ 57
	South	40	40	39	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	17	17	15	≤ 57	≤ 55	≤ 46
	East	40	40	38	≤ 64	≤ 62	≤ 53
	South	40	40	39	≤ 65	≤ 64	≤ 55
	West	36	36	33	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I4: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Nissan – 141 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	15	15	5	≤ 61	≤ 60	≤ 51
	South	37	37	30	≤ 61	≤ 60	≤ 51
	West	19	19	7	≤ 65	≤ 64	≤ 55
Building A Tower	North	19	19	8	≤ 59	≤ 58	≤ 49
	East	38	38	30	≤ 53	≤ 52	45 [2]
	South	41	41	34	≤ 58	≤ 57	≤ 48
	West	18	18	8	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	17	17	7	≤ 57	≤ 55	≤ 46
	East	37	37	29	≤ 56	≤ 55	≤ 46
	South	36	36	29	≤ 56	≤ 54	≤ 46
	West	30	30	23	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	14	14	4	≤ 57	≤ 56	≤ 47
	East	20	20	15	≤ 61	≤ 59	≤ 51
	South	38	38	31	≤ 59	≤ 58	≤ 49
	West	27	27	16	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	20	20	10	≤ 53	≤ 52	45 [2]
	East	39	39	31	≤ 56	≤ 54	45 [2]
	South	34	34	27	≤ 57	≤ 55	≤ 46
	West	23	23	15	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	33	33	14	≤ 57	≤ 55	≤ 47
	East	26	26	16	≤ 62	≤ 61	≤ 52
	South	42	42	35	≤ 63	≤ 62	≤ 53
	West	42	42	35	≤ 58	≤ 57	≤ 48
Building D Podium	North	23	23	14	≤ 61	≤ 59	≤ 50
	South	47	47	40	≤ 67	≤ 66	≤ 57
	West	41	41	33	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	36	36	28	≤ 57	≤ 56	≤ 47
	East	46	46	39	≤ 61	≤ 59	≤ 50
	South	46	46	39	≤ 65	≤ 63	≤ 54
	West	39	39	32	≤ 63	≤ 62	≤ 53



Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	24	24	15	≤ 52	50 [2]	45 [2]
	East	33	33	24	≤ 61	≤ 60	≤ 51
	South	46	46	39	≤ 64	≤ 62	≤ 54
	West	46	46	39	≤ 60	≤ 58	≤ 49
Building E Podium	North	13	13	4	≤ 61	≤ 60	≤ 51
	East	24	24	14	≤ 65	≤ 64	≤ 55
	South	37	37	29	≤ 61	≤ 60	≤ 51
Building E Tower	North	16	16	6	≤ 59	≤ 58	≤ 49
	East	26	26	17	≤ 62	≤ 60	≤ 51
	South	38	38	30	≤ 58	≤ 57	≤ 48
	West	24	24	16	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	16	16	7	≤ 58	≤ 57	≤ 48
	East	27	27	19	≤ 56	≤ 55	≤ 46
	South	22	22	13	≤ 56	≤ 54	45 [2]
	West	12	12	2	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	15	15	5	≤ 54	≤ 53	45 [2]
	East	19	19	10	≤ 53	≤ 52	45 [2]
	South	21	21	10	≤ 57	≤ 55	≤ 46
	West	15	15	4	≤ 58	≤ 57	≤ 48
Building G Podium	North	27	27	21	≤ 51	50 [2]	45 [2]
	South	42	42	35	≤ 68	≤ 67	≤ 58
	West	36	36	29	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	17	17	6	≤ 54	≤ 52	45 [2]
	East	39	39	32	≤ 60	≤ 59	≤ 50
	South	39	39	32	≤ 65	≤ 63	≤ 54
	West	21	21	11	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	34	34	25	≤ 53	≤ 51	45 [2]
	East	41	41	34	≤ 60	≤ 59	≤ 50
	South	41	41	34	≤ 65	≤ 63	≤ 54
	West	37	37	30	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	45	45	37	≤ 67	≤ 66	≤ 57
	South	45	45	37	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	25	25	17	≤ 57	≤ 55	≤ 46
	East	44	44	37	≤ 64	≤ 62	≤ 53
	South	44	44	37	≤ 65	≤ 64	≤ 55
	West	39	39	31	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I5: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Heffner Woodworking & Cabinetry – 145 Northfield Drive West – Unmitigated

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	21	15	10	≤ 61	≤ 60	≤ 51
	South	42	40	34	≤ 61	≤ 60	≤ 51
	West	39	37	31	≤ 65	≤ 64	≤ 55
Building A Tower	North	25	18	13	≤ 59	≤ 58	≤ 49
	East	32	29	23	≤ 53	≤ 52	45 [2]
	South	44	41	35	≤ 58	≤ 57	≤ 48
	West	41	39	33	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	26	19	13	≤ 57	≤ 55	≤ 46
	East	28	26	20	≤ 56	≤ 55	≤ 46
	South	37	33	27	≤ 56	≤ 54	≤ 46
	West	41	36	32	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	20	14	8	≤ 57	≤ 56	≤ 47
	East	20	15	10	≤ 61	≤ 59	≤ 51
	South	32	30	24	≤ 59	≤ 58	≤ 49
	West	34	31	25	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	27	24	18	≤ 53	≤ 52	45 [2]
	East	34	31	25	≤ 56	≤ 54	45 [2]
	South	40	38	32	≤ 57	≤ 55	≤ 46
	West	38	36	31	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	21	16	11	≤ 57	≤ 55	≤ 47
	East	27	22	17	≤ 62	≤ 61	≤ 52
	South	46	42	37	≤ 63	≤ 62	≤ 53
	West	46	42	37	≤ 58	≤ 57	≤ 48
Building D Podium	North	37	36	30	≤ 61	≤ 59	≤ 50
	South	53	49	44	≤ 67	≤ 66	≤ 57
	West	53	49	44	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	38	37	31	≤ 57	≤ 56	≤ 47
	East	44	39	35	≤ 61	≤ 59	≤ 50
	South	52	48	43	≤ 65	≤ 63	≤ 54

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	53	48	43	≤ 63	≤ 62	≤ 53
Building D2 Tower	North	36	36	30	≤ 52	50 [2]	45 [2]
	East	30	26	21	≤ 61	≤ 60	≤ 51
	South	49	45	40	≤ 64	≤ 62	≤ 54
	West	50	46	41	≤ 60	≤ 58	≤ 49
Building E Podium	North	23	17	12	≤ 61	≤ 60	≤ 51
	East	37	35	29	≤ 65	≤ 64	≤ 55
	South	43	41	36	≤ 61	≤ 60	≤ 51
Building E Tower	North	26	20	16	≤ 59	≤ 58	≤ 49
	East	36	33	27	≤ 62	≤ 60	≤ 51
	South	50	45	40	≤ 58	≤ 57	≤ 48
	West	47	43	38	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	26	18	13	≤ 58	≤ 57	≤ 48
	East	46	35	32	≤ 56	≤ 55	≤ 46
	South	43	27	21	≤ 56	≤ 54	45 [2]
	West	25	17	12	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	39	20	16	≤ 54	≤ 53	45 [2]
	East	48	40	35	≤ 53	≤ 52	45 [2]
	South	50	44	39	≤ 57	≤ 55	≤ 46
	West	29	21	16	≤ 58	≤ 57	≤ 48
Building G Podium	North	31	25	20	≤ 51	50 [2]	45 [2]
	South	58	52	47	≤ 68	≤ 67	≤ 58
	West	47	44	40	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	47	41	36	≤ 54	≤ 52	45 [2]
	East	**55** [3]	49	44	≤ 60	≤ 59	≤ 50
	South	55	49	45	≤ 65	≤ 63	≤ 54
	West	40	31	27	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	32	26	21	≤ 53	≤ 51	45 [2]
	East	53	48	43	≤ 60	≤ 59	≤ 50
	South	57	51	46	≤ 65	≤ 63	≤ 54
	West	48	41	37	≤ 60	≤ 58	≤ 49
	East	41	37	32	≤ 67	≤ 66	≤ 57

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Podium	South	57	52	47	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	43	37	32	≤ 57	≤ 55	≤ 46
	East	47	40	37	≤ 64	≤ 62	≤ 53
	South	56	51	46	≤ 65	≤ 64	≤ 55
	West	**56** [3]	50	45	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

[3] Excesses of up to 5 dBA are predicted along the west façade of Building H1 Tower during daytime hours. Excesses of up to 2 dBA are predicted along the east façade of Building G1 Tower due to daytime hours.

Table I6: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Greystone Club – 155 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	10	10	4	≤ 61	≤ 60	≤ 51
	South	19	19	13	≤ 61	≤ 60	≤ 51
	West	18	18	12	≤ 65	≤ 64	≤ 55
Building A Tower	North	14	14	8	≤ 59	≤ 58	≤ 49
	East	14	14	7	≤ 53	≤ 52	45 [2]
	South	22	22	16	≤ 58	≤ 57	≤ 48
	West	32	32	25	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	11	11	4	≤ 57	≤ 55	≤ 46
	East	10	10	4	≤ 56	≤ 55	≤ 46
	South	17	17	11	≤ 56	≤ 54	≤ 46
	West	23	23	17	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	7	7	1	≤ 57	≤ 56	≤ 47
	East	8	8	2	≤ 61	≤ 59	≤ 51
	South	17	17	10	≤ 59	≤ 58	≤ 49
	West	16	16	10	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	13	13	7	≤ 53	≤ 52	45 [2]
	East	13	13	7	≤ 56	≤ 54	45 [2]
	South	33	33	27	≤ 57	≤ 55	≤ 46
	West	18	18	12	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	9	9	3	≤ 57	≤ 55	≤ 47
	East	16	16	10	≤ 62	≤ 61	≤ 52
	South	36	36	30	≤ 63	≤ 62	≤ 53
	West	36	36	30	≤ 58	≤ 57	≤ 48
Building D Podium	North	15	15	9	≤ 61	≤ 59	≤ 50
	South	42	42	36	≤ 67	≤ 66	≤ 57
	West	42	42	36	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	14	14	8	≤ 57	≤ 56	≤ 47
	East	37	37	31	≤ 61	≤ 59	≤ 50
	South	41	41	35	≤ 65	≤ 63	≤ 54
	West	42	42	35	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	13	13	7	≤ 52	50 [2]	45 [2]
	East	19	19	13	≤ 61	≤ 60	≤ 51
	South	39	39	33	≤ 64	≤ 62	≤ 54
	West	39	39	33	≤ 60	≤ 58	≤ 49
Building E Podium	North	11	11	5	≤ 61	≤ 60	≤ 51
	East	13	13	6	≤ 65	≤ 64	≤ 55
	South	17	17	11	≤ 61	≤ 60	≤ 51
Building E Tower	North	16	16	10	≤ 59	≤ 58	≤ 49
	East	20	20	13	≤ 62	≤ 60	≤ 51
	South	30	30	24	≤ 58	≤ 57	≤ 48
	West	34	34	28	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	16	16	10	≤ 58	≤ 57	≤ 48
	East	28	28	22	≤ 56	≤ 55	≤ 46
	South	34	34	28	≤ 56	≤ 54	45 [2]
	West	34	34	28	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	20	20	14	≤ 54	≤ 53	45 [2]
	East	42	42	35	≤ 53	≤ 52	45 [2]
	South	44	44	38	≤ 57	≤ 55	≤ 46
	West	37	37	31	≤ 58	≤ 57	≤ 48
Building G Podium	North	22	22	16	≤ 51	50 [2]	45 [2]
	South	49	49	43	≤ 68	≤ 67	≤ 58
	West	43	43	37	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	28	28	22	≤ 54	≤ 52	45 [2]
	East	45	45	39	≤ 60	≤ 59	≤ 50
	South	48	48	42	≤ 65	≤ 63	≤ 54
	West	43	43	37	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	24	24	18	≤ 53	≤ 51	45 [2]
	East	41	41	35	≤ 60	≤ 59	≤ 50
	South	47	47	41	≤ 65	≤ 63	≤ 54
	West	47	47	41	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	30	30	24	≤ 67	≤ 66	≤ 57
	South	46	46	40	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	27	27	21	≤ 57	≤ 55	≤ 46
	East	39	39	33	≤ 64	≤ 62	≤ 53
	South	44	44	38	≤ 65	≤ 64	≤ 55
	West	44	44	38	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I7: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Shoppers Drug Mart – 190 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	14	10	6	≤ 61	≤ 60	≤ 51
	South	25	20	14	≤ 61	≤ 60	≤ 51
	West	23	22	16	≤ 65	≤ 64	≤ 55
Building A Tower	North	15	11	6	≤ 59	≤ 58	≤ 49
	East	17	10	5	≤ 53	≤ 52	45 [2]
	South	28	25	20	≤ 58	≤ 57	≤ 48
	West	32	30	26	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	12	8	3	≤ 57	≤ 55	≤ 46
	East	13	8	4	≤ 56	≤ 55	≤ 46
	South	24	17	13	≤ 56	≤ 54	≤ 46
	West	24	21	16	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	10	5	0	≤ 57	≤ 56	≤ 47
	East	9	5	0	≤ 61	≤ 59	≤ 51
	South	21	13	10	≤ 59	≤ 58	≤ 49
	West	12	8	3	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	20	12	8	≤ 53	≤ 52	45 [2]
	East	15	11	6	≤ 56	≤ 54	45 [2]
	South	24	14	10	≤ 57	≤ 55	≤ 46
	West	24	16	11	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	16	8	4	≤ 57	≤ 55	≤ 47
	East	10	7	2	≤ 62	≤ 61	≤ 52
	South	13	10	5	≤ 63	≤ 62	≤ 53
	West	21	12	8	≤ 58	≤ 57	≤ 48
Building D Podium	North	23	13	8	≤ 61	≤ 59	≤ 50
	South	18	17	12	≤ 67	≤ 66	≤ 57
	West	19	16	11	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	21	13	8	≤ 57	≤ 56	≤ 47
	East	17	13	8	≤ 61	≤ 59	≤ 50
	South	19	17	13	≤ 65	≤ 63	≤ 54
	West	22	17	13	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	19	11	6	≤ 52	50 [2]	45 [2]
	East	14	10	5	≤ 61	≤ 60	≤ 51
	South	15	13	9	≤ 64	≤ 62	≤ 54
	West	17	13	8	≤ 60	≤ 58	≤ 49
Building E Podium	North	17	13	9	≤ 61	≤ 60	≤ 51
	East	19	15	10	≤ 65	≤ 64	≤ 55
	South	21	17	12	≤ 61	≤ 60	≤ 51
Building E Tower	North	20	15	10	≤ 59	≤ 58	≤ 49
	East	21	19	14	≤ 62	≤ 60	≤ 51
	South	34	32	28	≤ 58	≤ 57	≤ 48
	West	24	21	16	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	26	21	17	≤ 58	≤ 57	≤ 48
	East	19	15	10	≤ 56	≤ 55	≤ 46
	South	46	43	38	≤ 56	≤ 54	45 [2]
	West	48	43	38	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	43	40	35	≤ 54	≤ 53	45 [2]
	East	28	24	20	≤ 53	≤ 52	45 [2]
	South	49	47	43	≤ 57	≤ 55	≤ 46
	West	50	47	43	≤ 58	≤ 57	≤ 48
Building G Podium	North	40	38	32	≤ 51	50 [2]	45 [2]
	South	38	27	23	≤ 68	≤ 67	≤ 58
	West	51	45	39	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	44	44	39	≤ 54	≤ 52	45 [2]
	East	27	24	19	≤ 60	≤ 59	≤ 50
	South	45	43	38	≤ 65	≤ 63	≤ 54
	West	52	52	47	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	41	40	35	≤ 53	≤ 51	45 [2]
	East	25	21	16	≤ 60	≤ 59	≤ 50
	South	34	34	31	≤ 65	≤ 63	≤ 54
	West	42	41	37	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	20	15	11	≤ 67	≤ 66	≤ 57
	South	26	21	18	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	29	19	14	≤ 57	≤ 55	≤ 46
	East	20	16	11	≤ 64	≤ 62	≤ 53
	South	29	29	26	≤ 65	≤ 64	≤ 55
	West	28	21	17	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I8: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Sobeys – 640 Parkside Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	49	46	43	≤ 61	≤ 60	≤ 51
	South	26	22	19	≤ 61	≤ 60	≤ 51
	West	49	46	43	≤ 65	≤ 64	≤ 55
Building A Tower	North	50	46	43	≤ 59	≤ 58	≤ 49
	East	43	42	39	≤ 53	≤ 52	45 [2]
	South	34	30	28	≤ 58	≤ 57	≤ 48
	West	51	47	44	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	48	44	41	≤ 57	≤ 55	≤ 46
	East	41	40	37	≤ 56	≤ 55	≤ 46
	South	32	28	25	≤ 56	≤ 54	≤ 46
	West	48	44	41	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	46	42	39	≤ 57	≤ 56	≤ 47
	East	24	23	20	≤ 61	≤ 59	≤ 51
	South	39	38	35	≤ 59	≤ 58	≤ 49
	West	46	42	39	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	31	30	27	≤ 53	≤ 52	45 [2]
	East	22	18	15	≤ 56	≤ 54	45 [2]
	South	41	40	37	≤ 57	≤ 55	≤ 46
	West	28	26	23	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	24	22	19	≤ 57	≤ 55	≤ 47
	East	21	18	15	≤ 62	≤ 61	≤ 52
	South	21	17	14	≤ 63	≤ 62	≤ 53
	West	31	30	27	≤ 58	≤ 57	≤ 48
Building D Podium	North	26	25	22	≤ 61	≤ 59	≤ 50
	South	20	15	12	≤ 67	≤ 66	≤ 57
	West	24	22	19	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	32	29	26	≤ 57	≤ 56	≤ 47
	East	25	22	19	≤ 61	≤ 59	≤ 50
	South	23	19	16	≤ 65	≤ 63	≤ 54
	West	34	31	29	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	45	42	39	≤ 52	50 [2]	45 [2]
	East	21	17	15	≤ 61	≤ 60	≤ 51
	South	21	17	14	≤ 64	≤ 62	≤ 54
	West	36	36	33	≤ 60	≤ 58	≤ 49
Building E Podium	North	51	47	44	≤ 61	≤ 60	≤ 51
	East	45	44	41	≤ 65	≤ 64	≤ 55
	South	33	31	28	≤ 61	≤ 60	≤ 51
Building E Tower	North	53	48	45	≤ 59	≤ 58	≤ 49
	East	43	42	39	≤ 62	≤ 60	≤ 51
	South	33	29	26	≤ 58	≤ 57	≤ 48
	West	54	48	45	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	56	50	47	≤ 58	≤ 57	≤ 48
	East	43	38	35	≤ 56	≤ 55	≤ 46
	South	41	40	37	≤ 56	≤ 54	45 [2]
	West	55	50	47	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	42	39	37	≤ 54	≤ 53	45 [2]
	East	34	31	29	≤ 53	≤ 52	45 [2]
	South	33	31	30	≤ 57	≤ 55	≤ 46
	West	52	47	44	≤ 58	≤ 57	≤ 48
Building G Podium	North	33	24	23	≤ 51	50 [2]	45 [2]
	South	23	17	14	≤ 68	≤ 67	≤ 58
	West	45	38	35	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	39	37	34	≤ 54	≤ 52	45 [2]
	East	45	42	39	≤ 60	≤ 59	≤ 50
	South	27	24	21	≤ 65	≤ 63	≤ 54
	West	50	45	42	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	42	36	33	≤ 53	≤ 51	45 [2]
	East	36	29	26	≤ 60	≤ 59	≤ 50
	South	23	19	16	≤ 65	≤ 63	≤ 54
	West	33	28	25	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	21	17	14	≤ 67	≤ 66	≤ 57
	South	23	20	17	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	49	44	41	≤ 57	≤ 55	≤ 46
	East	24	19	17	≤ 64	≤ 62	≤ 53
	South	28	24	21	≤ 65	≤ 64	≤ 55
	West	49	44	41	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I9: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	29	25	22	≤ 61	≤ 60	≤ 51
	South	29	25	22	≤ 61	≤ 60	≤ 51
	West	18	13	12	≤ 65	≤ 64	≤ 55
Building A Tower	North	29	25	22	≤ 59	≤ 58	≤ 49
	East	41	37	35	≤ 53	≤ 52	45 [2]
	South	41	37	35	≤ 58	≤ 57	≤ 48
	West	25	23	19	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	38	34	32	≤ 57	≤ 55	≤ 46
	East	42	37	35	≤ 56	≤ 55	≤ 46
	South	42	37	35	≤ 56	≤ 54	≤ 46
	West	42	37	35	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	32	31	26	≤ 57	≤ 56	≤ 47
	East	41	36	33	≤ 61	≤ 59	≤ 51
	South	45	40	38	≤ 59	≤ 58	≤ 49
	West	44	39	37	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	45	40	38	≤ 53	≤ 52	45 [2]
	East	25	15	13	≤ 56	≤ 54	45 [2]
	South	38	34	31	≤ 57	≤ 55	≤ 46
	West	46	41	39	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	46	41	39	≤ 57	≤ 55	≤ 47
	East	46	41	39	≤ 62	≤ 61	≤ 52
	South	39	31	31	≤ 63	≤ 62	≤ 53
	West	40	36	33	≤ 58	≤ 57	≤ 48
Building D Podium	North	38	36	32	≤ 61	≤ 59	≤ 50
	South	36	28	27	≤ 67	≤ 66	≤ 57
	West	38	36	32	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	24	20	18	≤ 57	≤ 56	≤ 47
	East	21	12	10	≤ 61	≤ 59	≤ 50
	South	45	40	38	≤ 65	≤ 63	≤ 54
	West	45	40	38	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	44	39	37	≤ 52	50 [2]	45 [2]
	East	26	20	18	≤ 61	≤ 60	≤ 51
	South	31	28	27	≤ 64	≤ 62	≤ 54
	West	17	13	10	≤ 60	≤ 58	≤ 49
Building E Podium	North	17	13	10	≤ 61	≤ 60	≤ 51
	East	16	12	10	≤ 65	≤ 64	≤ 55
	South	16	12	10	≤ 61	≤ 60	≤ 51
Building E Tower	North	14	9	7	≤ 59	≤ 58	≤ 49
	East	15	10	8	≤ 62	≤ 60	≤ 51
	South	29	24	23	≤ 58	≤ 57	≤ 48
	West	23	18	17	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	29	24	23	≤ 58	≤ 57	≤ 48
	East	18	14	12	≤ 56	≤ 55	≤ 46
	South	15	10	8	≤ 56	≤ 54	45 [2]
	West	39	35	32	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	37	35	32	≤ 54	≤ 53	45 [2]
	East	39	35	32	≤ 53	≤ 52	45 [2]
	South	22	14	13	≤ 57	≤ 55	≤ 46
	West	15	10	8	≤ 58	≤ 57	≤ 48
Building G Podium	North	29	25	23	≤ 51	50 [2]	45 [2]
	South	29	25	22	≤ 68	≤ 67	≤ 58
	West	29	25	23	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	14	10	7	≤ 54	≤ 52	45 [2]
	East	40	36	34	≤ 60	≤ 59	≤ 50
	South	40	36	34	≤ 65	≤ 63	≤ 54
	West	40	36	34	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	18	14	12	≤ 53	≤ 51	45 [2]
	East	40	36	33	≤ 60	≤ 59	≤ 50
	South	40	35	33	≤ 65	≤ 63	≤ 54
	West	40	36	33	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	18	13	12	≤ 67	≤ 66	≤ 57
	South	36	32	30	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	38	34	32	≤ 57	≤ 55	≤ 46
	East	38	34	32	≤ 64	≤ 62	≤ 53
	South	38	34	32	≤ 65	≤ 64	≤ 55
	West	27	22	20	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I10a: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Fire Station 3 – 150 Northfield Drive West – Emergency Generator

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	27	n/a	n/a	≤ 66	n/a	n/a
	South	32	n/a	n/a	≤ 66	n/a	n/a
	West	29	n/a	n/a	≤ 70	n/a	n/a
Building A Tower	North	28	n/a	n/a	≤ 64	n/a	n/a
	East	27	n/a	n/a	≤ 58	n/a	n/a
	South	30	n/a	n/a	≤ 63	n/a	n/a
	West	28	n/a	n/a	≤ 67	n/a	n/a
Building B1 Tower	North	27	n/a	n/a	≤ 62	n/a	n/a
	East	33	n/a	n/a	≤ 61	n/a	n/a
	South	31	n/a	n/a	≤ 61	n/a	n/a
	West	28	n/a	n/a	≤ 59	n/a	n/a
Building B2 Tower	North	30	n/a	n/a	≤ 62	n/a	n/a
	East	30	n/a	n/a	≤ 66	n/a	n/a
	South	38	n/a	n/a	≤ 64	n/a	n/a
	West	29	n/a	n/a	≤ 56	n/a	n/a
Building C1 Tower	North	34	n/a	n/a	≤ 58	n/a	n/a
	East	40	n/a	n/a	≤ 61	n/a	n/a
	South	43	n/a	n/a	≤ 62	n/a	n/a
	West	33	n/a	n/a	≤ 56	n/a	n/a
Building C2 Tower	North	37	n/a	n/a	≤ 62	n/a	n/a
	East	47	n/a	n/a	≤ 67	n/a	n/a
	South	68	n/a	n/a	≤ 68	n/a	n/a
	West	59	n/a	n/a	≤ 63	n/a	n/a
Building D Podium	North	36	n/a	n/a	≤ 66	n/a	n/a
	South	58	n/a	n/a	≤ 72	n/a	n/a
	West	32	n/a	n/a	≤ 71	n/a	n/a
Building D1 Tower	North	29	n/a	n/a	≤ 62	n/a	n/a
	East	47	n/a	n/a	≤ 66	n/a	n/a
	South	56	n/a	n/a	≤ 70	n/a	n/a
	West	31	n/a	n/a	≤ 68	n/a	n/a

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	44	n/a	n/a	≤ 57	n/a	n/a
	East	63	n/a	n/a	≤ 66	n/a	n/a
	South	63	n/a	n/a	≤ 69	n/a	n/a
	West	37	n/a	n/a	≤ 65	n/a	n/a
Building E Podium	North	22	n/a	n/a	≤ 66	n/a	n/a
	East	29	n/a	n/a	≤ 70	n/a	n/a
	South	26	n/a	n/a	≤ 66	n/a	n/a
Building E Tower	North	22	n/a	n/a	≤ 64	n/a	n/a
	East	28	n/a	n/a	≤ 67	n/a	n/a
	South	28	n/a	n/a	≤ 63	n/a	n/a
	West	21	n/a	n/a	≤ 60	n/a	n/a
Building F1 Tower	North	19	n/a	n/a	≤ 63	n/a	n/a
	East	25	n/a	n/a	≤ 61	n/a	n/a
	South	24	n/a	n/a	≤ 61	n/a	n/a
	West	18	n/a	n/a	≤ 63	n/a	n/a
Building F2 Tower	North	20	n/a	n/a	≤ 59	n/a	n/a
	East	25	n/a	n/a	≤ 58	n/a	n/a
	South	22	n/a	n/a	≤ 62	n/a	n/a
	West	19	n/a	n/a	≤ 63	n/a	n/a
Building G Podium	North	20	n/a	n/a	≤ 56	n/a	n/a
	South	40	n/a	n/a	≤ 73	n/a	n/a
	West	21	n/a	n/a	≤ 67	n/a	n/a
Building G1 Tower	North	20	n/a	n/a	≤ 59	n/a	n/a
	East	25	n/a	n/a	≤ 65	n/a	n/a
	South	32	n/a	n/a	≤ 70	n/a	n/a
	West	20	n/a	n/a	≤ 66	n/a	n/a
Building G2 Tower	North	23	n/a	n/a	≤ 58	n/a	n/a
	East	28	n/a	n/a	≤ 65	n/a	n/a
	South	35	n/a	n/a	≤ 70	n/a	n/a
	West	24	n/a	n/a	≤ 65	n/a	n/a
Building H1 Podium	East	39	n/a	n/a	≤ 72	n/a	n/a
	South	46	n/a	n/a	≤ 74	n/a	n/a

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	28	n/a	n/a	≤ 62	n/a	n/a
	East	41	n/a	n/a	≤ 69	n/a	n/a
	South	46	n/a	n/a	≤ 70	n/a	n/a
	West	27	n/a	n/a	≤ 65	n/a	n/a

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I10b: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Fire Station 3 – 150 Northfield Drive West – Continuous

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	9	9	9	≤ 61	≤ 60	≤ 51
	South	12	12	12	≤ 61	≤ 60	≤ 51
	West	11	11	11	≤ 65	≤ 64	≤ 55
Building A Tower	North	10	10	10	≤ 59	≤ 58	≤ 49
	East	13	13	13	≤ 53	≤ 52	45 [2]
	South	16	16	16	≤ 58	≤ 57	≤ 48
	West	9	9	9	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	12	12	12	≤ 57	≤ 55	≤ 46
	East	32	32	32	≤ 56	≤ 55	≤ 46
	South	22	22	22	≤ 56	≤ 54	≤ 46
	West	11	11	11	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	10	10	10	≤ 57	≤ 56	≤ 47
	East	14	14	14	≤ 61	≤ 59	≤ 51
	South	33	33	33	≤ 59	≤ 58	≤ 49
	West	32	32	32	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	15	15	15	≤ 53	≤ 52	45 [2]
	East	37	37	37	≤ 56	≤ 54	45 [2]
	South	38	38	38	≤ 57	≤ 55	≤ 46
	West	15	15	15	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	23	23	23	≤ 57	≤ 55	≤ 47
	East	29	29	29	≤ 62	≤ 61	≤ 52
	South	47	47	47	≤ 63	≤ 62	≤ 53
	West	46	46	46	≤ 58	≤ 57	≤ 48
Building D Podium	North	18	18	18	≤ 61	≤ 59	≤ 50
	South	39	39	39	≤ 67	≤ 66	≤ 57
	West	18	18	18	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	11	11	11	≤ 57	≤ 56	≤ 47
	East	37	37	37	≤ 61	≤ 59	≤ 50
	South	39	39	39	≤ 65	≤ 63	≤ 54
	West	18	18	18	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	29	29	29	≤ 52	50 [2]	45 [2]
	East	46	46	46	≤ 61	≤ 60	≤ 51
	South	46	46	46	≤ 64	≤ 62	≤ 54
	West	34	34	34	≤ 60	≤ 58	≤ 49
Building E Podium	North	5	5	5	≤ 61	≤ 60	≤ 51
	East	11	11	11	≤ 65	≤ 64	≤ 55
	South	11	11	11	≤ 61	≤ 60	≤ 51
Building E Tower	North	6	6	6	≤ 59	≤ 58	≤ 49
	East	12	12	12	≤ 62	≤ 60	≤ 51
	South	12	12	12	≤ 58	≤ 57	≤ 48
	West	5	5	5	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	3	3	3	≤ 58	≤ 57	≤ 48
	East	7	7	7	≤ 56	≤ 55	≤ 46
	South	4	4	4	≤ 56	≤ 54	45 [2]
	West	2	2	2	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	3	3	3	≤ 54	≤ 53	45 [2]
	East	7	7	7	≤ 53	≤ 52	45 [2]
	South	5	5	5	≤ 57	≤ 55	≤ 46
	West	3	3	3	≤ 58	≤ 57	≤ 48
Building G Podium	North	4	4	4	≤ 51	50 [2]	45 [2]
	South	25	25	25	≤ 68	≤ 67	≤ 58
	West	5	5	5	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	3	3	3	≤ 54	≤ 52	45 [2]
	East	15	15	15	≤ 60	≤ 59	≤ 50
	South	24	24	24	≤ 65	≤ 63	≤ 54
	West	7	7	7	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	6	6	6	≤ 53	≤ 51	45 [2]
	East	19	19	19	≤ 60	≤ 59	≤ 50
	South	26	26	26	≤ 65	≤ 63	≤ 54
	West	9	9	9	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	27	27	27	≤ 67	≤ 66	≤ 57
	South	27	27	27	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	11	11	11	≤ 57	≤ 55	≤ 46
	East	29	29	29	≤ 64	≤ 62	≤ 53
	South	33	33	33	≤ 65	≤ 64	≤ 55
	West	13	13	13	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I11: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – All Sources – Unmitigated

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	50	47	44	≤ 61	≤ 60	≤ 51
	South	42	42	36	≤ 61	≤ 60	≤ 51
	West	50	47	43	≤ 65	≤ 64	≤ 55
Building A Tower	North	51	46	43	≤ 59	≤ 58	≤ 49
	East	45	44	40	≤ 53	≤ 52	45 [2]
	South	48	47	41	≤ 58	≤ 57	≤ 48
	West	52	47	44	≤ 62	≤ 60	≤ 51
Building B1 Tower	North	49	45	42	≤ 57	≤ 55	≤ 46
	East	50	49	44	≤ 56	≤ 55	≤ 46
	South	48	48	43	≤ 56	≤ 54	≤ 46
	West	49	45	41	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	49	45	42	≤ 57	≤ 56	≤ 47
	East	54	53	48	≤ 61	≤ 59	≤ 51
	South	53	53	47	≤ 59	≤ 58	≤ 49
	West	47	46	41	≤ 51	50 [2]	45 [2]
Building C1 Tower	North	48	48	42	≤ 53	≤ 52	45 [2]
	East	50	50	45	≤ 56	≤ 54	45 [2]
	South	46	46	44	≤ 57	≤ 55	≤ 46
	West	42	41	38	≤ 51	50 [2]	45 [2]
Building C2 Tower	North	53	53	47	≤ 57	≤ 55	≤ 47
	East	54	53	48	≤ 62	≤ 61	≤ 52
	South	52	51	49	≤ 63	≤ 62	≤ 53
	West	51	50	48	≤ 58	≤ 57	≤ 48
Building D Podium	North	38	36	30	≤ 61	≤ 59	≤ 50
	South	55	52	47	≤ 67	≤ 66	≤ 57
	West	53	50	45	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	39	38	32	≤ 57	≤ 56	≤ 47
	East	49	48	44	≤ 61	≤ 59	≤ 50
	South	54	52	47	≤ 65	≤ 63	≤ 54
	West	53	49	44	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	45	43	40	≤ 52	50 [2]	45 [2]
	East	49	49	48	≤ 61	≤ 60	≤ 51
	South	53	51	49	≤ 64	≤ 62	≤ 54
	West	52	49	44	≤ 60	≤ 58	≤ 49
Building E Podium	North	52	48	45	≤ 61	≤ 60	≤ 51
	East	46	45	42	≤ 65	≤ 64	≤ 55
	South	44	43	37	≤ 61	≤ 60	≤ 51
Building E Tower	North	54	48	46	≤ 59	≤ 58	≤ 49
	East	44	43	39	≤ 62	≤ 60	≤ 51
	South	50	47	42	≤ 58	≤ 57	≤ 48
	West	54	49	45	≤ 55	≤ 53	45 [2]
Building F1 Tower	North	56	50	47	≤ 58	≤ 57	≤ 48
	East	48	41	38	≤ 56	≤ 55	≤ 46
	South	48	45	41	≤ 56	≤ 54	45 [2]
	West	55	51	47	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	44	40	37	≤ 54	≤ 53	45 [2]
	East	49	44	39	≤ 53	≤ 52	45 [2]
	South	52	48	43	≤ 57	≤ 55	≤ 46
	West	54	50	46	≤ 58	≤ 57	≤ 48
Building G Podium	North	41	38	33	≤ 51	50 [2]	45 [2]
	South	59	54	49	≤ 68	≤ 67	≤ 58
	West	54	49	45	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	48	44	40	≤ 54	≤ 52	45 [2]
	East	56	51	46	≤ 60	≤ 59	≤ 50
	South	56	52	47	≤ 65	≤ 63	≤ 54
	West	54	53	48	≤ 61	≤ 59	≤ 51
Building G2 Tower	North	45	41	37	≤ 53	≤ 51	45 [2]
	East	53	50	45	≤ 60	≤ 59	≤ 50
	South	58	53	48	≤ 65	≤ 63	≤ 54
	West	51	48	42	≤ 60	≤ 58	≤ 49
Building H1 Podium	East	47	47	42	≤ 67	≤ 66	≤ 57
	South	58	54	49	≤ 69	≤ 67	≤ 58

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building H1 Tower	North	50	45	42	≤ 57	≤ 55	≤ 46
	East	49	46	42	≤ 64	≤ 62	≤ 53
	South	57	53	48	≤ 65	≤ 64	≤ 55
	West	56	52	47	≤ 60	≤ 58	≤ 49

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.
[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Appendix J Stationary Source Sample Calculations

Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

March 14, 2024

Receiver
Name: Building G1 Tower - South Facade
ID: POR
X: 536627.14 m
Y: 4816108.61 m
Z: 372.57 m

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1	536660.48	4816041.55	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	45.4
1	536660.48	4816041.55	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	39.4
1	536660.48	4816041.55	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	45.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5	536660.95	4816008.64	345.75	0	D	A	101.5	0.0	0.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	51.1
5	536660.95	4816008.64	345.75	0	N	A	101.5	0.0	-188.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	-136.9
5	536660.95	4816008.64	345.75	0	E	A	101.5	0.0	-188.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	-136.9

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
9	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	44.1
9	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	38.1
9	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	44.1
12	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	14.0
12	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.9
12	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	14.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
15	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	44.0
15	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	38.0
15	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	44.0

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
26	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	16.9
26	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	13.9
26	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	16.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
30	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	42.8
30	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	51.9	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	36.7
30	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	42.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
32	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	47.5	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.7
32	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	47.5	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.7
32	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	47.5	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.7

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
44	536415.97	4816336.50	359.79	0	D	A	97.3	0.0	0.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	15.1

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
44	536415.97	4816336.50	359.79	0	N	A	97.3	0.0	-3.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	12.1
44	536415.97	4816336.50	359.79	0	E	A	97.3	0.0	0.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	15.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
45	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	47.8	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	39.8
45	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	47.8	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	33.7
45	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	47.8	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	39.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
49	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	47.6	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.6
49	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	47.6	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.6
49	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	47.6	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
54	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	48.2	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.0
54	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	48.2	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.0
54	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	48.2	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
60	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
60	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	33.8
60	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
63	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	38.3
63	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	32.3
63	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	38.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
68	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.5
68	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.5
68	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
71	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.5
71	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.5
71	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
79	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	47.0	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.4
79	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	47.0	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.6
79	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	47.0	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
82	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	49.6	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.6
82	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	49.6	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
82	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	49.6	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.6

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
86	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	55.3	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	21.9
86	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	55.3	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	-158.3
86	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	55.3	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	21.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
91	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	47.6	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	44.9
91	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	47.6	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.1
91	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	47.6	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.1

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
104	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	16.8
104	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-171.2
104	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-171.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
108	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	48.1	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	44.5
108	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	48.1	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.5
108	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	48.1	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
119	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	19.8	0.0	0.0	17.1
119	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	19.8	0.0	0.0	11.1
119	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	19.8	0.0	0.0	17.1
121	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
121	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
121	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
123	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
123	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
123	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
125	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5
125	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
125	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
128	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
128	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	30.8
128	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
131	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	6.6
131	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.6
131	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	6.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
140	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	12.5
140	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	6.5
140	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	12.5
145	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	4.3
145	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
145	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	4.3
146	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
146	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
146	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
151	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8
151	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.8
151	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
155	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.3	0.0	0.0	20.1
155	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.3	0.0	0.0	-160.1
155	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.3	0.0	0.0	20.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
166	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	17.5
166	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-167.5
166	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-167.5
169	536507.11	4816057.67	350.67	1	D	A	98.0	0.0	-3.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	11.5
169	536507.11	4816057.67	350.67	1	N	A	98.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-173.5
169	536507.11	4816057.67	350.67	1	E	A	98.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-173.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
172	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	48.9	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	43.7
172	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	48.9	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.3
172	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	48.9	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
177	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	49.3	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	43.3
177	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	49.3	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.7
177	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	49.3	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
182	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.7	0.0	0.0	8.9
182	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.7	0.0	0.0	8.9
182	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.7	0.0	0.0	8.9
186	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.4
186	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.4
186	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.4
188	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
188	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
188	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
191	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
191	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
191	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
194	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
194	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
194	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
199	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	18.1	0.0	0.0	17.5
199	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	18.1	0.0	0.0	11.4
199	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	18.1	0.0	0.0	17.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
202	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.0
202	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
202	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.0
206	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
206	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
206	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
213	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	12.5
213	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	6.5
213	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	12.5
219	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
219	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
219	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
222	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0
222	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-151.0
222	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
233	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.5	0.0	0.0	16.1
233	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.5	0.0	0.0	10.1
233	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.5	0.0	0.0	16.1
236	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.8
236	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.3
236	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.8
241	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	28.0	0.0	31.2	-24.8
241	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	28.0	0.0	31.2	-30.8
241	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	28.0	0.0	31.2	-24.8
244	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
244	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
244	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
247	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
247	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
247	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	0.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
249	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	33.4
249	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	27.4
249	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	33.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
261	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	6.1
261	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	0.1
261	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	6.1
264	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.0
264	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.0
264	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.0
266	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4
266	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6
266	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
275	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	6.0
275	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-0.1
275	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	6.0
278	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
278	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
278	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
282	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.2
282	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
282	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
287	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.0
287	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
287	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
294	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.4	0.0	0.0	16.7
294	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.4	0.0	0.0	10.7
294	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.4	0.0	0.0	16.7
298	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
298	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
298	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
300	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
300	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4
300	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
302	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
302	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
302	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
303	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
303	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
303	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
307	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
307	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.8
307	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
311	536593.76	4816005.73	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.7
311	536593.76	4816005.73	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-3.3
311	536593.76	4816005.73	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
314	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
314	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.8
314	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
317	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
317	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-3.4
317	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.6

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
322	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
322	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7
322	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
368	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8
368	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8
368	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8
371	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
371	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
371	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
375	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.5
375	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
375	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.5
378	536605.83	4815999.22	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
378	536605.83	4815999.22	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
378	536605.83	4815999.22	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
380	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
380	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
380	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
386	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
386	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
386	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
389	536596.30	4815999.27	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.3
389	536596.30	4815999.27	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-3.7
389	536596.30	4815999.27	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
392	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	32.0
392	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	26.0
392	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	32.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
397	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	6.0
397	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	-0.0
397	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	6.0
398	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
398	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
398	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
400	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	0.1
400	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
400	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	0.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
403	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
403	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
403	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
405	536613.71	4815987.38	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.7
405	536613.71	4815987.38	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
405	536613.71	4815987.38	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
409	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	9.8	0.0	0.0	29.0
409	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	9.8	0.0	0.0	-159.0
409	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	9.8	0.0	0.0	-159.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
413	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
413	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.3
413	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
414	536602.80	4815982.70	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4
414	536602.80	4815982.70	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6
414	536602.80	4815982.70	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
416	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	55.3	3.5	-3.0	0.0	0.0	20.1	0.0	0.0	10.4
416	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	55.3	3.5	-3.0	0.0	0.0	20.1	0.0	0.0	-159.8
416	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	55.3	3.5	-3.0	0.0	0.0	20.1	0.0	0.0	10.4

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
419	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	31.1
419	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
419	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	31.1
421	536599.19	4815980.04	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.2
421	536599.19	4815980.04	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
421	536599.19	4815980.04	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
427	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	53.9	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	30.7
427	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.9	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	24.7
427	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	53.9	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	30.7

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
433	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	2.3
433	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-3.7
433	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	2.3
436	536912.04	4816588.26	347.50	1	D	A	94.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
436	536912.04	4816588.26	347.50	1	N	A	94.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
436	536912.04	4816588.26	347.50	1	E	A	94.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
439	536912.04	4816588.26	347.50	1	D	A	94.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0
439	536912.04	4816588.26	347.50	1	N	A	94.5	0.0	-6.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
439	536912.04	4816588.26	347.50	1	E	A	94.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
445	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	12.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
445	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	6.7
445	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	12.7
448	537015.74	4816361.58	344.43	1	D	A	92.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.6
448	537015.74	4816361.58	344.43	1	N	A	92.5	0.0	-6.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
448	537015.74	4816361.58	344.43	1	E	A	92.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.6

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
451	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.6	0.0	0.0	8.7
451	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.6	0.0	0.0	-161.5
451	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.6	0.0	0.0	8.7

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
458	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	30.1
458	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
458	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	30.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
463	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	7.2	0.0	0.0	19.8
463	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	7.2	0.0	0.0	19.8
463	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	7.2	0.0	0.0	19.8
464	536503.25	4816045.85	353.78	1	D	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	14.2	0.0	1.0	8.5
464	536503.25	4816045.85	353.78	1	N	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	14.2	0.0	1.0	8.5
464	536503.25	4816045.85	353.78	1	E	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	14.2	0.0	1.0	8.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
465	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.0	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.5
465	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.0	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.5
465	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.0	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.5

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
478	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.4
478	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	23.4
478	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
496	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
496	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.2
496	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
499	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
499	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.2
499	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
501	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
501	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.1
501	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
504	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
504	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
504	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
509	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.3
509	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.3
509	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
512	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
512	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
512	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
517	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.2
517	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.2
517	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
522	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
522	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
522	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
534	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	7.2
534	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-180.8
534	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-180.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
539	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
539	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
539	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
541	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5
541	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5
541	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
544	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	50.9	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	30.2
544	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	50.9	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	-157.8
544	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	50.9	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	30.2
546	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0
546	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-188.0
546	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
548	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8
548	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
548	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
555	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
555	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
555	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
566	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.8	0.0	0.0	-0.1
566	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.8	0.0	0.0	-6.1
566	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.8	0.0	0.0	-0.1
569	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
569	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
569	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
572	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.6
572	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
572	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.6
579	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-4.9
579	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-10.9
579	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-4.9
582	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-4.1
582	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-10.2
582	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-4.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
589	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-1.2
589	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-7.2
589	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-1.2
592	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
592	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
592	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
597	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7
597	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
597	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
604	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-0.9
604	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-7.0
604	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-0.9
614	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4
614	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
614	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4
616	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
616	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
616	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
618	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
618	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
618	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
631	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.4	0.0	0.0	-1.6
631	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.4	0.0	0.0	-7.6
631	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.4	0.0	0.0	-1.6
634	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
634	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
634	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
637	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
637	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
637	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
640	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
640	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-5.3
640	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
648	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-2.4
648	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-5.4
648	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
653	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-0.9
653	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-6.9
653	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-0.9
658	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
658	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
658	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
661	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
661	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
661	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
668	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.6	0.0	0.0	-1.4
668	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.6	0.0	0.0	-7.5
668	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.6	0.0	0.0	-1.4
673	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
673	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
673	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
674	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
674	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
674	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
681	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-1.8
681	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-7.8
681	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-1.8
685	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
685	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
685	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
687	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
687	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
687	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
695	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	7.8
695	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	1.8
695	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	7.8
699	536970.45	4816325.51	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.4
699	536970.45	4816325.51	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
699	536970.45	4816325.51	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.4

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
705	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	5.2
705	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	-0.8
705	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	5.2
708	536970.68	4816340.65	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
708	536970.68	4816340.65	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.6
708	536970.68	4816340.65	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
713	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	3.0
713	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	-3.1
713	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	3.0
716	536966.20	4816349.69	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
716	536966.20	4816349.69	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.6
716	536966.20	4816349.69	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
719	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.0	0.0	0.0	14.8
719	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.0	0.0	0.0	-165.4
719	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.0	0.0	0.0	-165.4
722	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	25.3
722	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	-154.9
722	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	-154.9

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
728	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-4.9
728	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-4.9
728	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-4.9

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
733	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3
733	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3
733	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
739	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-3.3
739	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-9.3
739	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-3.3
742	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
742	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
742	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
745	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
745	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
745	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
747	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-7.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
747	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-13.8
747	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-7.8
751	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-7.0
751	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-13.0
751	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-7.0

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
757	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.9
757	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.9
757	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.9
759	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
759	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
759	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
761	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
761	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
761	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
769	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-4.1
769	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-10.1
769	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-4.1
770	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9
770	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
770	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9
772	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
772	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
772	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
778	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.3
778	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-162.7
778	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
785	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-4.3
785	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-10.4
785	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-4.3
788	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
788	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
788	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
793	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
793	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
793	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
798	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
798	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-10.2
798	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
800	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
800	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
800	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
803	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
803	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
803	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
811	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	16.9	0.0	0.0	4.9
811	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	16.9	0.0	0.0	-1.1
811	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	16.9	0.0	0.0	4.9
814	537024.98	4816371.79	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
814	537024.98	4816371.79	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
814	537024.98	4816371.79	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
823	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.3
823	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-10.3
823	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.3
824	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
824	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
824	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
826	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
826	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
826	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
832	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-4.3
832	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-10.3
832	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-4.3
834	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
834	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.5
834	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
840	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
840	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
840	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
843	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8
843	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-163.2
843	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
852	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-4.4
852	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-10.4
852	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-4.4
855	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
855	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
855	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
860	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.4
860	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.4
860	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
869	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7
869	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7
869	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
873	536904.16	4816494.80	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
873	536904.16	4816494.80	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
873	536904.16	4816494.80	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
876	536904.16	4816494.80	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
876	536904.16	4816494.80	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
876	536904.16	4816494.80	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
884	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
884	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
884	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
889	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
889	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
889	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
891	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
891	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
891	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
898	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-4.0
898	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-10.0
898	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-4.0
902	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
902	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
902	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
908	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
908	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
908	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
917	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
917	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
917	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
919	536895.35	4816513.18	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
919	536895.35	4816513.18	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
919	536895.35	4816513.18	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
922	536895.35	4816513.18	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
922	536895.35	4816513.18	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
922	536895.35	4816513.18	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
930	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
930	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
930	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
932	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
932	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
932	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
935	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
935	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
935	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
941	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.6	0.0	0.0	-7.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
941	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.6	0.0	0.0	-7.3
941	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.6	0.0	0.0	-7.3
945	536895.88	4816345.38	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
945	536895.88	4816345.38	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
945	536895.88	4816345.38	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
949	536895.88	4816345.38	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
949	536895.88	4816345.38	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
949	536895.88	4816345.38	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
967	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
967	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
967	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
969	536885.33	4816534.46	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
969	536885.33	4816534.46	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
969	536885.33	4816534.46	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
971	536885.33	4816534.46	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
971	536885.33	4816534.46	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
971	536885.33	4816534.46	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
975	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.4
975	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.4
975	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.4
976	536842.61	4816561.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
976	536842.61	4816561.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
976	536842.61	4816561.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
984	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
984	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
984	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
987	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
987	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
987	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
988	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
988	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
988	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
995	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
995	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
995	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
998	536831.48	4816585.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
998	536831.48	4816585.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
998	536831.48	4816585.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1005	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-6.4
1005	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-6.4
1005	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-6.4
1006	536924.87	4816349.18	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	64.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
1006	536924.87	4816349.18	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	64.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1006	536924.87	4816349.18	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	64.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1009	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1009	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1009	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1012	536866.53	4816583.53	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1012	536866.53	4816583.53	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1012	536866.53	4816583.53	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1014	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1014	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1014	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1017	536845.16	4816595.57	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1017	536845.16	4816595.57	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1017	536845.16	4816595.57	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1023	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
1023	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
1023	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
1024	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	67.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1024	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	67.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1024	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	67.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1025	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
1025	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
1025	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1029	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	2.7
1029	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	-3.3
1029	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	2.7
1031	536996.51	4816351.84	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-11.2
1031	536996.51	4816351.84	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2
1031	536996.51	4816351.84	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-11.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1035	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6
1035	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6
1035	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6
1037	536886.90	4816613.22	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1037	536886.90	4816613.22	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1037	536886.90	4816613.22	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1043	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-9.1
1043	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-12.1
1043	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-9.1
1044	536918.59	4816552.53	345.25	1	D	A	82.5	0.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
1044	536918.59	4816552.53	345.25	1	N	A	82.5	0.0	-3.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1044	536918.59	4816552.53	345.25	1	E	A	82.5	0.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1046	536918.59	4816552.53	345.25	1	D	A	82.5	0.0	0.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1046	536918.59	4816552.53	345.25	1	N	A	82.5	0.0	-3.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6
1046	536918.59	4816552.53	345.25	1	E	A	82.5	0.0	0.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1050	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-0.1
1050	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-6.1
1050	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-0.1
1052	537003.16	4816372.32	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
1052	537003.16	4816372.32	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
1052	537003.16	4816372.32	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1054	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	2.1
1054	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	-3.9
1054	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	2.1
1056	537012.51	4816364.27	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
1056	537012.51	4816364.27	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1056	537012.51	4816364.27	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1060	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	0.2
1060	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	-5.8
1060	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	0.2
1062	537009.03	4816374.15	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
1062	537009.03	4816374.15	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1062	537009.03	4816374.15	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1067	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	1.2
1067	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.8
1067	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.8
1068	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.3
1068	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.3
1068	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.3
1070	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
1070	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.0
1070	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1076	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	1.1
1076	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.9
1076	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.9
1077	536867.83	4816521.17	347.00	1	D	A	90.0	0.0	0.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.4
1077	536867.83	4816521.17	347.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
1077	536867.83	4816521.17	347.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
1078	536867.83	4816521.17	347.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1
1078	536867.83	4816521.17	347.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
1078	536867.83	4816521.17	347.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1083	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	1.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1083	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	-4.7
1083	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	1.3
1084	537023.46	4816375.21	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
1084	537023.46	4816375.21	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1084	537023.46	4816375.21	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1087	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	0.4
1087	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	-5.6
1087	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	0.4
1089	537020.87	4816379.70	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
1089	537020.87	4816379.70	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1089	537020.87	4816379.70	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1096	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	0.9
1096	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
1096	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
1098	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.4
1098	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
1098	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
1102	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1
1102	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
1102	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1109	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	0.9
1109	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
1109	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
1111	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.5
1111	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.5
1111	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.5
1113	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
1113	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.2
1113	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1116	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	53.5	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	27.4
1116	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	53.5	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	-160.6
1116	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	53.5	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	-160.6

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1123	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1
1123	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1
1123	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1
1124	537019.12	4816382.98	343.43	1	D	A	78.6	0.0	0.0	0.0	0.0	66.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
1124	537019.12	4816382.98	343.43	1	N	A	78.6	0.0	0.0	0.0	0.0	66.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
1124	537019.12	4816382.98	343.43	1	E	A	78.6	0.0	0.0	0.0	0.0	66.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1132	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.6
1132	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1132	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.6
1134	536869.70	4816527.58	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1134	536869.70	4816527.58	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1134	536869.70	4816527.58	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1136	536869.70	4816527.58	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	65.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0
1136	536869.70	4816527.58	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	65.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0
1136	536869.70	4816527.58	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	65.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1142	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
1142	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.5
1142	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
1144	536917.05	4816573.37	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
1144	536917.05	4816573.37	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
1144	536917.05	4816573.37	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
1145	536917.05	4816573.37	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9
1145	536917.05	4816573.37	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
1145	536917.05	4816573.37	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1151	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.6
1151	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
1151	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.6
1153	536918.65	4816580.36	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1153	536918.65	4816580.36	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1153	536918.65	4816580.36	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1155	536918.65	4816580.36	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1155	536918.65	4816580.36	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1155	536918.65	4816580.36	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1158	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-9.7
1158	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-15.7
1158	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-9.7
1161	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1161	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1161	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
1162	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1162	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1162	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1170	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.8
1170	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.8
1170	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.8
1172	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
1172	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1172	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
1173	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
1173	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1173	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1178	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
1178	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
1178	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
1181	536861.54	4816601.66	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1181	536861.54	4816601.66	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1181	536861.54	4816601.66	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1186	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-13.0
1186	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-13.0
1186	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-13.0
1190	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1190	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1190	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1193	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1193	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1193	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1202	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
1202	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
1202	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
1205	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1205	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1205	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1208	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1208	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1208	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1212	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.3
1212	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.3
1212	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.3
1216	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1216	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1216	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1219	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1219	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1219	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1225	536556.84	4816080.23	348.88	0	D	A	59.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	0.0
1225	536556.84	4816080.23	348.88	0	N	A	-40.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	-100.0
1225	536556.84	4816080.23	348.88	0	E	A	-40.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	-100.0
1233	536554.14	4816085.79	349.13	0	D	A	59.5	-2.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-15.5
1233	536554.14	4816085.79	349.13	0	N	A	-40.5	-2.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-115.5
1233	536554.14	4816085.79	349.13	0	E	A	-40.5	-2.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-115.5
1243	536558.89	4816076.01	348.68	1	D	A	59.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.0
1243	536558.89	4816076.01	348.68	1	N	A	-40.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1243	536558.89	4816076.01	348.68	1	E	A	-40.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1245	536556.67	4816080.56	348.89	1	D	A	59.5	8.8	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
1245	536556.67	4816080.56	348.89	1	N	A	-40.5	8.8	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.8
1245	536556.67	4816080.56	348.89	1	E	A	-40.5	8.8	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.8
1246	536554.51	4816085.01	349.09	1	D	A	59.5	3.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1246	536554.51	4816085.01	349.09	1	N	A	-40.5	3.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1246	536554.51	4816085.01	349.09	1	E	A	-40.5	3.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1250	536556.95	4816080.00	348.86	1	D	A	59.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	32.9	-44.8
1250	536556.95	4816080.00	348.86	1	N	A	-40.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	32.9	-144.8
1250	536556.95	4816080.00	348.86	1	E	A	-40.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	32.9	-144.8
1254	536557.57	4816078.71	348.81	1	D	A	59.5	9.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
1254	536557.57	4816078.71	348.81	1	N	A	-40.5	9.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
1254	536557.57	4816078.71	348.81	1	E	A	-40.5	9.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
1257	536554.87	4816084.27	349.06	1	D	A	59.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1257	536554.87	4816084.27	349.06	1	N	A	-40.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1257	536554.87	4816084.27	349.06	1	E	A	-40.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1259	536559.14	4816075.48	348.66	1	D	A	59.5	1.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1259	536559.14	4816075.48	348.66	1	N	A	-40.5	1.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1259	536559.14	4816075.48	348.66	1	E	A	-40.5	1.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1262	536556.85	4816080.20	348.87	1	D	A	59.5	9.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
1262	536556.85	4816080.20	348.87	1	N	A	-40.5	9.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1262	536556.85	4816080.20	348.87	1	E	A	-40.5	9.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1266	536554.07	4816085.93	349.14	1	D	A	59.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
1266	536554.07	4816085.93	349.14	1	N	A	-40.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
1266	536554.07	4816085.93	349.14	1	E	A	-40.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
1283	536550.10	4816086.22	349.30	0	D	A	59.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-7.0
1283	536550.10	4816086.22	349.30	0	N	A	-40.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-107.0
1283	536550.10	4816086.22	349.30	0	E	A	-40.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-107.0
1287	536552.46	4816081.07	349.01	0	D	A	59.5	8.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-2.7
1287	536552.46	4816081.07	349.01	0	N	A	-40.5	8.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-102.7
1287	536552.46	4816081.07	349.01	0	E	A	-40.5	8.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-102.7
1289	536551.67	4816082.79	349.10	1	D	A	59.5	10.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.0
1289	536551.67	4816082.79	349.10	1	N	A	-40.5	10.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0
1289	536551.67	4816082.79	349.10	1	E	A	-40.5	10.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0
1291	536553.74	4816078.26	348.84	1	D	A	59.5	1.3	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-47.7
1291	536553.74	4816078.26	348.84	1	N	A	-40.5	1.3	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-147.7
1291	536553.74	4816078.26	348.84	1	E	A	-40.5	1.3	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-147.7
1296	536551.67	4816082.79	349.10	1	D	A	59.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
1296	536551.67	4816082.79	349.10	1	N	A	-40.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1296	536551.67	4816082.79	349.10	1	E	A	-40.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1299	536552.80	4816080.32	348.96	1	D	A	59.5	7.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.8
1299	536552.80	4816080.32	348.96	1	N	A	-40.5	7.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
1299	536552.80	4816080.32	348.96	1	E	A	-40.5	7.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
1303	536550.11	4816086.19	349.30	1	D	A	59.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
1303	536550.11	4816086.19	349.30	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1303	536550.11	4816086.19	349.30	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1305	536550.22	4816085.96	349.29	1	D	A	59.5	6.4	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1305	536550.22	4816085.96	349.29	1	N	A	-40.5	6.4	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1305	536550.22	4816085.96	349.29	1	E	A	-40.5	6.4	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1308	536552.58	4816080.81	348.99	1	D	A	59.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1308	536552.58	4816080.81	348.99	1	N	A	-40.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1308	536552.58	4816080.81	348.99	1	E	A	-40.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1403	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	-3.6
1403	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	-103.6
1403	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	-103.6
1411	536520.62	4816101.17	350.52	1	D	A	59.5	7.6	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1411	536520.62	4816101.17	350.52	1	N	A	-40.5	7.6	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1411	536520.62	4816101.17	350.52	1	E	A	-40.5	7.6	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1415	536516.50	4816099.26	350.55	1	D	A	59.5	5.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1415	536516.50	4816099.26	350.55	1	N	A	-40.5	5.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1415	536516.50	4816099.26	350.55	1	E	A	-40.5	5.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1422	536515.27	4816098.69	350.56	1	D	A	59.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1422	536515.27	4816098.69	350.56	1	N	A	-40.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1422	536515.27	4816098.69	350.56	1	E	A	-40.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1425	536519.39	4816100.60	350.53	1	D	A	59.5	9.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1425	536519.39	4816100.60	350.53	1	N	A	-40.5	9.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1425	536519.39	4816100.60	350.53	1	E	A	-40.5	9.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1428	536511.45	4816096.92	350.59	1	D	A	59.5	9.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1428	536511.45	4816096.92	350.59	1	N	A	-40.5	9.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1428	536511.45	4816096.92	350.59	1	E	A	-40.5	9.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1431	536518.14	4816100.02	350.54	1	D	A	59.5	10.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.7
1431	536518.14	4816100.02	350.54	1	N	A	-40.5	10.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1431	536518.14	4816100.02	350.54	1	E	A	-40.5	10.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1434	536523.20	4816102.36	350.50	1	D	A	59.5	-16.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-41.5
1434	536523.20	4816102.36	350.50	1	N	A	-40.5	-16.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
1434	536523.20	4816102.36	350.50	1	E	A	-40.5	-16.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
1444	536554.97	4816075.57	348.71	0	D	A	59.5	6.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	20.1	0.0	0.0	-1.1
1444	536554.97	4816075.57	348.71	0	N	A	-40.5	6.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	20.1	0.0	0.0	-101.1
1444	536554.97	4816075.57	348.71	0	E	A	-40.5	6.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	20.1	0.0	0.0	-101.1
1449	536556.64	4816071.94	348.55	0	D	A	59.5	5.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	13.7	0.0	0.0	4.0
1449	536556.64	4816071.94	348.55	0	N	A	-40.5	5.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	13.7	0.0	0.0	-96.0
1449	536556.64	4816071.94	348.55	0	E	A	-40.5	5.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	13.7	0.0	0.0	-96.0
1452	536557.76	4816069.50	348.44	0	D	A	59.5	2.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	9.1	0.0	0.0	6.1
1452	536557.76	4816069.50	348.44	0	N	A	-40.5	2.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	9.1	0.0	0.0	-93.9
1452	536557.76	4816069.50	348.44	0	E	A	-40.5	2.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	9.1	0.0	0.0	-93.9
1457	536556.70	4816071.80	348.54	1	D	A	59.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.6	0.0	1.0	-6.2
1457	536556.70	4816071.80	348.54	1	N	A	-40.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.6	0.0	1.0	-106.2
1457	536556.70	4816071.80	348.54	1	E	A	-40.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.6	0.0	1.0	-106.2
1460	536557.66	4816069.71	348.45	1	D	A	59.5	-0.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.1	0.0	1.0	-12.1
1460	536557.66	4816069.71	348.45	1	N	A	-40.5	-0.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.1	0.0	1.0	-112.1
1460	536557.66	4816069.71	348.45	1	E	A	-40.5	-0.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	22.1	0.0	1.0	-112.1
1466	536555.89	4816073.57	348.62	1	D	A	59.5	9.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
1466	536555.89	4816073.57	348.62	1	N	A	-40.5	9.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
1466	536555.89	4816073.57	348.62	1	E	A	-40.5	9.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
1470	536557.96	4816069.06	348.42	1	D	A	59.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1470	536557.96	4816069.06	348.42	1	N	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1470	536557.96	4816069.06	348.42	1	E	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1475	536556.69	4816071.82	348.54	1	D	A	59.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	27.2	0.0	2.2	-12.0
1475	536556.69	4816071.82	348.54	1	N	A	-40.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	27.2	0.0	2.2	-112.0
1475	536556.69	4816071.82	348.54	1	E	A	-40.5	5.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	27.2	0.0	2.2	-112.0
1479	536557.64	4816069.74	348.45	1	D	A	59.5	-0.8	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-18.1
1479	536557.64	4816069.74	348.45	1	N	A	-40.5	-0.8	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-118.1
1479	536557.64	4816069.74	348.45	1	E	A	-40.5	-0.8	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-118.1
1510	536554.22	4816077.21	348.79	1	D	A	59.5	-0.2	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-49.2
1510	536554.22	4816077.21	348.79	1	N	A	-40.5	-0.2	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-149.2
1510	536554.22	4816077.21	348.79	1	E	A	-40.5	-0.2	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	33.3	-149.2
1515	536556.09	4816073.13	348.60	1	D	A	59.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
1515	536556.09	4816073.13	348.60	1	N	A	-40.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1515	536556.09	4816073.13	348.60	1	E	A	-40.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1519	536554.76	4816076.04	348.74	1	D	A	59.5	5.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1519	536554.76	4816076.04	348.74	1	N	A	-40.5	5.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1519	536554.76	4816076.04	348.74	1	E	A	-40.5	5.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1522	536555.73	4816073.92	348.64	1	D	A	59.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1522	536555.73	4816073.92	348.64	1	N	A	-40.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1522	536555.73	4816073.92	348.64	1	E	A	-40.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1526	536556.52	4816072.19	348.56	1	D	A	59.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-12.1
1526	536556.52	4816072.19	348.56	1	N	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-112.1
1526	536556.52	4816072.19	348.56	1	E	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-112.1
1533	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-5.6
1533	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-105.6
1533	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-105.6
1539	536523.28	4816100.93	350.49	1	D	A	59.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
1539	536523.28	4816100.93	350.49	1	N	A	-40.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1539	536523.28	4816100.93	350.49	1	E	A	-40.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1543	536518.36	4816098.85	350.53	1	D	A	59.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1543	536518.36	4816098.85	350.53	1	N	A	-40.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1543	536518.36	4816098.85	350.53	1	E	A	-40.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1547	536513.71	4816096.88	350.56	1	D	A	59.5	6.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
1547	536513.71	4816096.88	350.56	1	N	A	-40.5	6.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1547	536513.71	4816096.88	350.56	1	E	A	-40.5	6.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1550	536519.13	4816099.18	350.52	1	D	A	59.5	8.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1550	536519.13	4816099.18	350.52	1	N	A	-40.5	8.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1550	536519.13	4816099.18	350.52	1	E	A	-40.5	8.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1553	536523.78	4816101.14	350.49	1	D	A	59.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1553	536523.78	4816101.14	350.49	1	N	A	-40.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1553	536523.78	4816101.14	350.49	1	E	A	-40.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1558	536519.13	4816099.17	350.52	1	D	A	59.5	11.2	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.0
1558	536519.13	4816099.17	350.52	1	N	A	-40.5	11.2	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.0
1558	536519.13	4816099.17	350.52	1	E	A	-40.5	11.2	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.0
1562	536524.23	4816101.33	350.48	1	D	A	59.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1562	536524.23	4816101.33	350.48	1	N	A	-40.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1562	536524.23	4816101.33	350.48	1	E	A	-40.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1583	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-5.3
1583	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-105.3
1583	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-105.3
1588	536531.17	4816106.38	350.44	1	D	A	59.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1588	536531.17	4816106.38	350.44	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1588	536531.17	4816106.38	350.44	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1591	536529.03	4816105.30	350.46	1	D	A	59.5	8.8	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3
1591	536529.03	4816105.30	350.46	1	N	A	-40.5	8.8	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1591	536529.03	4816105.30	350.46	1	E	A	-40.5	8.8	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1595	536524.42	4816102.98	350.49	1	D	A	59.5	4.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1595	536524.42	4816102.98	350.49	1	N	A	-40.5	4.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1595	536524.42	4816102.98	350.49	1	E	A	-40.5	4.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1598	536530.93	4816106.26	350.45	1	D	A	59.5	5.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
1598	536530.93	4816106.26	350.45	1	N	A	-40.5	5.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1598	536530.93	4816106.26	350.45	1	E	A	-40.5	5.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1602	536527.81	4816104.69	350.47	1	D	A	59.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1602	536527.81	4816104.69	350.47	1	N	A	-40.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1602	536527.81	4816104.69	350.47	1	E	A	-40.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1606	536527.81	4816104.69	350.47	1	D	A	59.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
1606	536527.81	4816104.69	350.47	1	N	A	-40.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
1606	536527.81	4816104.69	350.47	1	E	A	-40.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
1609	536531.87	4816106.73	350.44	1	D	A	59.5	0.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1609	536531.87	4816106.73	350.44	1	N	A	-40.5	0.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1609	536531.87	4816106.73	350.44	1	E	A	-40.5	0.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1613	536530.83	4816106.21	350.45	1	D	A	59.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1613	536530.83	4816106.21	350.45	1	N	A	-40.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1613	536530.83	4816106.21	350.45	1	E	A	-40.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1614	536526.78	4816104.17	350.48	1	D	A	59.5	9.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1614	536526.78	4816104.17	350.48	1	N	A	-40.5	9.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1614	536526.78	4816104.17	350.48	1	E	A	-40.5	9.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1615	536530.28	4816105.93	350.45	1	D	A	59.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1615	536530.28	4816105.93	350.45	1	N	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1615	536530.28	4816105.93	350.45	1	E	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1618	536527.68	4816104.62	350.47	1	D	A	59.5	0.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
1618	536527.68	4816104.62	350.47	1	N	A	-40.5	0.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1618	536527.68	4816104.62	350.47	1	E	A	-40.5	0.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1621	536525.21	4816103.38	350.49	1	D	A	59.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1621	536525.21	4816103.38	350.49	1	N	A	-40.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1621	536525.21	4816103.38	350.49	1	E	A	-40.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1625	536561.70	4816071.14	348.46	0	D	A	59.5	4.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	8.8	0.0	0.0	8.3
1625	536561.70	4816071.14	348.46	0	N	A	-40.5	4.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	8.8	0.0	0.0	-91.7
1625	536561.70	4816071.14	348.46	0	E	A	-40.5	4.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	8.8	0.0	0.0	-91.7
1629	536560.21	4816073.61	348.57	0	D	A	59.5	4.8	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	14.0	0.0	0.0	3.5
1629	536560.21	4816073.61	348.57	0	N	A	-40.5	4.8	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	14.0	0.0	0.0	-96.5
1629	536560.21	4816073.61	348.57	0	E	A	-40.5	4.8	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	14.0	0.0	0.0	-96.5
1634	536561.03	4816072.25	348.51	1	D	A	59.5	7.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1634	536561.03	4816072.25	348.51	1	N	A	-40.5	7.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1634	536561.03	4816072.25	348.51	1	E	A	-40.5	7.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1637	536559.54	4816074.72	348.62	1	D	A	59.5	-3.7	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
1637	536559.54	4816074.72	348.62	1	N	A	-40.5	-3.7	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1637	536559.54	4816074.72	348.62	1	E	A	-40.5	-3.7	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1641	536559.67	4816074.50	348.61	1	D	A	59.5	-0.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1641	536559.67	4816074.50	348.61	1	N	A	-40.5	-0.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1641	536559.67	4816074.50	348.61	1	E	A	-40.5	-0.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1644	536560.07	4816073.84	348.58	1	D	A	59.5	3.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.0	0.0	1.0	-12.5
1644	536560.07	4816073.84	348.58	1	N	A	-40.5	3.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.0	0.0	1.0	-112.5
1644	536560.07	4816073.84	348.58	1	E	A	-40.5	3.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.0	0.0	1.0	-112.5
1647	536559.44	4816074.88	348.63	1	D	A	59.5	-11.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
1647	536559.44	4816074.88	348.63	1	N	A	-40.5	-11.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
1647	536559.44	4816074.88	348.63	1	E	A	-40.5	-11.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
1651	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-6.0
1651	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-106.0
1651	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-106.0
1656	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
1656	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1656	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1660	536544.43	4816097.95	349.91	1	D	A	59.5	2.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
1660	536544.43	4816097.95	349.91	1	N	A	-40.5	2.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1660	536544.43	4816097.95	349.91	1	E	A	-40.5	2.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1663	536545.99	4816095.21	349.80	1	D	A	59.5	6.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1663	536545.99	4816095.21	349.80	1	N	A	-40.5	6.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1663	536545.99	4816095.21	349.80	1	E	A	-40.5	6.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1667	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1667	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1667	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1672	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1672	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1672	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1676	536544.43	4816097.94	349.91	1	D	A	59.5	2.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
1676	536544.43	4816097.94	349.91	1	N	A	-40.5	2.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1676	536544.43	4816097.94	349.91	1	E	A	-40.5	2.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1680	536546.00	4816095.20	349.80	1	D	A	59.5	6.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1680	536546.00	4816095.20	349.80	1	N	A	-40.5	6.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1680	536546.00	4816095.20	349.80	1	E	A	-40.5	6.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1702	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-7.2
1702	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-107.2
1702	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-107.2
1706	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.8
1706	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
1706	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
1710	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1710	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1710	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1712	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1712	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1712	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1714	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1714	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1714	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1715	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1715	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1715	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1719	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-7.1
1719	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-107.1
1719	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-107.1
1722	536549.75	4816094.93	349.63	1	D	A	59.5	6.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
1722	536549.75	4816094.93	349.63	1	N	A	-40.5	6.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.2
1722	536549.75	4816094.93	349.63	1	E	A	-40.5	6.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.2
1727	536550.07	4816094.25	349.60	1	D	A	59.5	4.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1727	536550.07	4816094.25	349.60	1	N	A	-40.5	4.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1727	536550.07	4816094.25	349.60	1	E	A	-40.5	4.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1730	536549.09	4816096.29	349.68	1	D	A	59.5	1.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1730	536549.09	4816096.29	349.68	1	N	A	-40.5	1.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1730	536549.09	4816096.29	349.68	1	E	A	-40.5	1.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1734	536549.75	4816094.93	349.63	1	D	A	59.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1734	536549.75	4816094.93	349.63	1	N	A	-40.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1734	536549.75	4816094.93	349.63	1	E	A	-40.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1737	536550.42	4816093.52	349.57	1	D	A	59.5	1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1737	536550.42	4816093.52	349.57	1	N	A	-40.5	1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1737	536550.42	4816093.52	349.57	1	E	A	-40.5	1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1741	536549.44	4816095.56	349.65	1	D	A	59.5	4.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1741	536549.44	4816095.56	349.65	1	N	A	-40.5	4.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1741	536549.44	4816095.56	349.65	1	E	A	-40.5	4.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1744	536550.20	4816093.97	349.59	1	D	A	59.5	3.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1744	536550.20	4816093.97	349.59	1	N	A	-40.5	3.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1744	536550.20	4816093.97	349.59	1	E	A	-40.5	3.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1748	536549.23	4816096.01	349.67	1	D	A	59.5	3.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
1748	536549.23	4816096.01	349.67	1	N	A	-40.5	3.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1748	536549.23	4816096.01	349.67	1	E	A	-40.5	3.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1754	536499.88	4816089.50	350.59	0	D	A	59.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-14.7
1754	536499.88	4816089.50	350.59	0	N	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-114.7
1754	536499.88	4816089.50	350.59	0	E	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-114.7
1758	536502.16	4816090.86	350.59	0	D	A	59.5	5.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-10.6
1758	536502.16	4816090.86	350.59	0	N	A	-40.5	5.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-110.6
1758	536502.16	4816090.86	350.59	0	E	A	-40.5	5.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-110.6
1764	536506.04	4816093.17	350.60	0	D	A	59.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-9.2
1764	536506.04	4816093.17	350.60	0	N	A	-40.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-109.2
1764	536506.04	4816093.17	350.60	0	E	A	-40.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-109.2
1774	536501.26	4816090.33	350.59	1	D	A	59.5	6.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
1774	536501.26	4816090.33	350.59	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1774	536501.26	4816090.33	350.59	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1777	536505.79	4816093.02	350.60	1	D	A	59.5	7.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
1777	536505.79	4816093.02	350.60	1	N	A	-40.5	7.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
1777	536505.79	4816093.02	350.60	1	E	A	-40.5	7.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
1780	536499.88	4816089.50	350.59	1	D	A	59.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
1780	536499.88	4816089.50	350.59	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1780	536499.88	4816089.50	350.59	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1784	536504.41	4816092.20	350.60	1	D	A	59.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1784	536504.41	4816092.20	350.60	1	N	A	-40.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1784	536504.41	4816092.20	350.60	1	E	A	-40.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1819	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-7.5
1819	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-107.5
1819	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-107.5
1824	536545.67	4816103.16	349.96	1	D	A	59.5	2.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
1824	536545.67	4816103.16	349.96	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
1824	536545.67	4816103.16	349.96	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
1829	536544.61	4816105.25	350.06	1	D	A	59.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
1829	536544.61	4816105.25	350.06	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
1829	536544.61	4816105.25	350.06	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
1834	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
1834	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
1834	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
1839	536544.18	4816106.09	350.09	1	D	A	59.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1839	536544.18	4816106.09	350.09	1	N	A	-40.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1839	536544.18	4816106.09	350.09	1	E	A	-40.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1843	536545.43	4816103.62	349.98	1	D	A	59.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1843	536545.43	4816103.62	349.98	1	N	A	-40.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1843	536545.43	4816103.62	349.98	1	E	A	-40.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1846	536544.37	4816105.71	350.08	1	D	A	59.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
1846	536544.37	4816105.71	350.08	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1846	536544.37	4816105.71	350.08	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1849	536545.67	4816103.16	349.96	1	D	A	59.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1849	536545.67	4816103.16	349.96	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1849	536545.67	4816103.16	349.96	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1853	536544.95	4816104.57	350.02	1	D	A	59.5	0.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
1853	536544.95	4816104.57	350.02	1	N	A	-40.5	0.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1853	536544.95	4816104.57	350.02	1	E	A	-40.5	0.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1856	536544.33	4816105.79	350.08	1	D	A	59.5	1.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
1856	536544.33	4816105.79	350.08	1	N	A	-40.5	1.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1856	536544.33	4816105.79	350.08	1	E	A	-40.5	1.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1860	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
1860	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1860	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1864	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
1864	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1864	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1870	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.8	0.0	0.0	-7.6
1870	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.8	0.0	0.0	-107.6
1870	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.8	0.0	0.0	-107.6
1875	536547.42	4816092.51	349.67	1	D	A	59.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
1875	536547.42	4816092.51	349.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1875	536547.42	4816092.51	349.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1878	536548.15	4816090.71	349.57	1	D	A	59.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1878	536548.15	4816090.71	349.57	1	N	A	-40.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1878	536548.15	4816090.71	349.57	1	E	A	-40.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1883	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
1883	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
1883	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
1886	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
1886	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
1886	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
1890	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1890	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1890	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1918	536481.79	4816093.29	350.76	0	D	A	59.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-6.9
1918	536481.79	4816093.29	350.76	0	N	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-106.9
1918	536481.79	4816093.29	350.76	0	E	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-106.9
1921	536483.01	4816092.32	350.73	1	D	A	59.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1921	536483.01	4816092.32	350.73	1	N	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1921	536483.01	4816092.32	350.73	1	E	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1926	536479.38	4816095.19	350.80	1	D	A	59.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
1926	536479.38	4816095.19	350.80	1	N	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1926	536479.38	4816095.19	350.80	1	E	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1930	536478.22	4816096.10	350.82	1	D	A	59.5	4.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1930	536478.22	4816096.10	350.82	1	N	A	-40.5	4.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1930	536478.22	4816096.10	350.82	1	E	A	-40.5	4.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1935	536484.29	4816091.31	350.71	1	D	A	59.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
1935	536484.29	4816091.31	350.71	1	N	A	-40.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1935	536484.29	4816091.31	350.71	1	E	A	-40.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1938	536480.87	4816094.01	350.77	1	D	A	59.5	5.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1938	536480.87	4816094.01	350.77	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1938	536480.87	4816094.01	350.77	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1941	536478.84	4816095.61	350.81	1	D	A	59.5	2.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
1941	536478.84	4816095.61	350.81	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
1941	536478.84	4816095.61	350.81	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
1945	536477.70	4816096.51	350.83	1	D	A	59.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
1945	536477.70	4816096.51	350.83	1	N	A	-40.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
1945	536477.70	4816096.51	350.83	1	E	A	-40.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
1950	536483.68	4816091.79	350.72	1	D	A	59.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1950	536483.68	4816091.79	350.72	1	N	A	-40.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1950	536483.68	4816091.79	350.72	1	E	A	-40.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1954	536480.01	4816094.69	350.79	1	D	A	59.5	4.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
1954	536480.01	4816094.69	350.79	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1954	536480.01	4816094.69	350.79	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1958	536478.19	4816096.12	350.82	1	D	A	59.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
1958	536478.19	4816096.12	350.82	1	N	A	-40.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1958	536478.19	4816096.12	350.82	1	E	A	-40.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1962	536477.31	4816096.82	350.83	1	D	A	59.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
1962	536477.31	4816096.82	350.83	1	N	A	-40.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
1962	536477.31	4816096.82	350.83	1	E	A	-40.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
1980	536485.32	4816090.14	350.69	0	D	A	59.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-13.7
1980	536485.32	4816090.14	350.69	0	N	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-113.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1980	536485.32	4816090.14	350.69	0	E	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-113.7
1985	536487.13	4816088.74	350.66	0	D	A	59.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-13.5
1985	536487.13	4816088.74	350.66	0	N	A	-40.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-113.5
1985	536487.13	4816088.74	350.66	0	E	A	-40.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-113.5
1989	536490.30	4816086.28	350.61	0	D	A	59.5	7.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-9.2
1989	536490.30	4816086.28	350.61	0	N	A	-40.5	7.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-109.2
1989	536490.30	4816086.28	350.61	0	E	A	-40.5	7.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-109.2
1995	536487.57	4816088.40	350.65	1	D	A	59.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1995	536487.57	4816088.40	350.65	1	N	A	-40.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1995	536487.57	4816088.40	350.65	1	E	A	-40.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1999	536491.64	4816085.24	350.58	1	D	A	59.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
1999	536491.64	4816085.24	350.58	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1999	536491.64	4816085.24	350.58	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
2003	536487.32	4816088.59	350.66	1	D	A	59.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2003	536487.32	4816088.59	350.66	1	N	A	-40.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2003	536487.32	4816088.59	350.66	1	E	A	-40.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2006	536490.90	4816085.82	350.60	1	D	A	59.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2006	536490.90	4816085.82	350.60	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2006	536490.90	4816085.82	350.60	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2009	536492.07	4816084.90	350.58	1	D	A	59.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
2009	536492.07	4816084.90	350.58	1	N	A	-40.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2009	536492.07	4816084.90	350.58	1	E	A	-40.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2015	536501.34	4816092.22	350.62	0	D	A	59.5	6.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.1	0.0	0.0	-9.7
2015	536501.34	4816092.22	350.62	0	N	A	-40.5	6.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.1	0.0	0.0	-109.7
2015	536501.34	4816092.22	350.62	0	E	A	-40.5	6.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.1	0.0	0.0	-109.7
2020	536497.91	4816090.61	350.62	0	D	A	59.5	4.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-12.2
2020	536497.91	4816090.61	350.62	0	N	A	-40.5	4.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-112.2
2020	536497.91	4816090.61	350.62	0	E	A	-40.5	4.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.9	0.0	0.0	-112.2
2026	536500.08	4816091.63	350.62	1	D	A	59.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
2026	536500.08	4816091.63	350.62	1	N	A	-40.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
2026	536500.08	4816091.63	350.62	1	E	A	-40.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
2030	536500.08	4816091.63	350.62	1	D	A	59.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
2030	536500.08	4816091.63	350.62	1	N	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
2030	536500.08	4816091.63	350.62	1	E	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
2037	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-10.0
2037	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-110.0
2037	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-110.0
2041	536529.30	4816102.62	350.44	1	D	A	59.5	-0.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
2041	536529.30	4816102.62	350.44	1	N	A	-40.5	-0.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
2041	536529.30	4816102.62	350.44	1	E	A	-40.5	-0.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
2045	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
2045	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2045	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2049	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
2049	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2049	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2053	536526.35	4816102.00	350.47	1	D	A	59.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
2053	536526.35	4816102.00	350.47	1	N	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2053	536526.35	4816102.00	350.47	1	E	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2057	536528.60	4816102.47	350.45	1	D	A	59.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2057	536528.60	4816102.47	350.45	1	N	A	-40.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2057	536528.60	4816102.47	350.45	1	E	A	-40.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2062	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
2062	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2062	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2066	536526.27	4816101.98	350.47	1	D	A	59.5	3.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
2066	536526.27	4816101.98	350.47	1	N	A	-40.5	3.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
2066	536526.27	4816101.98	350.47	1	E	A	-40.5	3.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
2071	536528.52	4816102.45	350.45	1	D	A	59.5	4.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
2071	536528.52	4816102.45	350.45	1	N	A	-40.5	4.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2071	536528.52	4816102.45	350.45	1	E	A	-40.5	4.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2078	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-8.3
2078	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-108.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2078	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-108.3
2084	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.8
2084	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
2084	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
2087	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2087	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2087	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2092	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2092	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2092	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2096	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2096	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2096	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2125	536480.83	4816093.86	350.77	0	D	A	59.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-7.9
2125	536480.83	4816093.86	350.77	0	N	A	-40.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-107.9
2125	536480.83	4816093.86	350.77	0	E	A	-40.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-107.9
2127	536479.28	4816095.17	350.80	1	D	A	59.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2127	536479.28	4816095.17	350.80	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2127	536479.28	4816095.17	350.80	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2128	536482.74	4816092.25	350.73	1	D	A	59.5	5.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
2128	536482.74	4816092.25	350.73	1	N	A	-40.5	5.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2128	536482.74	4816092.25	350.73	1	E	A	-40.5	5.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2129	536478.17	4816096.09	350.82	1	D	A	59.5	3.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
2129	536478.17	4816096.09	350.82	1	N	A	-40.5	3.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
2129	536478.17	4816096.09	350.82	1	E	A	-40.5	3.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
2133	536477.68	4816096.50	350.83	1	D	A	59.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2133	536477.68	4816096.50	350.83	1	N	A	-40.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2133	536477.68	4816096.50	350.83	1	E	A	-40.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2138	536478.73	4816095.62	350.81	1	D	A	59.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
2138	536478.73	4816095.62	350.81	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2138	536478.73	4816095.62	350.81	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2143	536480.68	4816093.99	350.77	1	D	A	59.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2143	536480.68	4816093.99	350.77	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2143	536480.68	4816093.99	350.77	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2148	536483.22	4816091.85	350.73	1	D	A	59.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
2148	536483.22	4816091.85	350.73	1	N	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2148	536483.22	4816091.85	350.73	1	E	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2152	536478.04	4816096.20	350.82	1	D	A	59.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2152	536478.04	4816096.20	350.82	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2152	536478.04	4816096.20	350.82	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2156	536479.85	4816094.68	350.79	1	D	A	59.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2156	536479.85	4816094.68	350.79	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2156	536479.85	4816094.68	350.79	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2160	536482.64	4816092.34	350.74	1	D	A	59.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2160	536482.64	4816092.34	350.74	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2160	536482.64	4816092.34	350.74	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2166	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-9.1
2166	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-109.1
2166	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-109.1
2171	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
2171	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
2171	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
2173	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
2173	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
2173	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
2178	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2178	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2178	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2182	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2182	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2182	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2255	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-10.2
2255	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2255	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.2
2261	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
2261	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
2261	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
2266	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
2266	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2266	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2272	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2272	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2272	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2276	536538.68	4816102.62	350.25	1	D	A	59.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2276	536538.68	4816102.62	350.25	1	N	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2276	536538.68	4816102.62	350.25	1	E	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2281	536539.94	4816102.02	350.18	1	D	A	59.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
2281	536539.94	4816102.02	350.18	1	N	A	-40.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
2281	536539.94	4816102.02	350.18	1	E	A	-40.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
2286	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
2286	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
2286	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
2289	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
2289	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
2289	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
2296	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-9.7
2296	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-109.7
2296	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-109.7
2302	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
2302	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
2302	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
2308	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
2308	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
2308	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
2314	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2314	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2314	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2317	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
2317	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2317	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2323	536496.01	4816080.04	350.48	0	D	A	59.5	6.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.1
2323	536496.01	4816080.04	350.48	0	N	A	-40.5	6.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.1
2323	536496.01	4816080.04	350.48	0	E	A	-40.5	6.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.1
2328	536497.71	4816077.37	350.44	0	D	A	59.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.9
2328	536497.71	4816077.37	350.44	0	N	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.9
2328	536497.71	4816077.37	350.44	0	E	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.9
2334	536495.30	4816081.16	350.50	1	D	A	59.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2334	536495.30	4816081.16	350.50	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2334	536495.30	4816081.16	350.50	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2336	536496.15	4816079.82	350.48	1	D	A	59.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
2336	536496.15	4816079.82	350.48	1	N	A	-40.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
2336	536496.15	4816079.82	350.48	1	E	A	-40.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
2339	536496.84	4816078.73	350.46	1	D	A	59.5	1.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
2339	536496.84	4816078.73	350.46	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2339	536496.84	4816078.73	350.46	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2342	536497.69	4816077.39	350.44	1	D	A	59.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2342	536497.69	4816077.39	350.44	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2342	536497.69	4816077.39	350.44	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2356	536501.46	4816069.94	350.11	0	D	A	59.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
2356	536501.46	4816069.94	350.11	0	N	A	-40.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
2356	536501.46	4816069.94	350.11	0	E	A	-40.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
2362	536502.69	4816067.22	349.99	0	D	A	59.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.8
2362	536502.69	4816067.22	349.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
2362	536502.69	4816067.22	349.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
2366	536501.80	4816069.18	350.08	1	D	A	59.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2366	536501.80	4816069.18	350.08	1	N	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2366	536501.80	4816069.18	350.08	1	E	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2371	536503.04	4816066.45	349.96	1	D	A	59.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2371	536503.04	4816066.45	349.96	1	N	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2371	536503.04	4816066.45	349.96	1	E	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2378	536502.70	4816067.22	349.99	0	D	A	59.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.8
2378	536502.70	4816067.22	349.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
2378	536502.70	4816067.22	349.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
2384	536501.49	4816069.94	350.11	0	D	A	59.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
2384	536501.49	4816069.94	350.11	0	N	A	-40.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
2384	536501.49	4816069.94	350.11	0	E	A	-40.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
2390	536503.24	4816066.01	349.94	1	D	A	59.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
2390	536503.24	4816066.01	349.94	1	N	A	-40.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2390	536503.24	4816066.01	349.94	1	E	A	-40.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2394	536502.03	4816068.73	350.06	1	D	A	59.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
2394	536502.03	4816068.73	350.06	1	N	A	-40.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2394	536502.03	4816068.73	350.06	1	E	A	-40.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2408	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-10.6
2408	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.6
2408	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.6
2414	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6
2414	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
2414	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
2419	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2419	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2419	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2424	536533.93	4816107.73	350.42	1	D	A	59.5	3.7	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
2424	536533.93	4816107.73	350.42	1	N	A	-40.5	3.7	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
2424	536533.93	4816107.73	350.42	1	E	A	-40.5	3.7	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
2428	536532.64	4816107.12	350.43	1	D	A	59.5	-3.1	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
2428	536532.64	4816107.12	350.43	1	N	A	-40.5	-3.1	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2428	536532.64	4816107.12	350.43	1	E	A	-40.5	-3.1	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2433	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2433	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2433	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2437	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2437	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2437	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2441	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
2441	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2441	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2446	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
2446	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
2446	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
2453	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-10.5
2453	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.5
2453	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.5
2458	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
2458	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
2458	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
2462	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
2462	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
2462	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
2467	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
2467	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2467	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2470	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2470	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2470	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2475	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
2475	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2475	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2478	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
2478	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2478	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
2488	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.9	0.0	0.0	9.4
2488	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.9	0.0	0.0	-90.6
2488	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.9	0.0	0.0	-90.6
2492	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
2492	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
2492	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
2496	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
2496	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
2496	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
2580	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-10.2
2580	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-110.2
2580	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-110.2
2586	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
2586	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2586	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2591	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
2591	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2591	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2597	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.5	0.0	0.0	-10.6
2597	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.5	0.0	0.0	-110.6
2597	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	25.5	0.0	0.0	-110.6
2602	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
2602	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2602	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2606	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
2606	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
2606	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
2610	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
2610	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2610	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2614	536548.93	4816088.83	349.45	1	D	A	59.5	2.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2614	536548.93	4816088.83	349.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2614	536548.93	4816088.83	349.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2617	536549.29	4816087.99	349.40	1	D	A	59.5	-10.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-36.1
2617	536549.29	4816087.99	349.40	1	N	A	-40.5	-10.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.1
2617	536549.29	4816087.99	349.40	1	E	A	-40.5	-10.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.1
2623	536500.08	4816073.10	350.28	0	D	A	59.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-11.9
2623	536500.08	4816073.10	350.28	0	N	A	-40.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-111.9
2623	536500.08	4816073.10	350.28	0	E	A	-40.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-111.9
2628	536500.08	4816073.10	350.28	1	D	A	59.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
2628	536500.08	4816073.10	350.28	1	N	A	-40.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
2628	536500.08	4816073.10	350.28	1	E	A	-40.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
2650	536498.42	4816076.80	350.42	0	D	A	59.5	5.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-13.7
2650	536498.42	4816076.80	350.42	0	N	A	-40.5	5.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.7
2650	536498.42	4816076.80	350.42	0	E	A	-40.5	5.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.7
2656	536497.42	4816079.05	350.46	0	D	A	59.5	2.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.6
2656	536497.42	4816079.05	350.46	0	N	A	-40.5	2.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.6
2656	536497.42	4816079.05	350.46	0	E	A	-40.5	2.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.6
2663	536498.41	4816076.83	350.42	1	D	A	59.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
2663	536498.41	4816076.83	350.42	1	N	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2663	536498.41	4816076.83	350.42	1	E	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2667	536497.45	4816078.98	350.46	1	D	A	59.5	1.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
2667	536497.45	4816078.98	350.46	1	N	A	-40.5	1.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2667	536497.45	4816078.98	350.46	1	E	A	-40.5	1.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2672	536497.12	4816079.73	350.47	1	D	A	59.5	-7.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
2672	536497.12	4816079.73	350.47	1	N	A	-40.5	-7.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
2672	536497.12	4816079.73	350.47	1	E	A	-40.5	-7.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
2679	536499.74	4816073.41	350.30	0	D	A	59.5	5.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-13.0
2679	536499.74	4816073.41	350.30	0	N	A	-40.5	5.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.0
2679	536499.74	4816073.41	350.30	0	E	A	-40.5	5.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.0
2685	536500.82	4816071.30	350.18	0	D	A	59.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-19.1
2685	536500.82	4816071.30	350.18	0	N	A	-40.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2685	536500.82	4816071.30	350.18	0	E	A	-40.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1
2690	536499.95	4816073.00	350.28	1	D	A	59.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
2690	536499.95	4816073.00	350.28	1	N	A	-40.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2690	536499.95	4816073.00	350.28	1	E	A	-40.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2702	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-11.3
2702	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-111.3
2702	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-111.3
2706	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
2706	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2706	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
2710	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
2710	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2710	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2714	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2714	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2714	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2719	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2719	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2719	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2723	536530.58	4816102.85	350.43	1	D	A	59.5	2.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2723	536530.58	4816102.85	350.43	1	N	A	-40.5	2.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2723	536530.58	4816102.85	350.43	1	E	A	-40.5	2.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2728	536531.80	4816103.06	350.42	1	D	A	59.5	-1.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2728	536531.80	4816103.06	350.42	1	N	A	-40.5	-1.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2728	536531.80	4816103.06	350.42	1	E	A	-40.5	-1.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2732	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
2732	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
2732	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
2739	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-11.5
2739	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
2739	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
2746	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2746	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2746	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2753	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
2753	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
2753	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
2754	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
2754	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2754	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2756	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
2756	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2756	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2759	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
2759	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2759	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2762	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
2762	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2762	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2768	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-10.8
2768	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.8
2768	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.8
2774	536509.87	4816095.21	350.59	1	D	A	59.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2774	536509.87	4816095.21	350.59	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2774	536509.87	4816095.21	350.59	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2779	536509.87	4816095.21	350.59	1	D	A	59.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2779	536509.87	4816095.21	350.59	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2779	536509.87	4816095.21	350.59	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2783	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	8.7
2783	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	-91.3
2783	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	-91.3
2788	536562.78	4816069.35	348.40	1	D	A	59.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
2788	536562.78	4816069.35	348.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2788	536562.78	4816069.35	348.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2823	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-12.1
2823	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-112.1
2823	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-112.1
2826	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
2826	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
2826	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
2831	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
2831	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2831	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2834	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2834	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2834	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2837	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
2837	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2837	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2840	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2840	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2840	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2844	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
2844	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2844	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2849	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
2849	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2849	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2854	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
2854	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2854	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2877	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-12.1
2877	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.1
2877	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.1
2882	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
2882	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
2882	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
2887	536535.95	4816108.52	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
2887	536535.95	4816108.52	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2887	536535.95	4816108.52	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2890	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2890	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2890	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2894	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
2894	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2894	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2899	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
2899	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
2899	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
2902	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
2902	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2902	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2905	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
2905	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2905	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2908	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
2908	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
2908	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
2955	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-12.5
2955	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.5
2955	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.5
2959	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
2959	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2959	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2963	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2963	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2963	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2966	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
2966	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2966	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2970	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
2970	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
2970	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
2974	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2974	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2974	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2979	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
2979	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2979	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2982	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2982	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2982	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
2986	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
2986	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2986	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2999	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-12.4
2999	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.4
2999	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.4
3004	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
3004	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
3004	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
3010	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
3010	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
3010	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
3015	536542.13	4816100.50	350.06	1	D	A	59.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
3015	536542.13	4816100.50	350.06	1	N	A	-40.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3015	536542.13	4816100.50	350.06	1	E	A	-40.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3020	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
3020	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
3020	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
3024	536542.38	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
3024	536542.38	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
3024	536542.38	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
3029	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
3029	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3029	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3035	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-12.5
3035	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.5
3035	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.5
3040	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
3040	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
3040	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
3044	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
3044	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
3044	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
3049	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
3049	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3049	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3053	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
3053	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3053	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3058	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3058	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
3058	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
3093	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-11.3
3093	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-111.3
3093	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-111.3
3099	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
3099	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3099	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3103	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3103	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3103	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3110	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-13.0
3110	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-113.0
3110	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-113.0
3116	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
3116	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
3116	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
3119	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
3119	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
3119	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
3123	536546.27	4816101.98	349.91	1	D	A	59.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
3123	536546.27	4816101.98	349.91	1	N	A	-40.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3123	536546.27	4816101.98	349.91	1	E	A	-40.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3128	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
3128	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3128	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3132	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
3132	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3132	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3136	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
3136	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3136	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3142	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-13.2
3142	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.2
3142	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.2
3147	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
3147	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
3147	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
3150	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
3150	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
3150	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
3153	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
3153	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3153	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3158	536542.53	4816108.18	350.20	1	D	A	59.5	-12.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
3158	536542.53	4816108.18	350.20	1	N	A	-40.5	-12.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3158	536542.53	4816108.18	350.20	1	E	A	-40.5	-12.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3163	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
3163	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3163	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3166	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3166	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
3166	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
3171	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
3171	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3171	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3174	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
3174	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3174	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3223	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-11.2
3223	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-111.2
3223	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-111.2
3229	536493.42	4816083.54	350.55	1	D	A	59.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
3229	536493.42	4816083.54	350.55	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3229	536493.42	4816083.54	350.55	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3232	536493.65	4816083.28	350.54	1	D	A	59.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
3232	536493.65	4816083.28	350.54	1	N	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3232	536493.65	4816083.28	350.54	1	E	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3245	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-13.3
3245	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-113.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3245	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-113.3
3249	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
3249	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
3249	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
3254	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
3254	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3254	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3258	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
3258	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3258	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3261	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
3261	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
3261	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
3266	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
3266	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
3266	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
3269	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
3269	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3269	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3293	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-14.0
3293	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.0
3293	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.0
3299	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
3299	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
3299	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
3302	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
3302	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
3302	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
3304	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
3304	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
3304	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
3307	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
3307	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
3307	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
3311	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
3311	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3311	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3315	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3315	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3315	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3320	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3320	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3320	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3324	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
3324	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3324	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3374	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-14.1
3374	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-114.1
3374	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-114.1
3380	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
3380	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
3380	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
3385	536534.38	4816103.24	350.40	1	D	A	59.5	0.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
3385	536534.38	4816103.24	350.40	1	N	A	-40.5	0.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
3385	536534.38	4816103.24	350.40	1	E	A	-40.5	0.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
3390	536533.96	4816103.22	350.40	1	D	A	59.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3390	536533.96	4816103.22	350.40	1	N	A	-40.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
3390	536533.96	4816103.22	350.40	1	E	A	-40.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
3395	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3395	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3395	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3399	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3399	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3399	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3403	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3403	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3403	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3408	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
3408	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3408	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3414	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-14.4
3414	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.4
3414	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.4
3419	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
3419	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
3419	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
3424	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
3424	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
3424	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
3429	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
3429	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
3429	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
3433	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
3433	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
3433	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
3438	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
3438	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3438	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3441	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3441	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3441	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3446	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
3446	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3446	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3449	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
3449	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3449	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3457	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-14.5
3457	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.5
3457	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.5
3461	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
3461	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
3461	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
3465	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
3465	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
3465	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
3470	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
3470	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
3470	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
3474	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
3474	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3474	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3479	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
3479	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3479	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3483	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3483	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3483	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3488	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3488	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3488	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3539	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-13.2
3539	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-113.2
3539	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.8	0.0	0.0	-113.2
3543	536498.16	4816088.33	350.58	1	D	A	59.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3543	536498.16	4816088.33	350.58	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3543	536498.16	4816088.33	350.58	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3547	536499.02	4816088.96	350.59	1	D	A	59.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
3547	536499.02	4816088.96	350.59	1	N	A	-40.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
3547	536499.02	4816088.96	350.59	1	E	A	-40.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
3551	536498.37	4816088.48	350.58	1	D	A	59.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
3551	536498.37	4816088.48	350.58	1	N	A	-40.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3551	536498.37	4816088.48	350.58	1	E	A	-40.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3659	536487.50	4816089.14	350.66	0	D	A	59.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-14.7
3659	536487.50	4816089.14	350.66	0	N	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.7
3659	536487.50	4816089.14	350.66	0	E	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.7
3664	536486.53	4816089.60	350.67	0	D	A	59.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-20.9
3664	536486.53	4816089.60	350.67	0	N	A	-40.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-120.9
3664	536486.53	4816089.60	350.67	0	E	A	-40.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-120.9
3668	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
3668	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3668	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3671	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
3671	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
3671	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
3740	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.4
3740	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.4
3740	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.4
3746	536498.51	4816075.91	350.41	1	D	A	59.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3746	536498.51	4816075.91	350.41	1	N	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3746	536498.51	4816075.91	350.41	1	E	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3752	536491.19	4816088.40	350.63	0	D	A	59.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-16.4
3752	536491.19	4816088.40	350.63	0	N	A	-40.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-116.4
3752	536491.19	4816088.40	350.63	0	E	A	-40.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-116.4
3757	536490.26	4816088.43	350.64	0	D	A	59.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-18.2
3757	536490.26	4816088.43	350.64	0	N	A	-40.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-118.2
3757	536490.26	4816088.43	350.64	0	E	A	-40.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-118.2
3763	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3763	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3763	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3767	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
3767	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3767	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3806	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	27.0	0.0	0.0	-16.5
3806	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	27.0	0.0	0.0	-116.5
3806	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	27.0	0.0	0.0	-116.5
3810	536496.74	4816080.62	350.49	1	D	A	59.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3810	536496.74	4816080.62	350.49	1	N	A	-40.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3810	536496.74	4816080.62	350.49	1	E	A	-40.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3834	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-14.5
3834	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.5
3834	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.5
3838	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3838	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3838	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3842	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3842	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3842	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3897	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-14.5
3897	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-114.5
3897	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-114.5
3900	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
3900	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3900	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3905	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3905	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3905	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3911	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-14.8
3911	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3911	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-114.8
3915	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
3915	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3915	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3918	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
3918	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3918	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3983	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-15.1
3983	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-115.1
3983	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-115.1
3987	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
3987	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
3987	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
3991	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
3991	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3991	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
4084	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-15.4
4084	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-115.4
4084	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-115.4
4088	536496.29	4816082.00	350.51	1	D	A	59.5	0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
4088	536496.29	4816082.00	350.51	1	N	A	-40.5	0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4088	536496.29	4816082.00	350.51	1	E	A	-40.5	0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4182	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-16.6
4182	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-116.6
4182	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.7	0.0	0.0	-116.6
4187	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
4187	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4187	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4191	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
4191	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4191	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4198	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-16.3
4198	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-116.3
4198	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-116.3
4201	536496.12	4816083.40	350.53	1	D	A	59.5	-5.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
4201	536496.12	4816083.40	350.53	1	N	A	-40.5	-5.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
4201	536496.12	4816083.40	350.53	1	E	A	-40.5	-5.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
4203	536496.14	4816083.07	350.52	1	D	A	59.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
4203	536496.14	4816083.07	350.52	1	N	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4203	536496.14	4816083.07	350.52	1	E	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4413	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-17.7
4413	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-117.7
4413	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-117.7
4417	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
4417	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
4417	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
4420	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
4420	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4420	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1272	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-3.9
1272	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-191.9
1272	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-191.9
1275	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.8
1275	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.8
1275	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.8
1277	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
1277	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.5
1277	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.5

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1321	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-3.8
1321	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-191.8
1321	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-191.8
1324	536871.56	4816492.87	346.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
1324	536871.56	4816492.87	346.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1324	536871.56	4816492.87	346.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1328	536871.56	4816492.87	346.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
1328	536871.56	4816492.87	346.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9
1328	536871.56	4816492.87	346.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1339	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-4.0
1339	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
1339	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
1342	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
1342	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1
1342	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1
1344	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
1344	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9
1344	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1380	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-4.0
1380	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-192.0
1380	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-192.0
1382	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
1382	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1382	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1384	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
1384	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0
1384	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1389	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-4.0
1389	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
1389	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
1392	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
1392	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1392	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
1396	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
1396	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0
1396	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1570	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-7.8
1570	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-185.0
1570	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-185.0
1574	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.4
1574	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.6
1574	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.6
1577	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.1
1577	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.3
1577	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.3

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1683	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.6	0.0	0.0	-9.5
1683	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.6	0.0	0.0	-186.7
1683	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.6	0.0	0.0	-186.7
1685	536990.82	4816395.92	338.40	1	D	A	93.1	0.0	-10.8	0.0	0.0	65.8	3.2	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
1685	536990.82	4816395.92	338.40	1	N	A	93.1	0.0	-188.0	0.0	0.0	65.8	3.2	-3.0	0.0	0.0	28.0	0.0	1.0	-189.9
1685	536990.82	4816395.92	338.40	1	E	A	93.1	0.0	-188.0	0.0	0.0	65.8	3.2	-3.0	0.0	0.0	28.0	0.0	1.0	-189.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1688	536728.99	4815966.55	344.26	0	D	A	62.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	16.9	0.0	0.0	2.6
1688	536728.99	4815966.55	344.26	0	N	A	-40.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	16.9	0.0	0.0	-100.4
1688	536728.99	4815966.55	344.26	0	E	A	-40.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	16.9	0.0	0.0	-100.4
1691	536730.53	4815966.12	344.24	1	D	A	62.5	9.7	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	12.2
1691	536730.53	4815966.12	344.24	1	N	A	-40.5	9.7	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-90.8
1691	536730.53	4815966.12	344.24	1	E	A	-40.5	9.7	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-90.8
1788	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	18.6
1788	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-84.4
1788	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-84.4
1792	536751.60	4815961.12	343.92	1	D	A	62.5	3.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-13.6
1792	536751.60	4815961.12	343.92	1	N	A	-40.5	3.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-116.6
1792	536751.60	4815961.12	343.92	1	E	A	-40.5	3.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-116.6
1796	536753.18	4815960.41	343.90	1	D	A	62.5	-0.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-17.6
1796	536753.18	4815960.41	343.90	1	N	A	-40.5	-0.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-120.6
1796	536753.18	4815960.41	343.90	1	E	A	-40.5	-0.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-120.6
1800	536754.39	4815959.87	343.88	1	D	A	62.5	4.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	5.8
1800	536754.39	4815959.87	343.88	1	N	A	-40.5	4.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.2
1800	536754.39	4815959.87	343.88	1	E	A	-40.5	4.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.2
1803	536757.57	4815958.44	343.83	1	D	A	62.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	7.6
1803	536757.57	4815958.44	343.83	1	N	A	-40.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.4
1803	536757.57	4815958.44	343.83	1	E	A	-40.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.4
1806	536749.36	4815962.12	343.96	1	D	A	62.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	2.3
1806	536749.36	4815962.12	343.96	1	N	A	-40.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-100.7
1806	536749.36	4815962.12	343.96	1	E	A	-40.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-100.7
2111	536754.68	4815978.41	343.91	0	D	A	62.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	11.1
2111	536754.68	4815978.41	343.91	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.0
2111	536754.68	4815978.41	343.91	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.0
2113	536753.16	4815977.60	343.94	0	D	A	62.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	9.8
2113	536753.16	4815977.60	343.94	0	N	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-93.2
2113	536753.16	4815977.60	343.94	0	E	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-93.2
2117	536751.50	4815976.71	343.97	0	D	A	62.5	3.6	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	7.7
2117	536751.50	4815976.71	343.97	0	N	A	-40.5	3.6	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	-95.3
2117	536751.50	4815976.71	343.97	0	E	A	-40.5	3.6	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	-95.3
2120	536749.74	4815975.77	344.00	0	D	A	62.5	2.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	2.2
2120	536749.74	4815975.77	344.00	0	N	A	-40.5	2.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	-100.8
2120	536749.74	4815975.77	344.00	0	E	A	-40.5	2.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	-100.8
2187	536729.41	4815967.77	344.26	0	D	A	62.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.9	0.0	0.0	-1.2
2187	536729.41	4815967.77	344.26	0	N	A	-40.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.9	0.0	0.0	-104.2
2187	536729.41	4815967.77	344.26	0	E	A	-40.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.9	0.0	0.0	-104.2
2192	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	10.6
2192	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-92.4
2192	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-92.4
2222	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	16.2
2222	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	-86.8
2222	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	-86.8
2227	536753.71	4815959.35	343.88	1	D	A	62.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-22.6
2227	536753.71	4815959.35	343.88	1	N	A	-40.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-125.6
2227	536753.71	4815959.35	343.88	1	E	A	-40.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-125.6
2232	536757.69	4815958.02	343.82	1	D	A	62.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	7.3
2232	536757.69	4815958.02	343.82	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.7
2232	536757.69	4815958.02	343.82	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.7
2238	536754.71	4815959.01	343.87	1	D	A	62.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	5.2
2238	536754.71	4815959.01	343.87	1	N	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2238	536754.71	4815959.01	343.87	1	E	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.9
2480	536741.39	4815963.05	344.05	0	D	A	62.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	5.8
2480	536741.39	4815963.05	344.05	0	N	A	-40.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	-97.2
2480	536741.39	4815963.05	344.05	0	E	A	-40.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	-97.2
2484	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	10.7
2484	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.4
2484	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.4
2535	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.9	0.0	0.0	7.2
2535	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.9	0.0	0.0	-95.9
2535	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.9	0.0	0.0	-95.9
2539	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	10.7
2539	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.4
2539	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.4
2566	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.3	0.0	0.0	1.7
2566	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.3	0.0	0.0	-101.3
2566	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.3	0.0	0.0	-101.3
2574	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	9.4
2574	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-93.6
2574	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-93.6
2799	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	6.5
2799	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-96.6
2799	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-96.6
2804	536752.98	4815959.57	343.89	1	D	A	62.5	0.9	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-16.6
2804	536752.98	4815959.57	343.89	1	N	A	-40.5	0.9	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-119.6
2804	536752.98	4815959.57	343.89	1	E	A	-40.5	0.9	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-119.6
2808	536751.62	4815959.99	343.91	1	D	A	62.5	2.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-15.4
2808	536751.62	4815959.99	343.91	1	N	A	-40.5	2.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-118.4
2808	536751.62	4815959.99	343.91	1	E	A	-40.5	2.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-118.4
2813	536753.48	4815959.42	343.88	1	D	A	62.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-14.0
2813	536753.48	4815959.42	343.88	1	N	A	-40.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-117.0
2813	536753.48	4815959.42	343.88	1	E	A	-40.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-117.0
2817	536749.69	4815960.57	343.94	1	D	A	62.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	3.4
2817	536749.69	4815960.57	343.94	1	N	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-99.6
2817	536749.69	4815960.57	343.94	1	E	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-99.6
2912	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	2.1
2912	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	-100.9
2912	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	-100.9
2916	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	8.6
2916	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	-94.4
2916	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	-94.4
2919	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	13.9
2919	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-89.1
2919	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-89.1
2922	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	55.9	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-6.7
2922	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	55.9	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-109.7
2922	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	55.9	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-109.7
2927	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.2	0.0	0.0	4.5
2927	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.2	0.0	0.0	-98.5
2927	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.2	0.0	0.0	-98.5
2933	536748.01	4815967.04	344.02	1	D	A	62.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-0.1
2933	536748.01	4815967.04	344.02	1	N	A	-40.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-103.1
2933	536748.01	4815967.04	344.02	1	E	A	-40.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-103.1
2937	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.3	0.0	0.0	3.4
2937	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.3	0.0	0.0	-99.6
2937	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.3	0.0	0.0	-99.6
2942	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	8.8
2942	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-94.2
2942	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-94.2
2991	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.0	0.0	0.0	6.7
2991	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.0	0.0	0.0	-96.3
2991	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.0	0.0	0.0	-96.3
3176	536755.79	4815969.22	343.95	0	D	A	62.5	1.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.5	0.0	0.0	5.8
3176	536755.79	4815969.22	343.95	0	N	A	-40.5	1.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.5	0.0	0.0	-97.2

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3176	536755.79	4815969.22	343.95	0	E	A	-40.5	1.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.5	0.0	0.0	-97.2
3179	536757.29	4815969.98	343.94	0	D	A	62.5	2.9	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	10.6
3179	536757.29	4815969.98	343.94	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.4
3179	536757.29	4815969.98	343.94	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.4
3281	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.2	0.0	0.0	-1.7
3281	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.2	0.0	0.0	-104.7
3281	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.2	0.0	0.0	-104.7
3287	536745.90	4815972.67	344.08	1	D	A	62.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.8
3287	536745.90	4815972.67	344.08	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.2
3287	536745.90	4815972.67	344.08	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.2
3329	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.1	0.0	0.0	1.1
3329	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.1	0.0	0.0	-101.9
3329	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.1	0.0	0.0	-101.9
3335	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	7.2
3335	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	-95.8
3335	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	-95.8
3352	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	11.9
3352	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.1
3352	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.1
3358	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.8	0.0	0.0	0.1
3358	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.8	0.0	0.0	-102.9
3358	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	11.8	0.0	0.0	-102.9
3556	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.1	0.0	0.0	3.1
3556	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.1	0.0	0.0	-99.9
3556	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.1	0.0	0.0	-99.9
3560	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	6.8
3560	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-96.2
3560	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-96.2
3576	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.7	0.0	0.0	-4.4
3576	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.7	0.0	0.0	-107.5
3576	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.7	0.0	0.0	-107.5
3580	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	5.4
3580	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.6
3580	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.6
3594	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.2	0.0	0.0	-0.3
3594	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.2	0.0	0.0	-103.3
3594	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.2	0.0	0.0	-103.3
3598	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	5.6
3598	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.5
3598	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.5
3648	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	-2.9
3648	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	-105.9
3648	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	-105.9
3653	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	5.1
3653	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.9
3653	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.9
3733	536758.98	4815970.84	343.92	0	D	A	62.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	10.4
3733	536758.98	4815970.84	343.92	0	N	A	-40.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.6
3733	536758.98	4815970.84	343.92	0	E	A	-40.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.6
3814	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	0.5
3814	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	-102.5
3814	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.6	0.0	0.0	-102.5
3818	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	5.4
3818	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.6
3818	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.6
3845	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	14.8	0.0	0.0	-4.8
3845	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	14.8	0.0	0.0	-107.9
3845	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	14.8	0.0	0.0	-107.9
3846	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.2
3846	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.8
3846	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.8
3849	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	-2.0
3849	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	-105.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3849	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.9	0.0	0.0	-105.0
3852	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.4
3852	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
3852	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
3864	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.6	0.0	0.0	-2.7
3864	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.6	0.0	0.0	-105.8
3864	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.6	0.0	0.0	-105.8
3868	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.4
3868	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.7
3868	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.7
3873	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	8.7	0.0	0.0	1.2
3873	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	8.7	0.0	0.0	-101.8
3873	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	8.7	0.0	0.0	-101.8
3876	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	5.2
3876	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.8
3876	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1696	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	-8.1
1696	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	-111.1
1696	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	-111.1
1896	536360.78	4816212.03	354.72	0	D	A	62.5	13.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.4
1896	536360.78	4816212.03	354.72	0	N	A	-40.5	13.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-112.4
1896	536360.78	4816212.03	354.72	0	E	A	-40.5	13.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-112.4
1901	536350.68	4816207.21	354.89	0	D	A	62.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-27.8
1901	536350.68	4816207.21	354.89	0	N	A	-40.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-130.8
1901	536350.68	4816207.21	354.89	0	E	A	-40.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-130.8
1906	536355.43	4816209.48	354.81	1	D	A	62.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1906	536355.43	4816209.48	354.81	1	N	A	-40.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1906	536355.43	4816209.48	354.81	1	E	A	-40.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1909	536351.72	4816207.70	354.87	1	D	A	62.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1909	536351.72	4816207.70	354.87	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1909	536351.72	4816207.70	354.87	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1969	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-9.6
1969	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-112.6
1969	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-112.6
1974	536362.80	4816207.33	354.67	1	D	A	62.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
1974	536362.80	4816207.33	354.67	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1974	536362.80	4816207.33	354.67	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
2104	536436.24	4816248.09	352.25	0	D	A	62.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-10.2
2104	536436.24	4816248.09	352.25	0	N	A	-40.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-113.2
2104	536436.24	4816248.09	352.25	0	E	A	-40.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-113.2
2198	536382.28	4816216.75	354.23	0	D	A	62.5	4.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-17.7
2198	536382.28	4816216.75	354.23	0	N	A	-40.5	4.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-120.7
2198	536382.28	4816216.75	354.23	0	E	A	-40.5	4.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-120.7
2204	536388.80	4816220.02	353.92	0	D	A	62.5	10.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-11.7
2204	536388.80	4816220.02	353.92	0	N	A	-40.5	10.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-114.8
2204	536388.80	4816220.02	353.92	0	E	A	-40.5	10.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-114.8
2215	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-10.6
2215	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-113.6
2215	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-113.6
2245	536387.50	4816224.80	354.12	0	D	A	62.5	11.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-11.4
2245	536387.50	4816224.80	354.12	0	N	A	-40.5	11.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-114.4
2245	536387.50	4816224.80	354.12	0	E	A	-40.5	11.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-114.4
2349	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-11.4
2349	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-114.4
2349	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-114.4
2400	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-11.6
2400	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.6
2400	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.6
2500	536427.71	4816264.77	352.96	0	D	A	62.5	9.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-12.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2500	536427.71	4816264.77	352.96	0	N	A	-40.5	9.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-115.5
2500	536427.71	4816264.77	352.96	0	E	A	-40.5	9.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-115.5
2506	536432.04	4816267.05	352.80	0	D	A	62.5	0.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-21.1
2506	536432.04	4816267.05	352.80	0	N	A	-40.5	0.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.1
2506	536432.04	4816267.05	352.80	0	E	A	-40.5	0.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.1
2513	536432.64	4816267.37	352.78	0	D	A	62.5	-7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-29.2
2513	536432.64	4816267.37	352.78	0	N	A	-40.5	-7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-132.2
2513	536432.64	4816267.37	352.78	0	E	A	-40.5	-7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-132.2
2520	536448.74	4816254.07	351.95	0	D	A	62.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-19.3
2520	536448.74	4816254.07	351.95	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.3
2520	536448.74	4816254.07	351.95	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.3
2525	536445.78	4816252.65	352.02	0	D	A	62.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-14.0
2525	536445.78	4816252.65	352.02	0	N	A	-40.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-117.0
2525	536445.78	4816252.65	352.02	0	E	A	-40.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-117.0
2531	536442.75	4816251.20	352.09	0	D	A	62.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-19.0
2531	536442.75	4816251.20	352.09	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2531	536442.75	4816251.20	352.09	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2545	536398.33	4816229.98	353.59	0	D	A	62.5	9.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-12.4
2545	536398.33	4816229.98	353.59	0	N	A	-40.5	9.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-115.4
2545	536398.33	4816229.98	353.59	0	E	A	-40.5	9.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-115.4
2549	536393.99	4816227.90	353.80	0	D	A	62.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-21.9
2549	536393.99	4816227.90	353.80	0	N	A	-40.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.9
2549	536393.99	4816227.90	353.80	0	E	A	-40.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.9
2556	536393.38	4816227.61	353.83	0	D	A	62.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-28.5
2556	536393.38	4816227.61	353.83	0	N	A	-40.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-131.5
2556	536393.38	4816227.61	353.83	0	E	A	-40.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-131.5
2563	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-12.3
2563	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-115.3
2563	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-115.3
2637	536461.01	4816287.80	351.39	0	D	A	62.5	8.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-13.0
2637	536461.01	4816287.80	351.39	0	N	A	-40.5	8.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.1
2637	536461.01	4816287.80	351.39	0	E	A	-40.5	8.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.1
2643	536458.85	4816291.27	351.40	0	D	A	62.5	-0.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-22.0
2643	536458.85	4816291.27	351.40	0	N	A	-40.5	-0.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.0
2643	536458.85	4816291.27	351.40	0	E	A	-40.5	-0.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.0
2697	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-12.7
2697	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-115.7
2697	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-115.7
2795	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-13.0
2795	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.0
2795	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.0
2861	536452.77	4816276.74	351.89	0	D	A	62.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-13.3
2861	536452.77	4816276.74	351.89	0	N	A	-40.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-116.3
2861	536452.77	4816276.74	351.89	0	E	A	-40.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-116.3
2868	536456.12	4816277.77	351.72	0	D	A	62.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-25.5
2868	536456.12	4816277.77	351.72	0	N	A	-40.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
2868	536456.12	4816277.77	351.72	0	E	A	-40.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
2948	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-13.5
2948	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-116.5
2948	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-116.5
3065	536344.98	4816204.48	354.93	0	D	A	62.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-15.2
3065	536344.98	4816204.48	354.93	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-118.2
3065	536344.98	4816204.48	354.93	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-118.2
3070	536340.77	4816202.47	354.98	0	D	A	62.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-17.8
3070	536340.77	4816202.47	354.98	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
3070	536340.77	4816202.47	354.98	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
3074	536344.13	4816204.08	354.94	1	D	A	62.5	9.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.2
3074	536344.13	4816204.08	354.94	1	N	A	-40.5	9.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
3074	536344.13	4816204.08	354.94	1	E	A	-40.5	9.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
3078	536339.92	4816202.06	354.99	1	D	A	62.5	1.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
3078	536339.92	4816202.06	354.99	1	N	A	-40.5	1.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3078	536339.92	4816202.06	354.99	1	E	A	-40.5	1.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3086	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-13.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3086	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.8
3086	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-116.8
3186	536347.21	4816199.92	354.88	0	D	A	62.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-16.3
3186	536347.21	4816199.92	354.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-119.4
3186	536347.21	4816199.92	354.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-119.4
3196	536350.72	4816201.58	354.84	0	D	A	62.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-17.7
3196	536350.72	4816201.58	354.84	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.7
3196	536350.72	4816201.58	354.84	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.7
3202	536347.23	4816199.93	354.88	1	D	A	62.5	6.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
3202	536347.23	4816199.93	354.88	1	N	A	-40.5	6.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3202	536347.23	4816199.93	354.88	1	E	A	-40.5	6.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3207	536350.75	4816201.59	354.84	1	D	A	62.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
3207	536350.75	4816201.59	354.84	1	N	A	-40.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3207	536350.75	4816201.59	354.84	1	E	A	-40.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3215	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-14.2
3215	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-117.3
3215	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-117.3
3239	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-14.5
3239	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-117.5
3239	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-117.5
3276	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-14.7
3276	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-117.7
3276	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-117.7
3341	536394.81	4816223.04	353.63	0	D	A	62.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-19.4
3341	536394.81	4816223.04	353.63	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-122.4
3341	536394.81	4816223.04	353.63	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-122.4
3347	536397.01	4816224.15	353.53	0	D	A	62.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-17.4
3347	536397.01	4816224.15	353.53	0	N	A	-40.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-120.4
3347	536397.01	4816224.15	353.53	0	E	A	-40.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-120.4
3366	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-15.4
3366	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-118.4
3366	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-118.4
3496	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-15.5
3496	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-118.5
3496	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-118.5
3501	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-15.5
3501	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-118.5
3501	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-118.5
3511	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-15.6
3511	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3511	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3519	536356.11	4816204.13	354.78	0	D	A	62.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-17.6
3519	536356.11	4816204.13	354.78	0	N	A	-40.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-120.6
3519	536356.11	4816204.13	354.78	0	E	A	-40.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-120.6
3525	536358.48	4816205.25	354.74	0	D	A	62.5	2.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-20.1
3525	536358.48	4816205.25	354.74	0	N	A	-40.5	2.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
3525	536358.48	4816205.25	354.74	0	E	A	-40.5	2.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
3530	536355.17	4816203.68	354.80	1	D	A	62.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3530	536355.17	4816203.68	354.80	1	N	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3530	536355.17	4816203.68	354.80	1	E	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3534	536357.53	4816204.80	354.76	1	D	A	62.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
3534	536357.53	4816204.80	354.76	1	N	A	-40.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3534	536357.53	4816204.80	354.76	1	E	A	-40.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
3565	536380.06	4816221.24	354.48	0	D	A	62.5	5.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-16.9
3565	536380.06	4816221.24	354.48	0	N	A	-40.5	5.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.9
3565	536380.06	4816221.24	354.48	0	E	A	-40.5	5.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.9
3571	536378.02	4816220.27	354.58	0	D	A	62.5	-0.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-23.5
3571	536378.02	4816220.27	354.58	0	N	A	-40.5	-0.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-126.6
3571	536378.02	4816220.27	354.58	0	E	A	-40.5	-0.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-126.6
3588	536449.63	4816310.01	351.46	0	D	A	62.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-16.3
3588	536449.63	4816310.01	351.46	0	N	A	-40.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.3
3588	536449.63	4816310.01	351.46	0	E	A	-40.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.3
3604	536449.90	4816310.20	351.45	0	D	A	62.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-16.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3604	536449.90	4816310.20	351.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.4
3604	536449.90	4816310.20	351.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.4
3613	536467.78	4816273.41	351.39	0	D	A	62.5	0.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.5
3613	536467.78	4816273.41	351.39	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
3613	536467.78	4816273.41	351.39	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
3619	536468.18	4816271.98	351.38	0	D	A	62.5	2.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-18.4
3619	536468.18	4816271.98	351.38	0	N	A	-40.5	2.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
3619	536468.18	4816271.98	351.38	0	E	A	-40.5	2.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
3627	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-16.4
3627	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-119.4
3627	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-119.4
3635	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-16.4
3635	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-119.4
3635	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-119.4
3643	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-16.3
3643	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-119.3
3643	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-119.3
3677	536427.85	4816244.08	352.49	0	D	A	62.5	1.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-19.7
3677	536427.85	4816244.08	352.49	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.7
3677	536427.85	4816244.08	352.49	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.7
3682	536426.44	4816243.41	352.54	0	D	A	62.5	2.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-19.3
3682	536426.44	4816243.41	352.54	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.3
3682	536426.44	4816243.41	352.54	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.3
3714	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-16.7
3714	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-119.7
3714	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-119.7
3722	536443.77	4816273.25	352.34	0	D	A	62.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-19.0
3722	536443.77	4816273.25	352.34	0	N	A	-40.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
3722	536443.77	4816273.25	352.34	0	E	A	-40.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
3728	536445.21	4816273.87	352.29	0	D	A	62.5	1.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-20.5
3728	536445.21	4816273.87	352.29	0	N	A	-40.5	1.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-123.5
3728	536445.21	4816273.87	352.29	0	E	A	-40.5	1.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-123.5
3774	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-16.9
3774	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-119.9
3774	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-119.9
3824	536464.53	4816278.45	351.40	0	D	A	62.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-19.7
3824	536464.53	4816278.45	351.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-122.7
3824	536464.53	4816278.45	351.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-122.7
3828	536465.80	4816278.28	351.39	0	D	A	62.5	0.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.8
3828	536465.80	4816278.28	351.39	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
3828	536465.80	4816278.28	351.39	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
3858	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-17.1
3858	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-120.1
3858	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-120.1
3883	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-17.5
3883	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-120.5
3883	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-120.5
3890	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-17.1
3890	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-120.1
3890	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-120.1
3946	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-17.6
3946	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-120.6
3946	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-120.6
3952	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-17.7
3952	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-120.7
3952	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-120.7
3958	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-17.4
3958	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-120.4
3958	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-120.4
3962	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
3962	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3962	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3969	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-17.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3969	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-120.9
3969	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-120.9
3975	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-17.7
3975	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-120.7
3975	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-120.7
3996	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-18.0
3996	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.0
3996	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.0
4000	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
4000	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
4000	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
4006	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-18.2
4006	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.2
4006	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.2
4013	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-18.3
4013	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.3
4013	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-121.3
4019	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-18.1
4019	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.1
4019	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.1
4029	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.5
4029	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.6
4029	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.6
4050	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-18.5
4050	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.5
4050	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.5
4077	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.7
4077	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.7
4077	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.7
4095	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-18.2
4095	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-121.2
4095	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-121.2
4103	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.8
4103	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.8
4103	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.8
4110	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.9
4110	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.9
4110	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.9
4118	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-18.7
4118	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
4118	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
4122	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
4122	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
4122	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
4127	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-18.9
4127	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.9
4127	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.9
4134	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-18.7
4134	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.8
4134	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.8
4160	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-19.2
4160	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-122.2
4160	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-122.2
4166	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-19.2
4166	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
4166	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
4174	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-19.5
4174	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-122.5
4174	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-122.5
4242	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-19.1
4242	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.2
4242	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.2
4248	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-19.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4248	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.7
4248	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.7
4294	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.2
4294	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4294	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4314	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.2
4314	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4314	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4322	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	27.2	0.0	0.0	-20.2
4322	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4322	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
4346	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.3
4346	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.3
4346	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.3
4352	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.3
4352	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.3
4352	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.3
4359	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-20.4
4359	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-123.4
4359	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.2	0.0	0.0	-123.4
4385	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.5
4385	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
4385	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
4426	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.5
4426	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
4426	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.5
4471	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-20.7
4471	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-123.7
4471	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-123.7
4497	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-20.7
4497	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
4497	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
4503	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-20.7
4503	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-123.7
4503	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-123.7
4585	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-21.0
4585	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.0
4585	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.0
4678	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-21.2
4678	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
4678	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
4699	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-21.2
4699	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-124.2
4699	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-124.2
4705	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-21.3
4705	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-124.3
4705	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-124.3
4748	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-21.4
4748	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-124.4
4748	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-124.4
4788	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-21.6
4788	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
4788	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
4824	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-21.8
4824	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
4824	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
4843	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-21.8
4843	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.8
4843	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.8
4969	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-22.3
4969	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-125.3
4969	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-125.3
5007	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-22.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5007	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5007	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5676	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-25.6
5676	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-128.6
5676	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-128.6
5776	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-26.1
5776	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.1
5776	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.1
5845	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-26.6
5845	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
5845	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
6115	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-28.8
6115	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.8
6115	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.8
6119	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-28.8
6119	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.8
6119	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.8
6126	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-28.8
6126	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.9
6126	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.9
6127	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-28.9
6127	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.9
6127	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-131.9
6165	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-29.1
6165	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.1
6165	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.1
6180	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-29.2
6180	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.2
6180	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.2
6194	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-29.3
6194	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.3
6194	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.3
6197	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-29.4
6197	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.4
6197	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-132.4
6299	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-31.8
6299	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-134.8
6299	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-134.8
6317	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-32.3
6317	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-135.3
6317	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-135.3
6327	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-33.2
6327	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-136.2
6327	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-136.2
6331	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-33.3
6331	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-136.3
6331	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	27.2	0.0	0.0	-136.3
6354	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-38.0
6354	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-141.0
6354	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-141.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1810	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-10.2
1810	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-187.4
1810	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-187.4
1811	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
1811	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
1811	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
1814	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	66.5	3.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1814	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	66.5	3.4	-3.0	0.0	0.0	28.0	0.0	1.0	-190.9
1814	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	66.5	3.4	-3.0	0.0	0.0	28.0	0.0	1.0	-190.9

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3502	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-23.3
3502	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-26.3
3502	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-23.3
3504	536845.26	4816228.12	344.03	1	D	A	60.0	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
3504	536845.26	4816228.12	344.03	1	N	A	60.0	0.0	-3.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
3504	536845.26	4816228.12	344.03	1	E	A	60.0	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3690	536791.38	4816508.19	341.02	0	D	A	59.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-19.2
3690	536791.38	4816508.19	341.02	0	N	A	-40.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-119.2
3690	536791.38	4816508.19	341.02	0	E	A	-40.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-119.2
3695	536795.37	4816499.40	341.11	0	D	A	59.5	7.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-22.9
3695	536795.37	4816499.40	341.11	0	N	A	-40.5	7.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-122.9
3695	536795.37	4816499.40	341.11	0	E	A	-40.5	7.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-122.9
3699	536790.83	4816509.39	341.01	1	D	A	59.5	10.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
3699	536790.83	4816509.39	341.01	1	N	A	-40.5	10.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
3699	536790.83	4816509.39	341.01	1	E	A	-40.5	10.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
3703	536793.40	4816503.75	341.07	1	D	A	59.5	1.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
3703	536793.40	4816503.75	341.07	1	N	A	-40.5	1.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3703	536793.40	4816503.75	341.07	1	E	A	-40.5	1.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3706	536795.11	4816499.97	341.11	1	D	A	59.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
3706	536795.11	4816499.97	341.11	1	N	A	-40.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3706	536795.11	4816499.97	341.11	1	E	A	-40.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4035	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-19.7
4035	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-119.7
4035	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-119.7
4037	536835.24	4816629.56	340.17	1	D	A	59.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
4037	536835.24	4816629.56	340.17	1	N	A	-40.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
4037	536835.24	4816629.56	340.17	1	E	A	-40.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
4041	536829.01	4816626.68	340.23	1	D	A	59.5	5.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
4041	536829.01	4816626.68	340.23	1	N	A	-40.5	5.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
4041	536829.01	4816626.68	340.23	1	E	A	-40.5	5.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
4044	536824.35	4816624.53	340.27	1	D	A	59.5	8.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4044	536824.35	4816624.53	340.27	1	N	A	-40.5	8.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4044	536824.35	4816624.53	340.27	1	E	A	-40.5	8.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4058	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-19.1
4058	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
4058	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
4061	536907.16	4816461.73	340.40	1	D	A	59.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
4061	536907.16	4816461.73	340.40	1	N	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4061	536907.16	4816461.73	340.40	1	E	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4064	536913.12	4816464.83	340.40	1	D	A	59.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
4064	536913.12	4816464.83	340.40	1	N	A	-40.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4064	536913.12	4816464.83	340.40	1	E	A	-40.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4069	536910.45	4816463.44	340.40	1	D	A	59.5	11.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
4069	536910.45	4816463.44	340.40	1	N	A	-40.5	11.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
4069	536910.45	4816463.44	340.40	1	E	A	-40.5	11.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
4141	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-19.7
4141	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-119.7
4141	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-119.7
4145	536891.26	4816453.63	340.74	1	D	A	59.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
4145	536891.26	4816453.63	340.74	1	N	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
4145	536891.26	4816453.63	340.74	1	E	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
4149	536896.31	4816456.12	340.61	1	D	A	59.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
4149	536896.31	4816456.12	340.61	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
4149	536896.31	4816456.12	340.61	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
4153	536892.28	4816454.14	340.71	1	D	A	59.5	10.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
4153	536892.28	4816454.14	340.71	1	N	A	-40.5	10.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
4153	536892.28	4816454.14	340.71	1	E	A	-40.5	10.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
4209	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-20.5
4209	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-120.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4209	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-120.5
4213	536782.35	4816528.07	341.04	1	D	A	59.5	7.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
4213	536782.35	4816528.07	341.04	1	N	A	-40.5	7.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4213	536782.35	4816528.07	341.04	1	E	A	-40.5	7.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4216	536784.58	4816523.18	341.01	1	D	A	59.5	7.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4216	536784.58	4816523.18	341.01	1	N	A	-40.5	7.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4216	536784.58	4816523.18	341.01	1	E	A	-40.5	7.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4223	536806.73	4816467.88	341.19	0	D	A	59.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-20.3
4223	536806.73	4816467.88	341.19	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-120.3
4223	536806.73	4816467.88	341.19	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-120.3
4229	536807.64	4816463.63	341.19	0	D	A	59.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-48.8
4229	536807.64	4816463.63	341.19	0	N	A	-40.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-148.8
4229	536807.64	4816463.63	341.19	0	E	A	-40.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-148.8
4233	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
4233	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
4233	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
4238	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
4238	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
4238	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
4255	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-21.0
4255	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-121.0
4255	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-121.0
4260	536776.99	4816539.88	341.05	1	D	A	59.5	10.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
4260	536776.99	4816539.88	341.05	1	N	A	-40.5	10.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
4260	536776.99	4816539.88	341.05	1	E	A	-40.5	10.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
4266	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-20.6
4266	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-120.6
4266	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-120.6
4270	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
4270	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
4270	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
4274	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
4274	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
4274	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
4282	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-21.4
4282	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
4282	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
4287	536846.85	4816634.93	340.08	1	D	A	59.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
4287	536846.85	4816634.93	340.08	1	N	A	-40.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
4287	536846.85	4816634.93	340.08	1	E	A	-40.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
4367	536917.59	4816467.15	340.40	0	D	A	59.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-26.2
4367	536917.59	4816467.15	340.40	0	N	A	-40.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-126.2
4367	536917.59	4816467.15	340.40	0	E	A	-40.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-126.2
4373	536921.81	4816469.34	340.40	0	D	A	59.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-22.2
4373	536921.81	4816469.34	340.40	0	N	A	-40.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.2
4373	536921.81	4816469.34	340.40	0	E	A	-40.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.2
4377	536920.63	4816468.73	340.40	1	D	A	59.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
4377	536920.63	4816468.73	340.40	1	N	A	-40.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
4377	536920.63	4816468.73	340.40	1	E	A	-40.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
4380	536920.63	4816468.73	340.40	1	D	A	59.5	9.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
4380	536920.63	4816468.73	340.40	1	N	A	-40.5	9.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4380	536920.63	4816468.73	340.40	1	E	A	-40.5	9.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4390	536817.01	4816442.68	341.52	0	D	A	59.5	2.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.2
4390	536817.01	4816442.68	341.52	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.2
4390	536817.01	4816442.68	341.52	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.2
4396	536819.24	4816440.36	341.56	0	D	A	59.5	6.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.3
4396	536819.24	4816440.36	341.56	0	N	A	-40.5	6.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.3
4396	536819.24	4816440.36	341.56	0	E	A	-40.5	6.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.3
4398	536816.99	4816442.70	341.52	1	D	A	59.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
4398	536816.99	4816442.70	341.52	1	N	A	-40.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4398	536816.99	4816442.70	341.52	1	E	A	-40.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4400	536819.22	4816440.38	341.56	1	D	A	59.5	6.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4400	536819.22	4816440.38	341.56	1	N	A	-40.5	6.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4400	536819.22	4816440.38	341.56	1	E	A	-40.5	6.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4404	536816.91	4816442.77	341.52	1	D	A	59.5	1.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
4404	536816.91	4816442.77	341.52	1	N	A	-40.5	1.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4404	536816.91	4816442.77	341.52	1	E	A	-40.5	1.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4408	536819.14	4816440.46	341.56	1	D	A	59.5	7.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
4408	536819.14	4816440.46	341.56	1	N	A	-40.5	7.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4408	536819.14	4816440.46	341.56	1	E	A	-40.5	7.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4434	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-21.3
4434	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
4434	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
4440	536900.91	4816458.49	340.49	1	D	A	59.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
4440	536900.91	4816458.49	340.49	1	N	A	-40.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4440	536900.91	4816458.49	340.49	1	E	A	-40.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4442	536900.91	4816458.49	340.49	1	D	A	59.5	9.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
4442	536900.91	4816458.49	340.49	1	N	A	-40.5	9.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
4442	536900.91	4816458.49	340.49	1	E	A	-40.5	9.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
4477	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-20.6
4477	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-120.6
4477	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-120.6
4482	536988.75	4816484.61	339.64	1	D	A	59.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
4482	536988.75	4816484.61	339.64	1	N	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4482	536988.75	4816484.61	339.64	1	E	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4486	536994.22	4816485.29	339.56	1	D	A	59.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4486	536994.22	4816485.29	339.56	1	N	A	-40.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4486	536994.22	4816485.29	339.56	1	E	A	-40.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4490	536992.95	4816485.13	339.58	1	D	A	59.5	10.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
4490	536992.95	4816485.13	339.58	1	N	A	-40.5	10.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
4490	536992.95	4816485.13	339.58	1	E	A	-40.5	10.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
4509	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-21.3
4509	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
4509	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
4512	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
4512	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
4512	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
4515	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
4515	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4515	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4522	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-21.6
4522	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.6
4522	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.6
4540	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
4540	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
4540	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
4544	536843.00	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
4544	536843.00	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4544	536843.00	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4563	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-21.7
4563	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-121.7
4563	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-121.7
4565	536810.43	4816454.68	341.24	1	D	A	59.5	6.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4565	536810.43	4816454.68	341.24	1	N	A	-40.5	6.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4565	536810.43	4816454.68	341.24	1	E	A	-40.5	6.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4566	536811.49	4816451.92	341.30	1	D	A	59.5	-0.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
4566	536811.49	4816451.92	341.30	1	N	A	-40.5	-0.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
4566	536811.49	4816451.92	341.30	1	E	A	-40.5	-0.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
4569	536810.61	4816454.21	341.25	1	D	A	59.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
4569	536810.61	4816454.21	341.25	1	N	A	-40.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4569	536810.61	4816454.21	341.25	1	E	A	-40.5	7.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4574	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-22.0
4574	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-122.0
4574	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-122.0
4576	536799.14	4816490.98	341.22	1	D	A	59.5	6.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
4576	536799.14	4816490.98	341.22	1	N	A	-40.5	6.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4576	536799.14	4816490.98	341.22	1	E	A	-40.5	6.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
4579	536800.44	4816487.89	341.26	1	D	A	59.5	4.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4579	536800.44	4816487.89	341.26	1	N	A	-40.5	4.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4579	536800.44	4816487.89	341.26	1	E	A	-40.5	4.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4592	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-21.7
4592	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.7
4592	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.7
4597	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
4597	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4597	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4602	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
4602	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4602	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
4609	536804.50	4816476.85	341.22	0	D	A	59.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-25.7
4609	536804.50	4816476.85	341.22	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-125.7
4609	536804.50	4816476.85	341.22	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-125.7
4615	536805.34	4816473.85	341.21	0	D	A	59.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-24.4
4615	536805.34	4816473.85	341.21	0	N	A	-40.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-124.4
4615	536805.34	4816473.85	341.21	0	E	A	-40.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-124.4
4620	536804.49	4816476.88	341.22	1	D	A	59.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
4620	536804.49	4816476.88	341.22	1	N	A	-40.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4620	536804.49	4816476.88	341.22	1	E	A	-40.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4624	536805.33	4816473.88	341.21	1	D	A	59.5	5.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4624	536805.33	4816473.88	341.21	1	N	A	-40.5	5.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4624	536805.33	4816473.88	341.21	1	E	A	-40.5	5.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4630	536804.47	4816476.97	341.22	1	D	A	59.5	3.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
4630	536804.47	4816476.97	341.22	1	N	A	-40.5	3.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4630	536804.47	4816476.97	341.22	1	E	A	-40.5	3.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4634	536805.30	4816473.97	341.21	1	D	A	59.5	5.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4634	536805.30	4816473.97	341.21	1	N	A	-40.5	5.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4634	536805.30	4816473.97	341.21	1	E	A	-40.5	5.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4688	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-22.2
4688	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-122.2
4688	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-122.2
4692	536787.11	4816517.60	340.98	1	D	A	59.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
4692	536787.11	4816517.60	340.98	1	N	A	-40.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
4692	536787.11	4816517.60	340.98	1	E	A	-40.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
4712	536792.81	4816610.31	340.43	0	D	A	59.5	4.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-28.1
4712	536792.81	4816610.31	340.43	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.1
4712	536792.81	4816610.31	340.43	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.1
4718	536790.77	4816609.40	340.47	0	D	A	59.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-29.8
4718	536790.77	4816609.40	340.47	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-129.8
4718	536790.77	4816609.40	340.47	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-129.8
4725	536787.59	4816607.97	340.54	0	D	A	59.5	7.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-25.2
4725	536787.59	4816607.97	340.54	0	N	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
4725	536787.59	4816607.97	340.54	0	E	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
4730	536790.92	4816609.47	340.47	1	D	A	59.5	8.3	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4730	536790.92	4816609.47	340.47	1	N	A	-40.5	8.3	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4730	536790.92	4816609.47	340.47	1	E	A	-40.5	8.3	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4734	536786.54	4816607.50	340.57	1	D	A	59.5	4.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
4734	536786.54	4816607.50	340.57	1	N	A	-40.5	4.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4734	536786.54	4816607.50	340.57	1	E	A	-40.5	4.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4739	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-22.4
4739	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-122.4
4739	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-122.4
4741	536771.73	4816551.47	341.14	1	D	A	59.5	2.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
4741	536771.73	4816551.47	341.14	1	N	A	-40.5	2.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4741	536771.73	4816551.47	341.14	1	E	A	-40.5	2.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4742	536773.26	4816548.08	341.09	1	D	A	59.5	7.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4742	536773.26	4816548.08	341.09	1	N	A	-40.5	7.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4742	536773.26	4816548.08	341.09	1	E	A	-40.5	7.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
4755	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-21.8
4755	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-121.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4755	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-121.8
4758	536945.22	4816478.77	340.17	1	D	A	59.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
4758	536945.22	4816478.77	340.17	1	N	A	-40.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4758	536945.22	4816478.77	340.17	1	E	A	-40.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4760	536949.09	4816480.03	340.12	1	D	A	59.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-35.2
4760	536949.09	4816480.03	340.12	1	N	A	-40.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
4760	536949.09	4816480.03	340.12	1	E	A	-40.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
4764	536945.70	4816478.92	340.16	1	D	A	59.5	9.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
4764	536945.70	4816478.92	340.16	1	N	A	-40.5	9.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
4764	536945.70	4816478.92	340.16	1	E	A	-40.5	9.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
4796	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.5
4796	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.5
4796	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.5
4800	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4800	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4800	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4803	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
4803	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4803	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4809	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.6
4809	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.6
4809	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.6
4812	536808.33	4816461.22	341.17	1	D	A	59.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4812	536808.33	4816461.22	341.17	1	N	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4812	536808.33	4816461.22	341.17	1	E	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4815	536807.93	4816462.60	341.18	1	D	A	59.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
4815	536807.93	4816462.60	341.18	1	N	A	-40.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4815	536807.93	4816462.60	341.18	1	E	A	-40.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4817	536808.62	4816460.20	341.17	1	D	A	59.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
4817	536808.62	4816460.20	341.17	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4817	536808.62	4816460.20	341.17	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4830	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-22.4
4830	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.4
4830	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.4
4833	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
4833	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4833	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4837	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4837	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4837	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4905	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-23.1
4905	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
4905	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
4910	536803.75	4816479.24	341.23	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
4910	536803.75	4816479.24	341.23	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
4910	536803.75	4816479.24	341.23	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
4915	536803.31	4816480.48	341.24	1	D	A	59.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4915	536803.31	4816480.48	341.24	1	N	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4915	536803.31	4816480.48	341.24	1	E	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4992	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-22.6
4992	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-122.6
4992	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-122.6
4997	536955.13	4816481.72	340.05	1	D	A	59.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4997	536955.13	4816481.72	340.05	1	N	A	-40.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4997	536955.13	4816481.72	340.05	1	E	A	-40.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
5002	536955.13	4816481.72	340.05	1	D	A	59.5	8.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
5002	536955.13	4816481.72	340.05	1	N	A	-40.5	8.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
5002	536955.13	4816481.72	340.05	1	E	A	-40.5	8.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
5032	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-23.2
5032	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
5032	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
5034	536847.20	4816432.81	341.46	1	D	A	59.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5034	536847.20	4816432.81	341.46	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5034	536847.20	4816432.81	341.46	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5037	536849.17	4816433.37	341.42	1	D	A	59.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5037	536849.17	4816433.37	341.42	1	N	A	-40.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5037	536849.17	4816433.37	341.42	1	E	A	-40.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5041	536847.19	4816432.81	341.46	1	D	A	59.5	4.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5041	536847.19	4816432.81	341.46	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5041	536847.19	4816432.81	341.46	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5045	536849.16	4816433.37	341.42	1	D	A	59.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.2
5045	536849.16	4816433.37	341.42	1	N	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5045	536849.16	4816433.37	341.42	1	E	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5051	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-23.6
5051	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
5051	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
5055	536770.42	4816555.03	341.15	1	D	A	59.5	7.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
5055	536770.42	4816555.03	341.15	1	N	A	-40.5	7.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
5055	536770.42	4816555.03	341.15	1	E	A	-40.5	7.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
5071	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-23.4
5071	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
5071	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
5074	536877.46	4816446.83	340.88	1	D	A	59.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
5074	536877.46	4816446.83	340.88	1	N	A	-40.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
5074	536877.46	4816446.83	340.88	1	E	A	-40.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
5080	536877.46	4816446.83	340.88	1	D	A	59.5	6.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
5080	536877.46	4816446.83	340.88	1	N	A	-40.5	6.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
5080	536877.46	4816446.83	340.88	1	E	A	-40.5	6.5	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
5093	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-23.9
5093	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
5093	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
5095	536768.85	4816560.46	341.14	1	D	A	59.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
5095	536768.85	4816560.46	341.14	1	N	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
5095	536768.85	4816560.46	341.14	1	E	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
5113	536779.99	4816533.28	341.05	0	D	A	59.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-25.0
5113	536779.99	4816533.28	341.05	0	N	A	-40.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
5113	536779.99	4816533.28	341.05	0	E	A	-40.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
5114	536781.00	4816531.04	341.05	0	D	A	59.5	0.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-30.8
5114	536781.00	4816531.04	341.05	0	N	A	-40.5	0.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-130.8
5114	536781.00	4816531.04	341.05	0	E	A	-40.5	0.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-130.8
5118	536779.94	4816533.38	341.05	1	D	A	59.5	5.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5118	536779.94	4816533.38	341.05	1	N	A	-40.5	5.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5118	536779.94	4816533.38	341.05	1	E	A	-40.5	5.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5120	536780.95	4816531.15	341.05	1	D	A	59.5	1.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
5120	536780.95	4816531.15	341.05	1	N	A	-40.5	1.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5120	536780.95	4816531.15	341.05	1	E	A	-40.5	1.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5134	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-24.3
5134	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
5134	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
5136	536909.38	4816644.53	339.65	1	D	A	59.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5136	536909.38	4816644.53	339.65	1	N	A	-40.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5136	536909.38	4816644.53	339.65	1	E	A	-40.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5138	536906.59	4816644.05	339.70	1	D	A	59.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
5138	536906.59	4816644.05	339.70	1	N	A	-40.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
5138	536906.59	4816644.05	339.70	1	E	A	-40.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
5158	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-23.2
5158	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-123.2
5158	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-123.2
5160	536976.07	4816484.33	339.81	1	D	A	59.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
5160	536976.07	4816484.33	339.81	1	N	A	-40.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5160	536976.07	4816484.33	339.81	1	E	A	-40.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5162	536976.07	4816484.33	339.81	1	D	A	59.5	7.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
5162	536976.07	4816484.33	339.81	1	N	A	-40.5	7.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5162	536976.07	4816484.33	339.81	1	E	A	-40.5	7.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5178	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-23.9
5178	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5178	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
5180	536824.47	4816435.94	341.66	1	D	A	59.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
5180	536824.47	4816435.94	341.66	1	N	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5180	536824.47	4816435.94	341.66	1	E	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5184	536824.47	4816435.94	341.66	1	D	A	59.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
5184	536824.47	4816435.94	341.66	1	N	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
5184	536824.47	4816435.94	341.66	1	E	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
5191	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-23.9
5191	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.9
5191	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.9
5194	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
5194	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5194	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5197	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
5197	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5197	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5199	536914.81	4816645.72	339.56	0	D	A	59.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-24.5
5199	536914.81	4816645.72	339.56	0	N	A	-40.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.5
5199	536914.81	4816645.72	339.56	0	E	A	-40.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.5
5203	536914.81	4816645.72	339.56	1	D	A	59.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
5203	536914.81	4816645.72	339.56	1	N	A	-40.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5203	536914.81	4816645.72	339.56	1	E	A	-40.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5204	536914.81	4816645.72	339.56	1	D	A	59.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
5204	536914.81	4816645.72	339.56	1	N	A	-40.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5204	536914.81	4816645.72	339.56	1	E	A	-40.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5207	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-24.6
5207	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
5207	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
5210	536818.13	4816621.69	340.33	1	D	A	59.5	8.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
5210	536818.13	4816621.69	340.33	1	N	A	-40.5	8.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
5210	536818.13	4816621.69	340.33	1	E	A	-40.5	8.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
5225	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-24.6
5225	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
5225	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
5227	536798.03	4816612.66	340.40	1	D	A	59.5	5.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
5227	536798.03	4816612.66	340.40	1	N	A	-40.5	5.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5227	536798.03	4816612.66	340.40	1	E	A	-40.5	5.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5230	536795.25	4816611.41	340.40	1	D	A	59.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5230	536795.25	4816611.41	340.40	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5230	536795.25	4816611.41	340.40	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5244	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-23.5
5244	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.5
5244	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.5
5246	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5246	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5246	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5249	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5249	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5249	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5254	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-24.8
5254	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5254	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5256	536807.30	4816616.82	340.40	1	D	A	59.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
5256	536807.30	4816616.82	340.40	1	N	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5256	536807.30	4816616.82	340.40	1	E	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5285	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-24.5
5285	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.5
5285	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.5
5288	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5288	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5288	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5291	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5291	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5291	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5310	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-24.1
5310	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-124.1
5310	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-124.1
5313	536970.55	4816484.18	339.88	1	D	A	59.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
5313	536970.55	4816484.18	339.88	1	N	A	-40.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5313	536970.55	4816484.18	339.88	1	E	A	-40.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5315	536970.55	4816484.18	339.88	1	D	A	59.5	7.0	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5315	536970.55	4816484.18	339.88	1	N	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5315	536970.55	4816484.18	339.88	1	E	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5320	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-25.2
5320	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
5320	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
5322	536802.06	4816614.47	340.40	1	D	A	59.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5322	536802.06	4816614.47	340.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5322	536802.06	4816614.47	340.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5326	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.7
5326	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
5326	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
5329	536821.99	4816437.72	341.61	1	D	A	59.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5329	536821.99	4816437.72	341.61	1	N	A	-40.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5329	536821.99	4816437.72	341.61	1	E	A	-40.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5331	536821.99	4816437.72	341.61	1	D	A	59.5	4.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5331	536821.99	4816437.72	341.61	1	N	A	-40.5	4.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5331	536821.99	4816437.72	341.61	1	E	A	-40.5	4.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5343	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-24.5
5343	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-124.5
5343	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-124.5
5344	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5344	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5344	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5346	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5346	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5346	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5350	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-24.8
5350	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5350	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5352	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5352	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5352	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5356	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
5356	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5356	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5397	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-25.1
5397	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-125.1
5397	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-125.1
5401	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5401	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5401	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5404	536855.53	4816435.87	341.23	1	D	A	59.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5404	536855.53	4816435.87	341.23	1	N	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5404	536855.53	4816435.87	341.23	1	E	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5406	536856.77	4816436.44	341.19	1	D	A	59.5	-2.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
5406	536856.77	4816436.44	341.19	1	N	A	-40.5	-2.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5406	536856.77	4816436.44	341.19	1	E	A	-40.5	-2.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5411	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
5411	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5411	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5415	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5415	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5415	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5418	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5418	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5418	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5422	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-25.7
5422	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
5422	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
5423	536900.31	4816643.06	339.81	1	D	A	59.5	6.2	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5423	536900.31	4816643.06	339.81	1	N	A	-40.5	6.2	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5423	536900.31	4816643.06	339.81	1	E	A	-40.5	6.2	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5424	536897.29	4816642.67	339.86	1	D	A	59.5	2.9	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-33.8
5424	536897.29	4816642.67	339.86	1	N	A	-40.5	2.9	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
5424	536897.29	4816642.67	339.86	1	E	A	-40.5	2.9	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
5429	536832.64	4816432.46	341.75	0	D	A	59.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.9
5429	536832.64	4816432.46	341.75	0	N	A	-40.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.9
5429	536832.64	4816432.46	341.75	0	E	A	-40.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.9
5433	536833.85	4816432.27	341.73	0	D	A	59.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.7
5433	536833.85	4816432.27	341.73	0	N	A	-40.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.7
5433	536833.85	4816432.27	341.73	0	E	A	-40.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.7
5434	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5434	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5434	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5436	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5436	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5436	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5439	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.4
5439	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.4
5439	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.4
5442	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5442	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5442	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5445	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5445	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5445	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5480	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-25.1
5480	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-125.1
5480	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-125.1
5481	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5481	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5481	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5485	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5485	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5485	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5491	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.4
5491	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.4
5491	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.4
5493	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
5493	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5493	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5495	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5495	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5495	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5499	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-26.0
5499	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.0
5499	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.0
5502	536873.55	4816641.97	339.96	1	D	A	59.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
5502	536873.55	4816641.97	339.96	1	N	A	-40.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5502	536873.55	4816641.97	339.96	1	E	A	-40.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5504	536870.82	4816641.78	339.96	1	D	A	59.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-34.7
5504	536870.82	4816641.78	339.96	1	N	A	-40.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
5504	536870.82	4816641.78	339.96	1	E	A	-40.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
5509	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-25.5
5509	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5509	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5514	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
5514	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5514	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5516	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5516	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5516	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5521	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.6
5521	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
5521	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
5524	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5524	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5524	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5526	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5526	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5526	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5530	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.5
5530	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.5
5530	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.5
5534	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5534	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5534	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5537	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5537	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5537	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5542	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-25.5
5542	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5542	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-125.5
5544	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
5544	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5544	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5547	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5547	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5547	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5551	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-25.9
5551	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
5551	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
5554	536767.41	4816568.32	341.10	1	D	A	59.5	5.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
5554	536767.41	4816568.32	341.10	1	N	A	-40.5	5.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
5554	536767.41	4816568.32	341.10	1	E	A	-40.5	5.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
5592	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-26.0
5592	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5592	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5594	536767.92	4816564.84	341.12	1	D	A	59.5	5.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5594	536767.92	4816564.84	341.12	1	N	A	-40.5	5.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5594	536767.92	4816564.84	341.12	1	E	A	-40.5	5.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5615	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-26.4
5615	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.4
5615	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.4
5616	536867.60	4816641.40	339.97	1	D	A	59.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
5616	536867.60	4816641.40	339.97	1	N	A	-40.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5616	536867.60	4816641.40	339.97	1	E	A	-40.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5652	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.0
5652	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5652	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5654	536826.66	4816434.62	341.70	1	D	A	59.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5654	536826.66	4816434.62	341.70	1	N	A	-40.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5654	536826.66	4816434.62	341.70	1	E	A	-40.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5655	536827.57	4816434.13	341.72	1	D	A	59.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.0
5655	536827.57	4816434.13	341.72	1	N	A	-40.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-138.0
5655	536827.57	4816434.13	341.72	1	E	A	-40.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-138.0
5657	536826.80	4816434.55	341.70	1	D	A	59.5	3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5657	536826.80	4816434.55	341.70	1	N	A	-40.5	3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5657	536826.80	4816434.55	341.70	1	E	A	-40.5	3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5663	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-26.4
5663	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-126.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5663	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-126.4
5665	536768.98	4816585.81	340.96	1	D	A	59.5	5.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
5665	536768.98	4816585.81	340.96	1	N	A	-40.5	5.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5665	536768.98	4816585.81	340.96	1	E	A	-40.5	5.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
5671	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-26.6
5671	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-126.6
5671	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-126.6
5672	536813.29	4816619.51	340.38	1	D	A	59.5	6.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5672	536813.29	4816619.51	340.38	1	N	A	-40.5	6.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5672	536813.29	4816619.51	340.38	1	E	A	-40.5	6.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5680	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-26.6
5680	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
5680	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
5681	536797.03	4816495.76	341.16	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
5681	536797.03	4816495.76	341.16	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
5681	536797.03	4816495.76	341.16	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
5683	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-26.8
5683	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
5683	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
5686	536859.13	4816639.87	340.00	1	D	A	59.5	6.5	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5686	536859.13	4816639.87	340.00	1	N	A	-40.5	6.5	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5686	536859.13	4816639.87	340.00	1	E	A	-40.5	6.5	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5689	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-26.8
5689	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
5689	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
5693	536890.49	4816641.99	339.91	1	D	A	59.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5693	536890.49	4816641.99	339.91	1	N	A	-40.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5693	536890.49	4816641.99	339.91	1	E	A	-40.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5725	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-25.9
5725	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-125.9
5725	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-125.9
5728	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5728	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5728	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5730	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
5730	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5730	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5734	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-26.8
5734	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.8
5734	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.8
5737	536767.08	4816571.57	341.08	1	D	A	59.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5737	536767.08	4816571.57	341.08	1	N	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5737	536767.08	4816571.57	341.08	1	E	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5740	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.1
5740	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
5740	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
5742	536779.60	4816603.09	340.72	1	D	A	59.5	5.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5742	536779.60	4816603.09	340.72	1	N	A	-40.5	5.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5742	536779.60	4816603.09	340.72	1	E	A	-40.5	5.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5746	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.6
5746	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
5746	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
5748	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5748	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5748	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5749	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5749	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5749	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5763	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-26.1
5763	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
5763	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
5765	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5765	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5765	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5767	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5767	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5767	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5769	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-27.2
5769	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-127.2
5769	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-127.2
5771	536880.59	4816642.00	339.94	1	D	A	59.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5771	536880.59	4816642.00	339.94	1	N	A	-40.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5771	536880.59	4816642.00	339.94	1	E	A	-40.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5794	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-27.2
5794	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.2
5794	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.2
5795	536797.94	4816493.74	341.19	1	D	A	59.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5795	536797.94	4816493.74	341.19	1	N	A	-40.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5795	536797.94	4816493.74	341.19	1	E	A	-40.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5797	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-27.4
5797	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.4
5797	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.4
5799	536863.20	4816640.73	339.99	1	D	A	59.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
5799	536863.20	4816640.73	339.99	1	N	A	-40.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5799	536863.20	4816640.73	339.99	1	E	A	-40.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5805	536922.02	4816647.43	339.42	0	D	A	59.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-30.8
5805	536922.02	4816647.43	339.42	0	N	A	-40.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.8
5805	536922.02	4816647.43	339.42	0	E	A	-40.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.8
5807	536919.93	4816646.94	339.46	0	D	A	59.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-30.0
5807	536919.93	4816646.94	339.46	0	N	A	-40.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.0
5807	536919.93	4816646.94	339.46	0	E	A	-40.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.0
5808	536920.89	4816647.16	339.44	1	D	A	59.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5808	536920.89	4816647.16	339.44	1	N	A	-40.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5808	536920.89	4816647.16	339.44	1	E	A	-40.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5810	536920.89	4816647.16	339.44	1	D	A	59.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5810	536920.89	4816647.16	339.44	1	N	A	-40.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5810	536920.89	4816647.16	339.44	1	E	A	-40.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5829	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-27.4
5829	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.4
5829	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.4
5830	536770.88	4816591.06	340.92	1	D	A	59.5	4.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
5830	536770.88	4816591.06	340.92	1	N	A	-40.5	4.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5830	536770.88	4816591.06	340.92	1	E	A	-40.5	4.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5842	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.2	0.0	0.0	-27.5
5842	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
5842	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
5843	536767.60	4816580.49	341.01	1	D	A	59.5	4.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5843	536767.60	4816580.49	341.01	1	N	A	-40.5	4.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5843	536767.60	4816580.49	341.01	1	E	A	-40.5	4.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5851	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-27.7
5851	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-127.7
5851	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-127.7
5852	536855.32	4816638.72	340.02	1	D	A	59.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5852	536855.32	4816638.72	340.02	1	N	A	-40.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5852	536855.32	4816638.72	340.02	1	E	A	-40.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5853	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-27.6
5853	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
5853	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
5855	536767.16	4816577.93	341.04	1	D	A	59.5	4.1	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5855	536767.16	4816577.93	341.04	1	N	A	-40.5	4.1	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5855	536767.16	4816577.93	341.04	1	E	A	-40.5	4.1	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5856	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.8
5856	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
5856	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
5857	536783.99	4816606.22	340.63	1	D	A	59.5	4.6	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5857	536783.99	4816606.22	340.63	1	N	A	-40.5	4.6	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5857	536783.99	4816606.22	340.63	1	E	A	-40.5	4.6	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5863	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.8
5863	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
5863	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
5864	536773.25	4816595.59	340.87	1	D	A	59.5	4.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5864	536773.25	4816595.59	340.87	1	N	A	-40.5	4.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5864	536773.25	4816595.59	340.87	1	E	A	-40.5	4.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5875	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-26.7
5875	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.7
5875	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.7
5876	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5876	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5876	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5877	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5877	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5877	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5879	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-27.8
5879	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.8
5879	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.8
5880	536768.20	4816582.96	340.99	1	D	A	59.5	3.9	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5880	536768.20	4816582.96	340.99	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5880	536768.20	4816582.96	340.99	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5888	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-27.5
5888	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
5888	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
5889	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5889	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5889	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5890	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5890	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5890	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5896	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-27.9
5896	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.9
5896	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-127.9
5897	536769.88	4816588.62	340.94	1	D	A	59.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
5897	536769.88	4816588.62	340.94	1	N	A	-40.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5897	536769.88	4816588.62	340.94	1	E	A	-40.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5915	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-27.3
5915	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-127.3
5915	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-127.3
5916	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5916	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5916	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5917	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5917	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5917	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5940	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.4
5940	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.4
5940	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.4
5941	536771.97	4816593.40	340.89	1	D	A	59.5	3.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.2
5941	536771.97	4816593.40	340.89	1	N	A	-40.5	3.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5941	536771.97	4816593.40	340.89	1	E	A	-40.5	3.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5943	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-28.1
5943	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-128.1
5943	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-128.1
5944	536802.22	4816483.56	341.27	1	D	A	59.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5944	536802.22	4816483.56	341.27	1	N	A	-40.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5944	536802.22	4816483.56	341.27	1	E	A	-40.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5961	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.6
5961	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
5961	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
5962	536774.65	4816597.69	340.83	1	D	A	59.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5962	536774.65	4816597.69	340.83	1	N	A	-40.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5962	536774.65	4816597.69	340.83	1	E	A	-40.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5963	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-28.5
5963	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
5963	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
5964	536885.32	4816641.86	339.92	1	D	A	59.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5964	536885.32	4816641.86	339.92	1	N	A	-40.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5964	536885.32	4816641.86	339.92	1	E	A	-40.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5971	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.7
5971	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
5971	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
5972	536776.07	4816599.48	340.80	1	D	A	59.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5972	536776.07	4816599.48	340.80	1	N	A	-40.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5972	536776.07	4816599.48	340.80	1	E	A	-40.5	3.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5973	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.7
5973	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
5973	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
5974	536781.78	4816604.85	340.67	1	D	A	59.5	3.7	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5974	536781.78	4816604.85	340.67	1	N	A	-40.5	3.7	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5974	536781.78	4816604.85	340.67	1	E	A	-40.5	3.7	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5978	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.8
5978	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.8
5978	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.8
5979	536777.60	4816601.15	340.77	1	D	A	59.5	3.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5979	536777.60	4816601.15	340.77	1	N	A	-40.5	3.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5979	536777.60	4816601.15	340.77	1	E	A	-40.5	3.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5980	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-28.7
5980	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.7
5980	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.7
5981	536877.02	4816642.10	339.95	1	D	A	59.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
5981	536877.02	4816642.10	339.95	1	N	A	-40.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5981	536877.02	4816642.10	339.95	1	E	A	-40.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5994	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-28.6
5994	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
5994	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
5995	536801.65	4816485.02	341.28	1	D	A	59.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
5995	536801.65	4816485.02	341.28	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5995	536801.65	4816485.02	341.28	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5996	536801.92	4816484.37	341.27	1	D	A	59.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-41.7
5996	536801.92	4816484.37	341.27	1	N	A	-40.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.7
5996	536801.92	4816484.37	341.27	1	E	A	-40.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.7
6010	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-28.8
6010	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
6010	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
6011	536767.00	4816575.72	341.05	1	D	A	59.5	2.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
6011	536767.00	4816575.72	341.05	1	N	A	-40.5	2.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
6011	536767.00	4816575.72	341.05	1	E	A	-40.5	2.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
6049	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-28.8
6049	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-128.8
6049	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-128.8
6051	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
6051	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
6051	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
6052	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6052	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6052	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6054	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-28.7
6054	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.7
6054	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.7
6056	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6056	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6056	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6057	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6057	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6057	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6087	536963.97	4816483.74	339.95	0	D	A	59.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.7
6087	536963.97	4816483.74	339.95	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.7
6087	536963.97	4816483.74	339.95	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.7
6090	536964.81	4816483.90	339.94	0	D	A	59.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-35.8
6090	536964.81	4816483.90	339.94	0	N	A	-40.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-135.8
6090	536964.81	4816483.90	339.94	0	E	A	-40.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-135.8
6091	536964.13	4816483.77	339.95	1	D	A	59.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
6091	536964.13	4816483.77	339.95	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6091	536964.13	4816483.77	339.95	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6092	536963.97	4816483.74	339.95	1	D	A	59.5	1.4	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.8
6092	536963.97	4816483.74	339.95	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6092	536963.97	4816483.74	339.95	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6094	536964.81	4816483.91	339.94	1	D	A	59.5	-4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-40.1
6094	536964.81	4816483.91	339.94	1	N	A	-40.5	-4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6094	536964.81	4816483.91	339.94	1	E	A	-40.5	-4.9	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6108	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-29.6
6108	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-129.6
6108	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-129.6
6109	536801.18	4816486.13	341.28	1	D	A	59.5	0.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6109	536801.18	4816486.13	341.28	1	N	A	-40.5	0.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6109	536801.18	4816486.13	341.28	1	E	A	-40.5	0.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6181	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-30.2
6181	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
6181	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
6183	536766.98	4816573.72	341.06	1	D	A	59.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
6183	536766.98	4816573.72	341.06	1	N	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6183	536766.98	4816573.72	341.06	1	E	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6191	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-30.3
6191	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-130.3
6191	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-130.3
6192	536774.69	4816544.95	341.05	1	D	A	59.5	0.8	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
6192	536774.69	4816544.95	341.05	1	N	A	-40.5	0.8	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6192	536774.69	4816544.95	341.05	1	E	A	-40.5	0.8	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6204	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-30.7
6204	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-130.7
6204	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-130.7
6205	536893.75	4816642.26	339.91	1	D	A	59.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-33.8
6205	536893.75	4816642.26	339.91	1	N	A	-40.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6205	536893.75	4816642.26	339.91	1	E	A	-40.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6217	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-30.7
6217	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-130.7
6217	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-130.7
6218	536810.75	4816618.37	340.40	1	D	A	59.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
6218	536810.75	4816618.37	340.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6218	536810.75	4816618.37	340.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6237	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-31.4
6237	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-131.4
6237	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-131.4
6238	536895.65	4816642.46	339.88	1	D	A	59.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6238	536895.65	4816642.46	339.88	1	N	A	-40.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6238	536895.65	4816642.46	339.88	1	E	A	-40.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6239	536894.84	4816642.36	339.89	1	D	A	59.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-42.2
6239	536894.84	4816642.36	339.89	1	N	A	-40.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
6239	536894.84	4816642.36	339.89	1	E	A	-40.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
6279	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-31.7
6279	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-131.7
6279	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-131.7
6280	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-35.6
6280	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
6280	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
6281	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6281	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6281	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6282	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-32.3
6282	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-132.3
6282	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-132.3
6283	536887.53	4816641.81	339.90	1	D	A	59.5	1.2	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-35.4
6283	536887.53	4816641.81	339.90	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
6283	536887.53	4816641.81	339.90	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
6312	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-33.1
6312	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-133.1
6312	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-133.1
6313	536883.22	4816641.91	339.94	1	D	A	59.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-36.2
6313	536883.22	4816641.91	339.94	1	N	A	-40.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
6313	536883.22	4816641.91	339.94	1	E	A	-40.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
6338	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-35.6
6338	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-135.6
6338	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-135.6
6339	536779.12	4816535.20	341.05	1	D	A	59.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-38.6
6339	536779.12	4816535.20	341.05	1	N	A	-40.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
6339	536779.12	4816535.20	341.05	1	E	A	-40.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
6343	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-35.9
6343	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-135.9
6343	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-135.9
6344	536766.99	4816574.58	341.06	1	D	A	59.5	-4.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-38.9
6344	536766.99	4816574.58	341.06	1	N	A	-40.5	-4.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.9
6344	536766.99	4816574.58	341.06	1	E	A	-40.5	-4.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3783	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-14.2
3783	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-114.2
3783	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-114.2
3788	537014.55	4816421.48	338.77	1	D	A	59.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
3788	537014.55	4816421.48	338.77	1	N	A	-40.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
3788	537014.55	4816421.48	338.77	1	E	A	-40.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
3793	537006.99	4816417.88	338.67	1	D	A	59.5	8.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
3793	537006.99	4816417.88	338.67	1	N	A	-40.5	8.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3793	537006.99	4816417.88	338.67	1	E	A	-40.5	8.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3798	537017.52	4816422.90	338.82	1	D	A	59.5	12.2	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
3798	537017.52	4816422.90	338.82	1	N	A	-40.5	12.2	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
3798	537017.52	4816422.90	338.82	1	E	A	-40.5	12.2	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
4300	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-17.4
4300	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-117.4
4300	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-117.4
4304	537019.34	4816425.64	338.89	1	D	A	59.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
4304	537019.34	4816425.64	338.89	1	N	A	-40.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
4304	537019.34	4816425.64	338.89	1	E	A	-40.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
4308	537019.34	4816425.64	338.89	1	D	A	59.5	10.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
4308	537019.34	4816425.64	338.89	1	N	A	-40.5	10.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4308	537019.34	4816425.64	338.89	1	E	A	-40.5	10.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4328	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-17.7
4328	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-117.7
4328	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-117.7
4332	537012.41	4816422.54	338.80	1	D	A	59.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
4332	537012.41	4816422.54	338.80	1	N	A	-40.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4332	537012.41	4816422.54	338.80	1	E	A	-40.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4335	537007.39	4816420.42	338.74	1	D	A	59.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
4335	537007.39	4816420.42	338.74	1	N	A	-40.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4335	537007.39	4816420.42	338.74	1	E	A	-40.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4339	537009.05	4816421.12	338.76	1	D	A	59.5	10.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
4339	537009.05	4816421.12	338.76	1	N	A	-40.5	10.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4339	537009.05	4816421.12	338.76	1	E	A	-40.5	10.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
4664	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-19.0

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4664	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-119.0
4664	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-119.0
4669	536995.92	4816415.15	338.66	1	D	A	59.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
4669	536995.92	4816415.15	338.66	1	N	A	-40.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4669	536995.92	4816415.15	338.66	1	E	A	-40.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4672	536995.92	4816415.15	338.66	1	D	A	59.5	9.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
4672	536995.92	4816415.15	338.66	1	N	A	-40.5	9.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4672	536995.92	4816415.15	338.66	1	E	A	-40.5	9.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
4875	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-20.1
4875	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-120.1
4875	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-120.1
4880	536984.93	4816409.78	338.54	1	D	A	59.5	8.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
4880	536984.93	4816409.78	338.54	1	N	A	-40.5	8.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
4880	536984.93	4816409.78	338.54	1	E	A	-40.5	8.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
4882	536985.60	4816410.09	338.55	1	D	A	59.5	7.0	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
4882	536985.60	4816410.09	338.55	1	N	A	-40.5	7.0	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
4882	536985.60	4816410.09	338.55	1	E	A	-40.5	7.0	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
4885	536982.65	4816408.71	338.49	1	D	A	59.5	1.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
4885	536982.65	4816408.71	338.49	1	N	A	-40.5	1.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
4885	536982.65	4816408.71	338.49	1	E	A	-40.5	1.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
4923	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-20.3
4923	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-120.3
4923	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-120.3
4926	536980.63	4816407.88	338.46	1	D	A	59.5	4.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
4926	536980.63	4816407.88	338.46	1	N	A	-40.5	4.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4926	536980.63	4816407.88	338.46	1	E	A	-40.5	4.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4931	536977.74	4816406.78	338.42	1	D	A	59.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
4931	536977.74	4816406.78	338.42	1	N	A	-40.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4931	536977.74	4816406.78	338.42	1	E	A	-40.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4935	536979.81	4816407.57	338.45	1	D	A	59.5	6.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4935	536979.81	4816407.57	338.45	1	N	A	-40.5	6.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4935	536979.81	4816407.57	338.45	1	E	A	-40.5	6.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4939	536976.92	4816406.47	338.41	1	D	A	59.5	1.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
4939	536976.92	4816406.47	338.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
4939	536976.92	4816406.47	338.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
5061	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-23.8
5061	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-123.8
5061	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-123.8
5066	536990.42	4816396.62	338.40	1	D	A	59.5	7.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
5066	536990.42	4816396.62	338.40	1	N	A	-40.5	7.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
5066	536990.42	4816396.62	338.40	1	E	A	-40.5	7.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
5100	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-20.5
5100	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-120.5
5100	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-120.5
5104	536996.79	4816412.14	338.55	1	D	A	59.5	3.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
5104	536996.79	4816412.14	338.55	1	N	A	-40.5	3.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5104	536996.79	4816412.14	338.55	1	E	A	-40.5	3.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5106	536999.08	4816413.77	338.60	1	D	A	59.5	5.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5106	536999.08	4816413.77	338.60	1	N	A	-40.5	5.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5106	536999.08	4816413.77	338.60	1	E	A	-40.5	5.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5108	536998.27	4816413.19	338.58	1	D	A	59.5	7.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
5108	536998.27	4816413.19	338.58	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
5108	536998.27	4816413.19	338.58	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
5259	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-24.8
5259	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
5259	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
5260	536990.94	4816396.24	338.40	1	D	A	59.5	6.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5260	536990.94	4816396.24	338.40	1	N	A	-40.5	6.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5260	536990.94	4816396.24	338.40	1	E	A	-40.5	6.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5263	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.9	0.0	0.0	-21.4
5263	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.9	0.0	0.0	-121.4
5263	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.9	0.0	0.0	-121.4
5266	537001.82	4816418.05	338.70	1	D	A	59.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5266	537001.82	4816418.05	338.70	1	N	A	-40.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5266	537001.82	4816418.05	338.70	1	E	A	-40.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5267	537001.82	4816418.05	338.70	1	D	A	59.5	6.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5267	537001.82	4816418.05	338.70	1	N	A	-40.5	6.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5267	537001.82	4816418.05	338.70	1	E	A	-40.5	6.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5361	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-21.7
5361	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.7
5361	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.7
5365	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
5365	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
5365	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
5367	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
5367	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5367	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5471	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-22.1
5471	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-122.1
5471	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-122.1
5473	537001.78	4816415.40	338.63	1	D	A	59.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
5473	537001.78	4816415.40	338.63	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5473	537001.78	4816415.40	338.63	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5475	537003.51	4816416.22	338.62	1	D	A	59.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
5475	537003.51	4816416.22	338.62	1	N	A	-40.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
5475	537003.51	4816416.22	338.62	1	E	A	-40.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
5477	537002.30	4816415.64	338.63	1	D	A	59.5	5.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5477	537002.30	4816415.64	338.63	1	N	A	-40.5	5.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5477	537002.30	4816415.64	338.63	1	E	A	-40.5	5.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5581	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-22.2
5581	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-122.2
5581	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-122.2
5585	536988.19	4816400.68	338.40	1	D	A	59.5	4.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
5585	536988.19	4816400.68	338.40	1	N	A	-40.5	4.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5585	536988.19	4816400.68	338.40	1	E	A	-40.5	4.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5587	536988.29	4816400.52	338.40	1	D	A	59.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5587	536988.29	4816400.52	338.40	1	N	A	-40.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5587	536988.29	4816400.52	338.40	1	E	A	-40.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5607	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-23.0
5607	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-123.0
5607	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-123.0
5609	536989.37	4816411.85	338.59	1	D	A	59.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5609	536989.37	4816411.85	338.59	1	N	A	-40.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5609	536989.37	4816411.85	338.59	1	E	A	-40.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5611	536989.37	4816411.85	338.59	1	D	A	59.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5611	536989.37	4816411.85	338.59	1	N	A	-40.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5611	536989.37	4816411.85	338.59	1	E	A	-40.5	5.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5780	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-24.3
5780	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-124.3
5780	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-124.3
5782	536975.05	4816405.76	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5782	536975.05	4816405.76	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5782	536975.05	4816405.76	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5784	536975.05	4816405.76	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5784	536975.05	4816405.76	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5784	536975.05	4816405.76	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
5788	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-24.2
5788	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-124.2
5788	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-124.2
5789	536980.14	4816405.31	338.40	1	D	A	59.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
5789	536980.14	4816405.31	338.40	1	N	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
5789	536980.14	4816405.31	338.40	1	E	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
5790	536981.36	4816405.14	338.40	1	D	A	59.5	-0.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-35.7
5790	536981.36	4816405.14	338.40	1	N	A	-40.5	-0.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5790	536981.36	4816405.14	338.40	1	E	A	-40.5	-0.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5792	536980.54	4816405.26	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5792	536980.54	4816405.26	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5792	536980.54	4816405.26	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5825	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-24.1
5825	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.1
5825	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.1
5826	536982.93	4816404.80	338.40	1	D	A	59.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.0
5826	536982.93	4816404.80	338.40	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5826	536982.93	4816404.80	338.40	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5827	536982.93	4816404.80	338.40	1	D	A	59.5	3.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.7
5827	536982.93	4816404.80	338.40	1	N	A	-40.5	3.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.7
5827	536982.93	4816404.80	338.40	1	E	A	-40.5	3.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.7
5837	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-24.6
5837	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.6
5837	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.6
5838	536975.96	4816405.40	338.40	1	D	A	59.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5838	536975.96	4816405.40	338.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5838	536975.96	4816405.40	338.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5839	536975.96	4816405.40	338.40	1	D	A	59.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5839	536975.96	4816405.40	338.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5839	536975.96	4816405.40	338.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5866	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-24.7
5866	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-124.7
5866	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-124.7
5867	536978.21	4816405.45	338.40	1	D	A	59.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5867	536978.21	4816405.45	338.40	1	N	A	-40.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5867	536978.21	4816405.45	338.40	1	E	A	-40.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5868	536977.84	4816405.45	338.40	1	D	A	59.5	1.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
5868	536977.84	4816405.45	338.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
5868	536977.84	4816405.45	338.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
5869	536978.94	4816405.43	338.40	1	D	A	59.5	-1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-35.7
5869	536978.94	4816405.43	338.40	1	N	A	-40.5	-1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5869	536978.94	4816405.43	338.40	1	E	A	-40.5	-1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5871	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-25.0
5871	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-125.0
5871	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-125.0
5872	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5872	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5872	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5873	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.0
5873	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5873	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5892	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-24.3
5892	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-124.3
5892	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-124.3
5893	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5893	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5893	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5894	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.2
5894	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5894	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5907	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-24.2
5907	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-124.2
5907	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-124.2
5908	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5908	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5908	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5909	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5909	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5909	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5911	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	24.0	0.0	0.0	-24.7
5911	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	24.0	0.0	0.0	-124.7
5911	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	24.0	0.0	0.0	-124.7
5912	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5912	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5912	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5913	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5913	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5913	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5919	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-24.5
5919	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-124.5
5919	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-124.5
5920	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
5920	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5920	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5921	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5921	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5921	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5936	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-25.4
5936	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-125.4
5936	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	-125.4
5937	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
5937	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5937	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5938	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5938	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5938	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5955	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-24.3
5955	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-124.3
5955	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-124.3
5956	536989.87	4816400.19	338.40	1	D	A	59.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-42.6
5956	536989.87	4816400.19	338.40	1	N	A	-40.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-142.6
5956	536989.87	4816400.19	338.40	1	E	A	-40.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-142.6
5957	536990.04	4816399.31	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5957	536990.04	4816399.31	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5957	536990.04	4816399.31	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
6000	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-25.2
6000	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-125.2
6000	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-125.2
6001	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.4
6001	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6001	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6002	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
6002	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
6002	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
6015	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-25.2
6015	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-125.2
6015	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-125.2
6016	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.5
6016	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
6016	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
6017	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
6017	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
6017	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
6027	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-26.3
6027	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-126.3
6027	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-126.3
6028	536974.06	4816405.12	338.40	1	D	A	59.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6028	536974.06	4816405.12	338.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6028	536974.06	4816405.12	338.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6029	536974.06	4816405.12	338.40	1	D	A	59.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.5
6029	536974.06	4816405.12	338.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
6029	536974.06	4816405.12	338.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
6076	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-26.4
6076	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.4
6076	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.4
6077	536991.55	4816412.87	338.60	1	D	A	59.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6077	536991.55	4816412.87	338.60	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6077	536991.55	4816412.87	338.60	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6079	536991.55	4816412.87	338.60	1	D	A	59.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6079	536991.55	4816412.87	338.60	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6079	536991.55	4816412.87	338.60	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6081	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-26.0
6081	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-126.0
6081	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-126.0
6083	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
6083	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6083	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6085	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6085	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6085	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6328	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-31.5
6328	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-131.5
6328	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-131.5
6329	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-37.9
6329	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.9
6329	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.9
6330	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-37.6
6330	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
6330	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3924	536904.32	4816459.25	339.02	0	D	A	58.4	1.5	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-29.6
3924	536904.32	4816459.25	339.02	0	N	A	-48.6	1.5	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-136.6
3924	536904.32	4816459.25	339.02	0	E	A	-48.6	1.5	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-136.6
3930	536895.43	4816454.54	339.24	0	D	A	58.4	12.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-18.2
3930	536895.43	4816454.54	339.24	0	N	A	-48.6	12.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-125.2
3930	536895.43	4816454.54	339.24	0	E	A	-48.6	12.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-125.2
3934	536899.41	4816456.65	339.14	1	D	A	58.4	11.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-24.2
3934	536899.41	4816456.65	339.14	1	N	A	-48.6	11.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-131.2
3934	536899.41	4816456.65	339.14	1	E	A	-48.6	11.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-131.2
3936	536890.52	4816451.94	339.37	1	D	A	58.4	8.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-26.2
3936	536890.52	4816451.94	339.37	1	N	A	-48.6	8.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.2
3936	536890.52	4816451.94	339.37	1	E	A	-48.6	8.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.2
3938	536896.05	4816454.87	339.23	1	D	A	58.4	13.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
3938	536896.05	4816454.87	339.23	1	N	A	-48.6	13.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3938	536896.05	4816454.87	339.23	1	E	A	-48.6	13.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
4448	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-21.0
4448	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.0
4448	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.0
4451	536849.20	4816431.92	340.08	1	D	A	58.4	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
4451	536849.20	4816431.92	340.08	1	N	A	-48.6	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
4451	536849.20	4816431.92	340.08	1	E	A	-48.6	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
4454	536845.46	4816430.44	340.18	1	D	A	58.4	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.6
4454	536845.46	4816430.44	340.18	1	N	A	-48.6	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
4454	536845.46	4816430.44	340.18	1	E	A	-48.6	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
4458	536850.45	4816432.42	340.04	1	D	A	58.4	4.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
4458	536850.45	4816432.42	340.04	1	N	A	-48.6	4.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4458	536850.45	4816432.42	340.04	1	E	A	-48.6	4.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4461	536848.03	4816431.46	340.11	1	D	A	58.4	3.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
4461	536848.03	4816431.46	340.11	1	N	A	-48.6	3.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
4461	536848.03	4816431.46	340.11	1	E	A	-48.6	3.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
4464	536845.73	4816430.55	340.18	1	D	A	58.4	4.5	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
4464	536845.73	4816430.55	340.18	1	N	A	-48.6	4.5	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4464	536845.73	4816430.55	340.18	1	E	A	-48.6	4.5	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4550	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-21.2
4550	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-128.2
4550	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-128.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4553	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-25.3
4553	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-132.3
4553	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-132.3
4557	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
4557	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
4557	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
4641	536906.49	4816463.95	339.00	0	D	A	58.4	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-26.3
4641	536906.49	4816463.95	339.00	0	N	A	-48.6	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-133.3
4641	536906.49	4816463.95	339.00	0	E	A	-48.6	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-133.3
4647	536910.99	4816466.06	339.00	0	D	A	58.4	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-22.9
4647	536910.99	4816466.06	339.00	0	N	A	-48.6	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-129.9
4647	536910.99	4816466.06	339.00	0	E	A	-48.6	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-129.9
4650	536909.44	4816465.33	339.00	1	D	A	58.4	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-25.6
4650	536909.44	4816465.33	339.00	1	N	A	-48.6	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6
4650	536909.44	4816465.33	339.00	1	E	A	-48.6	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6
4652	536913.95	4816467.44	339.00	1	D	A	58.4	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-40.4
4652	536913.95	4816467.44	339.00	1	N	A	-48.6	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.4
4652	536913.95	4816467.44	339.00	1	E	A	-48.6	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.4
4656	536909.59	4816465.40	339.00	1	D	A	58.4	10.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
4656	536909.59	4816465.40	339.00	1	N	A	-48.6	10.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
4656	536909.59	4816465.40	339.00	1	E	A	-48.6	10.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
4774	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-21.9
4774	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-128.9
4774	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-128.9
4778	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.0
4778	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.0
4778	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.0
4782	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
4782	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
4782	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
4850	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-22.2
4850	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.2
4850	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.2
4854	536850.69	4816438.00	339.78	1	D	A	58.4	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.8
4854	536850.69	4816438.00	339.78	1	N	A	-48.6	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
4854	536850.69	4816438.00	339.78	1	E	A	-48.6	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
4858	536853.68	4816439.10	339.69	1	D	A	58.4	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
4858	536853.68	4816439.10	339.69	1	N	A	-48.6	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
4858	536853.68	4816439.10	339.69	1	E	A	-48.6	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
4862	536849.20	4816437.45	339.83	1	D	A	58.4	3.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
4862	536849.20	4816437.45	339.83	1	N	A	-48.6	3.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
4862	536849.20	4816437.45	339.83	1	E	A	-48.6	3.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
4865	536851.75	4816438.39	339.75	1	D	A	58.4	4.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
4865	536851.75	4816438.39	339.75	1	N	A	-48.6	4.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4865	536851.75	4816438.39	339.75	1	E	A	-48.6	4.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4868	536853.59	4816439.06	339.69	1	D	A	58.4	-0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
4868	536853.59	4816439.06	339.69	1	N	A	-48.6	-0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-141.3
4868	536853.59	4816439.06	339.69	1	E	A	-48.6	-0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-141.3
4892	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-22.2
4892	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-129.2
4892	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-129.2
4896	536913.43	4816464.20	339.00	1	D	A	58.4	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
4896	536913.43	4816464.20	339.00	1	N	A	-48.6	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
4896	536913.43	4816464.20	339.00	1	E	A	-48.6	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
4899	536913.43	4816464.20	339.00	1	D	A	58.4	9.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4899	536913.43	4816464.20	339.00	1	N	A	-48.6	9.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
4899	536913.43	4816464.20	339.00	1	E	A	-48.6	9.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
4945	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-22.5
4945	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-129.4
4945	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-129.4
4949	536877.52	4816457.90	339.21	1	D	A	58.4	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
4949	536877.52	4816457.90	339.21	1	N	A	-48.6	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
4949	536877.52	4816457.90	339.21	1	E	A	-48.6	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4953	536877.68	4816457.49	339.22	1	D	A	58.4	7.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
4953	536877.68	4816457.49	339.22	1	N	A	-48.6	7.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
4953	536877.68	4816457.49	339.22	1	E	A	-48.6	7.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
4956	536876.38	4816460.72	339.13	1	D	A	58.4	-0.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-35.2
4956	536876.38	4816460.72	339.13	1	N	A	-48.6	-0.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
4956	536876.38	4816460.72	339.13	1	E	A	-48.6	-0.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
4961	536876.48	4816460.49	339.13	1	D	A	58.4	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-31.8
4961	536876.48	4816460.49	339.13	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
4961	536876.48	4816460.49	339.13	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
4965	536876.48	4816460.49	339.13	1	D	A	58.4	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-31.8
4965	536876.48	4816460.49	339.13	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
4965	536876.48	4816460.49	339.13	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
5011	536829.87	4816436.78	340.12	0	D	A	58.4	0.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.7
5011	536829.87	4816436.78	340.12	0	N	A	-48.6	0.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.7
5011	536829.87	4816436.78	340.12	0	E	A	-48.6	0.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.7
5016	536832.42	4816436.17	340.12	0	D	A	58.4	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-23.9
5016	536832.42	4816436.17	340.12	0	N	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.9
5016	536832.42	4816436.17	340.12	0	E	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.9
5021	536831.89	4816436.30	340.12	1	D	A	58.4	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.8
5021	536831.89	4816436.30	340.12	1	N	A	-48.6	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
5021	536831.89	4816436.30	340.12	1	E	A	-48.6	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
5025	536831.89	4816436.30	340.12	1	D	A	58.4	7.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
5025	536831.89	4816436.30	340.12	1	N	A	-48.6	7.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
5025	536831.89	4816436.30	340.12	1	E	A	-48.6	7.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
5084	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-23.2
5084	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.2
5084	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.2
5086	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.3
5086	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
5086	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
5088	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
5088	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
5088	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
5126	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-23.4
5126	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5126	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5128	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.4
5128	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.4
5128	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.4
5132	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
5132	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
5132	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
5214	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-23.6
5214	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-130.6
5214	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-130.6
5216	536909.02	4816461.73	339.00	1	D	A	58.4	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-32.1
5216	536909.02	4816461.73	339.00	1	N	A	-48.6	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
5216	536909.02	4816461.73	339.00	1	E	A	-48.6	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
5218	536906.51	4816460.40	339.00	1	D	A	58.4	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-29.9
5218	536906.51	4816460.40	339.00	1	N	A	-48.6	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.9
5218	536906.51	4816460.40	339.00	1	E	A	-48.6	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.9
5220	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
5220	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
5220	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
5234	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-23.8
5234	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.8
5234	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.8
5236	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.9
5236	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.9
5236	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.9
5239	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
5239	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
5239	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5277	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-24.1
5277	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.1
5277	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.1
5278	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.2
5278	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.2
5278	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.2
5281	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
5281	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
5281	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
5335	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-24.3
5335	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.3
5335	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.3
5337	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.4
5337	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.4
5337	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.4
5338	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5338	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
5338	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
5371	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-24.5
5371	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.4
5371	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.4
5372	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.6
5372	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
5372	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
5373	536878.39	4816445.77	339.52	1	D	A	58.4	2.2	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5373	536878.39	4816445.77	339.52	1	N	A	-48.6	2.2	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
5373	536878.39	4816445.77	339.52	1	E	A	-48.6	2.2	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
5376	536876.54	4816444.85	339.52	1	D	A	58.4	4.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5376	536876.54	4816444.85	339.52	1	N	A	-48.6	4.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.4
5376	536876.54	4816444.85	339.52	1	E	A	-48.6	4.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.4
5380	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-24.5
5380	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.5
5380	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.5
5381	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-28.6
5381	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
5381	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
5382	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5382	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5382	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5387	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-24.7
5387	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-131.7
5387	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-131.7
5391	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-28.7
5391	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-135.7
5391	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-135.7
5393	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5393	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5393	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
5450	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-25.0
5450	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.0
5450	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.0
5454	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-29.0
5454	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
5454	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
5456	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5456	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5456	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5461	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-24.9
5461	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.9
5461	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.9
5464	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-29.1
5464	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
5464	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5466	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5466	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5466	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
5598	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.3
5598	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.3
5598	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.3
5600	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-29.4
5600	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.4
5600	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.4
5602	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5602	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-136.1
5602	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-136.1
5637	536894.27	4816470.01	339.05	0	D	A	58.4	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-25.8
5637	536894.27	4816470.01	339.05	0	N	A	-48.6	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
5637	536894.27	4816470.01	339.05	0	E	A	-48.6	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
5641	536894.27	4816470.01	339.05	1	D	A	58.4	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-29.6
5641	536894.27	4816470.01	339.05	1	N	A	-48.6	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.6
5641	536894.27	4816470.01	339.05	1	E	A	-48.6	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.6
5644	536894.27	4816470.01	339.05	1	D	A	58.4	5.7	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5644	536894.27	4816470.01	339.05	1	N	A	-48.6	5.7	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
5644	536894.27	4816470.01	339.05	1	E	A	-48.6	5.7	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
5648	536893.70	4816471.32	339.01	1	D	A	58.4	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
5648	536893.70	4816471.32	339.01	1	N	A	-48.6	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
5648	536893.70	4816471.32	339.01	1	E	A	-48.6	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
5714	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.0
5714	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.0
5714	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.0
5717	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
5717	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.0
5717	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.0
5719	536855.70	4816434.49	339.89	1	D	A	58.4	3.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5719	536855.70	4816434.49	339.89	1	N	A	-48.6	3.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3
5719	536855.70	4816434.49	339.89	1	E	A	-48.6	3.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3
5722	536854.46	4816434.00	339.92	1	D	A	58.4	-4.7	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-38.6
5722	536854.46	4816434.00	339.92	1	N	A	-48.6	-4.7	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-145.6
5722	536854.46	4816434.00	339.92	1	E	A	-48.6	-4.7	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-145.6
5754	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-26.3
5754	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
5754	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
5756	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.3
5756	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.3
5756	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.3
5759	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5759	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
5759	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
5812	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-26.6
5812	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.6
5812	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.6
5813	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.6
5813	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
5813	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
5814	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5814	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.2
5814	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.2
5821	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.6
5821	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.6
5821	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.6
5822	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.7
5822	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
5822	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
5823	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5823	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3
5823	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5847	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-26.8
5847	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-133.8
5847	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-133.8
5848	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.9
5848	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
5848	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
5849	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5849	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5849	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5859	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-26.8
5859	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-133.8
5859	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-133.8
5860	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.9
5860	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
5860	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
5861	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5861	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5861	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5923	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-27.2
5923	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.2
5923	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.2
5924	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-31.4
5924	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
5924	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
5925	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5925	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
5925	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	65.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
5929	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-27.3
5929	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-134.3
5929	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-134.3
5930	536896.37	4816465.47	339.10	1	D	A	58.4	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.4
5930	536896.37	4816465.47	339.10	1	N	A	-48.6	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
5930	536896.37	4816465.47	339.10	1	E	A	-48.6	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
5931	536896.37	4816465.47	339.10	1	D	A	58.4	3.9	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5931	536896.37	4816465.47	339.10	1	N	A	-48.6	3.9	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
5931	536896.37	4816465.47	339.10	1	E	A	-48.6	3.9	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
5932	536896.63	4816464.97	339.10	1	D	A	58.4	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-32.3
5932	536896.63	4816464.97	339.10	1	N	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
5932	536896.63	4816464.97	339.10	1	E	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
5934	536896.63	4816464.97	339.10	1	D	A	58.4	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-32.3
5934	536896.63	4816464.97	339.10	1	N	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
5934	536896.63	4816464.97	339.10	1	E	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
5945	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-27.4
5945	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.4
5945	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.4
5947	536901.03	4816462.08	339.05	1	D	A	58.4	0.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-34.5
5947	536901.03	4816462.08	339.05	1	N	A	-48.6	0.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-141.5
5947	536901.03	4816462.08	339.05	1	E	A	-48.6	0.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-141.5
5948	536902.20	4816462.29	339.02	1	D	A	58.4	0.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-34.7
5948	536902.20	4816462.29	339.02	1	N	A	-48.6	0.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
5948	536902.20	4816462.29	339.02	1	E	A	-48.6	0.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
5949	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5949	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.3
5949	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.3
5958	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-27.6
5958	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-134.6
5958	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-134.6
5959	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.6
5959	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
5959	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
5960	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5960	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.3
5960	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5965	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-27.6
5965	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.6
5965	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.6
5966	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.7
5966	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.7
5966	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.7
5967	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5967	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.4
5967	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.4
5975	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-27.8
5975	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-134.8
5975	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-134.8
5976	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
5976	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
5976	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
5977	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5977	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.5
5977	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.5
5982	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-27.8
5982	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.8
5982	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.8
5983	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
5983	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
5983	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
5984	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5984	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
5984	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
5988	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-27.9
5988	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.9
5988	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-134.9
5989	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
5989	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
5989	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
5990	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5990	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
5990	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
5991	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
5991	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
5991	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
5992	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
5992	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
5992	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
5993	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
5993	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
5993	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
6003	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.0
6003	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.0
6003	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.0
6004	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.0
6004	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
6004	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
6005	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
6005	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.7
6005	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.7
6006	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-28.0
6006	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
6006	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
6007	536860.82	4816441.81	339.51	1	D	A	58.4	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.1
6007	536860.82	4816441.81	339.51	1	N	A	-48.6	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
6007	536860.82	4816441.81	339.51	1	E	A	-48.6	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
6008	536860.64	4816441.72	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6008	536860.64	4816441.72	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
6008	536860.64	4816441.72	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6009	536861.43	4816442.09	339.49	1	D	A	58.4	-4.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-38.1
6009	536861.43	4816442.09	339.49	1	N	A	-48.6	-4.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-145.1
6009	536861.43	4816442.09	339.49	1	E	A	-48.6	-4.0	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-145.1
6018	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-28.1
6018	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-135.0
6018	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-135.0
6019	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-32.2
6019	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-139.2
6019	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-139.2
6020	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
6020	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.9
6020	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-138.9
6031	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-28.6
6031	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.6
6031	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.6
6032	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-32.5
6032	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.5
6032	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.5
6033	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
6033	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.2
6033	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.2
6040	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.7
6040	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.7
6040	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.7
6042	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.6
6042	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.6
6042	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.6
6043	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
6043	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
6043	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
6066	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.8
6066	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.8
6066	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.8
6068	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.9
6068	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.9
6068	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.9
6070	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.5
6070	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.5
6070	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.5
6096	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-29.0
6096	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-135.9
6096	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-135.9
6097	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.0
6097	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
6097	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
6098	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-32.7
6098	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6098	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6101	536832.20	4816429.90	340.47	0	D	A	58.4	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.6
6101	536832.20	4816429.90	340.47	0	N	A	-48.6	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.6
6101	536832.20	4816429.90	340.47	0	E	A	-48.6	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.6
6103	536831.63	4816430.12	340.49	0	D	A	58.4	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-37.8
6103	536831.63	4816430.12	340.49	0	N	A	-48.6	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-144.8
6103	536831.63	4816430.12	340.49	0	E	A	-48.6	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-144.8
6105	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.0
6105	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
6105	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
6106	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.7
6106	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6106	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6120	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-29.1
6120	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0
6120	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6121	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-33.2
6121	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-140.1
6121	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-140.1
6123	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6123	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6123	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6131	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.2
6131	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.2
6131	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.2
6132	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.2
6132	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
6132	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
6133	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6133	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
6133	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
6144	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-29.2
6144	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.2
6144	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.2
6146	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.3
6146	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.3
6146	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.3
6148	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
6148	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6148	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6159	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.4
6159	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.4
6159	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.4
6161	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.4
6161	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.4
6161	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.4
6163	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6163	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6163	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6176	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.5
6176	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.5
6176	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.5
6177	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-33.5
6177	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.5
6177	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.5
6178	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
6178	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.2
6178	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.2
6219	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.0
6219	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.0
6219	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.0
6220	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.0
6220	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.0
6220	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.0
6221	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
6221	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.7
6221	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-140.7
6240	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-30.5
6240	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-137.5
6240	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-137.5
6241	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-34.6
6241	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.6
6241	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.6
6242	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
6242	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-141.2
6242	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-141.2
6255	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.8
6255	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.8
6255	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6256	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.7
6256	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
6256	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
6257	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
6257	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.4
6257	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.4
6258	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-30.8
6258	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-137.7
6258	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-137.7
6259	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
6259	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6259	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6260	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-34.5
6260	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
6260	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
6261	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.9
6261	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
6261	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
6262	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
6262	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6262	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6263	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6263	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
6263	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
6264	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.9
6264	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
6264	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
6265	536827.69	4816435.96	340.20	1	D	A	58.4	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
6265	536827.69	4816435.96	340.20	1	N	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6265	536827.69	4816435.96	340.20	1	E	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
6266	536827.69	4816435.96	340.20	1	D	A	58.4	-0.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6266	536827.69	4816435.96	340.20	1	N	A	-48.6	-0.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
6266	536827.69	4816435.96	340.20	1	E	A	-48.6	-0.9	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
6270	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-31.2
6270	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.2
6270	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.2
6271	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.2
6271	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.2
6271	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.2
6272	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
6272	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.8
6272	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.8
6273	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-31.1
6273	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-138.1
6273	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-138.1
6274	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.3
6274	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.3
6274	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.3
6275	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-35.0
6275	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.0
6275	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.0
6284	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-31.5
6284	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.5
6284	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.5
6285	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.6
6285	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
6285	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
6286	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6286	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
6286	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
6287	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-31.5
6287	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-138.5
6287	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-138.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6288	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
6288	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
6288	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
6289	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6289	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.3
6289	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.3
6290	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-31.6
6290	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.6
6290	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.6
6291	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
6291	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
6291	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
6292	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-35.4
6292	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.4
6292	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.4
6293	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-31.8
6293	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.8
6293	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.8
6294	536828.55	4816436.86	340.14	1	D	A	58.4	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.8
6294	536828.55	4816436.86	340.14	1	N	A	-48.6	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
6294	536828.55	4816436.86	340.14	1	E	A	-48.6	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
6295	536828.55	4816436.86	340.14	1	D	A	58.4	-1.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-35.4
6295	536828.55	4816436.86	340.14	1	N	A	-48.6	-1.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.4
6295	536828.55	4816436.86	340.14	1	E	A	-48.6	-1.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.4
6296	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-31.7
6296	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.7
6296	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-138.7
6297	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.9
6297	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.9
6297	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.9
6298	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-35.5
6298	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.5
6298	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.5
6300	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-32.0
6300	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-139.0
6300	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-139.0
6301	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-36.1
6301	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.1
6301	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.1
6302	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-35.8
6302	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
6302	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
6303	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-32.2
6303	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
6303	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
6304	536828.03	4816436.56	340.16	1	D	A	58.4	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-36.2
6304	536828.03	4816436.56	340.16	1	N	A	-48.6	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
6304	536828.03	4816436.56	340.16	1	E	A	-48.6	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
6305	536828.03	4816436.56	340.16	1	D	A	58.4	-2.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
6305	536828.03	4816436.56	340.16	1	N	A	-48.6	-2.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
6305	536828.03	4816436.56	340.16	1	E	A	-48.6	-2.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
6306	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-32.2
6306	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
6306	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
6307	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-36.2
6307	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
6307	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
6308	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
6308	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9
6308	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9
6309	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-32.1
6309	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-139.1
6309	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.8	0.0	0.0	-139.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6310	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-36.3
6310	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
6310	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
6311	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
6311	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9
6311	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9
6314	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-32.1
6314	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-139.0
6314	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-139.0
6315	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-36.3
6315	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
6315	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
6316	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-36.0
6316	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-143.0
6316	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-143.0
6318	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-32.4
6318	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-139.4
6318	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-139.4
6319	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-36.7
6319	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.7
6319	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.7
6320	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
6320	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-143.4
6320	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-143.4
6321	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-33.0
6321	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-140.0
6321	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-140.0
6322	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-37.3
6322	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
6322	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
6323	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-37.0
6323	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-144.0
6323	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-144.0
6324	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-33.3
6324	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-140.3
6324	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-140.3
6325	536829.11	4816436.92	340.12	1	D	A	58.4	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-37.3
6325	536829.11	4816436.92	340.12	1	N	A	-48.6	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
6325	536829.11	4816436.92	340.12	1	E	A	-48.6	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
6326	536829.11	4816436.92	340.12	1	D	A	58.4	-3.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-36.9
6326	536829.11	4816436.92	340.12	1	N	A	-48.6	-3.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-143.9
6326	536829.11	4816436.92	340.12	1	E	A	-48.6	-3.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-143.9
6332	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-34.0
6332	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.0
6332	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.0
6333	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-38.3
6333	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.3
6333	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.3
6334	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.0
6334	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.0
6334	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.0
6335	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-34.5
6335	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.5
6335	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.5
6336	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-38.8
6336	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.8
6336	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.8
6337	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.5
6337	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.4
6337	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.4
6340	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-34.9
6340	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.9
6340	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-141.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6341	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-39.2
6341	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-146.2
6341	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-146.2
6342	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.9
6342	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.9
6342	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-145.9
6345	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-35.5
6345	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-142.5
6345	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-142.5
6346	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-39.6
6346	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-146.6
6346	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-146.6
6347	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-39.2
6347	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-146.2
6347	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-146.2
6348	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-36.5
6348	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-143.5
6348	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-143.5
6349	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-40.8
6349	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.8
6349	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.8
6350	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-40.5
6350	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-147.5
6350	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-147.5
6351	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-37.7
6351	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-144.7
6351	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-144.7
6352	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-42.0
6352	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-149.0
6352	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-149.0
6353	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-41.7
6353	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-148.7
6353	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-148.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4974	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-22.2
4974	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.2
4974	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.2
4978	536994.66	4816487.29	339.51	1	D	A	59.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
4978	536994.66	4816487.29	339.51	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4978	536994.66	4816487.29	339.51	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4982	536990.92	4816486.27	339.58	1	D	A	59.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
4982	536990.92	4816486.27	339.58	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
4982	536990.92	4816486.27	339.58	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
4986	536993.65	4816487.02	339.53	1	D	A	59.5	8.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
4986	536993.65	4816487.02	339.53	1	N	A	-40.5	8.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4986	536993.65	4816487.02	339.53	1	E	A	-40.5	8.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
5143	536957.48	4816510.17	339.53	0	D	A	59.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-23.8
5143	536957.48	4816510.17	339.53	0	N	A	-40.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
5143	536957.48	4816510.17	339.53	0	E	A	-40.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
5145	536958.50	4816510.81	339.50	1	D	A	59.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5145	536958.50	4816510.81	339.50	1	N	A	-40.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5145	536958.50	4816510.81	339.50	1	E	A	-40.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5149	536955.84	4816509.16	339.56	1	D	A	59.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
5149	536955.84	4816509.16	339.56	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5149	536955.84	4816509.16	339.56	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5151	536958.23	4816510.64	339.51	1	D	A	59.5	6.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5151	536958.23	4816510.64	339.51	1	N	A	-40.5	6.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5151	536958.23	4816510.64	339.51	1	E	A	-40.5	6.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5154	536955.56	4816508.99	339.56	1	D	A	59.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
5154	536955.56	4816508.99	339.56	1	N	A	-40.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5154	536955.56	4816508.99	339.56	1	E	A	-40.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5166	536960.06	4816523.96	339.50	0	D	A	59.5	8.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-24.0
5166	536960.06	4816523.96	339.50	0	N	A	-40.5	8.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
5166	536960.06	4816523.96	339.50	0	E	A	-40.5	8.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
5169	536960.03	4816523.81	339.50	1	D	A	59.5	7.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5169	536960.03	4816523.81	339.50	1	N	A	-40.5	7.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5169	536960.03	4816523.81	339.50	1	E	A	-40.5	7.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5172	536960.73	4816526.95	339.50	1	D	A	59.5	-5.1	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-41.1
5172	536960.73	4816526.95	339.50	1	N	A	-40.5	-5.1	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
5172	536960.73	4816526.95	339.50	1	E	A	-40.5	-5.1	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
5174	536960.06	4816523.96	339.50	1	D	A	59.5	8.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
5174	536960.06	4816523.96	339.50	1	N	A	-40.5	8.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5174	536960.06	4816523.96	339.50	1	E	A	-40.5	8.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
5295	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-23.7
5295	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5295	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5297	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5297	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5297	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5299	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5299	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5299	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5303	536963.72	4816507.19	339.51	0	D	A	59.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-24.2
5303	536963.72	4816507.19	339.51	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-124.2
5303	536963.72	4816507.19	339.51	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-124.2
5304	536963.72	4816507.19	339.51	1	D	A	59.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
5304	536963.72	4816507.19	339.51	1	N	A	-40.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5304	536963.72	4816507.19	339.51	1	E	A	-40.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
5306	536963.72	4816507.19	339.51	1	D	A	59.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5306	536963.72	4816507.19	339.51	1	N	A	-40.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5306	536963.72	4816507.19	339.51	1	E	A	-40.5	7.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5559	536955.26	4816509.49	339.57	0	D	A	59.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.5
5559	536955.26	4816509.49	339.57	0	N	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
5559	536955.26	4816509.49	339.57	0	E	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
5563	536956.14	4816511.39	339.55	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.7
5563	536956.14	4816511.39	339.55	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
5563	536956.14	4816511.39	339.55	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
5565	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5565	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5565	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5568	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
5568	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5568	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5571	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-25.6
5571	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
5571	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
5574	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5574	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5574	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5577	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5577	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5577	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
5621	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-25.5
5621	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-125.5
5621	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-125.5
5624	536965.11	4816502.71	339.57	1	D	A	59.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5624	536965.11	4816502.71	339.57	1	N	A	-40.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5624	536965.11	4816502.71	339.57	1	E	A	-40.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5628	536965.11	4816502.71	339.57	1	D	A	59.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5628	536965.11	4816502.71	339.57	1	N	A	-40.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5628	536965.11	4816502.71	339.57	1	E	A	-40.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5633	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-26.0
5633	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5633	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.0
5634	536958.41	4816517.56	339.51	1	D	A	59.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5634	536958.41	4816517.56	339.51	1	N	A	-40.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5634	536958.41	4816517.56	339.51	1	E	A	-40.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5636	536958.41	4816517.56	339.51	1	D	A	59.5	6.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5636	536958.41	4816517.56	339.51	1	N	A	-40.5	6.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5636	536958.41	4816517.56	339.51	1	E	A	-40.5	6.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5696	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-26.4
5696	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
5696	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
5698	536956.87	4816513.09	339.54	1	D	A	59.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
5698	536956.87	4816513.09	339.54	1	N	A	-40.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
5698	536956.87	4816513.09	339.54	1	E	A	-40.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
5700	536957.51	4816514.76	339.52	1	D	A	59.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
5700	536957.51	4816514.76	339.52	1	N	A	-40.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5700	536957.51	4816514.76	339.52	1	E	A	-40.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5702	536957.21	4816513.99	339.53	1	D	A	59.5	5.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5702	536957.21	4816513.99	339.53	1	N	A	-40.5	5.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5702	536957.21	4816513.99	339.53	1	E	A	-40.5	5.5	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5705	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-26.4
5705	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
5705	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
5707	536971.30	4816535.80	339.40	1	D	A	59.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5707	536971.30	4816535.80	339.40	1	N	A	-40.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5707	536971.30	4816535.80	339.40	1	E	A	-40.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5710	536971.30	4816535.80	339.40	1	D	A	59.5	5.9	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5710	536971.30	4816535.80	339.40	1	N	A	-40.5	5.9	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5710	536971.30	4816535.80	339.40	1	E	A	-40.5	5.9	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5800	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-26.3
5800	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
5800	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
5802	536978.53	4816487.38	339.72	1	D	A	59.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5802	536978.53	4816487.38	339.72	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5802	536978.53	4816487.38	339.72	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5803	536978.53	4816487.38	339.72	1	D	A	59.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5803	536978.53	4816487.38	339.72	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5803	536978.53	4816487.38	339.72	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5815	536971.80	4816491.00	339.74	0	D	A	59.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-30.7
5815	536971.80	4816491.00	339.74	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.7
5815	536971.80	4816491.00	339.74	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.7
5817	536970.83	4816492.15	339.73	0	D	A	59.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-28.5
5817	536970.83	4816492.15	339.73	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.5
5817	536970.83	4816492.15	339.73	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.5
5818	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
5818	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5818	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
5819	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5819	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5819	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
5833	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-26.4
5833	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
5833	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
5834	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.0
5834	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5834	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5835	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
5835	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5835	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5882	536962.05	4816516.73	339.44	0	D	A	59.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-27.5
5882	536962.05	4816516.73	339.44	0	N	A	-40.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
5882	536962.05	4816516.73	339.44	0	E	A	-40.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
5883	536961.97	4816518.13	339.44	0	D	A	59.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-47.6
5883	536961.97	4816518.13	339.44	0	N	A	-40.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-147.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5883	536961.97	4816518.13	339.44	0	E	A	-40.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-147.6
5885	536962.05	4816516.74	339.44	1	D	A	59.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
5885	536962.05	4816516.74	339.44	1	N	A	-40.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5885	536962.05	4816516.74	339.44	1	E	A	-40.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5886	536962.05	4816516.74	339.44	1	D	A	59.5	4.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
5886	536962.05	4816516.74	339.44	1	N	A	-40.5	4.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5886	536962.05	4816516.74	339.44	1	E	A	-40.5	4.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5899	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-27.5
5899	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
5899	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
5900	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5900	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5900	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5901	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.2
5901	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5901	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5902	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-27.0
5902	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-127.0
5902	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-127.0
5904	536975.81	4816488.20	339.74	1	D	A	59.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
5904	536975.81	4816488.20	339.74	1	N	A	-40.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5904	536975.81	4816488.20	339.74	1	E	A	-40.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5905	536975.81	4816488.20	339.74	1	D	A	59.5	4.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
5905	536975.81	4816488.20	339.74	1	N	A	-40.5	4.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5905	536975.81	4816488.20	339.74	1	E	A	-40.5	4.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5951	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-27.9
5951	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
5951	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
5952	536963.11	4816522.94	339.45	1	D	A	59.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
5952	536963.11	4816522.94	339.45	1	N	A	-40.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5952	536963.11	4816522.94	339.45	1	E	A	-40.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5953	536963.11	4816522.94	339.45	1	D	A	59.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
5953	536963.11	4816522.94	339.45	1	N	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5953	536963.11	4816522.94	339.45	1	E	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5968	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-27.7
5968	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-127.7
5968	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-127.7
5969	536969.49	4816493.76	339.71	1	D	A	59.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
5969	536969.49	4816493.76	339.71	1	N	A	-40.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5969	536969.49	4816493.76	339.71	1	E	A	-40.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5970	536969.49	4816493.76	339.71	1	D	A	59.5	3.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
5970	536969.49	4816493.76	339.71	1	N	A	-40.5	3.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5970	536969.49	4816493.76	339.71	1	E	A	-40.5	3.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5985	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-28.4
5985	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.4
5985	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.4
5986	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
5986	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5986	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5987	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
5987	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5987	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5997	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.4
5997	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
5997	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
5998	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5998	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5998	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5999	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.0
5999	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
5999	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
6012	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.5
6012	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6012	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
6013	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.4
6013	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6013	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6014	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
6014	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
6014	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
6021	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.7
6021	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
6021	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
6022	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
6022	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6022	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6023	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
6023	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
6023	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
6024	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-28.2
6024	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.2
6024	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.2
6025	536968.23	4816495.51	339.68	1	D	A	59.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
6025	536968.23	4816495.51	339.68	1	N	A	-40.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6025	536968.23	4816495.51	339.68	1	E	A	-40.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6026	536968.23	4816495.51	339.68	1	D	A	59.5	3.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.4
6026	536968.23	4816495.51	339.68	1	N	A	-40.5	3.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6026	536968.23	4816495.51	339.68	1	E	A	-40.5	3.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
6036	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.9
6036	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.9
6036	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.9
6037	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6037	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6037	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6038	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
6038	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6038	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
6045	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.2
6045	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.2
6045	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.2
6046	536962.06	4816519.10	339.45	1	D	A	59.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6046	536962.06	4816519.10	339.45	1	N	A	-40.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6046	536962.06	4816519.10	339.45	1	E	A	-40.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6047	536962.06	4816519.10	339.45	1	D	A	59.5	2.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6047	536962.06	4816519.10	339.45	1	N	A	-40.5	2.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6047	536962.06	4816519.10	339.45	1	E	A	-40.5	2.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6060	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-29.3
6060	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
6060	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
6062	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6062	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6062	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6063	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
6063	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6063	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
6071	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-28.6
6071	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.6
6071	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.6
6073	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6073	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6073	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6074	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
6074	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6074	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
6111	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.0
6111	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6111	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.0
6112	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
6112	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6112	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6114	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
6114	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6114	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
6134	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.7
6134	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.7
6134	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.7
6136	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
6136	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6136	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6137	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
6137	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6137	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6140	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.6
6140	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
6140	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
6141	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
6141	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6141	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6142	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
6142	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6142	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6150	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.6
6150	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
6150	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
6151	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
6151	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6151	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6153	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
6153	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6153	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
6155	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.3
6155	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.3
6155	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.3
6156	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
6156	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6156	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6157	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.4
6157	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
6157	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
6168	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-29.1
6168	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-129.1
6168	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-129.1
6169	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
6169	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6169	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6170	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
6170	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6170	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6172	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.4
6172	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.4
6172	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.4
6173	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.8
6173	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6173	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
6174	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
6174	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6174	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
6184	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.9
6184	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6184	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.9
6185	536964.52	4816518.50	339.41	1	D	A	59.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.0
6185	536964.52	4816518.50	339.41	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
6185	536964.52	4816518.50	339.41	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
6186	536964.33	4816517.70	339.41	1	D	A	59.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-47.2
6186	536964.33	4816517.70	339.41	1	N	A	-40.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-147.2
6186	536964.33	4816517.70	339.41	1	E	A	-40.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-147.2
6188	536964.51	4816518.46	339.41	1	D	A	59.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
6188	536964.51	4816518.46	339.41	1	N	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6188	536964.51	4816518.46	339.41	1	E	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
6198	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.1
6198	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.1
6198	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.1
6200	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.0
6200	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
6200	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
6201	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
6201	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6201	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
6208	536965.53	4816522.84	339.41	0	D	A	59.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-32.0
6208	536965.53	4816522.84	339.41	0	N	A	-40.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-132.0
6208	536965.53	4816522.84	339.41	0	E	A	-40.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-132.0
6211	536965.38	4816522.09	339.41	0	D	A	59.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-34.9
6211	536965.38	4816522.09	339.41	0	N	A	-40.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9
6211	536965.38	4816522.09	339.41	0	E	A	-40.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9
6213	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
6213	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6213	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6215	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.9
6215	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
6215	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
6222	536964.01	4816517.02	339.41	0	D	A	59.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.4
6222	536964.01	4816517.02	339.41	0	N	A	-40.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.4
6222	536964.01	4816517.02	339.41	0	E	A	-40.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.4
6223	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
6223	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
6223	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
6224	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
6224	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6224	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6225	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.5
6225	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
6225	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
6226	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
6226	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6226	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6227	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
6227	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6227	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6228	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.5
6228	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
6228	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
6229	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
6229	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6229	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6230	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
6230	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
6230	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
6231	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-30.0
6231	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.0
6231	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.0
6232	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.5
6232	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6232	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
6233	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
6233	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
6233	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
6234	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.7
6234	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.7
6234	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.7
6235	536965.18	4816521.17	339.41	1	D	A	59.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6235	536965.18	4816521.17	339.41	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6235	536965.18	4816521.17	339.41	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6236	536965.18	4816521.17	339.41	1	D	A	59.5	1.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
6236	536965.18	4816521.17	339.41	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
6236	536965.18	4816521.17	339.41	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
6243	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.9
6243	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.9
6243	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.9
6244	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.8
6244	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
6244	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
6245	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6245	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6245	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6246	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.0
6246	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
6246	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
6247	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
6247	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6247	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6248	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6248	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6248	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6249	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.1
6249	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
6249	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
6250	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
6250	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6250	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6251	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6251	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6251	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
6252	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.1
6252	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
6252	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
6253	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
6253	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6253	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
6254	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.7
6254	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
6254	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
6267	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.5
6267	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.5
6267	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.5
6268	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6268	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6268	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6269	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.1
6269	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
6269	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
6276	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-31.7
6276	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
6276	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
6277	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.6
6277	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																			
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6277	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
6278	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
6278	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
6278	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3

Receiver
Name: Building G1 Tower - West Facade
ID: POR
X: 536560.03 m
Y: 4816097.92 m
Z: 372.57 m

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	42.8
6	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	39.8
6	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	42.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
10	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	43.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	44.9
10	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	43.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	38.9
10	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	43.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	44.9
16	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	14.1
16	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	8.1
16	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	14.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
20	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	43.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	44.4
20	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	43.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	38.4
20	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	43.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	44.4
22	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	13.7
22	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	7.7
22	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	13.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
25	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	43.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	40.8
25	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	43.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	40.8
25	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	43.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	40.8
28	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	10.0
28	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	10.0
28	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	10.0

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
37	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	14.0	0.0	0.0	29.3
37	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	14.0	0.0	0.0	23.3
37	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	14.0	0.0	0.0	29.3
40	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	8.8
40	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.8
40	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	8.8
42	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	4.9
42	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
42	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	4.9
43	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	4.5
43	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5
43	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	4.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
48	536660.95	4816008.64	345.75	0	D	A	101.5	0.0	0.0	0.0	0.0	53.9	1.4	-2.5	0.0	0.0	15.4	0.0	0.0	33.3
48	536660.95	4816008.64	345.75	0	N	A	101.5	0.0	-188.0	0.0	0.0	53.9	1.4	-2.5	0.0	0.0	15.4	0.0	0.0	-154.7
48	536660.95	4816008.64	345.75	0	E	A	101.5	0.0	-188.0	0.0	0.0	53.9	1.4	-2.5	0.0	0.0	15.4	0.0	0.0	-154.7
51	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	57.9	1.9	-2.1	0.0	0.0	27.1	0.0	1.0	15.6
51	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	57.9	1.9	-2.1	0.0	0.0	27.1	0.0	1.0	-172.4
51	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	57.9	1.9	-2.1	0.0	0.0	27.1	0.0	1.0	-172.4
53	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	61.1	2.4	-1.6	0.0	0.0	26.6	0.0	1.0	12.0
53	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	61.1	2.4	-1.6	0.0	0.0	26.6	0.0	1.0	-176.0
53	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	61.1	2.4	-1.6	0.0	0.0	26.6	0.0	1.0	-176.0
56	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	61.4	2.5	-1.6	0.0	0.0	26.6	0.0	1.4	11.2
56	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	61.4	2.5	-1.6	0.0	0.0	26.6	0.0	1.4	-176.8
56	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	61.4	2.5	-1.6	0.0	0.0	26.6	0.0	1.4	-176.8
59	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	58.4	2.0	-2.1	0.0	0.0	27.0	0.0	1.4	14.7
59	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	58.4	2.0	-2.1	0.0	0.0	27.0	0.0	1.4	-173.3
59	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	58.4	2.0	-2.1	0.0	0.0	27.0	0.0	1.4	-173.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
70	536660.48	4816041.55	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.5	0.0	0.0	20.6	0.0	0.0	21.2
70	536660.48	4816041.55	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	52.6	0.7	-2.5	0.0	0.0	20.6	0.0	0.0	15.2
70	536660.48	4816041.55	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.5	0.0	0.0	20.6	0.0	0.0	21.2
73	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	8.6
73	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	2.6
73	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	8.6
76	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	60.3	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	4.8
76	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.3	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-1.2
76	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	60.3	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	4.8
81	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	60.6	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	4.5
81	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.6	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-1.6
81	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	60.6	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	4.5
84	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	57.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	8.1
84	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	57.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	2.1
84	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	57.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	8.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
88	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	45.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	42.3
88	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	45.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.3
88	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	45.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	42.3
89	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	11.7
89	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.7
89	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	11.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
94	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	48.3	0.3	-3.0	0.0	0.0	9.6	0.0	0.0	39.7
94	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	48.3	0.3	-3.0	0.0	0.0	9.6	0.0	0.0	-145.3
94	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	48.3	0.3	-3.0	0.0	0.0	9.6	0.0	0.0	-145.3
98	536507.11	4816057.67	350.67	1	D	A	98.0	0.0	-3.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	19.1
98	536507.11	4816057.67	350.67	1	N	A	98.0	0.0	-188.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-165.8
98	536507.11	4816057.67	350.67	1	E	A	98.0	0.0	-188.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-165.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
102	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	46.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
102	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	46.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	35.9
102	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	46.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
105	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	11.5
105	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
105	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	11.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
110	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	43.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
110	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	43.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	36.0
110	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	43.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
112	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.4
112	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	5.4
112	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.4

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
118	536415.97	4816336.50	359.79	0	D	A	97.3	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	39.5
118	536415.97	4816336.50	359.79	0	N	A	97.3	0.0	-3.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	36.5
118	536415.97	4816336.50	359.79	0	E	A	97.3	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	39.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
126	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	54.2	0.8	-2.5	0.0	0.0	18.7	0.0	0.0	21.3
126	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	54.2	0.8	-2.5	0.0	0.0	18.7	0.0	0.0	15.3
126	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	54.2	0.8	-2.5	0.0	0.0	18.7	0.0	0.0	21.3
129	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.0	1.1	-2.7	0.0	0.0	27.7	0.0	1.0	7.3
129	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.0	1.1	-2.7	0.0	0.0	27.7	0.0	1.0	1.3
129	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.0	1.1	-2.7	0.0	0.0	27.7	0.0	1.0	7.3
132	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.9
132	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-2.1
132	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.9
134	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	3.5
134	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	61.4	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-2.5
134	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	3.5
137	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	6.9
137	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.5	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	0.8
137	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	6.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
148	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	54.2	0.8	-2.7	0.0	0.0	21.7	0.0	0.0	18.6
148	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	54.2	0.8	-2.7	0.0	0.0	21.7	0.0	0.0	12.5
148	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	54.2	0.8	-2.7	0.0	0.0	21.7	0.0	0.0	18.6
150	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	7.7
150	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	1.6
150	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	7.7
154	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	60.8	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	4.2
154	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.8	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-1.8
154	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	60.8	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	4.2
157	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.2	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	7.2
157	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.2	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	1.2
157	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.2	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	7.2

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
159	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	39.7
159	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	33.7
159	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	39.7
161	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	46.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	9.2
161	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	46.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	3.2
161	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	46.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	9.2

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
165	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	4.8	0.0	0.0	40.3
165	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	4.8	0.0	0.0	-147.7
165	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	4.8	0.0	0.0	-147.7
204	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	7.8	0.0	1.1	35.1
204	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	7.8	0.0	1.1	-152.9
204	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	7.8	0.0	1.1	-152.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
239	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	61.1	1.8	-3.0	0.0	0.0	22.9	0.0	0.0	11.5
239	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	61.1	1.8	-3.0	0.0	0.0	22.9	0.0	0.0	8.5
239	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	61.1	1.8	-3.0	0.0	0.0	22.9	0.0	0.0	11.5

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
251	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	51.6	0.6	-3.0	0.0	0.0	10.6	0.0	0.0	25.7
251	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.6	0.6	-3.0	0.0	0.0	10.6	0.0	0.0	19.7
251	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	51.6	0.6	-3.0	0.0	0.0	10.6	0.0	0.0	25.7
253	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
253	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2
253	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
257	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1
257	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
257	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
270	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	51.6	0.6	-2.6	0.0	0.0	21.1	0.0	0.0	11.5
270	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	51.6	0.6	-2.6	0.0	0.0	21.1	0.0	0.0	11.5
270	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	51.6	0.6	-2.6	0.0	0.0	21.1	0.0	0.0	11.5
272	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.0
272	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.0
272	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.0
274	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.0
274	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.0
274	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.0
277	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.1	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
277	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.1	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
277	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.1	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
279	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.6
279	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.6
279	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
286	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-2.6	0.0	0.0	20.5	0.0	0.0	11.7
286	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-2.6	0.0	0.0	20.5	0.0	0.0	11.7
286	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-2.6	0.0	0.0	20.5	0.0	0.0	11.7
289	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.2
289	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.2
289	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.2
291	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.2
291	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.2
291	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.2
293	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
293	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
293	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
295	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.8
295	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
295	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
305	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	51.9	0.6	-2.6	0.0	0.0	21.5	0.0	0.0	10.7
305	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	51.9	0.6	-2.6	0.0	0.0	21.5	0.0	0.0	10.7
305	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	51.9	0.6	-2.6	0.0	0.0	21.5	0.0	0.0	10.7
308	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.1
308	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.1
308	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-1.1
312	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.1
312	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.1
312	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.1
316	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.2	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
316	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.2	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
316	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.2	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
318	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.7
318	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.7
318	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-1.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
324	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	52.8	0.7	-2.6	0.0	0.0	22.9	0.0	0.0	11.7
324	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.8	0.7	-2.6	0.0	0.0	22.9	0.0	0.0	5.7
324	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	52.8	0.7	-2.6	0.0	0.0	22.9	0.0	0.0	11.7
326	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	2.0
326	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-4.1
326	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	2.0
329	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-1.8
329	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
329	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-1.8
331	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.0	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	1.5
331	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.0	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-4.6
331	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.0	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	1.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
333	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-2.6	0.0	0.0	19.5	0.0	0.0	11.9
333	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-2.6	0.0	0.0	19.5	0.0	0.0	11.9
333	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-2.6	0.0	0.0	19.5	0.0	0.0	11.9
336	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.9
336	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.9
336	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.9
339	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
339	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
339	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.6
341	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-6.0
341	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-6.0
341	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-6.0
344	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-2.4
344	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-2.4
344	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	27.8	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
347	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	32.0
347	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	32.0
347	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	32.0
349	536503.25	4816045.85	353.78	1	D	A	78.6	0.0	0.0	0.0	0.0	50.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	1.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
349	536503.25	4816045.85	353.78	1	N	A	78.6	0.0	0.0	0.0	0.0	50.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
349	536503.25	4816045.85	353.78	1	E	A	78.6	0.0	0.0	0.0	0.0	50.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	1.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
355	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	58.1	2.1	-2.9	0.0	0.0	25.5	0.0	0.0	9.6
355	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	58.1	2.1	-2.9	0.0	0.0	25.5	0.0	0.0	-170.6
355	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	58.1	2.1	-2.9	0.0	0.0	25.5	0.0	0.0	9.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
362	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	51.1	0.2	-2.4	0.0	0.0	18.5	0.0	0.0	22.7
362	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.1	0.2	-2.4	0.0	0.0	18.5	0.0	0.0	-165.3
362	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.1	0.2	-2.4	0.0	0.0	18.5	0.0	0.0	-165.3
366	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	7.8
366	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.2
366	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.2
369	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	59.8	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.9
369	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	59.8	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.1
369	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	59.8	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.1
372	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	60.1	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.5
372	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.1	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.5
372	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.1	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.5
374	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	7.2
374	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.8
374	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
382	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	51.3	0.2	-2.6	0.0	0.0	19.6	0.0	0.0	21.6
382	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.3	0.2	-2.6	0.0	0.0	19.6	0.0	0.0	-166.4
382	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.3	0.2	-2.6	0.0	0.0	19.6	0.0	0.0	-166.4
385	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	55.9	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	7.9
385	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	55.9	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.1
385	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	55.9	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.1
388	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	4.0
388	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.0
388	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.0
391	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	3.6
391	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.4
391	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.4
393	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	7.3
393	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.7
393	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
396	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	58.8	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	8.5
396	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	58.8	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	-171.7
396	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	58.8	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	8.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
406	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	51.4	0.2	-2.3	0.0	0.0	18.2	0.0	0.0	22.7
406	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.4	0.2	-2.3	0.0	0.0	18.2	0.0	0.0	-165.3
406	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.4	0.2	-2.3	0.0	0.0	18.2	0.0	0.0	-165.3
410	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	56.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	7.6
410	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	-180.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
410	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	-180.4
412	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	59.9	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.8
412	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	59.9	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.2
412	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	59.9	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.2
415	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	60.2	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.4
415	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.2	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.6
415	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.2	0.5	-2.9	0.0	0.0	27.9	0.0	1.0	-184.6
424	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	56.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	7.0
424	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.0
424	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
435	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	53.9	0.8	-2.7	0.0	0.0	23.0	0.0	0.0	10.6
435	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	53.9	0.8	-2.7	0.0	0.0	23.0	0.0	0.0	4.5
435	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	53.9	0.8	-2.7	0.0	0.0	23.0	0.0	0.0	10.6
438	536692.85	4816072.45	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	1.3
438	536692.85	4816072.45	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-4.7
438	536692.85	4816072.45	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	1.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
449	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	51.5	0.2	-2.6	0.0	0.0	19.9	0.0	0.0	21.1
449	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.5	0.2	-2.6	0.0	0.0	19.9	0.0	0.0	-166.9
449	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.5	0.2	-2.6	0.0	0.0	19.9	0.0	0.0	-166.9
452	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	7.8
452	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.2
452	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.2
454	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	4.0
454	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.0
454	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.0
457	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	3.6
457	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.4
457	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.4
461	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	7.2
461	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.8
461	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
467	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	51.8	0.2	-2.6	0.0	0.0	20.3	0.0	0.0	20.4
467	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.8	0.2	-2.6	0.0	0.0	20.3	0.0	0.0	-167.6
467	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.8	0.2	-2.6	0.0	0.0	20.3	0.0	0.0	-167.6
470	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.1	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	7.7
470	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.1	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.3
470	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.1	0.3	-2.8	0.0	0.0	27.8	0.0	1.0	-180.3
473	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	3.9
473	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.1
473	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	59.7	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.1
475	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	7.1
475	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.9
475	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-180.9

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
477	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	51.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.6
477	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	51.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.6
477	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	51.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
487	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	51.9	0.2	-2.5	0.0	0.0	17.7	0.0	0.0	22.9
487	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	51.9	0.2	-2.5	0.0	0.0	17.7	0.0	0.0	-165.1
487	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	51.9	0.2	-2.5	0.0	0.0	17.7	0.0	0.0	-165.1
490	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	56.6	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	7.2
490	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-180.8
490	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.6	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-180.8
495	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	60.1	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	3.5
495	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.1	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.5
495	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.1	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-184.5
497	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	60.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	3.2
497	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-184.8
497	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-184.8
498	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	6.7
498	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.3
498	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
507	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	52.2	0.2	-2.6	0.0	0.0	17.4	0.0	0.0	23.0
507	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	52.2	0.2	-2.6	0.0	0.0	17.4	0.0	0.0	-165.0
507	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	52.2	0.2	-2.6	0.0	0.0	17.4	0.0	0.0	-165.0
510	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	56.7	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	7.0
510	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.7	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.0
510	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.7	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.0
513	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	60.2	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	3.4
513	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.2	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.6
513	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.2	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.6
516	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	27.7	0.0	1.0	3.0
516	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	27.7	0.0	1.0	-185.0
516	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	27.7	0.0	1.0	-185.0
519	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.2	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	6.5
519	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.5
519	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.5

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
523	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.0
523	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
523	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
526	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
526	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
526	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
532	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	7.3	0.0	0.0	25.1
532	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	7.3	0.0	0.0	19.1
532	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	7.3	0.0	0.0	25.1
535	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
535	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7
535	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
553	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
553	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
553	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
557	536556.72	4816080.46	348.89	0	D	A	59.5	10.9	0.0	0.0	0.0	42.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	30.7
557	536556.72	4816080.46	348.89	0	N	A	-40.5	10.9	0.0	0.0	0.0	42.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-69.3
557	536556.72	4816080.46	348.89	0	E	A	-40.5	10.9	0.0	0.0	0.0	42.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-69.3
559	536557.77	4816078.30	348.79	1	D	A	59.5	8.8	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
559	536557.77	4816078.30	348.79	1	N	A	-40.5	8.8	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-101.7
559	536557.77	4816078.30	348.79	1	E	A	-40.5	8.8	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-101.7
561	536555.07	4816083.85	349.04	1	D	A	59.5	6.8	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
561	536555.07	4816083.85	349.04	1	N	A	-40.5	6.8	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.2
561	536555.07	4816083.85	349.04	1	E	A	-40.5	6.8	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.2
691	536551.67	4816082.79	349.10	0	D	A	59.5	10.5	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	30.5
691	536551.67	4816082.79	349.10	0	N	A	-40.5	10.5	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-69.5
691	536551.67	4816082.79	349.10	0	E	A	-40.5	10.5	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-69.5
693	536550.15	4816086.09	349.29	1	D	A	59.5	6.1	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
693	536550.15	4816086.09	349.29	1	N	A	-40.5	6.1	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-104.1
693	536550.15	4816086.09	349.29	1	E	A	-40.5	6.1	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-104.1
696	536552.39	4816081.22	349.01	1	D	A	59.5	8.2	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
696	536552.39	4816081.22	349.01	1	N	A	-40.5	8.2	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-102.3
696	536552.39	4816081.22	349.01	1	E	A	-40.5	8.2	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-102.3
698	536553.90	4816077.92	348.82	1	D	A	59.5	-2.2	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9
698	536553.90	4816077.92	348.82	1	N	A	-40.5	-2.2	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-112.9
698	536553.90	4816077.92	348.82	1	E	A	-40.5	-2.2	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-112.9
750	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	27.2
750	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-72.8
750	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-72.8
755	536549.75	4816094.93	349.63	1	D	A	59.5	6.6	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
755	536549.75	4816094.93	349.63	1	N	A	-40.5	6.6	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.0
755	536549.75	4816094.93	349.63	1	E	A	-40.5	6.6	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.0
792	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	27.3
792	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-72.7
792	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-72.7
796	536548.23	4816098.05	349.75	1	D	A	59.5	3.8	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
796	536548.23	4816098.05	349.75	1	N	A	-40.5	3.8	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.8
796	536548.23	4816098.05	349.75	1	E	A	-40.5	3.8	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.8
797	536547.19	4816100.14	349.83	1	D	A	59.5	3.5	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
797	536547.19	4816100.14	349.83	1	N	A	-40.5	3.5	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-106.2
797	536547.19	4816100.14	349.83	1	E	A	-40.5	3.5	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-106.2
818	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	28.4
818	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.6
818	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.6
821	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
821	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-102.0
821	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-102.0
926	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
926	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.1
926	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	41.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.1
928	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
928	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.4
928	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.4
946	536556.09	4816073.13	348.60	0	D	A	59.5	10.0	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	28.8
946	536556.09	4816073.13	348.60	0	N	A	-40.5	10.0	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.2
946	536556.09	4816073.13	348.60	0	E	A	-40.5	10.0	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.2
952	536557.48	4816070.09	348.47	1	D	A	59.5	5.1	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	20.5
952	536557.48	4816070.09	348.47	1	N	A	-40.5	5.1	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	-79.5
952	536557.48	4816070.09	348.47	1	E	A	-40.5	5.1	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	-79.5
954	536555.81	4816073.76	348.63	1	D	A	59.5	9.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8
954	536555.81	4816073.76	348.63	1	N	A	-40.5	9.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-101.8
954	536555.81	4816073.76	348.63	1	E	A	-40.5	9.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-101.8
956	536557.87	4816069.24	348.43	1	D	A	59.5	1.4	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
956	536557.87	4816069.24	348.43	1	N	A	-40.5	1.4	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.2
956	536557.87	4816069.24	348.43	1	E	A	-40.5	1.4	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.2
964	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
964	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.1
964	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.1

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
966	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
966	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.2
966	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-103.2
977	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
977	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.7
977	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.7
980	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
980	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-104.1
980	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-104.1
992	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
992	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.1
992	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.1
1059	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.3
1059	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.3
1059	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-105.3
1095	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
1095	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.1
1095	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	41.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.1
1100	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.3
1100	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-106.3
1100	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-106.3
1165	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	45.7	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	28.9
1165	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	45.7	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-71.1
1165	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	45.7	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-71.1
1168	536522.70	4816102.13	350.50	1	D	A	59.5	0.5	0.0	0.0	0.0	46.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
1168	536522.70	4816102.13	350.50	1	N	A	-40.5	0.5	0.0	0.0	0.0	46.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-112.4
1168	536522.70	4816102.13	350.50	1	E	A	-40.5	0.5	0.0	0.0	0.0	46.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-112.4
1169	536514.76	4816098.45	350.56	1	D	A	59.5	12.1	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
1169	536514.76	4816098.45	350.56	1	N	A	-40.5	12.1	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-101.9
1169	536514.76	4816098.45	350.56	1	E	A	-40.5	12.1	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-101.9
1195	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	28.6
1195	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-71.4
1195	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-71.4
1198	536517.11	4816098.32	350.54	1	D	A	59.5	10.9	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-2.8
1198	536517.11	4816098.32	350.54	1	N	A	-40.5	10.9	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-102.8
1198	536517.11	4816098.32	350.54	1	E	A	-40.5	10.9	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-102.8
1201	536524.01	4816101.24	350.49	1	D	A	59.5	4.3	0.0	0.0	0.0	46.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
1201	536524.01	4816101.24	350.49	1	N	A	-40.5	4.3	0.0	0.0	0.0	46.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.5
1201	536524.01	4816101.24	350.49	1	E	A	-40.5	4.3	0.0	0.0	0.0	46.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.5
1210	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	44.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	28.2
1210	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	44.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.8
1210	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	44.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-71.8
1214	536527.81	4816104.69	350.47	1	D	A	59.5	10.1	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
1214	536527.81	4816104.69	350.47	1	N	A	-40.5	10.1	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-102.2
1214	536527.81	4816104.69	350.47	1	E	A	-40.5	10.1	0.0	0.0	0.0	45.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-102.2
1236	536560.92	4816072.43	348.52	0	D	A	59.5	7.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
1236	536560.92	4816072.43	348.52	0	N	A	-40.5	7.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.6
1236	536560.92	4816072.43	348.52	0	E	A	-40.5	7.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-73.6
1238	536560.96	4816072.37	348.51	1	D	A	59.5	7.5	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6
1238	536560.96	4816072.37	348.51	1	N	A	-40.5	7.5	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-103.6
1238	536560.96	4816072.37	348.51	1	E	A	-40.5	7.5	0.0	0.0	0.0	44.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-103.6
1242	536559.46	4816074.84	348.63	1	D	A	59.5	-8.4	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1242	536559.46	4816074.84	348.63	1	N	A	-40.5	-8.4	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1242	536559.46	4816074.84	348.63	1	E	A	-40.5	-8.4	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1310	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	42.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.0
1310	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	42.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.0
1310	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	42.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.0
1314	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
1314	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-107.5
1314	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-107.5
1424	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.5
1424	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
1424	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	41.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1427	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1427	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1427	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1438	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
1438	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.9
1438	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.9
1440	536538.16	4816102.86	350.27	1	D	A	59.5	0.8	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.1
1440	536538.16	4816102.86	350.27	1	N	A	-40.5	0.8	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.1
1440	536538.16	4816102.86	350.27	1	E	A	-40.5	0.8	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.1
1441	536539.43	4816102.26	350.21	1	D	A	59.5	2.0	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1441	536539.43	4816102.26	350.21	1	N	A	-40.5	2.0	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1441	536539.43	4816102.26	350.21	1	E	A	-40.5	2.0	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1487	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	22.9
1487	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.1
1487	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.1
1491	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
1491	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-107.5
1491	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-107.5
1495	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	22.0
1495	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
1495	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	42.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
1499	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1499	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1499	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1545	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	42.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.9
1545	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	42.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.1
1545	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	42.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.1
1548	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1548	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1548	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1567	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.6
1567	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.4
1567	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	43.0	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.4
1572	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
1572	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-106.8
1572	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	44.4	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-106.8
1582	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.7
1582	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.3
1582	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-75.3
1585	536526.82	4816102.10	350.46	1	D	A	59.5	5.0	0.0	0.0	0.0	45.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.4
1585	536526.82	4816102.10	350.46	1	N	A	-40.5	5.0	0.0	0.0	0.0	45.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.4
1585	536526.82	4816102.10	350.46	1	E	A	-40.5	5.0	0.0	0.0	0.0	45.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.4
1587	536529.07	4816102.57	350.44	1	D	A	59.5	1.5	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.6
1587	536529.07	4816102.57	350.44	1	N	A	-40.5	1.5	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.6
1587	536529.07	4816102.57	350.44	1	E	A	-40.5	1.5	0.0	0.0	0.0	45.3	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.6
1662	536501.42	4816090.42	350.59	0	D	A	59.5	7.1	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	21.7
1662	536501.42	4816090.42	350.59	0	N	A	-40.5	7.1	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.3
1662	536501.42	4816090.42	350.59	0	E	A	-40.5	7.1	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.3
1666	536505.95	4816093.11	350.60	0	D	A	59.5	7.3	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	22.6
1666	536505.95	4816093.11	350.60	0	N	A	-40.5	7.3	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-77.4
1666	536505.95	4816093.11	350.60	0	E	A	-40.5	7.3	0.0	0.0	0.0	46.9	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-77.4
1669	536501.02	4816090.18	350.59	1	D	A	59.5	6.2	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
1669	536501.02	4816090.18	350.59	1	N	A	-40.5	6.2	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.5
1669	536501.02	4816090.18	350.59	1	E	A	-40.5	6.2	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.5
1673	536505.55	4816092.88	350.60	1	D	A	59.5	8.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
1673	536505.55	4816092.88	350.60	1	N	A	-40.5	8.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-107.1
1673	536505.55	4816092.88	350.60	1	E	A	-40.5	8.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-107.1
1678	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
1678	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.7
1678	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-76.7
1682	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
1682	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.0
1682	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1697	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.1
1697	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.9
1697	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	42.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.9
1700	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.0
1700	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-109.0
1700	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	43.5	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-109.0
1709	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	22.1
1709	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.9
1709	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	42.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.9
1711	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
1711	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.1
1711	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	44.0	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-108.1
1723	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
1723	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1723	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	43.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1726	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
1726	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
1726	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	45.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
1736	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.9
1736	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.1
1736	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	43.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.1
1740	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	44.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.3
1740	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	44.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.3
1740	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	44.5	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.3
1743	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	42.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	19.9
1743	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	42.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1743	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	42.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1747	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.3
1747	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1747	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1751	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.5
1751	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
1751	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	43.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
1755	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	44.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1755	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	44.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1755	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	44.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1782	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	20.2
1782	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
1782	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	42.7	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
1785	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
1785	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
1785	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	43.8	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
1804	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	42.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	19.8
1804	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	42.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.2
1804	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	42.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.2
1807	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.3
1807	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1807	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	43.6	0.2	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1816	536501.38	4816092.24	350.62	0	D	A	59.5	6.7	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	21.4
1816	536501.38	4816092.24	350.62	0	N	A	-40.5	6.7	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.6
1816	536501.38	4816092.24	350.62	0	E	A	-40.5	6.7	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.6
1818	536497.95	4816090.63	350.62	0	D	A	59.5	4.6	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
1818	536497.95	4816090.63	350.62	0	N	A	-40.5	4.6	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.2
1818	536497.95	4816090.63	350.62	0	E	A	-40.5	4.6	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.2
1822	536500.36	4816091.76	350.62	1	D	A	59.5	8.4	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
1822	536500.36	4816091.76	350.62	1	N	A	-40.5	8.4	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-107.3
1822	536500.36	4816091.76	350.62	1	E	A	-40.5	8.4	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-107.3
1826	536496.93	4816090.16	350.62	1	D	A	59.5	-2.0	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
1826	536496.93	4816090.16	350.62	1	N	A	-40.5	-2.0	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1826	536496.93	4816090.16	350.62	1	E	A	-40.5	-2.0	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1830	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	21.2
1830	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.8
1830	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	44.1	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-78.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1835	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	18.2
1835	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	-81.8
1835	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	0.0	0.0	2.5	-81.8
1840	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1840	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1840	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	45.0	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-108.7
1866	536485.11	4816090.31	350.69	0	D	A	59.5	2.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
1866	536485.11	4816090.31	350.69	0	N	A	-40.5	2.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1866	536485.11	4816090.31	350.69	0	E	A	-40.5	2.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1869	536489.19	4816087.14	350.62	0	D	A	59.5	9.3	0.0	0.0	0.0	48.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
1869	536489.19	4816087.14	350.62	0	N	A	-40.5	9.3	0.0	0.0	0.0	48.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1869	536489.19	4816087.14	350.62	0	E	A	-40.5	9.3	0.0	0.0	0.0	48.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1873	536485.89	4816089.70	350.68	1	D	A	59.5	5.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
1873	536485.89	4816089.70	350.68	1	N	A	-40.5	5.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-111.5
1873	536485.89	4816089.70	350.68	1	E	A	-40.5	5.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-111.5
1876	536488.83	4816087.42	350.63	1	D	A	59.5	5.7	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
1876	536488.83	4816087.42	350.63	1	N	A	-40.5	5.7	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-111.3
1876	536488.83	4816087.42	350.63	1	E	A	-40.5	5.7	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-111.3
1881	536491.43	4816085.40	350.59	1	D	A	59.5	4.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
1881	536491.43	4816085.40	350.59	1	N	A	-40.5	4.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-112.1
1881	536491.43	4816085.40	350.59	1	E	A	-40.5	4.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-112.1
1888	536483.95	4816091.58	350.72	0	D	A	59.5	7.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
1888	536483.95	4816091.58	350.72	0	N	A	-40.5	7.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-79.4
1888	536483.95	4816091.58	350.72	0	E	A	-40.5	7.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-79.4
1891	536479.40	4816095.17	350.80	0	D	A	59.5	7.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	19.7
1891	536479.40	4816095.17	350.80	0	N	A	-40.5	7.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.3
1891	536479.40	4816095.17	350.80	0	E	A	-40.5	7.4	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.3
1893	536481.79	4816093.29	350.76	1	D	A	59.5	10.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-6.9
1893	536481.79	4816093.29	350.76	1	N	A	-40.5	10.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-106.9
1893	536481.79	4816093.29	350.76	1	E	A	-40.5	10.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-106.9
1898	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
1898	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-79.4
1898	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	43.4	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-79.4
1900	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-9.8
1900	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
1900	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	44.8	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
1905	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	19.9
1905	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1905	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	43.2	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1908	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5
1908	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.5
1908	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	44.6	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-110.5
1912	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	19.9
1912	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1912	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	43.9	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	-80.1
1915	536562.78	4816069.35	348.40	1	D	A	59.5	1.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
1915	536562.78	4816069.35	348.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
1915	536562.78	4816069.35	348.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	44.7	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
1920	536479.27	4816095.17	350.80	0	D	A	59.5	7.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	19.6
1920	536479.27	4816095.17	350.80	0	N	A	-40.5	7.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.4
1920	536479.27	4816095.17	350.80	0	E	A	-40.5	7.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.4
1924	536482.87	4816092.15	350.73	0	D	A	59.5	6.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
1924	536482.87	4816092.15	350.73	0	N	A	-40.5	6.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.3
1924	536482.87	4816092.15	350.73	0	E	A	-40.5	6.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.3
1934	536480.83	4816093.86	350.77	1	D	A	59.5	9.7	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
1934	536480.83	4816093.86	350.77	1	N	A	-40.5	9.7	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
1934	536480.83	4816093.86	350.77	1	E	A	-40.5	9.7	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
1951	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	47.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	21.4
1951	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	47.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-78.6
1951	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	47.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-78.6
1955	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9
1955	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.9
1955	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1960	536496.43	4816079.37	350.47	0	D	A	59.5	8.0	0.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	21.8
1960	536496.43	4816079.37	350.47	0	N	A	-40.5	8.0	0.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.2
1960	536496.43	4816079.37	350.47	0	E	A	-40.5	8.0	0.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-78.2
1965	536496.43	4816079.37	350.47	1	D	A	59.5	8.0	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1965	536496.43	4816079.37	350.47	1	N	A	-40.5	8.0	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1965	536496.43	4816079.37	350.47	1	E	A	-40.5	8.0	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.4
1972	536508.90	4816094.78	350.60	0	D	A	59.5	1.3	0.0	0.0	0.0	46.6	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
1972	536508.90	4816094.78	350.60	0	N	A	-40.5	1.3	0.0	0.0	0.0	46.6	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1972	536508.90	4816094.78	350.60	0	E	A	-40.5	1.3	0.0	0.0	0.0	46.6	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1976	536510.48	4816095.49	350.59	0	D	A	59.5	3.3	0.0	0.0	0.0	46.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	19.1
1976	536510.48	4816095.49	350.59	0	N	A	-40.5	3.3	0.0	0.0	0.0	46.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
1976	536510.48	4816095.49	350.59	0	E	A	-40.5	3.3	0.0	0.0	0.0	46.4	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
1979	536509.87	4816095.21	350.59	1	D	A	59.5	5.4	0.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
1979	536509.87	4816095.21	350.59	1	N	A	-40.5	5.4	0.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.2
1979	536509.87	4816095.21	350.59	1	E	A	-40.5	5.4	0.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.2
1983	536502.26	4816068.17	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.3	0.0	0.0	8.4
1983	536502.26	4816068.17	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.3	0.0	0.0	-91.6
1983	536502.26	4816068.17	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.3	0.0	0.0	-91.6
1986	536502.26	4816068.17	350.03	1	D	A	59.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
1986	536502.26	4816068.17	350.03	1	N	A	-40.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.6
1986	536502.26	4816068.17	350.03	1	E	A	-40.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.6
1990	536502.28	4816068.16	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	8.3
1990	536502.28	4816068.16	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	-91.7
1990	536502.28	4816068.16	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	-91.7
1994	536502.28	4816068.16	350.03	1	D	A	59.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
1994	536502.28	4816068.16	350.03	1	N	A	-40.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.6
1994	536502.28	4816068.16	350.03	1	E	A	-40.5	7.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-108.6
2022	536498.80	4816075.96	350.41	0	D	A	59.5	1.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	6.0	0.0	0.0	9.4
2022	536498.80	4816075.96	350.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	6.0	0.0	0.0	-90.6
2022	536498.80	4816075.96	350.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	6.0	0.0	0.0	-90.6
2025	536497.79	4816078.21	350.45	0	D	A	59.5	5.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	19.4
2025	536497.79	4816078.21	350.45	0	N	A	-40.5	5.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
2025	536497.79	4816078.21	350.45	0	E	A	-40.5	5.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
2028	536498.80	4816075.97	350.41	1	D	A	59.5	1.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
2028	536498.80	4816075.97	350.41	1	N	A	-40.5	1.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
2028	536498.80	4816075.97	350.41	1	E	A	-40.5	1.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
2033	536497.79	4816078.21	350.45	1	D	A	59.5	5.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-10.9
2033	536497.79	4816078.21	350.45	1	N	A	-40.5	5.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-110.9
2033	536497.79	4816078.21	350.45	1	E	A	-40.5	5.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-110.9
2039	536500.08	4816073.10	350.28	0	D	A	59.5	6.9	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.4	0.0	0.0	8.5
2039	536500.08	4816073.10	350.28	0	N	A	-40.5	6.9	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.4	0.0	0.0	-91.5
2039	536500.08	4816073.10	350.28	0	E	A	-40.5	6.9	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.4	0.0	0.0	-91.5
2044	536500.08	4816073.10	350.28	1	D	A	59.5	6.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-9.4
2044	536500.08	4816073.10	350.28	1	N	A	-40.5	6.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.4
2044	536500.08	4816073.10	350.28	1	E	A	-40.5	6.9	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.4
2063	536499.95	4816073.00	350.28	0	D	A	59.5	6.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.0	0.0	0.0	8.7
2063	536499.95	4816073.00	350.28	0	N	A	-40.5	6.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.0	0.0	0.0	-91.3
2063	536499.95	4816073.00	350.28	0	E	A	-40.5	6.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	12.0	0.0	0.0	-91.3
2068	536499.95	4816073.00	350.28	1	D	A	59.5	6.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
2068	536499.95	4816073.00	350.28	1	N	A	-40.5	6.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
2068	536499.95	4816073.00	350.28	1	E	A	-40.5	6.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
2114	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
2114	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
2114	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
2118	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-10.9
2118	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-110.9
2118	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-110.9
2122	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
2122	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.2
2122	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-81.2
2124	536493.65	4816083.28	350.54	1	D	A	59.5	5.2	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-11.4
2124	536493.65	4816083.28	350.54	1	N	A	-40.5	5.2	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-111.4
2124	536493.65	4816083.28	350.54	1	E	A	-40.5	5.2	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-111.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2225	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	17.5
2225	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-82.5
2225	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-82.5
2230	536498.37	4816088.48	350.58	1	D	A	59.5	3.3	0.0	0.0	0.0	49.1	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
2230	536498.37	4816088.48	350.58	1	N	A	-40.5	3.3	0.0	0.0	0.0	49.1	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
2230	536498.37	4816088.48	350.58	1	E	A	-40.5	3.3	0.0	0.0	0.0	49.1	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
2322	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	10.8
2322	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	-89.2
2322	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	5.6	0.0	0.0	-89.2
2325	536498.51	4816075.91	350.41	1	D	A	59.5	2.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
2325	536498.51	4816075.91	350.41	1	N	A	-40.5	2.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-113.9
2325	536498.51	4816075.91	350.41	1	E	A	-40.5	2.5	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-113.9
2330	536487.31	4816089.23	350.66	0	D	A	59.5	3.3	0.0	0.0	0.0	49.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	16.4
2330	536487.31	4816089.23	350.66	0	N	A	-40.5	3.3	0.0	0.0	0.0	49.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.6
2330	536487.31	4816089.23	350.66	0	E	A	-40.5	3.3	0.0	0.0	0.0	49.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.6
2333	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
2333	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-113.7
2333	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-113.7
2337	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	16.3
2337	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
2337	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
2340	536496.74	4816080.62	350.49	1	D	A	59.5	2.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.0
2340	536496.74	4816080.62	350.49	1	N	A	-40.5	2.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.0
2340	536496.74	4816080.62	350.49	1	E	A	-40.5	2.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.0
2345	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	48.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	16.1
2345	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	48.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.9
2345	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	48.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-83.9
2348	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
2348	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
2348	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
2358	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
2358	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
2358	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	48.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
2368	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
2368	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.2
2368	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.2
2382	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
2382	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.3
2382	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.3
2387	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
2387	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
2387	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
2421	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.4
2421	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
2421	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	48.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
2426	536489.18	4816088.59	350.64	1	D	A	59.5	1.6	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.3
2426	536489.18	4816088.59	350.64	1	N	A	-40.5	1.6	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
2426	536489.18	4816088.59	350.64	1	E	A	-40.5	1.6	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
2430	536488.38	4816088.75	350.65	1	D	A	59.5	-7.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
2430	536488.38	4816088.75	350.65	1	N	A	-40.5	-7.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2430	536488.38	4816088.75	350.65	1	E	A	-40.5	-7.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2461	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
2461	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
2461	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
2466	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0
2466	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-115.0
2466	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-115.0
2534	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
2534	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2534	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2538	536496.29	4816082.00	350.51	1	D	A	59.5	0.7	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
2538	536496.29	4816082.00	350.51	1	N	A	-40.5	0.7	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
2538	536496.29	4816082.00	350.51	1	E	A	-40.5	0.7	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2568	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	13.9
2568	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2568	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2572	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-16.3
2572	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.3
2572	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.3
2594	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
2594	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2594	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2596	536496.14	4816083.07	350.52	1	D	A	59.5	-0.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
2596	536496.14	4816083.07	350.52	1	N	A	-40.5	-0.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
2596	536496.14	4816083.07	350.52	1	E	A	-40.5	-0.1	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
2751	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
2751	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
2751	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
2752	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2752	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2752	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
575	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	58.4	0.6	-3.0	0.0	0.0	21.1	0.0	0.0	12.9
575	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	58.4	0.6	-3.0	0.0	0.0	21.1	0.0	0.0	-175.1
575	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	58.4	0.6	-3.0	0.0	0.0	21.1	0.0	0.0	12.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
585	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	3.9
585	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-2.2
585	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	3.9
608	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-1.4
608	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-7.4
608	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-1.4
611	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	0.9
611	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-5.1
611	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	0.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
621	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	3.7
621	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-2.3
621	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	3.7
625	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-1.5
625	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-7.5
625	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-1.5
627	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	0.8
627	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-5.2
627	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	0.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
629	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.7
629	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
629	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.7
632	536613.71	4815987.38	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
632	536613.71	4815987.38	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
632	536613.71	4815987.38	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
666	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.7
666	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
666	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
670	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.6
670	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.6
670	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
677	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	56.3	1.0	-2.8	0.0	0.0	19.3	0.0	0.0	11.7
677	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	56.3	1.0	-2.8	0.0	0.0	19.3	0.0	0.0	5.6
677	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	56.3	1.0	-2.8	0.0	0.0	19.3	0.0	0.0	11.7
680	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-1.2
680	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-7.2
680	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-1.2
683	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-4.2
683	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-10.2
683	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-4.2
686	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-4.6
686	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-10.6
686	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-4.6
688	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-1.6
688	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-7.6
688	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.8	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-1.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
710	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	2.7
710	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	-3.3
710	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	2.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
718	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.0	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	1.4
718	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.0	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	1.4
718	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.0	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	1.4

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
729	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.1	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	1.2
729	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.1	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	1.2
729	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.1	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	1.2

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
734	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	1.4
734	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-4.6
734	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	1.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
740	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	5.8
740	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	-0.3
740	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	5.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
746	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.9	0.0	0.0	5.5
746	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.9	0.0	0.0	-0.5
746	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.9	0.0	0.0	5.5

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
760	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	58.7	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	32.7
760	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	58.7	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	-155.3
760	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	58.7	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	-155.3
765	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	7.8	0.0	1.0	25.7
765	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	7.8	0.0	1.0	-162.3
765	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	7.8	0.0	1.0	-162.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
771	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-2.7	0.0	0.0	20.5	0.0	0.0	8.5
771	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.4	0.9	-2.7	0.0	0.0	20.5	0.0	0.0	2.5
771	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-2.7	0.0	0.0	20.5	0.0	0.0	8.5
773	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	58.7	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	-3.3
773	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.7	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	-9.4
773	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	58.7	1.2	-2.8	0.0	0.0	27.8	0.0	1.0	-3.3
776	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-6.5
776	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.5	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-12.6
776	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-6.5
779	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-3.8
779	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-9.8
779	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.0	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-3.8

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
783	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.3	0.0	0.0	2.7
783	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.3	0.0	0.0	2.7
783	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	23.3	0.0	0.0	2.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
791	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	1.3
791	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-4.8
791	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	1.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
805	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	55.8	0.9	-2.5	0.0	0.0	18.1	0.0	0.0	10.3
805	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.8	0.9	-2.5	0.0	0.0	18.1	0.0	0.0	4.2
805	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	55.8	0.9	-2.5	0.0	0.0	18.1	0.0	0.0	10.3
807	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-3.9
807	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.1	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-9.9
807	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-3.9
810	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-7.0
810	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-13.0
810	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-7.0
812	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-7.4
812	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-13.5
812	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-2.9	0.0	0.0	27.9	0.0	1.1	-7.4
815	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-4.3
815	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-10.3
815	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.7	0.0	0.0	27.7	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
828	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	58.1	4.3	-2.9	0.0	0.0	27.0	0.0	0.0	-0.3
828	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	58.1	4.3	-2.9	0.0	0.0	27.0	0.0	0.0	-170.5
828	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	58.1	4.3	-2.9	0.0	0.0	27.0	0.0	0.0	-0.3

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
831	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
831	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
831	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	24.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
833	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	55.0	0.5	-2.5	0.0	0.0	26.9	0.0	0.0	8.1
833	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	55.0	0.5	-2.5	0.0	0.0	26.9	0.0	0.0	-179.9
833	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	55.0	0.5	-2.5	0.0	0.0	26.9	0.0	0.0	-179.9
837	536707.14	4816053.41	345.47	1	D	A	85.0	0.0	0.0	3.0	0.0	58.1	0.7	-2.7	0.0	0.0	27.7	0.0	1.0	3.2
837	536707.14	4816053.41	345.47	1	N	A	85.0	0.0	-188.0	3.0	0.0	58.1	0.7	-2.7	0.0	0.0	27.7	0.0	1.0	-184.8
837	536707.14	4816053.41	345.47	1	E	A	85.0	0.0	-188.0	3.0	0.0	58.1	0.7	-2.7	0.0	0.0	27.7	0.0	1.0	-184.8
841	536707.14	4816053.41	345.47	1	D	A	85.0	0.0	0.0	3.0	0.0	58.5	0.8	-2.7	0.0	0.0	27.7	0.0	1.0	2.8
841	536707.14	4816053.41	345.47	1	N	A	85.0	0.0	-188.0	3.0	0.0	58.5	0.8	-2.7	0.0	0.0	27.7	0.0	1.0	-185.2
841	536707.14	4816053.41	345.47	1	E	A	85.0	0.0	-188.0	3.0	0.0	58.5	0.8	-2.7	0.0	0.0	27.7	0.0	1.0	-185.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
849	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	17.2	0.0	0.0	10.4
849	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	17.2	0.0	0.0	4.4
849	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	56.6	1.0	-2.8	0.0	0.0	17.2	0.0	0.0	10.4
851	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-4.6
851	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.7	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-10.6
851	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-4.6
854	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-7.5
854	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-13.6
854	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-7.5
857	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.8	0.0	0.0	27.8	0.0	1.1	-7.9
857	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-2.8	0.0	0.0	27.8	0.0	1.1	-14.0
857	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.8	0.0	0.0	27.8	0.0	1.1	-7.9
861	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-5.0
861	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-11.0
861	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-5.0

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
866	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	58.8	4.5	-3.0	0.0	0.0	27.2	0.0	0.0	-1.3
866	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	58.8	4.5	-3.0	0.0	0.0	27.2	0.0	0.0	-171.5
866	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	58.8	4.5	-3.0	0.0	0.0	27.2	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
878	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	57.1	1.1	-2.6	0.0	0.0	18.3	0.0	0.0	8.7
878	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.1	1.1	-2.6	0.0	0.0	18.3	0.0	0.0	2.7
878	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	57.1	1.1	-2.6	0.0	0.0	18.3	0.0	0.0	8.7
880	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-4.9
880	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-10.9
880	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-4.9
881	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
881	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-13.8
881	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
883	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-8.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
883	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-14.2
883	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-8.2
886	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.3
886	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-11.3
886	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
893	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	57.1	1.1	-2.7	0.0	0.0	18.6	0.0	0.0	8.4
893	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.1	1.1	-2.7	0.0	0.0	18.6	0.0	0.0	2.3
893	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	57.1	1.1	-2.7	0.0	0.0	18.6	0.0	0.0	8.4
894	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-4.9
894	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-10.9
894	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-4.9
896	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
896	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-13.8
896	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
900	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-8.1
900	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-14.2
900	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.9	0.0	0.0	27.9	0.0	1.1	-8.1
904	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.3
904	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-11.3
904	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
913	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	19.4	0.0	0.0	7.6
913	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	19.4	0.0	0.0	1.5
913	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	19.4	0.0	0.0	7.6
916	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.0
916	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-11.0
916	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.0
918	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
918	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-13.8
918	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-7.8
920	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4
920	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-11.4
920	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	1.0	-5.4

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
938	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	11.6	0.0	0.0	17.9
938	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	11.6	0.0	0.0	-170.1
938	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	11.6	0.0	0.0	17.9
940	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	56.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
940	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	56.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-192.8
940	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	56.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
943	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
943	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-196.7
943	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
974	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	2.9
974	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	-3.1
974	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	2.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
990	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-0.9
990	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-0.9
990	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-0.9

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1073	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	2.4
1073	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-3.7
1073	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1075	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.8
1075	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	21.8
1075	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1082	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	24.1	0.0	0.0	2.0
1082	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	24.1	0.0	0.0	-4.0
1082	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	24.1	0.0	0.0	2.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1090	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-1.1
1090	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-1.1
1090	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.8	0.0	0.0	-1.1

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1092	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.5
1092	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	21.5
1092	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1112	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	60.7	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-2.9
1112	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	60.7	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-2.9
1112	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	60.7	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-2.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1122	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.1	0.0	0.0	-0.2
1122	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.1	0.0	0.0	-0.2
1122	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.1	0.0	0.0	-0.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1130	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.2
1130	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.2
1130	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1141	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.0	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1141	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.0	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.4
1141	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.0	0.8	-3.0	0.0	0.0	23.0	0.0	0.0	-0.4

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1143	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	22.0
1143	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	22.0
1143	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	22.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1152	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0
1152	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-9.0
1152	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1159	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-3.2
1159	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-9.2
1159	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-3.2

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1164	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	59.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	21.6
1164	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	59.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	21.6
1164	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	59.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	21.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1182	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.5
1182	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-9.6
1182	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.5
1185	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	10.4	-15.2
1185	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	10.4	-21.2
1185	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	10.4	-15.2
1189	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.8	-6.5
1189	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.8	-12.6
1189	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.8	-6.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1230	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-3.7
1230	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-9.8
1230	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-3.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1269	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-4.1
1269	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-10.2
1269	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-4.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1279	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-4.2
1279	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-10.2
1279	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1286	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-4.3
1286	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-10.3
1286	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1293	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.7
1293	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.7
1293	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1306	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.6
1306	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-10.6
1306	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.6

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1335	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.6	0.0	0.0	-4.8
1335	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.6	0.0	0.0	-10.8
1335	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.6	0.0	0.0	-4.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1349	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-4.8
1349	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-10.9
1349	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-4.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1361	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	57.8	1.6	-2.8	0.0	0.0	26.8	0.0	0.0	2.0
1361	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	57.8	1.6	-2.8	0.0	0.0	26.8	0.0	0.0	-178.2
1361	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	57.8	1.6	-2.8	0.0	0.0	26.8	0.0	0.0	-178.2
1364	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	60.5	2.0	-2.9	0.0	0.0	27.9	0.0	1.0	-3.2
1364	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	60.5	2.0	-2.9	0.0	0.0	27.9	0.0	1.0	-183.4
1364	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	60.5	2.0	-2.9	0.0	0.0	27.9	0.0	1.0	-183.4
1368	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
1368	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.3
1368	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.3
1371	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	63.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.1	-6.5
1371	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	63.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.1	-186.7
1371	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	63.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.1	-186.7
1373	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	60.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6
1373	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	60.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-183.8
1373	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	60.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-183.8

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1383	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	-8.7
1383	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	-8.7
1383	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.9	0.0	0.0	-8.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1391	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-5.9
1391	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-11.9
1391	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-5.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1398	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-6.0
1398	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-12.0
1398	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-6.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1412	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-6.1
1412	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-12.2
1412	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-6.1
1418	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-11.3
1418	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-17.3
1418	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	4.0	-11.3
1420	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-8.9
1420	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-15.0
1420	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-8.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1456	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-6.3
1456	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-12.3
1456	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-6.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1464	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.3
1464	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-12.3
1464	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1471	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.4
1471	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-12.4
1471	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1478	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.6
1478	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-12.7
1478	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-6.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1483	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
1483	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
1483	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1505	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-6.8
1505	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-12.8
1505	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-6.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1512	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.9
1512	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1512	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1517	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.1
1517	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.1
1517	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1523	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.0
1523	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.0
1523	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1530	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
1530	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
1530	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1536	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.2
1536	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.2
1536	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1541	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-7.2
1541	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-13.3
1541	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-7.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1556	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.4
1556	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.4
1556	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1563	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.3
1563	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.3
1563	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.9	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1580	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.4	0.9	-3.0	0.0	0.0	23.0	0.0	0.0	-0.6
1580	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.4	0.9	-3.0	0.0	0.0	23.0	0.0	0.0	-188.6
1580	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.4	0.9	-3.0	0.0	0.0	23.0	0.0	0.0	-0.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1594	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6
1594	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6
1594	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1599	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.7
1599	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.7
1599	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1604	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-10.0
1604	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-10.0
1604	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-10.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1610	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.9
1610	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.9
1610	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1616	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	-1.6
1616	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	-189.6
1616	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	23.4	0.0	0.0	-1.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1622	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.7	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-10.2
1622	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.7	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-10.2
1622	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.7	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-10.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1628	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	64.0	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-10.5
1628	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	64.0	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-10.5
1628	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	64.0	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-10.5

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1633	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	65.3	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	0.4
1633	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	65.3	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-187.6
1633	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	65.3	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-187.6

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1638	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	66.3	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-10.2
1638	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	66.3	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
1638	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	66.3	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-10.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1643	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	65.4	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	0.2
1643	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	65.4	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-187.8
1643	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	65.4	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-187.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1648	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	0.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1648	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-187.8
1648	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-187.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1654	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
1654	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-14.4
1654	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1659	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	0.2
1659	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-187.8
1659	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	65.5	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-187.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1689	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.7
1689	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-14.7
1689	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1694	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.7
1694	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-14.7
1694	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1705	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
1705	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-14.8
1705	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1718	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1718	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-15.0
1718	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1721	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
1721	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-15.0
1721	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.7	2.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1732	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-12.4
1732	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-12.4
1732	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.5	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-12.4

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1761	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-10.4
1761	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-16.4

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1761	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-10.4

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1766	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	65.7	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-12.2
1766	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	65.7	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-12.2
1766	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	65.7	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-12.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1770	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.5
1770	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-16.6
1770	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.5

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1775	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.5
1775	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-16.6
1775	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.6	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.5

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1779	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.6
1779	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-16.7
1779	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.7	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-10.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1790	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	56.2	0.7	-2.8	0.0	0.0	20.2	0.0	0.0	4.4
1790	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	56.2	0.7	-2.8	0.0	0.0	20.2	0.0	0.0	-183.6
1790	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	56.2	0.7	-2.8	0.0	0.0	20.2	0.0	0.0	-183.6
1793	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-7.4
1793	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	59.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-195.4
1793	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	59.2	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-195.4
1797	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	61.8	1.2	-2.9	0.0	0.0	27.9	0.0	1.0	-10.4
1797	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	61.8	1.2	-2.9	0.0	0.0	27.9	0.0	1.0	-198.4
1797	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	61.8	1.2	-2.9	0.0	0.0	27.9	0.0	1.0	-198.4
1801	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	59.5	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-7.8
1801	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	59.5	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-195.8
1801	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	59.5	0.9	-2.8	0.0	0.0	27.8	0.0	1.0	-195.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1812	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.4	1.8	-3.0	0.0	0.0	26.8	0.0	0.0	-13.4
1812	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.4	1.8	-3.0	0.0	0.0	26.8	0.0	0.0	-13.4
1812	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.4	1.8	-3.0	0.0	0.0	26.8	0.0	0.0	-13.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1847	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	66.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.8
1847	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	66.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.8
1847	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	66.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1854	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1854	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9
1854	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1861	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9
1861	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9
1861	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-13.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1946	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.7	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-4.8
1946	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.7	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-192.8
1946	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.7	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-192.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2002	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	65.0	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-4.8
2002	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	65.0	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-192.8
2002	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	65.0	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-192.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2008	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-4.8
2008	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-192.8
2008	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.4	0.0	0.0	-192.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2014	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-4.8
2014	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-192.8
2014	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-192.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2019	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-4.8
2019	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-192.8
2019	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	65.1	1.4	-3.0	0.0	0.0	26.3	0.0	0.0	-192.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2050	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.9
2050	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-82.1
2050	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-82.1
2055	536416.98	4816238.89	352.87	1	D	A	62.5	12.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	16.3
2055	536416.98	4816238.89	352.87	1	N	A	-40.5	12.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-86.8
2055	536416.98	4816238.89	352.87	1	E	A	-40.5	12.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-86.8
2058	536410.01	4816235.56	353.11	1	D	A	62.5	10.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	15.7
2058	536410.01	4816235.56	353.11	1	N	A	-40.5	10.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-87.3
2058	536410.01	4816235.56	353.11	1	E	A	-40.5	10.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-87.3
2080	536361.99	4816212.61	354.70	0	D	A	62.5	12.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	11.3	0.0	0.0	7.7
2080	536361.99	4816212.61	354.70	0	N	A	-40.5	12.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	11.3	0.0	0.0	-95.3
2080	536361.99	4816212.61	354.70	0	E	A	-40.5	12.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	11.3	0.0	0.0	-95.3
2083	536351.90	4816207.79	354.87	0	D	A	62.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.3	0.0	0.0	-2.6
2083	536351.90	4816207.79	354.87	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.3	0.0	0.0	-105.6
2083	536351.90	4816207.79	354.87	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.3	0.0	0.0	-105.6
2086	536361.68	4816212.46	354.70	1	D	A	62.5	13.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2086	536361.68	4816212.46	354.70	1	N	A	-40.5	13.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
2086	536361.68	4816212.46	354.70	1	E	A	-40.5	13.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
2089	536351.58	4816207.64	354.87	1	D	A	62.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
2089	536351.58	4816207.64	354.87	1	N	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
2089	536351.58	4816207.64	354.87	1	E	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
2093	536369.28	4816216.09	354.57	1	D	A	62.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	11.3	0.0	1.4	-1.8
2093	536369.28	4816216.09	354.57	1	N	A	-40.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	11.3	0.0	1.4	-104.8
2093	536369.28	4816216.09	354.57	1	E	A	-40.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	11.3	0.0	1.4	-104.8
2098	536363.70	4816207.76	354.65	0	D	A	62.5	9.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	15.5	0.0	0.0	0.7
2098	536363.70	4816207.76	354.65	0	N	A	-40.5	9.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	15.5	0.0	0.0	-102.3
2098	536363.70	4816207.76	354.65	0	E	A	-40.5	9.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	15.5	0.0	0.0	-102.3
2102	536372.98	4816212.24	354.50	0	D	A	62.5	10.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	16.1	0.0	0.0	0.8
2102	536372.98	4816212.24	354.50	0	N	A	-40.5	10.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	16.1	0.0	0.0	-102.2
2102	536372.98	4816212.24	354.50	0	E	A	-40.5	10.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	16.1	0.0	0.0	-102.2
2105	536363.66	4816207.74	354.66	1	D	A	62.5	9.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
2105	536363.66	4816207.74	354.66	1	N	A	-40.5	9.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
2105	536363.66	4816207.74	354.66	1	E	A	-40.5	9.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
2107	536372.68	4816212.09	354.50	1	D	A	62.5	10.2	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
2107	536372.68	4816212.09	354.50	1	N	A	-40.5	10.2	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
2107	536372.68	4816212.09	354.50	1	E	A	-40.5	10.2	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
2110	536377.63	4816214.48	354.42	1	D	A	62.5	-2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
2110	536377.63	4816214.48	354.42	1	N	A	-40.5	-2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2110	536377.63	4816214.48	354.42	1	E	A	-40.5	-2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2139	536436.24	4816248.09	352.25	0	D	A	62.5	11.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
2139	536436.24	4816248.09	352.25	0	N	A	-40.5	11.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-84.3
2139	536436.24	4816248.09	352.25	0	E	A	-40.5	11.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-84.3
2144	536436.24	4816248.09	352.25	1	D	A	62.5	11.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	14.6
2144	536436.24	4816248.09	352.25	1	N	A	-40.5	11.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-88.4
2144	536436.24	4816248.09	352.25	1	E	A	-40.5	11.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-88.4
2149	536387.45	4816219.34	353.99	0	D	A	62.5	11.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	16.3	0.0	0.0	2.3
2149	536387.45	4816219.34	353.99	0	N	A	-40.5	11.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	16.3	0.0	0.0	-100.7
2149	536387.45	4816219.34	353.99	0	E	A	-40.5	11.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	16.3	0.0	0.0	-100.7
2153	536383.42	4816217.32	354.18	1	D	A	62.5	7.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0
2153	536383.42	4816217.32	354.18	1	N	A	-40.5	7.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
2153	536383.42	4816217.32	354.18	1	E	A	-40.5	7.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
2157	536387.95	4816219.60	353.96	1	D	A	62.5	6.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
2157	536387.95	4816219.60	353.96	1	N	A	-40.5	6.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
2157	536387.95	4816219.60	353.96	1	E	A	-40.5	6.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
2161	536457.56	4816257.94	351.61	0	D	A	62.5	8.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
2161	536457.56	4816257.94	351.61	0	N	A	-40.5	8.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2161	536457.56	4816257.94	351.61	0	E	A	-40.5	8.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2164	536452.62	4816255.84	351.81	0	D	A	62.5	4.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.5
2164	536452.62	4816255.84	351.81	0	N	A	-40.5	4.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2164	536452.62	4816255.84	351.81	0	E	A	-40.5	4.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2168	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	13.9
2168	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-89.1
2168	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-89.1
2211	536390.02	4816226.01	354.00	0	D	A	62.5	8.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	3.6
2211	536390.02	4816226.01	354.00	0	N	A	-40.5	8.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	-99.4
2211	536390.02	4816226.01	354.00	0	E	A	-40.5	8.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	-99.4
2216	536384.24	4816223.24	354.28	0	D	A	62.5	7.5	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	12.3	0.0	0.0	1.9
2216	536384.24	4816223.24	354.28	0	N	A	-40.5	7.5	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	12.3	0.0	0.0	-101.1
2216	536384.24	4816223.24	354.28	0	E	A	-40.5	7.5	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	12.3	0.0	0.0	-101.1
2220	536383.48	4816222.88	354.31	1	D	A	62.5	5.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
2220	536383.48	4816222.88	354.31	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2220	536383.48	4816222.88	354.31	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2235	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	17.4
2235	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
2235	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
2237	536410.05	4816255.17	353.59	1	D	A	62.5	10.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	15.2
2237	536410.05	4816255.17	353.59	1	N	A	-40.5	10.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-87.8
2237	536410.05	4816255.17	353.59	1	E	A	-40.5	10.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-87.8
2240	536406.18	4816253.06	353.73	1	D	A	62.5	5.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	9.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2240	536406.18	4816253.06	353.73	1	N	A	-40.5	5.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-93.3
2240	536406.18	4816253.06	353.73	1	E	A	-40.5	5.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-93.3
2279	536438.24	4816270.36	352.56	0	D	A	62.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
2279	536438.24	4816270.36	352.56	0	N	A	-40.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2279	536438.24	4816270.36	352.56	0	E	A	-40.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2283	536442.77	4816272.80	352.38	0	D	A	62.5	-4.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	2.3
2283	536442.77	4816272.80	352.38	0	N	A	-40.5	-4.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2283	536442.77	4816272.80	352.38	0	E	A	-40.5	-4.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2287	536437.07	4816269.73	352.61	1	D	A	62.5	8.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	13.6
2287	536437.07	4816269.73	352.61	1	N	A	-40.5	8.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
2287	536437.07	4816269.73	352.61	1	E	A	-40.5	8.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
2290	536441.59	4816272.17	352.43	1	D	A	62.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	9.8
2290	536441.59	4816272.17	352.43	1	N	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
2290	536441.59	4816272.17	352.43	1	E	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
2294	536399.15	4816230.37	353.55	0	D	A	62.5	8.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
2294	536399.15	4816230.37	353.55	0	N	A	-40.5	8.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.7
2294	536399.15	4816230.37	353.55	0	E	A	-40.5	8.3	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.7
2298	536394.70	4816228.24	353.77	0	D	A	62.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	4.8
2298	536394.70	4816228.24	353.77	0	N	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	-98.3
2298	536394.70	4816228.24	353.77	0	E	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	-98.3
2303	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
2303	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2303	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
2307	536448.41	4816253.91	351.96	1	D	A	62.5	3.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	7.1
2307	536448.41	4816253.91	351.96	1	N	A	-40.5	3.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-95.9
2307	536448.41	4816253.91	351.96	1	E	A	-40.5	3.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-95.9
2310	536444.70	4816252.14	352.04	1	D	A	62.5	7.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	11.3
2310	536444.70	4816252.14	352.04	1	N	A	-40.5	7.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-91.7
2310	536444.70	4816252.14	352.04	1	E	A	-40.5	7.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-91.7
2315	536428.31	4816265.09	352.94	0	D	A	62.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
2315	536428.31	4816265.09	352.94	0	N	A	-40.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2315	536428.31	4816265.09	352.94	0	E	A	-40.5	10.0	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2318	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	14.7
2318	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-88.3
2318	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-88.3
2353	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.6	0.0	0.0	11.4
2353	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.6	0.0	0.0	-91.6
2353	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.6	0.0	0.0	-91.6
2355	536455.99	4816298.49	351.39	1	D	A	62.5	9.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	4.7
2355	536455.99	4816298.49	351.39	1	N	A	-40.5	9.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-98.3
2355	536455.99	4816298.49	351.39	1	E	A	-40.5	9.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-98.3
2374	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	4.3	0.0	0.0	11.6
2374	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	4.3	0.0	0.0	-91.4
2374	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	4.3	0.0	0.0	-91.4
2379	536460.76	4816288.21	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	3.3
2379	536460.76	4816288.21	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-99.7
2379	536460.76	4816288.21	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-99.7
2393	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	11.3
2393	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	-91.8
2393	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	-91.8
2397	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	3.3
2397	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-99.7
2397	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-99.7
2402	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	5.0	0.0	0.0	10.5
2402	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	5.0	0.0	0.0	-92.5
2402	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	5.0	0.0	0.0	-92.5
2405	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	10.1
2405	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-93.0
2405	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-93.0
2409	536343.48	4816203.77	354.95	0	D	A	62.5	9.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	12.7	0.0	0.0	2.7
2409	536343.48	4816203.77	354.95	0	N	A	-40.5	9.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	12.7	0.0	0.0	-100.4
2409	536343.48	4816203.77	354.95	0	E	A	-40.5	9.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	12.7	0.0	0.0	-100.4
2412	536343.48	4816203.77	354.95	1	D	A	62.5	9.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2412	536343.48	4816203.77	354.95	1	N	A	-40.5	9.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-116.9
2412	536343.48	4816203.77	354.95	1	E	A	-40.5	9.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-116.9
2415	536344.72	4816204.36	354.94	1	D	A	62.5	8.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	2.2	11.0
2415	536344.72	4816204.36	354.94	1	N	A	-40.5	8.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	2.2	-92.0
2415	536344.72	4816204.36	354.94	1	E	A	-40.5	8.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	2.2	-92.0
2418	536340.55	4816202.37	354.99	1	D	A	62.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	7.8	0.0	2.2	-0.4
2418	536340.55	4816202.37	354.99	1	N	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	7.8	0.0	2.2	-103.4
2418	536340.55	4816202.37	354.99	1	E	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	7.8	0.0	2.2	-103.4
2435	536451.96	4816276.49	351.94	0	D	A	62.5	6.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.9
2435	536451.96	4816276.49	351.94	0	N	A	-40.5	6.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2435	536451.96	4816276.49	351.94	0	E	A	-40.5	6.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2439	536455.21	4816277.49	351.76	0	D	A	62.5	2.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
2439	536455.21	4816277.49	351.76	0	N	A	-40.5	2.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2439	536455.21	4816277.49	351.76	0	E	A	-40.5	2.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2443	536456.21	4816277.79	351.71	0	D	A	62.5	-6.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	0.4
2443	536456.21	4816277.79	351.71	0	N	A	-40.5	-6.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.7
2443	536456.21	4816277.79	351.71	0	E	A	-40.5	-6.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.7
2448	536451.24	4816276.27	351.97	1	D	A	62.5	5.3	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	10.3
2448	536451.24	4816276.27	351.97	1	N	A	-40.5	5.3	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-92.7
2448	536451.24	4816276.27	351.97	1	E	A	-40.5	5.3	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-92.7
2452	536453.86	4816277.07	351.84	1	D	A	62.5	3.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	8.1
2452	536453.86	4816277.07	351.84	1	N	A	-40.5	3.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-94.9
2452	536453.86	4816277.07	351.84	1	E	A	-40.5	3.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-94.9
2456	536455.58	4816277.60	351.74	1	D	A	62.5	1.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	6.8
2456	536455.58	4816277.60	351.74	1	N	A	-40.5	1.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-96.2
2456	536455.58	4816277.60	351.74	1	E	A	-40.5	1.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-96.2
2471	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
2471	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.7
2471	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.7
2476	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	13.1
2476	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-89.9
2476	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-89.9
2522	536348.69	4816200.62	354.86	0	D	A	62.5	8.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	16.6	0.0	0.0	-1.8
2522	536348.69	4816200.62	354.86	0	N	A	-40.5	8.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	16.6	0.0	0.0	-104.8
2522	536348.69	4816200.62	354.86	0	E	A	-40.5	8.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	16.6	0.0	0.0	-104.8
2524	536348.69	4816200.62	354.86	1	D	A	62.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
2524	536348.69	4816200.62	354.86	1	N	A	-40.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
2524	536348.69	4816200.62	354.86	1	E	A	-40.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
2527	536346.07	4816199.38	354.89	1	D	A	62.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	5.3
2527	536346.07	4816199.38	354.89	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	-97.7
2527	536346.07	4816199.38	354.89	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	-97.7
2529	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
2529	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
2529	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
2532	536404.74	4816239.77	353.46	1	D	A	62.5	2.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	7.9
2532	536404.74	4816239.77	353.46	1	N	A	-40.5	2.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-95.1
2532	536404.74	4816239.77	353.46	1	E	A	-40.5	2.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-95.1
2543	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	9.8
2543	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	-93.2
2543	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	-93.2
2546	536463.54	4816284.75	351.38	1	D	A	62.5	7.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	9.5
2546	536463.54	4816284.75	351.38	1	N	A	-40.5	7.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-93.5
2546	536463.54	4816284.75	351.38	1	E	A	-40.5	7.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-93.5
2578	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	13.6	0.0	0.0	0.4
2578	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	13.6	0.0	0.0	-102.6
2578	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	13.6	0.0	0.0	-102.6
2583	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	3.9	0.0	0.0	10.0
2583	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	3.9	0.0	0.0	-93.0
2583	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	3.9	0.0	0.0	-93.0
2588	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	1.8
2588	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-101.2
2588	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	7.8	0.0	1.7	-101.2
2633	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.1	0.0	0.0	9.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2633	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.1	0.0	0.0	-93.4
2633	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	4.1	0.0	0.0	-93.4
2638	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	2.4
2638	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-100.6
2638	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-100.6
2641	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	12.0	0.0	0.0	1.5
2641	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	12.0	0.0	0.0	-101.5
2641	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	12.0	0.0	0.0	-101.5
2646	536374.24	4816218.47	354.55	1	D	A	62.5	6.8	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
2646	536374.24	4816218.47	354.55	1	N	A	-40.5	6.8	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2646	536374.24	4816218.47	354.55	1	E	A	-40.5	6.8	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2649	536371.95	4816217.37	354.53	1	D	A	62.5	-5.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
2649	536371.95	4816217.37	354.53	1	N	A	-40.5	-5.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
2649	536371.95	4816217.37	354.53	1	E	A	-40.5	-5.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
2653	536372.12	4816217.45	354.54	1	D	A	62.5	-2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	2.1	-9.7
2653	536372.12	4816217.45	354.54	1	N	A	-40.5	-2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	2.1	-112.8
2653	536372.12	4816217.45	354.54	1	E	A	-40.5	-2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	2.1	-112.8
2691	536356.74	4816204.42	354.77	0	D	A	62.5	6.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	17.7	0.0	0.0	-4.8
2691	536356.74	4816204.42	354.77	0	N	A	-40.5	6.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	17.7	0.0	0.0	-107.9
2691	536356.74	4816204.42	354.77	0	E	A	-40.5	6.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	17.7	0.0	0.0	-107.9
2693	536359.10	4816205.54	354.73	0	D	A	62.5	-3.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	15.1	0.0	0.0	-12.0
2693	536359.10	4816205.54	354.73	0	N	A	-40.5	-3.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	15.1	0.0	0.0	-115.0
2693	536359.10	4816205.54	354.73	0	E	A	-40.5	-3.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	15.1	0.0	0.0	-115.0
2695	536356.44	4816204.28	354.78	1	D	A	62.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
2695	536356.44	4816204.28	354.78	1	N	A	-40.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
2695	536356.44	4816204.28	354.78	1	E	A	-40.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
2698	536358.80	4816205.40	354.74	1	D	A	62.5	0.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2698	536358.80	4816205.40	354.74	1	N	A	-40.5	0.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2698	536358.80	4816205.40	354.74	1	E	A	-40.5	0.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2734	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	1.2
2734	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	-101.8
2734	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.9	0.0	0.0	-101.8
2738	536379.69	4816221.07	354.50	1	D	A	62.5	6.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
2738	536379.69	4816221.07	354.50	1	N	A	-40.5	6.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2738	536379.69	4816221.07	354.50	1	E	A	-40.5	6.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2743	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.9	0.0	0.0	8.1
2743	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.9	0.0	0.0	-94.9
2743	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.9	0.0	0.0	-94.9
2747	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	7.5
2747	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-95.5
2747	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-95.5
2766	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	8.2
2766	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	-94.8
2766	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	4.8	0.0	0.0	-94.8
2771	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	7.2
2771	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-95.8
2771	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-95.8
2776	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	9.0
2776	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	-94.0
2776	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	-94.0
2781	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	2.2
2781	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-100.8
2781	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-100.8
2785	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
2785	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
2785	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
2790	536405.04	4816233.19	353.28	1	D	A	62.5	-0.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	5.1
2790	536405.04	4816233.19	353.28	1	N	A	-40.5	-0.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.9
2790	536405.04	4816233.19	353.28	1	E	A	-40.5	-0.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.9
2824	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.5
2824	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2824	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2828	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	8.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2828	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-94.6
2828	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-94.6
2862	536468.03	4816272.53	351.38	0	D	A	62.5	4.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	4.6	0.0	0.0	7.7
2862	536468.03	4816272.53	351.38	0	N	A	-40.5	4.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	4.6	0.0	0.0	-95.3
2862	536468.03	4816272.53	351.38	0	E	A	-40.5	4.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	4.6	0.0	0.0	-95.3
2865	536468.03	4816272.53	351.38	1	D	A	62.5	4.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	6.1
2865	536468.03	4816272.53	351.38	1	N	A	-40.5	4.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-96.9
2865	536468.03	4816272.53	351.38	1	E	A	-40.5	4.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-96.9
2870	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.2
2870	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.8
2870	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.8
2872	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	10.2
2872	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-92.8
2872	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-92.8
2875	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	5.0
2875	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	-98.0
2875	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	-98.0
2879	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	6.4
2879	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-96.6
2879	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-96.6
2884	536449.63	4816310.01	351.46	0	D	A	62.5	6.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	8.1
2884	536449.63	4816310.01	351.46	0	N	A	-40.5	6.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	-94.9
2884	536449.63	4816310.01	351.46	0	E	A	-40.5	6.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.8	0.0	0.0	-94.9
2889	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	1.7
2889	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-101.4
2889	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-101.4
2973	536449.90	4816310.20	351.45	0	D	A	62.5	6.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	4.0	0.0	0.0	7.8
2973	536449.90	4816310.20	351.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	4.0	0.0	0.0	-95.2
2973	536449.90	4816310.20	351.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	4.0	0.0	0.0	-95.2
2978	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	1.5
2978	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-101.5
2978	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-101.5
3025	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
3025	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
3025	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
3030	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	10.0
3030	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.0
3030	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.0
3034	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
3034	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
3034	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
3038	536404.94	4816230.40	353.23	1	D	A	62.5	-1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	4.3
3038	536404.94	4816230.40	353.23	1	N	A	-40.5	-1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-98.7
3038	536404.94	4816230.40	353.23	1	E	A	-40.5	-1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-98.7
3041	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	5.2	0.0	0.0	6.5
3041	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	5.2	0.0	0.0	-96.5
3041	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	5.2	0.0	0.0	-96.5
3045	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	6.0
3045	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0
3045	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0
3050	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.6
3050	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
3050	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
3055	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	9.5
3055	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.6
3055	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-93.6
3059	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.4
3059	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
3059	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
3064	536342.95	4816197.41	354.93	0	D	A	62.5	2.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.4	0.0	0.0	-7.6
3064	536342.95	4816197.41	354.93	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.4	0.0	0.0	-110.6
3064	536342.95	4816197.41	354.93	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.4	0.0	0.0	-110.6
3068	536344.40	4816198.41	354.91	0	D	A	62.5	2.8	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-7.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3068	536344.40	4816198.41	354.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-110.0
3068	536344.40	4816198.41	354.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-110.0
3072	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
3072	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3072	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
3076	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	7.7
3076	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	-95.3
3076	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	2.6	-95.3
3080	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	6.9
3080	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	-96.2
3080	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	4.5	0.0	0.0	-96.2
3083	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	5.7
3083	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-97.3
3083	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-97.3
3104	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.2
3104	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.8
3104	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.8
3108	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
3108	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3108	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3112	536459.86	4816278.43	351.53	1	D	A	62.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	6.9
3112	536459.86	4816278.43	351.53	1	N	A	-40.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-96.1
3112	536459.86	4816278.43	351.53	1	E	A	-40.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-96.1
3117	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
3117	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3117	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3121	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	7.1
3121	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-95.9
3121	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-95.9
3126	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	3.6	0.0	0.0	7.4
3126	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	3.6	0.0	0.0	-95.6
3126	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	3.6	0.0	0.0	-95.6
3130	536468.54	4816270.03	351.38	1	D	A	62.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	4.6
3130	536468.54	4816270.03	351.38	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-98.4
3130	536468.54	4816270.03	351.38	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-98.4
3135	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-2.3
3135	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-105.3
3135	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-105.3
3138	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
3138	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
3138	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
3140	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
3140	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
3140	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
3144	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	6.7
3144	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.3
3144	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.3
3148	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.8
3148	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3148	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3192	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.4
3192	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
3192	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
3197	536405.68	4816237.45	353.35	1	D	A	62.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	6.0
3197	536405.68	4816237.45	353.35	1	N	A	-40.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.0
3197	536405.68	4816237.45	353.35	1	E	A	-40.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.0
3201	536405.29	4816238.47	353.40	1	D	A	62.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	5.9
3201	536405.29	4816238.47	353.40	1	N	A	-40.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.1
3201	536405.29	4816238.47	353.40	1	E	A	-40.5	0.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-97.1
3206	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.5
3206	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3206	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3210	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	6.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3210	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-96.4
3210	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-96.4
3214	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	16.0	0.0	0.0	-5.6
3214	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	16.0	0.0	0.0	-108.6
3214	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	16.0	0.0	0.0	-108.6
3218	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
3218	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
3218	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
3222	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	17.5	0.0	0.0	-7.2
3222	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	17.5	0.0	0.0	-110.2
3222	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	17.5	0.0	0.0	-110.2
3225	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
3225	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
3225	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
3230	536464.61	4816261.42	351.40	0	D	A	62.5	2.3	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
3230	536464.61	4816261.42	351.40	0	N	A	-40.5	2.3	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3230	536464.61	4816261.42	351.40	0	E	A	-40.5	2.3	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3233	536463.85	4816260.97	351.40	0	D	A	62.5	-11.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-3.9
3233	536463.85	4816260.97	351.40	0	N	A	-40.5	-11.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-106.9
3233	536463.85	4816260.97	351.40	0	E	A	-40.5	-11.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-106.9
3236	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	6.5
3236	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-96.5
3236	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-96.5
3241	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
3241	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3241	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3264	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
3264	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3264	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3268	536405.48	4816231.60	353.22	1	D	A	62.5	2.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	9.0
3268	536405.48	4816231.60	353.22	1	N	A	-40.5	2.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-94.0
3268	536405.48	4816231.60	353.22	1	E	A	-40.5	2.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-94.0
3301	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.9
3301	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3301	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3303	536404.35	4816252.05	353.80	1	D	A	62.5	-0.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	4.0
3303	536404.35	4816252.05	353.80	1	N	A	-40.5	-0.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-99.1
3303	536404.35	4816252.05	353.80	1	E	A	-40.5	-0.6	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-99.1
3306	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	5.9
3306	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-97.1
3306	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-97.1
3310	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-1.2
3310	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.2
3310	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.2
3313	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
3313	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3313	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3318	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	8.3
3318	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-94.7
3318	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-94.7
3323	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	5.2
3323	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-97.8
3323	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-97.8
3327	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-1.2
3327	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.2
3327	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.2
3353	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	5.1
3353	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-97.9
3353	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-97.9
3357	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-1.4
3357	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.4
3357	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.4
3382	536468.64	4816268.35	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	3.0	0.0	0.0	5.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3382	536468.64	4816268.35	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	3.0	0.0	0.0	-97.4
3382	536468.64	4816268.35	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	3.0	0.0	0.0	-97.4
3386	536468.61	4816267.62	351.37	0	D	A	62.5	-6.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.7
3386	536468.61	4816267.62	351.37	0	N	A	-40.5	-6.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
3386	536468.61	4816267.62	351.37	0	E	A	-40.5	-6.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
3391	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	3.0
3391	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
3391	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
3425	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.3
3425	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3425	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3431	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.3
3431	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3431	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3436	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	7.9
3436	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-95.1
3436	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-95.1
3486	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.2	0.0	0.0	4.6
3486	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.2	0.0	0.0	-98.4
3486	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	4.2	0.0	0.0	-98.4
3490	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-1.7
3490	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.8
3490	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-104.8
3494	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.9	0.0	0.0	0.9
3494	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.9	0.0	0.0	-102.1
3494	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.9	0.0	0.0	-102.1
3557	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
3557	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3557	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3563	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	4.7
3563	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-98.4
3563	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-98.4
3566	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3566	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3566	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3569	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	1.7
3569	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3569	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3573	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	0.6
3573	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-102.4
3573	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-102.4
3577	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	2.3
3577	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.7
3577	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.7
3582	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3582	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3582	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3586	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	1.8
3586	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3586	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3591	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3591	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3591	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3596	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	2.7
3596	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.3
3596	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.3
3625	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.2
3625	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3625	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3630	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	4.2
3630	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-98.9
3630	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-98.9
3707	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.8	0.0	0.0	0.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3707	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.8	0.0	0.0	-102.8
3707	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.8	0.0	0.0	-102.8
3711	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	2.1
3711	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.9
3711	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-100.9
3717	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	4.6	0.0	0.0	3.4
3717	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	4.6	0.0	0.0	-99.6
3717	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	4.6	0.0	0.0	-99.6
3721	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	2.0
3721	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.0
3721	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.0
3726	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3726	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3726	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3730	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	6.0
3730	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-97.0
3730	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-97.0
3735	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.7	0.0	0.0	-3.8
3735	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.7	0.0	0.0	-106.8
3735	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	11.7	0.0	0.0	-106.8
3738	536377.04	4816219.80	354.59	1	D	A	62.5	1.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
3738	536377.04	4816219.80	354.59	1	N	A	-40.5	1.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3738	536377.04	4816219.80	354.59	1	E	A	-40.5	1.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3741	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3741	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3741	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3745	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	4.1
3745	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-98.9
3745	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-98.9
3750	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3750	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3750	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3755	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	5.6
3755	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-97.4
3755	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-97.4
3759	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3759	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3759	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3764	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	6.3
3764	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-96.7
3764	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	1.2	-96.7
3778	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
3778	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-95.4
3778	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-95.4
3782	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	3.5
3782	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-99.5
3782	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-99.5
3787	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-4.7
3787	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-107.7
3787	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-107.7
3790	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
3790	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3790	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3795	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	1.4	-6.1
3795	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	1.4	-109.1
3795	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	11.4	0.0	1.4	-109.1
3808	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.2
3808	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3808	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3811	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	1.7
3811	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3811	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-101.3
3816	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3816	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3816	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3829	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	5.0
3829	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-98.0
3829	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-98.0
3866	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3866	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3866	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3870	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	0.2
3870	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-102.8
3870	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-102.8
3891	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
3891	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3891	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3893	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-0.3
3893	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-103.3
3893	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-103.3
3896	536467.45	4816264.04	351.38	1	D	A	62.5	-7.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-3.1
3896	536467.45	4816264.04	351.38	1	N	A	-40.5	-7.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-106.1
3896	536467.45	4816264.04	351.38	1	E	A	-40.5	-7.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	1.2	-106.1
3909	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
3909	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3909	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3913	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	4.1
3913	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-98.9
3913	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	1.0	-98.9
4288	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
4288	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
4288	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
4292	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	1.1
4292	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-101.9
4292	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	1.2	-101.9
4337	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-12.8
4337	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-115.8
4337	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-115.8
4341	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4341	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
4341	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
4405	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-13.3
4405	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-116.3
4405	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-116.3
4409	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4409	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4409	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5001	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.5	0.0	0.0	-7.9
5001	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.5	0.0	0.0	-110.9
5001	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	7.5	0.0	0.0	-110.9
5004	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.2
5004	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.2
5004	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.2
5012	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-7.9
5012	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-110.9
5012	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-110.9
5015	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.2
5015	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.2
5015	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.2
5020	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-8.0
5020	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-111.0
5020	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.6	0.0	0.0	-111.0
5024	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.3
5024	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.3
5024	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.3
5028	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-8.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5028	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-111.0
5028	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-111.0
5031	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.3
5031	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.3
5031	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.3
5094	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-8.0
5094	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-111.0
5094	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-111.0
5096	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.5
5096	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.5
5096	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.5
5123	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.3	0.0	0.0	-8.0
5123	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.3	0.0	0.0	-111.0
5123	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.3	0.0	0.0	-111.0
5125	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.6
5125	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.6
5125	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.6
5190	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	-8.0
5190	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	-111.0
5190	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.2	0.0	0.0	-111.0
5193	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.7
5193	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.7
5193	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.7
5205	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	-8.0
5205	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	-111.1
5205	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.1	0.0	0.0	-111.1
5206	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-6.8
5206	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.8
5206	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-109.8
5414	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-18.4
5414	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-121.4
5414	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-121.4
5417	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
5417	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
5417	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
5500	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-19.0
5500	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-122.0
5500	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	15.9	0.0	0.0	-122.0
5503	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5503	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
5503	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
5623	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-12.3
5623	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-115.4
5623	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.7	0.0	0.0	-115.4
5626	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-10.6
5626	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-113.6
5626	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-113.6
5629	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-12.2
5629	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-115.2
5629	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	7.4	0.0	0.0	-115.2
5631	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-10.8
5631	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-113.8
5631	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	1.7	-113.8
5753	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-14.0
5753	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-117.0
5753	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	4.3	0.0	0.0	-117.0
5755	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-20.5
5755	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-123.5
5755	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	7.8	0.0	1.2	-123.5

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2076	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	64.0	2.8	-3.0	0.0	0.0	27.3	0.0	0.0	-8.8
2076	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	64.0	2.8	-3.0	0.0	0.0	27.3	0.0	0.0	-186.0
2076	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	64.0	2.8	-3.0	0.0	0.0	27.3	0.0	0.0	-186.0

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2134	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	65.4	3.1	-3.0	0.0	0.0	27.5	0.0	0.0	-10.8
2134	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	65.4	3.1	-3.0	0.0	0.0	27.5	0.0	0.0	-188.0
2134	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	65.4	3.1	-3.0	0.0	0.0	27.5	0.0	0.0	-188.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2177	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	66.1	3.3	-3.0	0.0	0.0	27.5	0.0	0.0	-11.7
2177	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	66.1	3.3	-3.0	0.0	0.0	27.5	0.0	0.0	-188.9
2177	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	66.1	3.3	-3.0	0.0	0.0	27.5	0.0	0.0	-188.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2183	536729.76	4815966.33	344.25	0	D	A	62.5	10.4	0.0	0.0	0.0	57.8	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-9.6
2183	536729.76	4815966.33	344.25	0	N	A	-40.5	10.4	0.0	0.0	0.0	57.8	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-112.6
2183	536729.76	4815966.33	344.25	0	E	A	-40.5	10.4	0.0	0.0	0.0	57.8	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-112.6
2188	536723.75	4815968.01	344.36	0	D	A	62.5	2.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-17.8
2188	536723.75	4815968.01	344.36	0	N	A	-40.5	2.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-120.8
2188	536723.75	4815968.01	344.36	0	E	A	-40.5	2.0	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-120.8
2193	536729.26	4815966.47	344.26	1	D	A	62.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
2193	536729.26	4815966.47	344.26	1	N	A	-40.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2193	536729.26	4815966.47	344.26	1	E	A	-40.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2197	536723.26	4815968.14	344.37	1	D	A	62.5	-2.5	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-27.6
2197	536723.26	4815968.14	344.37	1	N	A	-40.5	-2.5	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-130.6
2197	536723.26	4815968.14	344.37	1	E	A	-40.5	-2.5	0.0	0.0	0.0	60.3	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-130.6
2202	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
2202	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
2202	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
2206	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-17.7
2206	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-120.7
2206	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-120.7
2208	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
2208	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2208	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2247	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	22.6	0.0	0.0	-5.9
2247	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	22.6	0.0	0.0	-108.9
2247	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	22.6	0.0	0.0	-108.9
2250	536754.93	4815959.62	343.87	1	D	A	62.5	11.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
2250	536754.93	4815959.62	343.87	1	N	A	-40.5	11.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2250	536754.93	4815959.62	343.87	1	E	A	-40.5	11.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2253	536751.75	4815961.05	343.92	1	D	A	62.5	7.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
2253	536751.75	4815961.05	343.92	1	N	A	-40.5	7.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2253	536751.75	4815961.05	343.92	1	E	A	-40.5	7.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2256	536755.25	4815959.48	343.87	1	D	A	62.5	2.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
2256	536755.25	4815959.48	343.87	1	N	A	-40.5	2.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2256	536755.25	4815959.48	343.87	1	E	A	-40.5	2.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2260	536758.43	4815958.05	343.82	1	D	A	62.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
2260	536758.43	4815958.05	343.82	1	N	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2260	536758.43	4815958.05	343.82	1	E	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
2264	536750.12	4815961.78	343.95	1	D	A	62.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.1
2264	536750.12	4815961.78	343.95	1	N	A	-40.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.1
2264	536750.12	4815961.78	343.95	1	E	A	-40.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.1
2269	536751.68	4815961.08	343.92	1	D	A	62.5	-0.2	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-29.3
2269	536751.68	4815961.08	343.92	1	N	A	-40.5	-0.2	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-132.3
2269	536751.68	4815961.08	343.92	1	E	A	-40.5	-0.2	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-132.3

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2274	536754.93	4815959.62	343.87	1	D	A	62.5	11.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.3
2274	536754.93	4815959.62	343.87	1	N	A	-40.5	11.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2274	536754.93	4815959.62	343.87	1	E	A	-40.5	11.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2481	536752.27	4815977.12	343.95	0	D	A	62.5	8.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-11.5
2481	536752.27	4815977.12	343.95	0	N	A	-40.5	8.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-114.5
2481	536752.27	4815977.12	343.95	0	E	A	-40.5	8.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-114.5
2486	536752.27	4815977.12	343.95	1	D	A	62.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-16.9
2486	536752.27	4815977.12	343.95	1	N	A	-40.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2486	536752.27	4815977.12	343.95	1	E	A	-40.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2489	536754.61	4815978.37	343.91	1	D	A	62.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2489	536754.61	4815978.37	343.91	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
2489	536754.61	4815978.37	343.91	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
2493	536751.33	4815976.62	343.97	1	D	A	62.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
2493	536751.33	4815976.62	343.97	1	N	A	-40.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2493	536751.33	4815976.62	343.97	1	E	A	-40.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2497	536752.27	4815977.12	343.95	1	D	A	62.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
2497	536752.27	4815977.12	343.95	1	N	A	-40.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2497	536752.27	4815977.12	343.95	1	E	A	-40.5	8.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2502	536729.41	4815967.77	344.26	0	D	A	62.5	8.1	0.0	0.0	0.0	57.7	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-11.8
2502	536729.41	4815967.77	344.26	0	N	A	-40.5	8.1	0.0	0.0	0.0	57.7	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-114.8
2502	536729.41	4815967.77	344.26	0	E	A	-40.5	8.1	0.0	0.0	0.0	57.7	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-114.8
2505	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2
2505	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
2505	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
2510	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
2510	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2510	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2514	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-20.5
2514	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-123.5
2514	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-123.5
2517	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
2517	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
2517	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
2551	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	18.8	0.0	0.0	-4.4
2551	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	18.8	0.0	0.0	-107.5
2551	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	18.8	0.0	0.0	-107.5
2555	536757.21	4815958.18	343.83	1	D	A	62.5	8.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
2555	536757.21	4815958.18	343.83	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2555	536757.21	4815958.18	343.83	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
2558	536758.62	4815957.71	343.81	1	D	A	62.5	6.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
2558	536758.62	4815957.71	343.81	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2558	536758.62	4815957.71	343.81	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2561	536754.97	4815958.93	343.86	1	D	A	62.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2561	536754.97	4815958.93	343.86	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2561	536754.97	4815958.93	343.86	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2564	536757.21	4815958.18	343.83	1	D	A	62.5	8.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
2564	536757.21	4815958.18	343.83	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2564	536757.21	4815958.18	343.83	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2603	536741.39	4815963.05	344.05	0	D	A	62.5	7.4	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	25.4	0.0	0.0	-11.9
2603	536741.39	4815963.05	344.05	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	25.4	0.0	0.0	-114.9
2603	536741.39	4815963.05	344.05	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	25.4	0.0	0.0	-114.9
2607	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2607	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
2607	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
2611	536742.55	4815962.72	344.04	1	D	A	62.5	5.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2611	536742.55	4815962.72	344.04	1	N	A	-40.5	5.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2611	536742.55	4815962.72	344.04	1	E	A	-40.5	5.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2615	536739.88	4815963.48	344.07	1	D	A	62.5	3.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
2615	536739.88	4815963.48	344.07	1	N	A	-40.5	3.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
2615	536739.88	4815963.48	344.07	1	E	A	-40.5	3.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
2621	536743.04	4815962.58	344.03	1	D	A	62.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.7
2621	536743.04	4815962.58	344.03	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.7
2621	536743.04	4815962.58	344.03	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.7

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2625	536740.37	4815963.34	344.07	1	D	A	62.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-23.5
2625	536740.37	4815963.34	344.07	1	N	A	-40.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.5
2625	536740.37	4815963.34	344.07	1	E	A	-40.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.5
2629	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
2629	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
2629	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
2659	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.4	0.0	0.0	-11.2
2659	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.4	0.0	0.0	-114.2
2659	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.4	0.0	0.0	-114.2
2665	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
2665	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2665	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
2669	536748.37	4815960.97	343.96	1	D	A	62.5	2.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2669	536748.37	4815960.97	343.96	1	N	A	-40.5	2.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2669	536748.37	4815960.97	343.96	1	E	A	-40.5	2.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2674	536745.83	4815961.74	343.99	1	D	A	62.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
2674	536745.83	4815961.74	343.99	1	N	A	-40.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2674	536745.83	4815961.74	343.99	1	E	A	-40.5	5.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2677	536744.10	4815962.27	344.02	1	D	A	62.5	-10.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-38.5
2677	536744.10	4815962.27	344.02	1	N	A	-40.5	-10.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
2677	536744.10	4815962.27	344.02	1	E	A	-40.5	-10.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
2680	536747.38	4815961.27	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-23.2
2680	536747.38	4815961.27	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.2
2680	536747.38	4815961.27	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.2
2681	536744.80	4815962.06	344.01	1	D	A	62.5	1.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-27.0
2681	536744.80	4815962.06	344.01	1	N	A	-40.5	1.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.0
2681	536744.80	4815962.06	344.01	1	E	A	-40.5	1.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.0
2684	536747.55	4815961.22	343.97	1	D	A	62.5	5.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
2684	536747.55	4815961.22	343.97	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2684	536747.55	4815961.22	343.97	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2687	536744.97	4815962.01	344.00	1	D	A	62.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2687	536744.97	4815962.01	344.00	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2687	536744.97	4815962.01	344.00	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2704	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.1	0.0	0.0	-13.1
2704	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.1	0.0	0.0	-116.2
2704	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.1	0.0	0.0	-116.2
2707	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
2707	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
2707	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
2712	536736.83	4815967.10	344.15	1	D	A	62.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2712	536736.83	4815967.10	344.15	1	N	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2712	536736.83	4815967.10	344.15	1	E	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2717	536739.17	4815966.88	344.12	1	D	A	62.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
2717	536739.17	4815966.88	344.12	1	N	A	-40.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2717	536739.17	4815966.88	344.12	1	E	A	-40.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2722	536737.25	4815967.06	344.14	1	D	A	62.5	4.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-24.7
2722	536737.25	4815967.06	344.14	1	N	A	-40.5	4.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
2722	536737.25	4815967.06	344.14	1	E	A	-40.5	4.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
2727	536739.59	4815966.84	344.12	1	D	A	62.5	3.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.4
2727	536739.59	4815966.84	344.12	1	N	A	-40.5	3.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.4
2727	536739.59	4815966.84	344.12	1	E	A	-40.5	3.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.4
2731	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
2731	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2731	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2797	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	23.2	0.0	0.0	-10.9
2797	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	23.2	0.0	0.0	-114.0
2797	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	23.2	0.0	0.0	-114.0
2802	536751.79	4815959.93	343.91	1	D	A	62.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
2802	536751.79	4815959.93	343.91	1	N	A	-40.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2802	536751.79	4815959.93	343.91	1	E	A	-40.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2806	536749.62	4815960.59	343.94	1	D	A	62.5	-0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2806	536749.62	4815960.59	343.94	1	N	A	-40.5	-0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2806	536749.62	4815960.59	343.94	1	E	A	-40.5	-0.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2810	536751.39	4815960.06	343.91	1	D	A	62.5	6.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
2810	536751.39	4815960.06	343.91	1	N	A	-40.5	6.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2810	536751.39	4815960.06	343.91	1	E	A	-40.5	6.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2814	536751.31	4815960.08	343.91	1	D	A	62.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-22.7
2814	536751.31	4815960.08	343.91	1	N	A	-40.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-125.7
2814	536751.31	4815960.08	343.91	1	E	A	-40.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-125.7
2819	536751.39	4815960.06	343.91	1	D	A	62.5	6.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2819	536751.39	4815960.06	343.91	1	N	A	-40.5	6.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2819	536751.39	4815960.06	343.91	1	E	A	-40.5	6.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2836	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.0	0.0	0.0	-13.9
2836	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.0	0.0	0.0	-116.9
2836	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.0	1.0	-2.8	0.0	0.0	26.0	0.0	0.0	-116.9
2839	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
2839	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
2839	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
2843	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
2843	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2843	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2846	536738.07	4815964.00	344.10	1	D	A	62.5	1.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-27.4
2846	536738.07	4815964.00	344.10	1	N	A	-40.5	1.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.5
2846	536738.07	4815964.00	344.10	1	E	A	-40.5	1.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.5
2851	536736.20	4815964.53	344.13	1	D	A	62.5	4.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-24.8
2851	536736.20	4815964.53	344.13	1	N	A	-40.5	4.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.8
2851	536736.20	4815964.53	344.13	1	E	A	-40.5	4.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.8
2855	536737.54	4815964.15	344.11	1	D	A	62.5	3.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
2855	536737.54	4815964.15	344.11	1	N	A	-40.5	3.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
2855	536737.54	4815964.15	344.11	1	E	A	-40.5	3.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
2858	536735.68	4815964.68	344.14	1	D	A	62.5	1.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
2858	536735.68	4815964.68	344.14	1	N	A	-40.5	1.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2858	536735.68	4815964.68	344.14	1	E	A	-40.5	1.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2893	536724.15	4815968.16	344.35	0	D	A	62.5	3.7	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-16.1
2893	536724.15	4815968.16	344.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-119.1
2893	536724.15	4815968.16	344.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	57.5	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-119.1
2895	536725.74	4815968.09	344.32	0	D	A	62.5	-0.6	0.0	0.0	0.0	57.6	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-20.4
2895	536725.74	4815968.09	344.32	0	N	A	-40.5	-0.6	0.0	0.0	0.0	57.6	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-123.4
2895	536725.74	4815968.09	344.32	0	E	A	-40.5	-0.6	0.0	0.0	0.0	57.6	1.0	-2.8	0.0	0.0	26.5	0.0	0.0	-123.4
2901	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	60.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-20.1
2901	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	60.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-123.2
2901	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	60.4	1.3	-2.9	0.0	0.0	27.9	0.0	1.0	-123.2
2906	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2906	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2906	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2910	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-23.5
2910	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-126.5
2910	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-126.5
2913	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
2913	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2913	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2920	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-14.4
2920	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-117.4
2920	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-117.4
2924	536757.83	4815979.63	343.86	1	D	A	62.5	4.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
2924	536757.83	4815979.63	343.86	1	N	A	-40.5	4.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2924	536757.83	4815979.63	343.86	1	E	A	-40.5	4.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2928	536756.01	4815979.02	343.89	1	D	A	62.5	-0.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
2928	536756.01	4815979.02	343.89	1	N	A	-40.5	-0.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
2928	536756.01	4815979.02	343.89	1	E	A	-40.5	-0.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
2932	536757.37	4815979.48	343.87	1	D	A	62.5	5.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2932	536757.37	4815979.48	343.87	1	N	A	-40.5	5.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2932	536757.37	4815979.48	343.87	1	E	A	-40.5	5.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2935	536757.57	4815979.55	343.86	1	D	A	62.5	5.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
2935	536757.57	4815979.55	343.86	1	N	A	-40.5	5.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2935	536757.57	4815979.55	343.86	1	E	A	-40.5	5.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2939	536755.74	4815978.94	343.89	1	D	A	62.5	-3.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
2939	536755.74	4815978.94	343.89	1	N	A	-40.5	-3.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
2939	536755.74	4815978.94	343.89	1	E	A	-40.5	-3.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
2945	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-13.6
2945	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-116.6
2945	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-116.6
2949	536749.67	4815967.29	344.00	1	D	A	62.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
2949	536749.67	4815967.29	344.00	1	N	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2949	536749.67	4815967.29	344.00	1	E	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2953	536749.60	4815967.28	344.01	1	D	A	62.5	5.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2953	536749.60	4815967.28	344.01	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2953	536749.60	4815967.28	344.01	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2956	536751.48	4815967.57	343.99	1	D	A	62.5	-8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-36.8
2956	536751.48	4815967.57	343.99	1	N	A	-40.5	-8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
2956	536751.48	4815967.57	343.99	1	E	A	-40.5	-8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
2960	536749.67	4815967.29	344.00	1	D	A	62.5	5.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
2960	536749.67	4815967.29	344.00	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2960	536749.67	4815967.29	344.00	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2985	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.6	0.0	0.0	-13.9
2985	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.6	0.0	0.0	-116.9
2985	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.6	0.0	0.0	-116.9
2990	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
2990	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2990	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2994	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
2994	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2994	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2997	536745.44	4815966.74	344.05	1	D	A	62.5	4.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-24.6
2997	536745.44	4815966.74	344.05	1	N	A	-40.5	4.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.6
2997	536745.44	4815966.74	344.05	1	E	A	-40.5	4.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.6
3000	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
3000	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3000	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3006	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.2	0.0	0.0	-13.5
3006	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.2	0.0	0.0	-116.5
3006	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.2	0.0	0.0	-116.5
3011	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
3011	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
3011	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
3016	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
3016	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3016	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3021	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
3021	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3021	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3088	536756.66	4815969.66	343.94	0	D	A	62.5	5.3	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-14.1
3088	536756.66	4815969.66	343.94	0	N	A	-40.5	5.3	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-117.1
3088	536756.66	4815969.66	343.94	0	E	A	-40.5	5.3	0.0	0.0	0.0	58.5	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-117.1
3091	536756.66	4815969.66	343.94	1	D	A	62.5	5.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
3091	536756.66	4815969.66	343.94	1	N	A	-40.5	5.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3091	536756.66	4815969.66	343.94	1	E	A	-40.5	5.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3096	536756.66	4815969.66	343.94	1	D	A	62.5	5.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
3096	536756.66	4815969.66	343.94	1	N	A	-40.5	5.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3096	536756.66	4815969.66	343.94	1	E	A	-40.5	5.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3100	536756.66	4815969.66	343.94	1	D	A	62.5	5.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
3100	536756.66	4815969.66	343.94	1	N	A	-40.5	5.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
3100	536756.66	4815969.66	343.94	1	E	A	-40.5	5.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
3155	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-15.8
3155	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-118.8
3155	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.2	0.0	0.0	-118.8
3159	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
3159	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
3159	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3164	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3164	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3164	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3167	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
3167	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3167	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3172	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-15.6
3172	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-118.6
3172	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-118.6
3175	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
3175	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3175	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3178	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3178	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3178	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3183	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-24.7
3183	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
3183	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
3188	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
3188	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3188	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3248	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-15.2
3248	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-118.2
3248	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-118.2
3252	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
3252	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3252	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
3256	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3256	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3256	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3259	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
3259	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3259	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3273	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.3	0.0	0.0	-16.4
3273	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.3	0.0	0.0	-119.4
3273	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.3	0.0	0.0	-119.4
3275	536748.03	4815974.71	344.03	1	D	A	62.5	3.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
3275	536748.03	4815974.71	344.03	1	N	A	-40.5	3.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3275	536748.03	4815974.71	344.03	1	E	A	-40.5	3.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3278	536748.40	4815974.96	344.03	1	D	A	62.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3278	536748.40	4815974.96	344.03	1	N	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3278	536748.40	4815974.96	344.03	1	E	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3283	536747.43	4815974.30	344.04	1	D	A	62.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
3283	536747.43	4815974.30	344.04	1	N	A	-40.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3283	536747.43	4815974.30	344.04	1	E	A	-40.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3288	536748.03	4815974.71	344.03	1	D	A	62.5	3.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
3288	536748.03	4815974.71	344.03	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
3288	536748.03	4815974.71	344.03	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
3332	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.6	0.0	0.0	-15.3
3332	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.6	0.0	0.0	-118.3
3332	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.6	0.0	0.0	-118.3
3337	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
3337	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3337	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3340	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3340	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3340	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3342	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.5
3342	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.5
3342	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.5
3346	536747.75	4815963.22	343.99	1	D	A	62.5	1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3346	536747.75	4815963.22	343.99	1	N	A	-40.5	1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3346	536747.75	4815963.22	343.99	1	E	A	-40.5	1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3348	536748.64	4815962.55	343.97	1	D	A	62.5	-0.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
3348	536748.64	4815962.55	343.97	1	N	A	-40.5	-0.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
3348	536748.64	4815962.55	343.97	1	E	A	-40.5	-0.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
3362	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.4	0.0	0.0	-17.2
3362	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.4	0.0	0.0	-120.2
3362	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.4	0.0	0.0	-120.2
3365	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
3365	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3365	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3370	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
3370	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
3370	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
3373	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-25.9
3373	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-128.9
3373	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-128.9
3377	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
3377	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3377	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3442	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-16.8
3442	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-119.8
3442	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	25.8	0.0	0.0	-119.8
3447	536742.84	4815966.65	344.08	1	D	A	62.5	1.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
3447	536742.84	4815966.65	344.08	1	N	A	-40.5	1.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3447	536742.84	4815966.65	344.08	1	E	A	-40.5	1.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3450	536743.80	4815966.60	344.07	1	D	A	62.5	-2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
3450	536743.80	4815966.60	344.07	1	N	A	-40.5	-2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
3450	536743.80	4815966.60	344.07	1	E	A	-40.5	-2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
3454	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3454	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3454	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3456	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-26.0
3456	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.0
3456	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.0
3458	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
3458	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3458	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3464	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.1	0.0	0.0	-17.4
3464	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.1	0.0	0.0	-120.4
3464	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	26.1	0.0	0.0	-120.4
3469	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
3469	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3469	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3473	536745.10	4815971.26	344.09	1	D	A	62.5	2.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
3473	536745.10	4815971.26	344.09	1	N	A	-40.5	2.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
3473	536745.10	4815971.26	344.09	1	E	A	-40.5	2.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
3477	536744.81	4815970.41	344.09	1	D	A	62.5	-7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-35.5
3477	536744.81	4815970.41	344.09	1	N	A	-40.5	-7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.5
3477	536744.81	4815970.41	344.09	1	E	A	-40.5	-7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-138.5
3481	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3481	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3481	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3507	536758.76	4815970.73	343.92	0	D	A	62.5	1.4	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-18.0
3507	536758.76	4815970.73	343.92	0	N	A	-40.5	1.4	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-121.1
3507	536758.76	4815970.73	343.92	0	E	A	-40.5	1.4	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-121.1
3512	536759.58	4815971.15	343.90	0	D	A	62.5	-3.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-22.6
3512	536759.58	4815971.15	343.90	0	N	A	-40.5	-3.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-125.6
3512	536759.58	4815971.15	343.90	0	E	A	-40.5	-3.1	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-125.6
3515	536758.74	4815970.72	343.92	1	D	A	62.5	1.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
3515	536758.74	4815970.72	343.92	1	N	A	-40.5	1.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3515	536758.74	4815970.72	343.92	1	E	A	-40.5	1.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3518	536759.56	4815971.14	343.90	1	D	A	62.5	-2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
3518	536759.56	4815971.14	343.90	1	N	A	-40.5	-2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
3518	536759.56	4815971.14	343.90	1	E	A	-40.5	-2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3521	536758.67	4815970.69	343.92	1	D	A	62.5	0.7	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
3521	536758.67	4815970.69	343.92	1	N	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3521	536758.67	4815970.69	343.92	1	E	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3524	536759.50	4815971.11	343.91	1	D	A	62.5	-1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
3524	536759.50	4815971.11	343.91	1	N	A	-40.5	-1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3524	536759.50	4815971.11	343.91	1	E	A	-40.5	-1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3528	536758.72	4815970.71	343.92	1	D	A	62.5	1.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
3528	536758.72	4815970.71	343.92	1	N	A	-40.5	1.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3528	536758.72	4815970.71	343.92	1	E	A	-40.5	1.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3532	536759.55	4815971.13	343.90	1	D	A	62.5	-2.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
3532	536759.55	4815971.13	343.90	1	N	A	-40.5	-2.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
3532	536759.55	4815971.13	343.90	1	E	A	-40.5	-2.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
3538	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-17.2
3538	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-120.2
3538	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.4	0.0	0.0	-120.2
3541	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
3541	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3541	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3544	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
3544	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
3544	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
3548	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-26.7
3548	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.7
3548	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.7
3552	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3552	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3552	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3602	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.3	0.0	0.0	-18.4
3602	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.3	0.0	0.0	-121.4
3602	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	57.9	1.0	-2.8	0.0	0.0	26.3	0.0	0.0	-121.4
3606	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3606	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3606	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3609	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3609	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3609	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3612	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-27.1
3612	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3612	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3615	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3615	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3615	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3636	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	25.9	0.0	0.0	-18.0
3636	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	25.9	0.0	0.0	-121.0
3636	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	58.1	1.1	-2.9	0.0	0.0	25.9	0.0	0.0	-121.0
3639	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3639	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3639	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3644	536741.19	4815966.72	344.10	1	D	A	62.5	0.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
3644	536741.19	4815966.72	344.10	1	N	A	-40.5	0.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
3644	536741.19	4815966.72	344.10	1	E	A	-40.5	0.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
3647	536741.94	4815966.69	344.09	1	D	A	62.5	-3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
3647	536741.94	4815966.69	344.09	1	N	A	-40.5	-3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
3647	536741.94	4815966.69	344.09	1	E	A	-40.5	-3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
3652	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-27.1
3652	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3652	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3655	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3655	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3655	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3660	536746.73	4815964.26	344.01	0	D	A	62.5	1.9	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-17.3
3660	536746.73	4815964.26	344.01	0	N	A	-40.5	1.9	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-120.3
3660	536746.73	4815964.26	344.01	0	E	A	-40.5	1.9	0.0	0.0	0.0	58.3	1.1	-2.9	0.0	0.0	25.1	0.0	0.0	-120.3

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3665	536747.21	4815963.63	344.00	0	D	A	62.5	-15.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.9	0.0	0.0	-34.8
3665	536747.21	4815963.63	344.00	0	N	A	-40.5	-15.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.9	0.0	0.0	-137.8
3665	536747.21	4815963.63	344.00	0	E	A	-40.5	-15.8	0.0	0.0	0.0	58.4	1.1	-2.9	0.0	0.0	24.9	0.0	0.0	-137.8
3670	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
3670	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
3670	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
3675	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3675	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3675	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3679	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-27.0
3679	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.0
3679	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.0
3681	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3681	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3681	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3686	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.0	0.0	0.0	-18.1
3686	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.0	0.0	0.0	-121.1
3686	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.2	1.1	-2.9	0.0	0.0	26.0	0.0	0.0	-121.1
3691	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3691	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3691	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3693	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
3693	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3693	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3697	536744.88	4815968.93	344.07	1	D	A	62.5	-6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-35.7
3697	536744.88	4815968.93	344.07	1	N	A	-40.5	-6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-138.7
3697	536744.88	4815968.93	344.07	1	E	A	-40.5	-6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-138.7
3702	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3702	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3702	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3295	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-18.5
3295	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-118.5
3295	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-118.5
3621	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-18.8
3621	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-118.8
3621	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-118.8
3772	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-20.5
3772	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-120.5
3772	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-120.5
3803	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-20.9
3803	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-120.9
3803	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-120.9
3836	536782.59	4816527.54	341.03	0	D	A	59.5	8.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-23.4
3836	536782.59	4816527.54	341.03	0	N	A	-40.5	8.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-123.4
3836	536782.59	4816527.54	341.03	0	E	A	-40.5	8.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-123.4
3843	536784.82	4816522.64	341.01	0	D	A	59.5	6.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-25.5
3843	536784.82	4816522.64	341.01	0	N	A	-40.5	6.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
3843	536784.82	4816522.64	341.01	0	E	A	-40.5	6.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
3853	536806.27	4816470.00	341.20	0	D	A	59.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-24.5
3853	536806.27	4816470.00	341.20	0	N	A	-40.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-124.5
3853	536806.27	4816470.00	341.20	0	E	A	-40.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-124.5
3861	536807.18	4816465.75	341.19	0	D	A	59.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-24.1
3861	536807.18	4816465.75	341.19	0	N	A	-40.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-124.1
3861	536807.18	4816465.75	341.19	0	E	A	-40.5	6.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-124.1
3879	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-21.8
3879	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-121.8
3879	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-121.8
3886	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-20.5
3886	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-120.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3886	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	25.6	0.0	0.0	-120.5
3903	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-21.9
3903	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-121.9
3903	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-121.9
3935	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-22.2
3935	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-122.2
3935	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-122.2
3942	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-22.1
3942	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.1
3942	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.1
3949	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.1	0.0	0.0	-22.5
3949	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.5
3949	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.1	0.0	0.0	-122.5
3960	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-22.6
3960	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-122.6
3960	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-122.6
3982	536799.43	4816490.29	341.23	0	D	A	59.5	7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
3982	536799.43	4816490.29	341.23	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-123.8
3982	536799.43	4816490.29	341.23	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-123.8
3985	536800.73	4816487.20	341.27	0	D	A	59.5	0.8	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-30.3
3985	536800.73	4816487.20	341.27	0	N	A	-40.5	0.8	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-130.3
3985	536800.73	4816487.20	341.27	0	E	A	-40.5	0.8	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-130.3
3993	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-22.7
3993	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.7
3993	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.7
4001	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-22.6
4001	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.6
4001	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-122.6
4007	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-23.1
4007	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
4007	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
4014	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-22.7
4014	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-122.7
4014	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-122.7
4026	536804.98	4816475.13	341.21	0	D	A	59.5	7.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-23.1
4026	536804.98	4816475.13	341.21	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-123.1
4026	536804.98	4816475.13	341.21	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-123.1
4039	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-21.4
4039	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-121.4
4039	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-121.4
4056	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-23.2
4056	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
4056	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
4066	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-22.9
4066	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-122.9
4066	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-122.9
4081	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-23.3
4081	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
4081	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
4099	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-23.4
4099	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
4099	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
4107	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-23.4
4107	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
4107	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-123.4
4115	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-23.6
4115	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-123.6
4115	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-123.6
4129	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-24.1
4129	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-124.1
4129	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-124.1
4173	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-24.3
4173	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-124.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4173	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-124.3
4196	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-24.2
4196	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-124.2
4196	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-124.2
4211	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-24.6
4211	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
4211	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
4219	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-24.4
4219	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.4
4219	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.4
4226	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-24.8
4226	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
4226	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
4234	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-25.0
4234	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-125.0
4234	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-125.0
4241	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-24.6
4241	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
4241	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
4264	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-23.6
4264	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-123.6
4264	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-123.6
4271	536914.81	4816645.72	339.56	0	D	A	59.5	9.1	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.3
4271	536914.81	4816645.72	339.56	0	N	A	-40.5	9.1	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.3
4271	536914.81	4816645.72	339.56	0	E	A	-40.5	9.1	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.3
4299	536798.64	4816612.93	340.40	0	D	A	59.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-28.3
4299	536798.64	4816612.93	340.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-128.3
4299	536798.64	4816612.93	340.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-128.3
4305	536795.86	4816611.69	340.40	0	D	A	59.5	6.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-25.3
4305	536795.86	4816611.69	340.40	0	N	A	-40.5	6.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-125.3
4305	536795.86	4816611.69	340.40	0	E	A	-40.5	6.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-125.3
4325	536974.56	4816484.31	339.83	0	D	A	59.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.0
4325	536974.56	4816484.31	339.83	0	N	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4325	536974.56	4816484.31	339.83	0	E	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4330	536977.59	4816484.34	339.79	0	D	A	59.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.0
4330	536977.59	4816484.34	339.79	0	N	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4330	536977.59	4816484.34	339.79	0	E	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4348	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-23.7
4348	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-123.7
4348	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-123.7
4355	536823.58	4816436.51	341.64	0	D	A	59.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-29.3
4355	536823.58	4816436.51	341.64	0	N	A	-40.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-129.3
4355	536823.58	4816436.51	341.64	0	E	A	-40.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-129.3
4361	536824.66	4816435.82	341.66	0	D	A	59.5	1.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-28.9
4361	536824.66	4816435.82	341.66	0	N	A	-40.5	1.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-128.9
4361	536824.66	4816435.82	341.66	0	E	A	-40.5	1.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-128.9
4366	536825.56	4816435.25	341.68	0	D	A	59.5	-1.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-31.3
4366	536825.56	4816435.25	341.68	0	N	A	-40.5	-1.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-131.3
4366	536825.56	4816435.25	341.68	0	E	A	-40.5	-1.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-131.3
4371	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-25.1
4371	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-125.1
4371	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.1	0.0	0.0	-125.1
4386	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-25.4
4386	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.4
4386	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.4
4401	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-24.1
4401	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-124.1
4401	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-124.1
4460	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-25.6
4460	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-125.6
4460	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-125.6
4467	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-25.8
4467	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4467	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.8
4475	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-25.7
4475	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-125.7
4475	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-125.7
4484	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-26.0
4484	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-126.0
4484	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-126.0
4498	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.4
4498	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
4498	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
4505	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-25.9
4505	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-125.9
4505	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-125.9
4535	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.5
4535	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-126.5
4535	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-126.5
4545	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-26.6
4545	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
4545	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
4552	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-26.3
4552	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.3
4552	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.3
4560	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-26.3
4560	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.3
4560	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.3
4567	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-26.7
4567	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.7
4567	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.7
4573	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-26.3
4573	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-126.3
4573	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-126.3
4581	536833.33	4816432.35	341.74	0	D	A	59.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-26.3
4581	536833.33	4816432.35	341.74	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.3
4581	536833.33	4816432.35	341.74	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.3
4587	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-26.5
4587	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-126.5
4587	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-126.5
4632	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-26.9
4632	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-126.9
4632	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-126.9
4639	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-26.5
4639	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.5
4639	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.5
4646	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-26.5
4646	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
4646	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
4655	536865.89	4816441.02	341.02	0	D	A	59.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-26.9
4655	536865.89	4816441.02	341.02	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.9
4655	536865.89	4816441.02	341.02	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.9
4661	536867.07	4816441.61	341.02	0	D	A	59.5	-7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-38.3
4661	536867.07	4816441.61	341.02	0	N	A	-40.5	-7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-138.3
4661	536867.07	4816441.61	341.02	0	E	A	-40.5	-7.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-138.3
4668	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-26.6
4668	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.6
4668	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-126.6
4675	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-26.7
4675	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.7
4675	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.7
4683	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-27.1
4683	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-127.1
4683	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-127.1
4695	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-25.6
4695	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-125.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4695	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-125.6
4729	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-27.3
4729	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-127.3
4729	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-127.3
4745	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-27.4
4745	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-127.4
4745	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-127.4
4751	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-27.0
4751	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-127.0
4751	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.2	0.0	0.0	-127.0
4757	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-27.5
4757	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-127.5
4757	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-127.5
4766	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-27.5
4766	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
4766	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
4770	536767.15	4816570.61	341.09	1	D	A	59.5	0.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.3	-34.3
4770	536767.15	4816570.61	341.09	1	N	A	-40.5	0.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.3	-134.3
4770	536767.15	4816570.61	341.09	1	E	A	-40.5	0.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.3	-134.3
4776	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-25.8
4776	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-125.8
4776	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-125.8
4798	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-27.8
4798	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-127.8
4798	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-127.8
4806	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-27.5
4806	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-127.5
4806	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-127.5
4820	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-27.9
4820	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-127.9
4820	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	26.9	0.0	0.0	-127.9
4828	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-27.5
4828	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-127.5
4828	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-127.5
4836	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-28.1
4836	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-128.1
4836	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	27.0	0.0	0.0	-128.1
4841	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-27.8
4841	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-127.8
4841	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-127.8
4848	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-27.7
4848	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.7
4848	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.7
4855	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-28.1
4855	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-128.1
4855	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-128.1
4872	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-28.1
4872	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.1
4872	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.1
4886	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	25.6	0.0	0.0	-26.9
4886	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	25.6	0.0	0.0	-126.9
4886	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	25.6	0.0	0.0	-126.9
4894	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-28.2
4894	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-128.2
4894	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-128.2
4901	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-26.5
4901	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-126.5
4901	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	25.4	0.0	0.0	-126.5
4906	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-27.9
4906	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-127.9
4906	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-127.9
4967	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-28.4
4967	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4967	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.4
4980	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-28.5
4980	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.5
4980	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.2	0.0	0.0	-128.5
5047	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.6
5047	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.6
5047	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.6
5062	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-28.5
5062	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.5
5062	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.5
5091	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-28.6
5091	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-128.6
5091	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-128.6
5102	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-27.2
5102	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.2
5102	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.2
5112	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-28.8
5112	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-128.8
5112	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-128.8
5116	536885.84	4816641.85	339.91	0	D	A	59.5	3.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-30.9
5116	536885.84	4816641.85	339.91	0	N	A	-40.5	3.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-130.9
5116	536885.84	4816641.85	339.91	0	E	A	-40.5	3.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-130.9
5121	536884.28	4816641.88	339.93	0	D	A	59.5	0.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-33.9
5121	536884.28	4816641.88	339.93	0	N	A	-40.5	0.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.9
5121	536884.28	4816641.88	339.93	0	E	A	-40.5	0.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.9
5153	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-27.3
5153	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.3
5153	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.3
5159	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-29.1
5159	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-129.1
5159	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-129.1
5170	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-27.4
5170	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.4
5170	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.4
5186	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-27.4
5186	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.4
5186	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-127.4
5202	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-29.3
5202	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.3
5202	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.3
5241	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-29.4
5241	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-129.4
5241	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-129.4
5261	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-29.6
5261	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-129.6
5261	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-129.6
5348	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-30.3
5348	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5348	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5354	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-30.3
5354	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5354	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
5363	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-30.4
5363	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.4
5363	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.4
5368	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-30.6
5368	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-130.6
5368	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	-130.6
5421	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-30.9
5421	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-130.9
5421	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-130.9
5447	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-31.0
5447	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-131.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5447	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-131.0
5478	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-31.3
5478	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
5478	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
5483	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-29.7
5483	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-129.7
5483	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	25.5	0.0	0.0	-129.7
5543	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-32.0
5543	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-132.0
5543	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-132.0
5603	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-32.9
5603	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-132.9
5603	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-132.9
5635	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-32.9
5635	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-132.9
5635	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-132.9
5668	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-33.7
5668	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.7
5668	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.7
5729	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-36.4
5729	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-136.4
5729	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.4	0.0	0.0	-136.4
5741	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-36.6
5741	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-136.6
5741	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-136.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3398	537011.55	4816420.05	338.73	0	D	A	59.5	12.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-20.1
3398	537011.55	4816420.05	338.73	0	N	A	-40.5	12.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.1
3398	537011.55	4816420.05	338.73	0	E	A	-40.5	12.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.1
3404	537020.00	4816424.08	338.85	0	D	A	59.5	3.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-29.5
3404	537020.00	4816424.08	338.85	0	N	A	-40.5	3.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-129.5
3404	537020.00	4816424.08	338.85	0	E	A	-40.5	3.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-129.5
3412	537023.00	4816425.51	338.90	0	D	A	59.5	6.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-25.9
3412	537023.00	4816425.51	338.90	0	N	A	-40.5	6.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-125.9
3412	537023.00	4816425.51	338.90	0	E	A	-40.5	6.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-125.9
3920	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-21.9
3920	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.9
3920	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.9
3928	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-22.0
3928	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-122.0
3928	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-122.0
4073	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-22.9
4073	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-122.9
4073	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-122.9
4146	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-23.8
4146	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
4146	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
4184	536980.03	4816407.65	338.45	0	D	A	59.5	6.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-25.6
4184	536980.03	4816407.65	338.45	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
4184	536980.03	4816407.65	338.45	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
4190	536977.14	4816406.55	338.41	0	D	A	59.5	3.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.8
4190	536977.14	4816406.55	338.41	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.8
4190	536977.14	4816406.55	338.41	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.8
4247	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-25.0
4247	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
4247	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
4258	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-24.6
4258	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-124.6
4258	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-124.6
4430	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-26.0

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4430	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-126.0
4430	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-126.0
4437	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-25.4
4437	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-125.4
4437	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-125.4
4510	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-25.9
4510	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-125.9
4510	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-125.9
4608	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-26.4
4608	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-126.4
4608	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-126.4
4689	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-26.6
4689	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-126.6
4689	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-126.6
4722	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-26.8
4722	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.8
4722	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.8
4914	536975.60	4816405.96	338.40	0	D	A	59.5	1.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-30.6
4914	536975.60	4816405.96	338.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-130.6
4914	536975.60	4816405.96	338.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-130.6
4921	536974.45	4816405.52	338.40	0	D	A	59.5	0.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-31.0
4921	536974.45	4816405.52	338.40	0	N	A	-40.5	0.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
4921	536974.45	4816405.52	338.40	0	E	A	-40.5	0.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
4938	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-27.9
4938	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
4938	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
4973	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.0
4973	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.0
4973	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.0
4988	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.1
4988	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.1
4988	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.1
5054	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.3
5054	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.3
5054	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.3
5078	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.4
5078	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
5078	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
5107	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-28.5
5107	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-128.5
5107	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-128.5
5164	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-28.6
5164	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-128.6
5164	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-128.6
5181	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-28.7
5181	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-128.7
5181	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.7	0.0	0.0	-128.7
5198	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-28.7
5198	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-128.7
5198	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-128.7
5219	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.8
5219	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.8
5219	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.8
5223	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-29.6
5223	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-129.6
5223	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-129.6
5289	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-29.4
5289	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-129.4
5289	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-129.4
5317	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-29.5
5317	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-129.5
5317	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-129.5
5330	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-29.8

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5330	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-129.8
5330	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-129.8
5374	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-30.2
5374	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-130.2
5374	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-130.2
5383	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-30.2
5383	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-130.2
5383	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.7	0.0	0.0	-130.2
5718	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-34.9
5718	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9
5718	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3420	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-26.3
3420	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-29.3
3420	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-26.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3500	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-19.1
3500	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-126.1
3500	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-126.1
3970	536850.43	4816432.41	340.04	0	D	A	58.4	5.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-26.3
3970	536850.43	4816432.41	340.04	0	N	A	-48.6	5.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.3
3970	536850.43	4816432.41	340.04	0	E	A	-48.6	5.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.3
3976	536846.69	4816430.93	340.15	0	D	A	58.4	6.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-24.3
3976	536846.69	4816430.93	340.15	0	N	A	-48.6	6.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
3976	536846.69	4816430.93	340.15	0	E	A	-48.6	6.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
4020	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-22.4
4020	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-129.4
4020	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-129.4
4047	536909.59	4816465.40	339.00	0	D	A	58.4	10.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-22.5
4047	536909.59	4816465.40	339.00	0	N	A	-48.6	10.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-129.5
4047	536909.59	4816465.40	339.00	0	E	A	-48.6	10.0	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-129.5
4090	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-23.1
4090	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-130.1
4090	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-130.1
4123	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-23.3
4123	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
4123	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
4138	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-23.5
4138	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-130.5
4138	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-130.5
4154	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-23.6
4154	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-130.6
4154	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-130.6
4158	536876.54	4816460.34	339.14	1	D	A	58.4	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.0
4158	536876.54	4816460.34	339.14	1	N	A	-48.6	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
4158	536876.54	4816460.34	339.14	1	E	A	-48.6	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
4167	536876.54	4816460.34	339.14	1	D	A	58.4	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.0
4167	536876.54	4816460.34	339.14	1	N	A	-48.6	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
4167	536876.54	4816460.34	339.14	1	E	A	-48.6	2.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
4204	536831.89	4816436.30	340.12	0	D	A	58.4	7.2	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-23.9
4204	536831.89	4816436.30	340.12	0	N	A	-48.6	7.2	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.9
4204	536831.89	4816436.30	340.12	0	E	A	-48.6	7.2	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.9
4252	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-24.3
4252	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
4252	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.3
4312	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-24.5
4312	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4312	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.5
4379	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-24.9
4379	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-131.9
4379	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	65.1	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-131.9
4394	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-24.9
4394	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.9
4394	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-131.9
4444	536869.40	4816445.60	339.48	0	D	A	58.4	6.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-25.6
4444	536869.40	4816445.60	339.48	0	N	A	-48.6	6.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-132.6
4444	536869.40	4816445.60	339.48	0	E	A	-48.6	6.1	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-132.6
4450	536871.47	4816446.45	339.42	0	D	A	58.4	-3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-35.6
4450	536871.47	4816446.45	339.42	0	N	A	-48.6	-3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-142.5
4450	536871.47	4816446.45	339.42	0	E	A	-48.6	-3.8	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-142.5
4491	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-25.5
4491	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-132.5
4491	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-132.5
4518	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-25.6
4518	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-132.6
4518	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-132.6
4526	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-25.7
4526	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
4526	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
4531	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.7
4531	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
4531	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
4593	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-26.1
4593	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-133.1
4593	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-133.1
4600	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-26.1
4600	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.1
4600	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.1
4707	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-26.5
4707	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.5
4707	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-133.5
4736	536894.27	4816470.01	339.05	0	D	A	58.4	5.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-27.2
4736	536894.27	4816470.01	339.05	0	N	A	-48.6	5.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-134.2
4736	536894.27	4816470.01	339.05	0	E	A	-48.6	5.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-134.2
4740	536893.63	4816471.47	339.01	1	D	A	58.4	-2.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.2
4740	536893.63	4816471.47	339.01	1	N	A	-48.6	-2.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.2
4740	536893.63	4816471.47	339.01	1	E	A	-48.6	-2.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.2
4814	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-27.1
4814	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.1
4814	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.1
4863	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-27.4
4863	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.4
4863	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.4
4951	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-27.7
4951	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-134.6
4951	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-134.6
4960	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-27.7
4960	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.7
4960	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.7
4996	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-28.0
4996	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.9
4996	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-134.9
5009	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-28.0
5009	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
5009	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
5133	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-28.4
5133	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.4
5133	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.4
5140	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-28.4
5140	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5140	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.4
5142	536896.56	4816465.11	339.10	1	D	A	58.4	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.4
5142	536896.56	4816465.11	339.10	1	N	A	-48.6	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.4
5142	536896.56	4816465.11	339.10	1	E	A	-48.6	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.4
5147	536896.56	4816465.11	339.10	1	D	A	58.4	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.4
5147	536896.56	4816465.11	339.10	1	N	A	-48.6	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.4
5147	536896.56	4816465.11	339.10	1	E	A	-48.6	2.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.4
5212	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-28.6
5212	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.6
5212	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.6
5229	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-28.7
5229	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.7
5229	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.7
5245	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-28.8
5245	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.8
5245	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-135.8
5265	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-28.9
5265	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-135.9
5265	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-135.9
5269	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-29.0
5269	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0
5269	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0
5271	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.2
5271	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5271	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5272	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.2
5272	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5272	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5274	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.2
5274	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5274	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.2
5276	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-29.0
5276	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0
5276	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-136.0
5283	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-29.1
5283	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-136.1
5283	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-136.1
5294	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-29.1
5294	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.1
5294	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.1
5305	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-29.3
5305	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-136.2
5305	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-136.2
5321	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-30.1
5321	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-137.1
5321	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-137.1
5345	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-29.7
5345	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.7
5345	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.7
5378	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-29.9
5378	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.9
5378	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-136.9
5395	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-30.1
5395	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.0
5395	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.0
5405	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-30.1
5405	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.1
5405	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.1
5426	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-30.2
5426	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-137.2
5426	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-137.2
5441	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-30.3
5441	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5441	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.3
5453	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-30.4
5453	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.3
5453	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-137.3
5474	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-30.5
5474	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.4
5474	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.4
5489	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-30.5
5489	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.5
5489	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-137.5
5533	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-31.1
5533	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-138.1
5533	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-138.1
5572	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-31.6
5572	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-138.6
5572	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-138.6
5578	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-31.8
5578	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-138.8
5578	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-138.8
5584	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-31.9
5584	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-138.9
5584	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-138.9
5593	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-31.9
5593	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-138.9
5593	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-138.9
5597	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-31.9
5597	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-138.9
5597	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-138.9
5614	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-32.2
5614	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-139.2
5614	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-139.2
5619	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-32.3
5619	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.3
5619	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.3
5640	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-32.6
5640	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.6
5640	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.6
5646	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-32.7
5646	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.7
5646	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.7
5651	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-32.8
5651	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.8
5651	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.8
5658	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-32.8
5658	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-139.8
5658	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-139.8
5662	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-32.9
5662	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.9
5662	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-139.9
5673	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-33.2
5673	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-140.2
5673	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-140.2
5677	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-33.3
5677	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-140.3
5677	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-140.3
5684	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-33.2
5684	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-140.2
5684	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-140.2
5691	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-33.3
5691	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-140.3
5691	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-140.3
5695	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-33.4
5695	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-140.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5695	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-140.4
5701	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-33.7
5701	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-140.7
5701	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-140.7
5706	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-34.3
5706	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-141.3
5706	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-141.3
5712	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-34.3
5712	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-141.3
5712	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-141.3
5723	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-35.4
5723	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-142.4
5723	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-142.4
5736	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-35.8
5736	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-142.8
5736	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-142.8
5745	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-36.2
5745	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-143.2
5745	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-143.2
5751	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-36.6
5751	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-143.6
5751	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-143.6
5760	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-37.9
5760	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-144.9
5760	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-144.9
5766	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-39.0
5766	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-146.0
5766	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-146.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4179	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-24.2
4179	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-124.2
4179	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-124.2
4278	536958.91	4816511.06	339.50	0	D	A	59.5	4.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-28.7
4278	536958.91	4816511.06	339.50	0	N	A	-40.5	4.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
4278	536958.91	4816511.06	339.50	0	E	A	-40.5	4.6	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
4285	536956.24	4816509.41	339.55	0	D	A	59.5	5.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-28.1
4285	536956.24	4816509.41	339.55	0	N	A	-40.5	5.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-128.1
4285	536956.24	4816509.41	339.55	0	E	A	-40.5	5.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-128.1
4318	536960.06	4816523.96	339.50	0	D	A	59.5	8.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-25.5
4318	536960.06	4816523.96	339.50	0	N	A	-40.5	8.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
4318	536960.06	4816523.96	339.50	0	E	A	-40.5	8.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
4415	536963.72	4816507.19	339.51	0	D	A	59.5	7.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-25.7
4415	536963.72	4816507.19	339.51	0	N	A	-40.5	7.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-125.7
4415	536963.72	4816507.19	339.51	0	E	A	-40.5	7.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-125.7
4422	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-25.6
4422	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.6
4422	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-125.6
4617	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-27.2
4617	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-127.2
4617	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-127.2
4625	536955.69	4816510.42	339.56	0	D	A	59.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-27.1
4625	536955.69	4816510.42	339.56	0	N	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
4625	536955.69	4816510.42	339.56	0	E	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
4701	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-27.0
4701	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-127.0
4701	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.0	0.0	0.0	-127.0
4715	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-27.5
4715	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
4715	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
4783	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-27.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4783	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
4783	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
4791	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-27.9
4791	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.9
4791	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-127.9
4879	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.0
4879	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4879	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.0
4929	536971.19	4816491.72	339.73	0	D	A	59.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.1
4929	536971.19	4816491.72	339.73	0	N	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.1
4929	536971.19	4816491.72	339.73	0	E	A	-40.5	4.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.1
4944	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.2
4944	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.2
4944	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.2
5040	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-29.0
5040	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-129.0
5040	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-129.0
5070	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-29.1
5070	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-129.1
5070	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-129.1
5083	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-28.7
5083	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.7
5083	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-128.7
5176	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-29.5
5176	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-129.5
5176	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-129.5
5233	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-29.3
5233	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
5233	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
5252	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-29.8
5252	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-129.8
5252	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-129.8
5258	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-29.9
5258	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-129.9
5258	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-129.9
5279	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-30.1
5279	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.1
5279	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.1
5300	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-30.2
5300	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
5300	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
5312	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-29.8
5312	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-129.8
5312	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-129.8
5324	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-30.5
5324	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.5
5324	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.5
5332	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-30.7
5332	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.7
5332	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-130.7
5336	536961.94	4816530.00	339.50	0	D	A	59.5	1.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-32.0
5336	536961.94	4816530.00	339.50	0	N	A	-40.5	1.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-132.0
5336	536961.94	4816530.00	339.50	0	E	A	-40.5	1.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-132.0
5340	536962.42	4816530.86	339.49	0	D	A	59.5	-2.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-36.6
5340	536962.42	4816530.86	339.49	0	N	A	-40.5	-2.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-136.6
5340	536962.42	4816530.86	339.49	0	E	A	-40.5	-2.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.4	0.0	0.0	-136.6
5358	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-30.3
5358	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.3
5358	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.3
5389	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-30.6
5389	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.6
5389	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.6
5400	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-31.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5400	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-131.1
5400	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-131.1
5410	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-31.1
5410	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.1
5410	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.1
5432	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-31.2
5432	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.2
5432	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.2
5437	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-30.8
5437	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.8
5437	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.8
5458	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-30.9
5458	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.9
5458	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-130.9
5463	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-31.0
5463	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-131.0
5463	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-131.0
5468	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-31.4
5468	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.4
5468	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-131.4
5494	536962.15	4816514.37	339.43	0	D	A	59.5	0.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-33.0
5494	536962.15	4816514.37	339.43	0	N	A	-40.5	0.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-133.0
5494	536962.15	4816514.37	339.43	0	E	A	-40.5	0.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-133.0
5497	536962.14	4816515.13	339.43	0	D	A	59.5	-3.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-37.3
5497	536962.14	4816515.13	339.43	0	N	A	-40.5	-3.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-137.3
5497	536962.14	4816515.13	339.43	0	E	A	-40.5	-3.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-137.3
5506	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-31.8
5506	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-131.8
5506	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-131.8
5513	536964.09	4816517.19	339.41	0	D	A	59.5	0.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-33.3
5513	536964.09	4816517.19	339.41	0	N	A	-40.5	0.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-133.3
5513	536964.09	4816517.19	339.41	0	E	A	-40.5	0.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-133.3
5517	536963.78	4816516.54	339.41	0	D	A	59.5	-4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-37.8
5517	536963.78	4816516.54	339.41	0	N	A	-40.5	-4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-137.8
5517	536963.78	4816516.54	339.41	0	E	A	-40.5	-4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-137.8
5522	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-32.0
5522	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-132.0
5522	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-132.0
5527	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-32.1
5527	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-132.1
5527	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-132.1
5538	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-31.7
5538	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
5538	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
5548	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-32.2
5548	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.2
5548	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.2
5552	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-32.5
5552	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5552	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5557	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-32.5
5557	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5557	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5562	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-32.5
5562	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5562	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.5
5567	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-32.6
5567	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.6
5567	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-132.6
5589	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-33.0
5589	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-133.0
5589	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-133.0
5608	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-33.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																			
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5608	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-133.2
5608	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.3	0.0	0.0	-133.2

Receiver
Name: Building F1 Tower - North Facade Facade
ID: POR
X: 536534.39 m
Y: 4816217.06 m
Z: 372.57 m

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	48.2
3	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	45.2
3	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	48.2

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
8	536415.97	4816336.50	359.79	0	D	A	97.3	0.0	0.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	44.2
8	536415.97	4816336.50	359.79	0	N	A	97.3	0.0	-3.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	41.2
8	536415.97	4816336.50	359.79	0	E	A	97.3	0.0	0.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	44.2

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
14	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	50.9
14	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-137.1
14	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-137.1
18	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	49.4
18	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-138.6
18	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-138.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
29	536660.95	4816008.64	345.75	0	D	A	101.5	0.0	0.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	16.7
29	536660.95	4816008.64	345.75	0	N	A	101.5	0.0	-188.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	-171.3
29	536660.95	4816008.64	345.75	0	E	A	101.5	0.0	-188.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	-171.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
36	536660.48	4816041.55	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	9.5
36	536660.48	4816041.55	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	3.5
36	536660.48	4816041.55	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	9.5
39	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	8.8	-0.3
39	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	8.8	-6.3
39	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	8.8	-0.3

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
46	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	9.5
46	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	3.5
46	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	9.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
61	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	9.0
61	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	3.0
61	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	9.0
64	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	6.2
64	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	0.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
64	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	6.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
74	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	8.4
74	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	2.4
74	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	8.4
77	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-12.1
77	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-18.1
77	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-12.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
92	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	6.0
92	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	3.0
92	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	6.0

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
95	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	41.7
95	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-146.3
95	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-146.3
99	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	38.8
99	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	-149.2
99	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	-149.2
101	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	40.6
101	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-147.4
101	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-147.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
113	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.7	0.0	0.0	16.3
113	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.7	0.0	0.0	-168.6
113	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.7	0.0	0.0	-168.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
124	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	9.0
124	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	3.0
124	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	9.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
133	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.6	0.0	0.0	8.8
133	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.6	0.0	0.0	2.8
133	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.6	0.0	0.0	8.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
143	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.1	0.0	0.0	8.2
143	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.1	0.0	0.0	2.2
143	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.1	0.0	0.0	8.2

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
153	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	8.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
153	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	2.0
153	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	8.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
163	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	6.3
163	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	6.3
163	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	6.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
173	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	5.1
173	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	-175.1
173	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	5.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
180	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	5.4
180	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-0.6
180	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	5.4
183	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-6.2
183	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-12.2
183	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-6.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
193	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.2	0.0	0.0	5.5
193	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.2	0.0	0.0	-0.5
193	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.2	0.0	0.0	5.5
196	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	10.0	-6.4
196	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	10.0	-12.4
196	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	10.0	-6.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
214	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	4.6
214	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	-175.6
214	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	4.6

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
217	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
217	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
217	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
221	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
221	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
221	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
224	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
224	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
224	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
227	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
227	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
227	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
238	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	5.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
238	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-0.9
238	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	5.1

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
242	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.8
242	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.8
242	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
254	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	3.2
254	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	-2.8
254	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	3.2
259	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	0.5
259	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	-5.5
259	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	0.5
263	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-1.9
263	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-7.9
263	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-1.9
267	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-1.5
267	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-7.5
267	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-1.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
288	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.7	0.0	0.0	11.4
288	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.7	0.0	0.0	-176.6
288	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.7	0.0	0.0	11.4

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
290	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
290	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.2
290	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
292	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
292	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-10.0
292	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
296	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
296	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-3.3
296	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
299	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
299	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
299	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
310	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	5.0
310	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	-1.0
310	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	5.0

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
315	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	28.9
315	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	25.9
315	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	28.9
319	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
319	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
319	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
320	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.6
320	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6
320	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.6
321	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6
321	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
321	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
327	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	2.9
327	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	-3.1
327	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	2.9
332	536692.85	4816072.45	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	0.5
332	536692.85	4816072.45	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	-5.5
332	536692.85	4816072.45	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	0.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
334	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
334	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
334	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
337	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
337	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
337	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
340	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
340	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
340	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
343	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0
343	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0
343	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
353	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.9	0.0	0.0	4.9
353	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.9	0.0	0.0	-1.1
353	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.9	0.0	0.0	4.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
361	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
361	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
361	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
363	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0
363	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0
363	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
376	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	2.5
376	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	-3.5
376	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	2.5

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
447	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
447	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
447	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
459	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
459	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
459	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
466	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
466	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
466	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
471	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
471	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
471	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
474	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
474	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
474	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
476	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2
476	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2
476	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
483	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	2.6
483	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	-3.5
483	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	2.6

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
486	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
486	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
486	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
489	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	61.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.8
489	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	61.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.8
489	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	61.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.8
491	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
491	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
491	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
494	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
494	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
494	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
503	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.9	0.0	0.0	-0.9
503	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.9	0.0	0.0	-0.9
503	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.9	0.0	0.0	-0.9
506	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5
506	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5
506	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
520	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.3
520	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
520	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
524	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-11.6
524	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-199.6
524	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-199.6
527	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	2.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
527	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-185.8
527	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-185.8
528	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	6.0
528	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.0
528	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
536	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.2
536	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
536	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
540	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-0.6
540	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
540	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
543	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	6.1
543	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.9
543	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
554	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.2
554	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
554	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
564	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-0.6
564	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
564	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
567	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	3.6
567	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.4
567	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.4

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
571	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
571	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
571	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
574	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	61.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
574	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	61.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
574	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	61.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
576	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
576	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
576	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
578	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
578	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
578	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
587	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.1
587	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.9
587	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.9
588	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-24.7
588	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-212.7
588	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-212.7
591	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	1.8
591	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.2
591	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.2
594	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.6
594	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.4
594	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
603	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.0
603	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-179.0
603	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-179.0
606	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-25.0
606	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-213.0
606	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-213.0
613	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	1.7
613	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.3
613	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.3
615	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.5
615	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.5
615	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.5

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
624	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.5	0.0	0.0	5.2
624	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.5	0.0	0.0	-0.8
624	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.5	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
633	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.1	0.0	0.0	5.5
633	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.1	0.0	0.0	-0.6
633	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.1	0.0	0.0	5.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
638	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	8.7
638	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	-179.3
638	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	-179.3
641	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-25.5
641	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-213.5
641	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-213.5
645	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	1.4
645	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.6
645	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.6
647	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.2
647	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.8
647	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
651	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	8.5
651	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	-179.5
651	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	-179.5
654	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-25.8
654	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-213.8
654	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-213.8
657	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	1.3
657	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.7
657	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.7
660	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	5.1
660	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-182.9
660	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-182.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
669	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	0.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
669	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	-5.8
669	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	0.2
672	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-4.7
672	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-10.8
672	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-4.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
679	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	1.3
679	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	1.3
679	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	1.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
689	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1
689	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1
689	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
701	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	1.0
701	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-5.1
701	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	1.0

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
706	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-3.8
706	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-174.0
706	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-3.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
712	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	0.7
712	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3
712	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	0.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
720	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.8
720	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-6.8
720	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
727	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.9
727	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-7.0
727	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
731	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-4.3
731	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-174.6
731	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
736	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-1.3
736	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-7.4
736	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
744	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-0.0
744	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-6.0
744	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-0.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
754	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-0.0
754	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-6.1
754	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-0.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
764	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-1.2
764	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-7.2
764	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-1.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
780	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-2.1
780	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-8.1
780	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-2.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
786	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-1.9
786	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-8.0
786	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-1.9
790	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-6.8
790	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-12.9
790	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-6.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
795	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7
795	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7
795	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
801	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-1.8
801	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-7.8
801	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-1.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
809	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8
809	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8
809	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
820	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-0.8
820	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-6.8
820	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-0.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
829	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	1.8
829	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	-4.2
829	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	1.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
836	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	2.4
836	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	-3.7
836	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
846	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-3.3
846	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-9.3
846	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-3.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
858	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4
858	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4
858	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
868	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-2.6
868	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-8.7
868	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-2.6
871	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-24.0
871	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-30.1
871	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-24.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
877	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	5.3
877	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	-182.7
877	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	-182.7
879	536707.14	4816053.41	345.47	1	D	A	85.0	0.0	0.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	1.7
879	536707.14	4816053.41	345.47	1	N	A	85.0	0.0	-188.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	-186.3
879	536707.14	4816053.41	345.47	1	E	A	85.0	0.0	-188.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	-186.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
887	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
887	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
887	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
895	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
895	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
895	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
906	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-0.5
906	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-6.5
906	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-0.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
915	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.7
915	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.7
915	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
925	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.9	0.0	0.0	-1.3
925	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.9	0.0	0.0	-7.3
925	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.9	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
934	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.6	0.0	0.0	-2.0
934	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.6	0.0	0.0	-8.0
934	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.6	0.0	0.0	-2.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
944	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-3.2
944	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-9.3
944	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-3.2
947	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-25.2
947	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-31.3
947	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-25.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
961	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
961	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-9.4
961	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
965	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.4
965	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-14.5
965	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
970	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
970	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-9.4
970	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
972	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-14.1
972	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-20.2
972	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-14.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
979	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-3.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
979	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-9.4
979	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-3.4
982	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.5
982	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-14.5
982	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.5

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
983	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
983	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
983	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
989	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
989	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-10.2
989	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
997	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-3.5
997	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-9.6
997	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-3.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1003	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-3.9
1003	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-9.9
1003	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-3.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1011	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-4.3
1011	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-10.3
1011	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1022	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-5.0
1022	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-11.0
1022	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-5.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1028	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.6	0.0	0.0	-3.8
1028	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.6	0.0	0.0	-9.8
1028	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.6	0.0	0.0	-3.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1039	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-4.2
1039	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-10.2
1039	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1048	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-4.2
1048	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-10.2
1048	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1055	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-4.3
1055	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-10.4
1055	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1058	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
1058	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
1058	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1065	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-4.4
1065	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-10.4
1065	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-4.4
1069	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.4	-30.2
1069	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.4	-36.3
1069	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.4	-30.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1071	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1
1071	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1
1071	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1079	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5
1079	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5
1079	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1080	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1080	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1080	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1086	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-4.2
1086	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-10.2
1086	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-4.2
1088	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	23.6	-30.7
1088	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	23.6	-36.8
1088	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	23.6	-30.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1091	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9
1091	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1091	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1093	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
1093	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
1093	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1094	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
1094	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
1094	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1101	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
1101	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
1101	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1104	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6
1104	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6
1104	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1106	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
1106	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
1106	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1114	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-4.9
1114	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-10.9
1114	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.3	0.0	0.0	-4.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1117	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1117	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1117	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1119	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	28.0
1119	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.0
1119	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.0

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1125	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-3.9
1125	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-191.9
1125	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-3.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1129	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.9
1129	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1
1129	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1133	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.9
1133	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1
1133	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1135	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
1135	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.2
1135	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1137	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0
1137	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0
1137	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1139	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
1139	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
1139	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1146	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.4	0.0	0.0	-7.8
1146	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.4	0.0	0.0	-7.8
1146	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.4	0.0	0.0	-7.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1148	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
1148	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
1148	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1156	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.5	0.0	0.0	-8.5
1156	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.5	0.0	0.0	-8.5
1156	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.5	0.0	0.0	-8.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1163	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-7.2
1163	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-13.3
1163	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-7.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1171	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1171	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-12.7
1171	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1177	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.8
1177	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-12.8
1177	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1187	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-7.3
1187	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-13.3
1187	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-7.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1203	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-2.2
1203	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-182.4
1203	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-182.4
1207	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-8.7
1207	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-188.9
1207	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-188.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1218	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-6.9
1218	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-12.9
1218	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-6.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1226	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-7.2
1226	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-13.2
1226	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-7.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1231	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.5
1231	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1231	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
1234	536418.14	4816239.44	352.83	1	D	A	62.5	12.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.0
1234	536418.14	4816239.44	352.83	1	N	A	-40.5	12.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-112.1
1234	536418.14	4816239.44	352.83	1	E	A	-40.5	12.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-112.1
1239	536418.40	4816239.57	352.82	1	D	A	62.5	12.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
1239	536418.40	4816239.57	352.82	1	N	A	-40.5	12.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-108.2
1239	536418.40	4816239.57	352.82	1	E	A	-40.5	12.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-108.2
1244	536408.27	4816234.73	353.17	1	D	A	62.5	8.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
1244	536408.27	4816234.73	353.17	1	N	A	-40.5	8.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.9
1244	536408.27	4816234.73	353.17	1	E	A	-40.5	8.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.9
1247	536421.22	4816240.91	352.72	1	D	A	62.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	18.6
1247	536421.22	4816240.91	352.72	1	N	A	-40.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-84.4
1247	536421.22	4816240.91	352.72	1	E	A	-40.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-84.4
1285	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	25.0
1285	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
1285	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
1292	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
1292	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1292	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
1297	536457.23	4816257.79	351.62	1	D	A	62.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	14.1
1297	536457.23	4816257.79	351.62	1	N	A	-40.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-89.0
1297	536457.23	4816257.79	351.62	1	E	A	-40.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-89.0
1316	536436.24	4816248.09	352.25	0	D	A	62.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	24.5
1316	536436.24	4816248.09	352.25	0	N	A	-40.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
1316	536436.24	4816248.09	352.25	0	E	A	-40.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
1318	536441.46	4816250.58	352.12	1	D	A	62.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1318	536441.46	4816250.58	352.12	1	N	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1318	536441.46	4816250.58	352.12	1	E	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1319	536435.68	4816247.83	352.27	1	D	A	62.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
1319	536435.68	4816247.83	352.27	1	N	A	-40.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.2
1319	536435.68	4816247.83	352.27	1	E	A	-40.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.2
1326	536440.12	4816249.95	352.16	1	D	A	62.5	6.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1326	536440.12	4816249.95	352.16	1	N	A	-40.5	6.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1326	536440.12	4816249.95	352.16	1	E	A	-40.5	6.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1329	536434.87	4816247.44	352.29	1	D	A	62.5	8.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1329	536434.87	4816247.44	352.29	1	N	A	-40.5	8.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1329	536434.87	4816247.44	352.29	1	E	A	-40.5	8.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1332	536438.45	4816249.15	352.20	1	D	A	62.5	9.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
1332	536438.45	4816249.15	352.20	1	N	A	-40.5	9.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.2
1332	536438.45	4816249.15	352.20	1	E	A	-40.5	9.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.2
1334	536432.67	4816246.39	352.34	1	D	A	62.5	6.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
1334	536432.67	4816246.39	352.34	1	N	A	-40.5	6.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.6
1334	536432.67	4816246.39	352.34	1	E	A	-40.5	6.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.6
1338	536439.16	4816249.49	352.18	1	D	A	62.5	8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.4
1338	536439.16	4816249.49	352.18	1	N	A	-40.5	8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
1338	536439.16	4816249.49	352.18	1	E	A	-40.5	8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
1341	536436.21	4816248.08	352.26	1	D	A	62.5	-7.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
1341	536436.21	4816248.08	352.26	1	N	A	-40.5	-7.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
1341	536436.21	4816248.08	352.26	1	E	A	-40.5	-7.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
1366	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
1366	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
1366	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
1374	536443.93	4816251.77	352.06	1	D	A	62.5	6.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
1374	536443.93	4816251.77	352.06	1	N	A	-40.5	6.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1374	536443.93	4816251.77	352.06	1	E	A	-40.5	6.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1376	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
1376	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
1376	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
1378	536444.73	4816252.15	352.04	1	D	A	62.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1378	536444.73	4816252.15	352.04	1	N	A	-40.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1378	536444.73	4816252.15	352.04	1	E	A	-40.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1385	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	23.0
1385	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.0
1385	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.0
1388	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
1388	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
1388	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
1390	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	20.5
1390	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-82.5
1390	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-82.5
1394	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
1394	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.5
1394	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.5
1399	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	13.8
1399	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	-89.2
1399	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	-89.2
1401	536368.61	4816210.13	354.57	1	D	A	62.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
1401	536368.61	4816210.13	354.57	1	N	A	-40.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
1401	536368.61	4816210.13	354.57	1	E	A	-40.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
1404	536377.86	4816214.59	354.41	1	D	A	62.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-14.3
1404	536377.86	4816214.59	354.41	1	N	A	-40.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-117.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1404	536377.86	4816214.59	354.41	1	E	A	-40.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-117.3
1408	536369.13	4816216.02	354.57	0	D	A	62.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	11.7
1408	536369.13	4816216.02	354.57	0	N	A	-40.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	-91.3
1408	536369.13	4816216.02	354.57	0	E	A	-40.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	-91.3
1409	536359.04	4816211.20	354.75	0	D	A	62.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	21.4
1409	536359.04	4816211.20	354.75	0	N	A	-40.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.6
1409	536359.04	4816211.20	354.75	0	E	A	-40.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.6
1414	536360.63	4816211.96	354.72	1	D	A	62.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
1414	536360.63	4816211.96	354.72	1	N	A	-40.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
1414	536360.63	4816211.96	354.72	1	E	A	-40.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
1419	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.4
1419	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
1419	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
1433	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
1433	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1433	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1445	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
1445	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1445	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1455	536428.31	4816265.09	352.94	0	D	A	62.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
1455	536428.31	4816265.09	352.94	0	N	A	-40.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1455	536428.31	4816265.09	352.94	0	E	A	-40.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
1461	536424.71	4816263.19	353.06	1	D	A	62.5	2.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1461	536424.71	4816263.19	353.06	1	N	A	-40.5	2.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1461	536424.71	4816263.19	353.06	1	E	A	-40.5	2.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1465	536429.12	4816265.51	352.91	1	D	A	62.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-16.3
1465	536429.12	4816265.51	352.91	1	N	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1465	536429.12	4816265.51	352.91	1	E	A	-40.5	9.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1469	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
1469	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1469	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
1474	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
1474	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
1474	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
1477	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	19.8
1477	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
1477	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
1482	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	22.1
1482	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
1482	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
1486	536408.42	4816254.28	353.65	1	D	A	62.5	9.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-9.0
1486	536408.42	4816254.28	353.65	1	N	A	-40.5	9.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.0
1486	536408.42	4816254.28	353.65	1	E	A	-40.5	9.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.0
1489	536413.65	4816257.15	353.46	1	D	A	62.5	5.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
1489	536413.65	4816257.15	353.46	1	N	A	-40.5	5.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1489	536413.65	4816257.15	353.46	1	E	A	-40.5	5.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1493	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	19.8
1493	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
1493	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
1497	536381.81	4816216.51	354.26	0	D	A	62.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	3.1
1497	536381.81	4816216.51	354.26	0	N	A	-40.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	-99.9
1497	536381.81	4816216.51	354.26	0	E	A	-40.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	-99.9
1501	536387.91	4816219.58	353.96	0	D	A	62.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	12.6
1501	536387.91	4816219.58	353.96	0	N	A	-40.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	-90.4
1501	536387.91	4816219.58	353.96	0	E	A	-40.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	-90.4
1504	536393.55	4816222.41	353.69	0	D	A	62.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	10.3
1504	536393.55	4816222.41	353.69	0	N	A	-40.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
1504	536393.55	4816222.41	353.69	0	E	A	-40.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
1507	536381.82	4816216.52	354.26	1	D	A	62.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1507	536381.82	4816216.52	354.26	1	N	A	-40.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1507	536381.82	4816216.52	354.26	1	E	A	-40.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1509	536388.33	4816219.79	353.94	1	D	A	62.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
1509	536388.33	4816219.79	353.94	1	N	A	-40.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1509	536388.33	4816219.79	353.94	1	E	A	-40.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0
1514	536452.96	4816276.80	351.88	0	D	A	62.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.0
1514	536452.96	4816276.80	351.88	0	N	A	-40.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.0
1514	536452.96	4816276.80	351.88	0	E	A	-40.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.0
1520	536451.82	4816276.45	351.94	1	D	A	62.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
1520	536451.82	4816276.45	351.94	1	N	A	-40.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1520	536451.82	4816276.45	351.94	1	E	A	-40.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1525	536452.90	4816276.78	351.89	1	D	A	62.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	19.2
1525	536452.90	4816276.78	351.89	1	N	A	-40.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-83.8
1525	536452.90	4816276.78	351.89	1	E	A	-40.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-83.8
1544	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	21.5
1544	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.5
1544	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.5
1551	536388.06	4816225.07	354.09	0	D	A	62.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	20.9
1551	536388.06	4816225.07	354.09	0	N	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.1
1551	536388.06	4816225.07	354.09	0	E	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.1
1555	536382.28	4816222.31	354.37	0	D	A	62.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	7.8
1555	536382.28	4816222.31	354.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.2
1555	536382.28	4816222.31	354.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.2
1559	536389.48	4816225.75	354.02	1	D	A	62.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
1559	536389.48	4816225.75	354.02	1	N	A	-40.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1559	536389.48	4816225.75	354.02	1	E	A	-40.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
1564	536383.71	4816222.99	354.30	1	D	A	62.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9
1564	536383.71	4816222.99	354.30	1	N	A	-40.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
1564	536383.71	4816222.99	354.30	1	E	A	-40.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
1568	536391.61	4816226.77	353.92	1	D	A	62.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	3.4
1568	536391.61	4816226.77	353.92	1	N	A	-40.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-99.6
1568	536391.61	4816226.77	353.92	1	E	A	-40.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-99.6
1573	536389.11	4816225.57	354.04	1	D	A	62.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	0.6
1573	536389.11	4816225.57	354.04	1	N	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-102.4
1573	536389.11	4816225.57	354.04	1	E	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-102.4
1589	536397.73	4816229.69	353.62	0	D	A	62.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	20.8
1589	536397.73	4816229.69	353.62	0	N	A	-40.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.2
1589	536397.73	4816229.69	353.62	0	E	A	-40.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.2
1592	536397.73	4816229.69	353.62	1	D	A	62.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
1592	536397.73	4816229.69	353.62	1	N	A	-40.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1592	536397.73	4816229.69	353.62	1	E	A	-40.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1763	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	20.5
1763	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.6
1763	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.6
1767	536421.26	4816261.32	353.19	1	D	A	62.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1767	536421.26	4816261.32	353.19	1	N	A	-40.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1767	536421.26	4816261.32	353.19	1	E	A	-40.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1769	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
1769	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.2
1769	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.2
1771	536422.57	4816262.03	353.14	1	D	A	62.5	4.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
1771	536422.57	4816262.03	353.14	1	N	A	-40.5	4.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1771	536422.57	4816262.03	353.14	1	E	A	-40.5	4.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1773	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	18.0
1773	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-85.0
1773	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-85.0
1776	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
1776	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1776	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1781	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
1781	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
1781	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
1787	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
1787	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1787	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1794	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	19.9
1794	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1794	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1799	536453.76	4816301.05	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	7.8
1799	536453.76	4816301.05	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-95.2
1799	536453.76	4816301.05	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-95.2
1813	536468.03	4816272.53	351.38	0	D	A	62.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.6
1813	536468.03	4816272.53	351.38	0	N	A	-40.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1813	536468.03	4816272.53	351.38	0	E	A	-40.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1825	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
1825	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
1825	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
1836	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1836	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1836	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1857	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1857	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1857	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1862	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5
1862	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.5
1862	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.5
1867	536403.55	4816242.41	353.61	1	D	A	62.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	14.4
1867	536403.55	4816242.41	353.61	1	N	A	-40.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-88.6
1867	536403.55	4816242.41	353.61	1	E	A	-40.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-88.6
1871	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	18.9
1871	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1871	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1877	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	15.0
1877	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
1877	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
1882	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	17.7
1882	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-85.3
1882	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-85.3
1919	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.5
1919	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1919	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1925	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
1925	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1925	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1928	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	15.9
1928	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.1
1928	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.1
1933	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
1933	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1933	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1942	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1942	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1942	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1949	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1949	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1949	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1956	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
1956	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
1956	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
1963	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
1963	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1963	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1967	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	18.1
1967	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
1967	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
1973	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
1973	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1973	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1977	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	15.6
1977	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1977	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.4
1987	536449.63	4816310.01	351.46	0	D	A	62.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
1987	536449.63	4816310.01	351.46	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1987	536449.63	4816310.01	351.46	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1993	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	14.5
1993	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.5
1993	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.5
1996	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	16.7
1996	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.3
1996	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.3
2000	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
2000	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
2000	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
2005	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
2005	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
2005	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
2010	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
2010	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.1
2010	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.1
2013	536343.48	4816203.77	354.95	0	D	A	62.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
2013	536343.48	4816203.77	354.95	0	N	A	-40.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2013	536343.48	4816203.77	354.95	0	E	A	-40.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2016	536343.48	4816203.77	354.95	1	D	A	62.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
2016	536343.48	4816203.77	354.95	1	N	A	-40.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
2016	536343.48	4816203.77	354.95	1	E	A	-40.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
2018	536449.90	4816310.20	351.45	0	D	A	62.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
2018	536449.90	4816310.20	351.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2018	536449.90	4816310.20	351.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2023	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	14.4
2023	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.6
2023	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.6
2027	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	16.6
2027	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.5
2027	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.5
2031	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
2031	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2031	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2034	536396.16	4816223.72	353.57	1	D	A	62.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
2034	536396.16	4816223.72	353.57	1	N	A	-40.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.6
2034	536396.16	4816223.72	353.57	1	E	A	-40.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.6
2051	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
2051	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2051	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
2056	536427.25	4816243.79	352.51	1	D	A	62.5	4.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
2056	536427.25	4816243.79	352.51	1	N	A	-40.5	4.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
2056	536427.25	4816243.79	352.51	1	E	A	-40.5	4.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
2060	536425.84	4816243.12	352.56	1	D	A	62.5	-5.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
2060	536425.84	4816243.12	352.56	1	N	A	-40.5	-5.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
2060	536425.84	4816243.12	352.56	1	E	A	-40.5	-5.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
2065	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
2065	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
2065	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
2070	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	12.8
2070	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.2
2070	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.2
2074	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
2074	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2074	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
2079	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
2079	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
2079	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
2090	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.4
2090	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2090	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
2094	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
2094	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
2094	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
2099	536347.35	4816199.98	354.88	0	D	A	62.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	6.2
2099	536347.35	4816199.98	354.88	0	N	A	-40.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-96.8
2099	536347.35	4816199.98	354.88	0	E	A	-40.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-96.8
2103	536350.86	4816201.65	354.84	0	D	A	62.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	6.0
2103	536350.86	4816201.65	354.84	0	N	A	-40.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	-97.0
2103	536350.86	4816201.65	354.84	0	E	A	-40.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	-97.0
2106	536348.40	4816200.48	354.87	1	D	A	62.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-12.8
2106	536348.40	4816200.48	354.87	1	N	A	-40.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-115.8
2106	536348.40	4816200.48	354.87	1	E	A	-40.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-115.8
2109	536351.91	4816202.14	354.82	1	D	A	62.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2109	536351.91	4816202.14	354.82	1	N	A	-40.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2109	536351.91	4816202.14	354.82	1	E	A	-40.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2126	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
2126	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2126	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2131	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
2131	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2131	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
2135	536403.80	4816232.59	353.33	1	D	A	62.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
2135	536403.80	4816232.59	353.33	1	N	A	-40.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
2135	536403.80	4816232.59	353.33	1	E	A	-40.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
2140	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	13.5
2140	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-89.6
2140	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-89.6
2145	536374.13	4816218.41	354.55	1	D	A	62.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
2145	536374.13	4816218.41	354.55	1	N	A	-40.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
2145	536374.13	4816218.41	354.55	1	E	A	-40.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
2150	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	13.0
2150	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	-90.0
2150	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	-90.0
2155	536379.69	4816221.07	354.50	1	D	A	62.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
2155	536379.69	4816221.07	354.50	1	N	A	-40.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
2155	536379.69	4816221.07	354.50	1	E	A	-40.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
2174	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.0
2174	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
2174	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
2179	536404.33	4816229.46	353.24	1	D	A	62.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
2179	536404.33	4816229.46	353.24	1	N	A	-40.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
2179	536404.33	4816229.46	353.24	1	E	A	-40.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
2191	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
2191	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
2191	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
2196	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
2196	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
2196	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
2201	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
2201	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
2201	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
2207	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.5
2207	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.5
2207	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.5
2210	536452.80	4816302.87	351.41	1	D	A	62.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	13.0
2210	536452.80	4816302.87	351.41	1	N	A	-40.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-90.1
2210	536452.80	4816302.87	351.41	1	E	A	-40.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-90.1
2214	536356.96	4816204.53	354.77	0	D	A	62.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	8.3
2214	536356.96	4816204.53	354.77	0	N	A	-40.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	-94.7
2214	536356.96	4816204.53	354.77	0	E	A	-40.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	-94.7
2217	536356.96	4816204.53	354.77	1	D	A	62.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
2217	536356.96	4816204.53	354.77	1	N	A	-40.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2217	536356.96	4816204.53	354.77	1	E	A	-40.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
2221	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.8
2221	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
2221	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
2226	536468.11	4816265.40	351.37	1	D	A	62.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2226	536468.11	4816265.40	351.37	1	N	A	-40.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2226	536468.11	4816265.40	351.37	1	E	A	-40.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2231	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
2231	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
2231	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
2236	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
2236	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
2236	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
2239	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
2239	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
2239	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
2241	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	12.7
2241	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.3
2241	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.3
2244	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
2244	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2244	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2257	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
2257	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2257	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2263	536452.93	4816304.47	351.39	1	D	A	62.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	3.5
2263	536452.93	4816304.47	351.39	1	N	A	-40.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-99.5
2263	536452.93	4816304.47	351.39	1	E	A	-40.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-99.5
2268	536452.86	4816304.61	351.39	1	D	A	62.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-2.3
2268	536452.86	4816304.61	351.39	1	N	A	-40.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-105.3
2268	536452.86	4816304.61	351.39	1	E	A	-40.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-105.3
2273	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
2273	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2273	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
2278	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.6
2278	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.4
2278	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.4
2282	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	14.4
2282	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-88.7
2282	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-88.7
2292	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.4
2292	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
2292	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
2299	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
2299	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2299	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2306	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
2306	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2306	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2312	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
2312	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2312	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
2316	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
2316	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2316	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
2320	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
2320	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
2320	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
2324	536400.70	4816226.18	353.36	1	D	A	62.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3
2324	536400.70	4816226.18	353.36	1	N	A	-40.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2324	536400.70	4816226.18	353.36	1	E	A	-40.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
2360	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.8
2360	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2360	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
2364	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.1
2364	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.0
2364	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.0
2369	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	13.6
2369	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
2369	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
2373	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.8
2373	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
2373	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
2377	536402.65	4816227.52	353.28	1	D	A	62.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
2377	536402.65	4816227.52	353.28	1	N	A	-40.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2377	536402.65	4816227.52	353.28	1	E	A	-40.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
2381	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
2381	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
2381	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
2386	536405.48	4816237.96	353.37	1	D	A	62.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.7
2386	536405.48	4816237.96	353.37	1	N	A	-40.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
2386	536405.48	4816237.96	353.37	1	E	A	-40.5	3.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
2417	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
2417	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
2417	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
2420	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
2420	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2420	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
2425	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	11.8
2425	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-91.2
2425	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-91.2
2445	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
2445	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2445	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2450	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
2450	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
2450	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
2455	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
2455	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2455	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2460	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
2460	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
2460	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
2465	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	12.0
2465	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.0
2465	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.0
2491	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
2491	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2491	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2494	536405.48	4816231.60	353.22	1	D	A	62.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
2494	536405.48	4816231.60	353.22	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
2494	536405.48	4816231.60	353.22	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
2521	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.1
2521	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
2521	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
2541	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.0
2541	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
2541	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
2544	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.4
2544	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2544	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
2554	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
2554	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
2554	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
2559	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
2559	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2559	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
2569	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
2569	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2569	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2573	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
2573	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2573	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2577	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
2577	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2577	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2581	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	11.1
2581	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-91.9
2581	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-91.9
2585	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
2585	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2585	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2589	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
2589	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
2589	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
2593	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.4
2593	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.7
2593	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.7
2595	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
2595	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
2595	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
2598	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2598	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2598	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2601	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
2601	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2601	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
2620	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	3.8
2620	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	-99.3
2620	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	-99.3
2624	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
2624	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
2624	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
2627	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	0.9
2627	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	-102.2
2627	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	-102.2
2631	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
2631	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
2631	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
2635	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
2635	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
2635	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
2640	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	4.7
2640	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-98.3
2640	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-98.3
2644	536342.89	4816197.36	354.93	1	D	A	62.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-20.0
2644	536342.89	4816197.36	354.93	1	N	A	-40.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
2644	536342.89	4816197.36	354.93	1	E	A	-40.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
2648	536344.33	4816198.37	354.91	1	D	A	62.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-18.4
2648	536344.33	4816198.37	354.91	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
2648	536344.33	4816198.37	354.91	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
2660	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	13.1
2660	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
2660	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
2664	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
2664	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2664	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
2668	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.0
2668	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2668	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
2673	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
2673	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2673	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2678	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
2678	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2678	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2709	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
2709	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
2709	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
2713	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.8
2713	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2713	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
2718	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	10.4
2718	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-92.6
2718	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-92.6
2729	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	5.4
2729	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	-97.6
2729	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	-97.6
2733	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
2733	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2733	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2737	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
2737	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
2737	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
2742	536398.99	4816225.19	353.43	1	D	A	62.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
2742	536398.99	4816225.19	353.43	1	N	A	-40.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2742	536398.99	4816225.19	353.43	1	E	A	-40.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
2760	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
2760	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
2760	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
2765	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2765	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2765	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2770	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	9.8
2770	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
2770	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
2807	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
2807	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2807	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2812	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
2812	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
2812	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
2815	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	9.7
2815	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-93.3
2815	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-93.3
2820	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
2820	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2820	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2822	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2822	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2822	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2915	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	8.0
2915	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.0
2915	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.0
2917	536377.04	4816219.80	354.59	1	D	A	62.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2917	536377.04	4816219.80	354.59	1	N	A	-40.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
2917	536377.04	4816219.80	354.59	1	E	A	-40.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
3008	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	7.1
3008	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.9
3008	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.9
3013	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
3013	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3013	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
3277	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.2
3277	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3277	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3282	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
3282	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
3282	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
3286	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	5.8
3286	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-97.2
3286	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-97.2
3455	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3455	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3455	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3460	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3460	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3460	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3466	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3466	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3466	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3471	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3471	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3471	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3510	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
3510	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3510	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3559	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
3559	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
3559	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
3567	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
3567	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3567	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3572	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
3572	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
3572	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
3616	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-3.3
3616	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.3
3616	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.3
3618	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
3618	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3618	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3620	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-6.1
3620	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.2
3620	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.2
3720	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-3.8
3720	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.8
3720	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.8
3725	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
3725	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3725	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
3729	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-6.7
3729	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.7
3729	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.7
4168	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
4168	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.4
4168	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.4
4197	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	2.4
4197	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
4197	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
4462	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-9.0
4462	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.0
4462	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.0
4465	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
4465	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4465	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
4469	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-11.8
4469	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-114.8
4469	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-114.8
4589	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-9.5
4589	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.5
4589	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.5
4594	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
4594	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
4594	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
4598	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-12.3
4598	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-115.3
4598	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-115.3
4966	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-3.6
4966	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-106.6
4966	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-106.6
4971	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-7.7
4971	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-110.7
4971	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-110.7
4972	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-4.8
4972	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-107.8
4972	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-107.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1249	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
1249	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
1249	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1252	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
1252	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
1252	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1256	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
1256	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.8
1256	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1260	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
1260	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.8
1260	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1263	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
1263	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	11.7
1263	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1273	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-2.4
1273	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-190.4
1273	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1284	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-7.4
1284	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-195.4
1284	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-7.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1301	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
1301	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
1301	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1312	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-9.7
1312	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-9.7
1312	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-9.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1345	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1345	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1345	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1348	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1348	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1348	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1352	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1352	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1352	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1355	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.6
1355	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.4
1355	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1358	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
1358	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.8
1358	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1360	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
1360	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9
1360	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1363	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1363	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9
1363	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1381	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.0
1381	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-165.0
1381	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-165.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1529	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
1529	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
1529	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
1532	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	18.9
1532	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	-158.3
1532	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	-158.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1538	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-2.8
1538	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-102.8
1538	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-102.8
1581	536517.86	4816098.64	350.53	0	D	A	59.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-3.8
1581	536517.86	4816098.64	350.53	0	N	A	-40.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-103.8
1581	536517.86	4816098.64	350.53	0	E	A	-40.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-103.8
1584	536524.77	4816101.56	350.48	0	D	A	59.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-14.9
1584	536524.77	4816101.56	350.48	0	N	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-114.9
1584	536524.77	4816101.56	350.48	0	E	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-114.9
1805	536528.42	4816104.99	350.46	0	D	A	59.5	9.5	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-5.5
1805	536528.42	4816104.99	350.46	0	N	A	-40.5	9.5	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-105.5
1805	536528.42	4816104.99	350.46	0	E	A	-40.5	9.5	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-105.5
1809	536523.81	4816102.67	350.50	0	D	A	59.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-13.8
1809	536523.81	4816102.67	350.50	0	N	A	-40.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-113.8
1809	536523.81	4816102.67	350.50	0	E	A	-40.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-113.8
1845	536558.61	4816076.58	348.71	0	D	A	59.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-12.2
1845	536558.61	4816076.58	348.71	0	N	A	-40.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.2
1845	536558.61	4816076.58	348.71	0	E	A	-40.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.2
1851	536555.91	4816082.14	348.96	0	D	A	59.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-8.2
1851	536555.91	4816082.14	348.96	0	N	A	-40.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.2
1851	536555.91	4816082.14	348.96	0	E	A	-40.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.2
1889	536550.79	4816084.71	349.21	0	D	A	59.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-8.7
1889	536550.79	4816084.71	349.21	0	N	A	-40.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.7
1889	536550.79	4816084.71	349.21	0	E	A	-40.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.7
1894	536553.14	4816079.56	348.92	0	D	A	59.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-11.4
1894	536553.14	4816079.56	348.92	0	N	A	-40.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-111.4
1894	536553.14	4816079.56	348.92	0	E	A	-40.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-111.4
1902	536503.76	4816091.81	350.60	0	D	A	59.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-5.3
1902	536503.76	4816091.81	350.60	0	N	A	-40.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-105.3
1902	536503.76	4816091.81	350.60	0	E	A	-40.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-105.3
1910	536482.58	4816092.66	350.74	0	D	A	59.5	9.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.0	0.0	0.0	-5.2
1910	536482.58	4816092.66	350.74	0	N	A	-40.5	9.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.0	0.0	0.0	-105.2
1910	536482.58	4816092.66	350.74	0	E	A	-40.5	9.8	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.0	0.0	0.0	-105.2
1914	536478.03	4816096.26	350.82	0	D	A	59.5	3.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-11.5
1914	536478.03	4816096.26	350.82	0	N	A	-40.5	3.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-111.5
1914	536478.03	4816096.26	350.82	0	E	A	-40.5	3.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-111.5
1981	536488.50	4816087.68	350.64	0	D	A	59.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-5.3
1981	536488.50	4816087.68	350.64	0	N	A	-40.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-105.3
1981	536488.50	4816087.68	350.64	0	E	A	-40.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-105.3
2040	536478.01	4816096.23	350.82	0	D	A	59.5	3.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-11.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2040	536478.01	4816096.23	350.82	0	N	A	-40.5	3.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-111.5
2040	536478.01	4816096.23	350.82	0	E	A	-40.5	3.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.7	0.0	0.0	-111.5
2046	536481.61	4816093.21	350.76	0	D	A	59.5	8.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-6.2
2046	536481.61	4816093.21	350.76	0	N	A	-40.5	8.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-106.2
2046	536481.61	4816093.21	350.76	0	E	A	-40.5	8.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-106.2
2085	536556.09	4816073.13	348.60	0	D	A	59.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-8.1
2085	536556.09	4816073.13	348.60	0	N	A	-40.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.1
2085	536556.09	4816073.13	348.60	0	E	A	-40.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.1
2115	536500.08	4816091.63	350.62	0	D	A	59.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-6.6
2115	536500.08	4816091.63	350.62	0	N	A	-40.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-106.6
2115	536500.08	4816091.63	350.62	0	E	A	-40.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-106.6
2123	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-8.4
2123	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-108.4
2123	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-108.4
2163	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-9.1
2163	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.1
2163	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.1
2170	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-8.6
2170	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-108.6
2170	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-108.6
2185	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-9.6
2185	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-109.6
2185	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-109.6
2252	536496.43	4816079.37	350.47	0	D	A	59.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-8.2
2252	536496.43	4816079.37	350.47	0	N	A	-40.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-108.2
2252	536496.43	4816079.37	350.47	0	E	A	-40.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-108.2
2288	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-10.0
2288	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-110.0
2288	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-110.0
2332	536560.92	4816072.43	348.52	0	D	A	59.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-10.6
2332	536560.92	4816072.43	348.52	0	N	A	-40.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-110.6
2332	536560.92	4816072.43	348.52	0	E	A	-40.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-110.6
2341	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.9	0.0	0.0	-9.1
2341	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.9	0.0	0.0	-109.1
2341	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.9	0.0	0.0	-109.1
2350	536502.26	4816068.17	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-11.6
2350	536502.26	4816068.17	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.6
2350	536502.26	4816068.17	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.6
2357	536502.28	4816068.16	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-11.6
2357	536502.28	4816068.16	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.6
2357	536502.28	4816068.16	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.6
2411	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-10.9
2411	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.9
2411	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.9
2432	536498.08	4816077.57	350.44	0	D	A	59.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-9.4
2432	536498.08	4816077.57	350.44	0	N	A	-40.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-109.4
2432	536498.08	4816077.57	350.44	0	E	A	-40.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-109.4
2438	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-10.4
2438	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-110.4
2438	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-110.4
2499	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.1	0.0	0.0	-10.0
2499	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.1	0.0	0.0	-110.0
2499	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.1	0.0	0.0	-110.0
2509	536500.65	4816071.82	350.21	0	D	A	59.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-13.8
2509	536500.65	4816071.82	350.21	0	N	A	-40.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-113.8
2509	536500.65	4816071.82	350.21	0	E	A	-40.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-113.8
2516	536499.66	4816074.05	350.33	0	D	A	59.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-12.3
2516	536499.66	4816074.05	350.33	0	N	A	-40.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-112.3
2516	536499.66	4816074.05	350.33	0	E	A	-40.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-112.3
2530	536499.53	4816073.83	350.32	0	D	A	59.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-12.2
2530	536499.53	4816073.83	350.32	0	N	A	-40.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-112.2
2530	536499.53	4816073.83	350.32	0	E	A	-40.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-112.2
2537	536500.60	4816071.72	350.20	0	D	A	59.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-14.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2537	536500.60	4816071.72	350.20	0	N	A	-40.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-114.2
2537	536500.60	4816071.72	350.20	0	E	A	-40.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-114.2
2550	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-11.3
2550	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-111.3
2550	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-111.3
2565	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-11.3
2565	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.3
2565	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.3
2609	536495.77	4816089.72	350.62	0	D	A	59.5	2.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-12.8
2609	536495.77	4816089.72	350.62	0	N	A	-40.5	2.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-112.8
2609	536495.77	4816089.72	350.62	0	E	A	-40.5	2.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-112.8
2616	536494.13	4816089.15	350.62	0	D	A	59.5	2.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-13.4
2616	536494.13	4816089.15	350.62	0	N	A	-40.5	2.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.4
2616	536494.13	4816089.15	350.62	0	E	A	-40.5	2.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.4
2655	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-11.3
2655	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-111.3
2655	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-111.3
2686	536551.38	4816091.51	349.46	0	D	A	59.5	3.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-13.3
2686	536551.38	4816091.51	349.46	0	N	A	-40.5	3.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-113.3
2686	536551.38	4816091.51	349.46	0	E	A	-40.5	3.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-113.3
2692	536550.81	4816092.71	349.54	0	D	A	59.5	-4.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-20.8
2692	536550.81	4816092.71	349.54	0	N	A	-40.5	-4.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-120.8
2692	536550.81	4816092.71	349.54	0	E	A	-40.5	-4.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-120.8
2699	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-10.7
2699	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-110.7
2699	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-110.7
2705	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-12.0
2705	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.0
2705	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.0
2725	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-12.7
2725	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.7
2725	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.7
2749	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-12.3
2749	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-112.3
2749	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-112.3
2755	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-12.9
2755	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-112.9
2755	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-112.9
2778	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-12.6
2778	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.6
2778	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.6
2841	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-13.6
2841	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-113.6
2841	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-113.6
2878	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-12.3
2878	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-112.3
2878	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-112.3
2885	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-13.4
2885	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-113.4
2885	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-113.4
2891	536487.31	4816089.23	350.66	0	D	A	59.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-12.0
2891	536487.31	4816089.23	350.66	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-112.0
2891	536487.31	4816089.23	350.66	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-112.0
2898	536542.20	4816100.45	350.05	0	D	A	59.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-15.8
2898	536542.20	4816100.45	350.05	0	N	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.8
2898	536542.20	4816100.45	350.05	0	E	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.8
2903	536542.80	4816099.97	350.02	0	D	A	59.5	-3.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-19.2
2903	536542.80	4816099.97	350.02	0	N	A	-40.5	-3.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-119.2
2903	536542.80	4816099.97	350.02	0	E	A	-40.5	-3.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-119.2
2909	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-14.3
2909	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2909	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2923	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-14.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2923	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2923	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2931	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-14.4
2931	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.4
2931	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.4
2957	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-12.8
2957	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-112.8
2957	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-112.8
2977	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-14.3
2977	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-114.3
2977	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.9	0.0	0.0	-114.3
2987	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-15.0
2987	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-115.0
2987	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.4	0.0	0.0	-115.0
2995	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-14.4
2995	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-114.4
2995	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-114.4
3003	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-13.2
3003	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.2
3003	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.2
3046	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-15.4
3046	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-115.4
3046	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-115.4
3054	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-13.3
3054	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-113.3
3054	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-113.3
3061	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-13.7
3061	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-113.7
3061	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-113.7
3073	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-15.3
3073	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.3
3073	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.3
3085	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-14.0
3085	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-114.0
3085	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-114.0
3105	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-14.1
3105	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-114.1
3105	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-114.1
3114	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-15.7
3114	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.7
3114	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.7
3145	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-14.5
3145	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-114.5
3145	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-114.5
3228	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-16.9
3228	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-116.9
3228	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-116.9
3272	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-15.3
3272	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-115.3
3272	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-115.3
3298	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-15.8
3298	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-115.8
3298	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-115.8
3305	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-16.0
3305	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-116.0
3305	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-116.0
3505	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-16.9
3505	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-116.9
3505	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-116.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1597	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-5.6
1597	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-193.6
1597	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-193.6
1600	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-8.7
1600	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-196.7
1600	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-196.7

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1821	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.9	0.0	0.0	-6.4
1821	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.9	0.0	0.0	-183.6
1821	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.9	0.0	0.0	-183.6

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1831	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	7.2
1831	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	-170.0
1831	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	-170.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2395	536733.77	4815965.21	344.18	0	D	A	62.5	4.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-20.1
2395	536733.77	4815965.21	344.18	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
2395	536733.77	4815965.21	344.18	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
2401	536727.77	4815966.89	344.29	0	D	A	62.5	10.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-14.1
2401	536727.77	4815966.89	344.29	0	N	A	-40.5	10.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-117.1
2401	536727.77	4815966.89	344.29	0	E	A	-40.5	10.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-117.1
2404	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-23.4
2404	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-126.4
2404	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-126.4
2473	536751.71	4815961.07	343.92	0	D	A	62.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-16.6
2473	536751.71	4815961.07	343.92	0	N	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.6
2473	536751.71	4815961.07	343.92	0	E	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.6
2479	536757.65	4815958.41	343.83	0	D	A	62.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-16.0
2479	536757.65	4815958.41	343.83	0	N	A	-40.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.0
2479	536757.65	4815958.41	343.83	0	E	A	-40.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.0
2483	536751.71	4815961.07	343.92	1	D	A	62.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.2
2483	536751.71	4815961.07	343.92	1	N	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2483	536751.71	4815961.07	343.92	1	E	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2487	536757.65	4815958.41	343.83	1	D	A	62.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-20.7
2487	536757.65	4815958.41	343.83	1	N	A	-40.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.7
2487	536757.65	4815958.41	343.83	1	E	A	-40.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.7
2787	536754.46	4815978.29	343.92	0	D	A	62.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-20.0
2787	536754.46	4815978.29	343.92	0	N	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.1
2787	536754.46	4815978.29	343.92	0	E	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.1
2792	536751.19	4815976.54	343.97	0	D	A	62.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-17.0
2792	536751.19	4815976.54	343.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
2792	536751.19	4815976.54	343.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
2796	536754.67	4815978.41	343.91	1	D	A	62.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.0
2796	536754.67	4815978.41	343.91	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
2796	536754.67	4815978.41	343.91	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
2800	536751.40	4815976.66	343.97	1	D	A	62.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-19.6
2800	536751.40	4815976.66	343.97	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-122.6
2800	536751.40	4815976.66	343.97	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-122.6
2830	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-15.6
2830	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-118.6
2830	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-118.6
2833	536757.21	4815958.18	343.83	1	D	A	62.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-20.3
2833	536757.21	4815958.18	343.83	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2833	536757.21	4815958.18	343.83	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2850	536728.54	4815967.85	344.27	0	D	A	62.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-17.3
2850	536728.54	4815967.85	344.27	0	N	A	-40.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-120.3
2850	536728.54	4815967.85	344.27	0	E	A	-40.5	6.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-120.3
2856	536731.78	4815967.56	344.21	0	D	A	62.5	2.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-21.7
2856	536731.78	4815967.56	344.21	0	N	A	-40.5	2.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.7
2856	536731.78	4815967.56	344.21	0	E	A	-40.5	2.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.7
2859	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-20.3
2859	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2859	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2940	536743.05	4815962.57	344.03	0	D	A	62.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-21.0
2940	536743.05	4815962.57	344.03	0	N	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
2940	536743.05	4815962.57	344.03	0	E	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
2946	536740.38	4815963.34	344.07	0	D	A	62.5	5.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-18.8
2946	536740.38	4815963.34	344.07	0	N	A	-40.5	5.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.8
2946	536740.38	4815963.34	344.07	0	E	A	-40.5	5.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.8
2950	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.3
2950	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2950	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2964	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-16.9
2964	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-119.9
2964	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-119.9
2968	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.6
2968	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.6
2968	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.6
3019	536737.35	4815967.05	344.14	0	D	A	62.5	4.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-19.7
3019	536737.35	4815967.05	344.14	0	N	A	-40.5	4.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-122.7
3019	536737.35	4815967.05	344.14	0	E	A	-40.5	4.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-122.7
3026	536739.70	4815966.83	344.12	0	D	A	62.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-21.2
3026	536739.70	4815966.83	344.12	0	N	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-124.2
3026	536739.70	4815966.83	344.12	0	E	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-124.2
3031	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-21.8
3031	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-124.9
3031	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-124.9
3092	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-17.8
3092	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-120.8
3092	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-120.8
3097	536751.39	4815960.06	343.91	1	D	A	62.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-22.4
3097	536751.39	4815960.06	343.91	1	N	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-125.4
3097	536751.39	4815960.06	343.91	1	E	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-125.4
3120	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-18.3
3120	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
3120	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
3125	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-22.7
3125	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-125.7
3125	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-125.7
3133	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-18.1
3133	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-121.1
3133	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-121.1
3137	536757.37	4815979.48	343.87	1	D	A	62.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-21.1
3137	536757.37	4815979.48	343.87	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
3137	536757.37	4815979.48	343.87	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
3157	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-18.3
3157	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
3157	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
3162	536749.67	4815967.29	344.00	1	D	A	62.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.0
3162	536749.67	4815967.29	344.00	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
3162	536749.67	4815967.29	344.00	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
3170	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-18.3
3170	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
3170	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
3173	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.0
3173	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
3173	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3181	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-18.4
3181	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.4
3181	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.4
3184	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.1
3184	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.1
3184	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.1
3204	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-19.0
3204	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
3204	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
3208	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-29.2
3208	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-132.2
3208	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-132.2
3250	536756.22	4815969.44	343.94	0	D	A	62.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-20.4
3250	536756.22	4815969.44	343.94	0	N	A	-40.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.4
3250	536756.22	4815969.44	343.94	0	E	A	-40.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.4
3257	536757.72	4815970.20	343.93	0	D	A	62.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-24.3
3257	536757.72	4815970.20	343.93	0	N	A	-40.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-127.3
3257	536757.72	4815970.20	343.93	0	E	A	-40.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-127.3
3260	536756.43	4815969.55	343.94	1	D	A	62.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-22.6
3260	536756.43	4815969.55	343.94	1	N	A	-40.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
3260	536756.43	4815969.55	343.94	1	E	A	-40.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
3265	536757.93	4815970.31	343.93	1	D	A	62.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.2
3265	536757.93	4815970.31	343.93	1	N	A	-40.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
3265	536757.93	4815970.31	343.93	1	E	A	-40.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
3312	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-19.7
3312	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
3312	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
3317	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-24.4
3317	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-127.4
3317	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-127.4
3343	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-20.0
3343	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
3343	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
3350	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-24.6
3350	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-127.6
3350	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-127.6
3355	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-19.9
3355	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.9
3355	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.9
3360	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-23.0
3360	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.0
3360	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.0
3407	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-20.2
3407	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.3
3407	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.3
3411	536748.03	4815974.71	344.03	1	D	A	62.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-23.2
3411	536748.03	4815974.71	344.03	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3411	536748.03	4815974.71	344.03	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3520	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-20.8
3520	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.8
3520	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.8
3523	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-25.4
3523	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.4
3523	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.4
3579	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-21.3
3579	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
3579	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
3584	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-25.7
3584	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-128.7
3584	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-128.7
3608	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-21.3
3608	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.3
3608	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.3

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3611	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-25.8
3611	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.8
3611	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.8
3674	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-21.5
3674	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-124.5
3674	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-124.5
3678	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-26.1
3678	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.1
3678	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.1
3700	536758.66	4815970.68	343.92	0	D	A	62.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-23.6
3700	536758.66	4815970.68	343.92	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-126.6
3700	536758.66	4815970.68	343.92	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-126.6
3708	536759.49	4815971.10	343.91	0	D	A	62.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-25.7
3708	536759.49	4815971.10	343.91	0	N	A	-40.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-128.7
3708	536759.49	4815971.10	343.91	0	E	A	-40.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-128.7
3712	536758.93	4815970.82	343.92	1	D	A	62.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.8
3712	536758.93	4815970.82	343.92	1	N	A	-40.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8
3712	536758.93	4815970.82	343.92	1	E	A	-40.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8
3716	536759.75	4815971.24	343.90	1	D	A	62.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-37.0
3716	536759.75	4815971.24	343.90	1	N	A	-40.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.0
3716	536759.75	4815971.24	343.90	1	E	A	-40.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.0
3743	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-22.0
3743	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-125.0
3743	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-125.0
3747	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.6
3747	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.6
3747	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.6
3792	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-22.2
3792	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
3792	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
3797	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.8
3797	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3797	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3812	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-22.3
3812	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.4
3812	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.4
3817	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
3817	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3817	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3822	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-22.3
3822	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
3822	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
3825	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
3825	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3825	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3830	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-22.5
3830	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-125.5
3830	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-125.5
3832	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
3832	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
3832	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2864	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	8.5	0.0	0.0	2.4
2864	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	8.5	0.0	0.0	-97.6
2864	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	8.5	0.0	0.0	-97.6
2869	536792.55	4816505.62	341.05	1	D	A	59.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	0.8
2869	536792.55	4816505.62	341.05	1	N	A	-40.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-99.2
2869	536792.55	4816505.62	341.05	1	E	A	-40.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-99.2
3079	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
3079	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3079	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3190	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-0.2
3190	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-100.2
3190	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-100.2
3194	536783.44	4816525.69	341.03	1	D	A	59.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-1.9
3194	536783.44	4816525.69	341.03	1	N	A	-40.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-101.9
3194	536783.44	4816525.69	341.03	1	E	A	-40.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-101.9
3199	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3199	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3199	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3213	536806.49	4816468.96	341.19	0	D	A	59.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	1.5
3213	536806.49	4816468.96	341.19	0	N	A	-40.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	-98.5
3213	536806.49	4816468.96	341.19	0	E	A	-40.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	-98.5
3217	536807.41	4816464.70	341.19	0	D	A	59.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.9
3217	536807.41	4816464.70	341.19	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
3217	536807.41	4816464.70	341.19	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
3221	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	5.4
3221	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-94.6
3221	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-94.6
3234	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
3234	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3234	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3237	536776.83	4816540.23	341.05	0	D	A	59.5	9.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-0.4
3237	536776.83	4816540.23	341.05	0	N	A	-40.5	9.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-100.4
3237	536776.83	4816540.23	341.05	0	E	A	-40.5	9.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-100.4
3240	536778.88	4816535.71	341.06	0	D	A	59.5	-1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-11.5
3240	536778.88	4816535.71	341.06	0	N	A	-40.5	-1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-111.5
3240	536778.88	4816535.71	341.06	0	E	A	-40.5	-1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-111.5
3243	536776.99	4816539.88	341.05	1	D	A	59.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-2.4
3243	536776.99	4816539.88	341.05	1	N	A	-40.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.4
3243	536776.99	4816539.88	341.05	1	E	A	-40.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.4
3291	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
3291	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3291	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3322	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-1.2
3322	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-101.2
3322	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-101.2
3326	536818.31	4816441.32	341.54	0	D	A	59.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
3326	536818.31	4816441.32	341.54	0	N	A	-40.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
3326	536818.31	4816441.32	341.54	0	E	A	-40.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
3331	536820.54	4816439.00	341.59	0	D	A	59.5	0.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-1.0
3331	536820.54	4816439.00	341.59	0	N	A	-40.5	0.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-101.0
3331	536820.54	4816439.00	341.59	0	E	A	-40.5	0.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-101.0
3336	536817.40	4816442.27	341.53	1	D	A	59.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.5
3336	536817.40	4816442.27	341.53	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
3336	536817.40	4816442.27	341.53	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
3364	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-1.9
3364	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-101.9
3364	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.3	0.0	0.0	-101.9
3368	536799.66	4816489.73	341.24	1	D	A	59.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-3.6
3368	536799.66	4816489.73	341.24	1	N	A	-40.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-103.6
3368	536799.66	4816489.73	341.24	1	E	A	-40.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-103.6
3372	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	8.6	0.0	0.0	-2.2
3372	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	8.6	0.0	0.0	-102.2
3372	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	8.6	0.0	0.0	-102.2
3376	536787.11	4816517.60	340.98	1	D	A	59.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-3.7
3376	536787.11	4816517.60	340.98	1	N	A	-40.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.7
3376	536787.11	4816517.60	340.98	1	E	A	-40.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.7
3381	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
3381	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
3381	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
3387	536924.11	4816470.54	340.40	1	D	A	59.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-30.5
3387	536924.11	4816470.54	340.40	1	N	A	-40.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-130.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3387	536924.11	4816470.54	340.40	1	E	A	-40.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-130.5
3392	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-0.8
3392	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-100.8
3392	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-100.8
3396	536772.49	4816549.79	341.12	1	D	A	59.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-5.2
3396	536772.49	4816549.79	341.12	1	N	A	-40.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.2
3396	536772.49	4816549.79	341.12	1	E	A	-40.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.2
3401	536774.03	4816546.40	341.06	1	D	A	59.5	3.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-9.5
3401	536774.03	4816546.40	341.06	1	N	A	-40.5	3.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-109.5
3401	536774.03	4816546.40	341.06	1	E	A	-40.5	3.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-109.5
3416	536804.34	4816477.43	341.22	0	D	A	59.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.7	0.0	0.0	-7.8
3416	536804.34	4816477.43	341.22	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.7	0.0	0.0	-107.8
3416	536804.34	4816477.43	341.22	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.7	0.0	0.0	-107.8
3421	536805.17	4816474.43	341.21	0	D	A	59.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.2	0.0	0.0	-2.1
3421	536805.17	4816474.43	341.21	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.2	0.0	0.0	-102.1
3421	536805.17	4816474.43	341.21	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.2	0.0	0.0	-102.1
3426	536804.59	4816476.53	341.22	1	D	A	59.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-6.6
3426	536804.59	4816476.53	341.22	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.6
3426	536804.59	4816476.53	341.22	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.6
3430	536805.42	4816473.53	341.20	1	D	A	59.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.6
3430	536805.42	4816473.53	341.20	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
3430	536805.42	4816473.53	341.20	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
3434	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
3434	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3434	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3439	536810.61	4816454.21	341.25	1	D	A	59.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.8
3439	536810.61	4816454.21	341.25	1	N	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.2
3439	536810.61	4816454.21	341.25	1	E	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.2
3443	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
3443	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
3443	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
3478	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
3478	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3478	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3491	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	3.6	0.0	0.0	2.4
3491	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	3.6	0.0	0.0	-97.6
3491	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	3.6	0.0	0.0	-97.6
3495	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	4.0
3495	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.0
3495	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.0
3533	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	0.9
3533	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-99.1
3533	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-99.1
3537	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.7
3537	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.3
3537	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.3
3540	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.2
3540	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3540	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
3546	536936.11	4816475.41	340.27	0	D	A	59.5	7.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.4
3546	536936.11	4816475.41	340.27	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3546	536936.11	4816475.41	340.27	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3550	536940.29	4816477.05	340.22	0	D	A	59.5	5.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	1.0
3550	536940.29	4816477.05	340.22	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
3550	536940.29	4816477.05	340.22	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
3555	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-72.8
3555	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-172.8
3555	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-172.8
3589	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
3589	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3589	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3593	536808.33	4816461.22	341.17	1	D	A	59.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.0
3593	536808.33	4816461.22	341.17	1	N	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3593	536808.33	4816461.22	341.17	1	E	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0
3597	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
3597	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3597	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
3601	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	2.9
3601	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.1
3601	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.1
3624	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.0	0.0	0.0	-2.7
3624	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.0	0.0	0.0	-102.7
3624	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.0	0.0	0.0	-102.7
3629	536803.09	4816481.10	341.25	1	D	A	59.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-6.2
3629	536803.09	4816481.10	341.25	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.2
3629	536803.09	4816481.10	341.25	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.2
3633	536803.92	4816478.76	341.23	1	D	A	59.5	1.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-10.6
3633	536803.92	4816478.76	341.23	1	N	A	-40.5	1.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.6
3633	536803.92	4816478.76	341.23	1	E	A	-40.5	1.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.6
3645	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
3645	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3645	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3649	536942.87	4816477.99	340.19	1	D	A	59.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-79.7
3649	536942.87	4816477.99	340.19	1	N	A	-40.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-179.7
3649	536942.87	4816477.99	340.19	1	E	A	-40.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-179.7
3654	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	6.0	0.0	0.0	-0.9
3654	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	6.0	0.0	0.0	-100.9
3654	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	6.0	0.0	0.0	-100.9
3656	536770.09	4816556.00	341.15	1	D	A	59.5	5.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-6.8
3656	536770.09	4816556.00	341.15	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-106.8
3656	536770.09	4816556.00	341.15	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-106.8
3666	536771.03	4816553.25	341.15	1	D	A	59.5	3.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-9.5
3666	536771.03	4816553.25	341.15	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-109.5
3666	536771.03	4816553.25	341.15	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-109.5
3688	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	0.1
3688	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-99.9
3688	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-99.9
3734	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	3.7	0.0	0.0	1.0
3734	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	3.7	0.0	0.0	-99.0
3734	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	3.7	0.0	0.0	-99.0
3737	536768.85	4816560.46	341.14	1	D	A	59.5	7.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-5.2
3737	536768.85	4816560.46	341.14	1	N	A	-40.5	7.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.2
3737	536768.85	4816560.46	341.14	1	E	A	-40.5	7.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.2
3751	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-3.6
3751	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-103.6
3751	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-103.6
3756	536780.20	4816532.81	341.05	1	D	A	59.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-5.4
3756	536780.20	4816532.81	341.05	1	N	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.4
3756	536780.20	4816532.81	341.05	1	E	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.4
3801	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.3	0.0	0.0	-0.0
3801	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.3	0.0	0.0	-100.0
3801	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.3	0.0	0.0	-100.0
3805	536847.92	4816433.01	341.45	1	D	A	59.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	2.3
3805	536847.92	4816433.01	341.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.7
3805	536847.92	4816433.01	341.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.7
3835	536953.57	4816481.29	340.06	0	D	A	59.5	5.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
3835	536953.57	4816481.29	340.06	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
3835	536953.57	4816481.29	340.06	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
3837	536956.88	4816482.19	340.03	0	D	A	59.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	0.5
3837	536956.88	4816482.19	340.03	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3837	536956.88	4816482.19	340.03	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3850	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.8
3850	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
3850	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
3855	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
3855	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3855	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3860	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-3.8
3860	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-103.8
3860	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-103.8
3871	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-0.9
3871	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-100.9
3871	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-100.9
3877	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.5
3877	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
3877	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
3888	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	3.9
3888	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3888	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
3892	536825.84	4816435.07	341.69	1	D	A	59.5	-10.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-13.3
3892	536825.84	4816435.07	341.69	1	N	A	-40.5	-10.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-113.3
3892	536825.84	4816435.07	341.69	1	E	A	-40.5	-10.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-113.3
3895	536914.81	4816645.72	339.56	0	D	A	59.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-4.4
3895	536914.81	4816645.72	339.56	0	N	A	-40.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-104.4
3895	536914.81	4816645.72	339.56	0	E	A	-40.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-104.4
3898	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
3898	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
3898	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
3914	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-1.5
3914	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-101.5
3914	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	4.8	0.0	0.0	-101.5
3933	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.9
3933	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
3933	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
3947	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	0.1
3947	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-99.9
3947	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-99.9
3951	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	1.1
3951	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.9
3951	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.9
3953	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	3.1
3953	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3953	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3961	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
3961	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
3961	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
3965	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
3965	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3965	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3966	536767.45	4816567.96	341.11	1	D	A	59.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	0.1
3966	536767.45	4816567.96	341.11	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3966	536767.45	4816567.96	341.11	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3990	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
3990	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
3990	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
3994	536767.92	4816564.84	341.12	1	D	A	59.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	0.9
3994	536767.92	4816564.84	341.12	1	N	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.1
3994	536767.92	4816564.84	341.12	1	E	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.1
4002	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-2.0
4002	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-102.0
4002	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-102.0
4005	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.6
4005	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
4005	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
4008	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-4.9
4008	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-104.9
4008	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-104.9
4018	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.1
4018	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4018	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
4030	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
4030	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
4030	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
4032	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-26.9
4032	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-126.9
4032	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-126.9
4036	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
4036	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
4036	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
4040	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.0
4040	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.0
4040	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.0
4045	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.9
4045	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
4045	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
4054	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
4054	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
4054	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
4057	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.5
4057	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
4057	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
4068	536833.33	4816432.35	341.74	0	D	A	59.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.4
4068	536833.33	4816432.35	341.74	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
4068	536833.33	4816432.35	341.74	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
4071	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.4
4071	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
4071	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
4075	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-2.5
4075	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-102.5
4075	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-102.5
4079	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.3
4079	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.7
4079	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.7
4082	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	2.1
4082	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
4082	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
4086	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.4
4086	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
4086	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
4091	536814.15	4816446.06	341.44	1	D	A	59.5	3.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-0.3
4091	536814.15	4816446.06	341.44	1	N	A	-40.5	3.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.3
4091	536814.15	4816446.06	341.44	1	E	A	-40.5	3.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.3
4094	536814.77	4816445.07	341.47	1	D	A	59.5	-13.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-17.3
4094	536814.77	4816445.07	341.47	1	N	A	-40.5	-13.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-117.3
4094	536814.77	4816445.07	341.47	1	E	A	-40.5	-13.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-117.3
4105	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.3
4105	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
4105	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
4108	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.4
4108	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
4108	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
4112	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
4112	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
4112	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
4114	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.2
4114	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.8
4114	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.8
4119	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
4119	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4119	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4126	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	1.7
4126	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4126	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3
4140	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-2.9
4140	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-102.9
4140	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-102.9
4144	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
4144	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4144	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4148	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-27.3
4148	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-127.3
4148	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-127.3
4152	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.8
4152	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
4152	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
4157	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-3.0
4157	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-103.0
4157	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-103.0
4162	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-6.6
4162	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-106.6
4162	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-106.6
4164	536797.03	4816495.76	341.16	1	D	A	59.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-8.2
4164	536797.03	4816495.76	341.16	1	N	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.2
4164	536797.03	4816495.76	341.16	1	E	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.2
4178	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.5
4178	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
4178	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
4185	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.8
4185	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
4185	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
4189	536826.80	4816434.55	341.70	1	D	A	59.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-0.1
4189	536826.80	4816434.55	341.70	1	N	A	-40.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
4189	536826.80	4816434.55	341.70	1	E	A	-40.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
4193	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.2
4193	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
4193	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
4202	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-5.2
4202	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-105.2
4202	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-105.2
4228	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.4
4228	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
4228	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
4232	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-1.1
4232	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-101.1
4232	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-101.1
4236	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
4236	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
4236	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
4239	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
4239	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
4239	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
4243	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-7.1
4243	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-107.1
4243	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	8.4	0.0	0.0	-107.1
4246	536797.94	4816493.74	341.19	1	D	A	59.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-8.8
4246	536797.94	4816493.74	341.19	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.8
4246	536797.94	4816493.74	341.19	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.8
4250	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-3.0
4250	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-103.0
4250	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-103.0
4253	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.0
4253	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
4253	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
4272	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.9
4272	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4272	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1
4275	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	0.6
4275	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
4275	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
4279	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.8
4279	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
4279	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
4295	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	0.8
4295	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
4295	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
4306	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-7.2
4306	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-107.2
4306	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-107.2
4310	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.7
4310	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
4310	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
4313	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	0.4
4313	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
4313	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
4316	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	0.3
4316	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
4316	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
4326	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	0.2
4326	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
4326	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
4331	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.3
4331	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
4331	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
4343	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.1
4343	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
4343	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
4364	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.0
4364	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.0
4364	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.0
4374	536802.16	4816483.71	341.27	0	D	A	59.5	1.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-8.9
4374	536802.16	4816483.71	341.27	0	N	A	-40.5	1.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-108.9
4374	536802.16	4816483.71	341.27	0	E	A	-40.5	1.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-108.9
4378	536802.43	4816482.97	341.26	0	D	A	59.5	-5.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.1	0.0	0.0	-14.9
4378	536802.43	4816482.97	341.26	0	N	A	-40.5	-5.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.1	0.0	0.0	-114.9
4378	536802.43	4816482.97	341.26	0	E	A	-40.5	-5.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.1	0.0	0.0	-114.9
4382	536802.22	4816483.56	341.27	1	D	A	59.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-9.9
4382	536802.22	4816483.56	341.27	1	N	A	-40.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-109.9
4382	536802.22	4816483.56	341.27	1	E	A	-40.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-109.9
4387	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
4387	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4387	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4389	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
4389	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4389	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4407	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-4.6
4407	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-104.6
4407	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-104.6
4411	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-2.0
4411	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.0
4411	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.0
4423	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-0.2
4423	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-100.2
4423	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-100.2
4431	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-6.0
4431	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-106.0
4431	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-106.0
4446	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.7
4446	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4446	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
4452	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
4452	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4452	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4455	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-8.4
4455	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-108.4
4455	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-108.4
4459	536801.68	4816484.96	341.28	1	D	A	59.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-10.3
4459	536801.68	4816484.96	341.28	1	N	A	-40.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.3
4459	536801.68	4816484.96	341.28	1	E	A	-40.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.3
4501	536950.38	4816480.42	340.10	0	D	A	59.5	2.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-2.2
4501	536950.38	4816480.42	340.10	0	N	A	-40.5	2.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
4501	536950.38	4816480.42	340.10	0	E	A	-40.5	2.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
4504	536951.51	4816480.72	340.08	0	D	A	59.5	-1.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-6.4
4504	536951.51	4816480.72	340.08	0	N	A	-40.5	-1.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-106.4
4504	536951.51	4816480.72	340.08	0	E	A	-40.5	-1.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-106.4
4645	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-9.5
4645	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-109.5
4645	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.2	0.0	0.0	-109.5
4649	536801.18	4816486.13	341.28	1	D	A	59.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-11.4
4649	536801.18	4816486.13	341.28	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-111.4
4649	536801.18	4816486.13	341.28	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-111.4
4666	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-1.6
4666	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
4666	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
4679	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.3	0.0	0.0	-8.9
4679	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.3	0.0	0.0	-108.9
4679	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.3	0.0	0.0	-108.9
4681	536774.69	4816544.95	341.05	1	D	A	59.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-11.7
4681	536774.69	4816544.95	341.05	1	N	A	-40.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-111.7
4681	536774.69	4816544.95	341.05	1	E	A	-40.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-111.7
4726	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-2.1
4726	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
4726	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
4731	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-31.0
4731	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-131.0
4731	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-131.0
4735	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.3
4735	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
4735	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
4756	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
4756	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4756	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4769	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
4769	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4769	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4816	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-9.4
4816	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-109.4
4816	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-109.4
4864	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-10.2
4864	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-110.2
4864	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-110.2
4941	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-10.3
4941	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-110.3
4941	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-110.3
4954	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-9.0
4954	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-109.0
4954	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	4.7	0.0	0.0	-109.0
4958	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-6.3
4958	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-106.3
4958	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-106.3
4984	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-9.9
4984	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-109.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4984	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-109.9
5039	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-15.2
5039	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-115.2
5039	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.1	0.0	0.0	-115.2
5043	536779.12	4816535.20	341.05	1	D	A	59.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-17.0
5043	536779.12	4816535.20	341.05	1	N	A	-40.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-117.0
5043	536779.12	4816535.20	341.05	1	E	A	-40.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-117.0
5053	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-7.3
5053	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
5053	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3039	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-11.7
3039	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-111.7
3039	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-111.7
3485	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.9	0.0	0.0	-14.4
3485	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.9	0.0	0.0	-114.4
3485	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.9	0.0	0.0	-114.4
3499	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-14.6
3499	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-114.6
3499	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-114.6
3685	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-15.6
3685	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-115.6
3685	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-115.6
3847	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-16.8
3847	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-116.8
3847	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-116.8
3867	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-16.9
3867	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-116.9
3867	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-116.9
3922	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-19.8
3922	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-119.8
3922	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-119.8
3941	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.8	0.0	0.0	-17.9
3941	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.8	0.0	0.0	-117.9
3941	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.8	0.0	0.0	-117.9
4051	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.1	0.0	0.0	-18.0
4051	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.1	0.0	0.0	-118.0
4051	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.1	0.0	0.0	-118.0
4063	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.0	0.0	0.0	-20.9
4063	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.0	0.0	0.0	-120.9
4063	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.0	0.0	0.0	-120.9
4131	536993.62	4816409.43	338.47	0	D	A	59.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.2	0.0	0.0	-22.8
4131	536993.62	4816409.43	338.47	0	N	A	-40.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.2	0.0	0.0	-122.8
4131	536993.62	4816409.43	338.47	0	E	A	-40.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.2	0.0	0.0	-122.8
4136	536995.16	4816410.82	338.51	0	D	A	59.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.0	0.0	0.0	-22.2
4136	536995.16	4816410.82	338.51	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.0	0.0	0.0	-122.2
4136	536995.16	4816410.82	338.51	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.0	0.0	0.0	-122.2
4207	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.6	0.0	0.0	-19.5
4207	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.6	0.0	0.0	-119.5
4207	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.6	0.0	0.0	-119.5
4261	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-21.5
4261	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-121.5
4261	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-121.5
4289	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-19.7
4289	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-119.7
4289	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-119.7
4403	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-20.8
4403	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-120.8
4403	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-120.8
4418	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.1	0.0	0.0	-21.4

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4418	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.1	0.0	0.0	-121.4
4418	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.1	0.0	0.0	-121.4
4436	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.3	0.0	0.0	-21.8
4436	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.3	0.0	0.0	-121.8
4436	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.3	0.0	0.0	-121.8
4445	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-21.3
4445	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-121.3
4445	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-121.3
4511	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.9	0.0	0.0	-21.7
4511	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.9	0.0	0.0	-121.7
4511	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.9	0.0	0.0	-121.7
4517	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-21.4
4517	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.4
4517	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.4
4534	536986.44	4816402.86	338.40	0	D	A	59.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-24.2
4534	536986.44	4816402.86	338.40	0	N	A	-40.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-124.2
4534	536986.44	4816402.86	338.40	0	E	A	-40.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-124.2
4537	536987.21	4816402.12	338.40	0	D	A	59.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-29.0
4537	536987.21	4816402.12	338.40	0	N	A	-40.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-129.0
4537	536987.21	4816402.12	338.40	0	E	A	-40.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-129.0
4564	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.6	0.0	0.0	-22.8
4564	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.6	0.0	0.0	-122.8
4564	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.6	0.0	0.0	-122.8
4571	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-23.4
4571	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-123.4
4571	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.3	0.0	0.0	-123.4
4586	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-23.0
4586	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-123.0
4586	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-123.0
4605	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-21.9
4605	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.9
4605	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.9
4619	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.6	0.0	0.0	-24.0
4619	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.6	0.0	0.0	-124.0
4619	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.6	0.0	0.0	-124.0
4674	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-23.2
4674	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-123.2
4674	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-123.2
4696	536990.12	4816403.00	338.40	0	D	A	59.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-25.4
4696	536990.12	4816403.00	338.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-125.4
4696	536990.12	4816403.00	338.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.0	0.0	0.0	-125.4
4702	536990.29	4816403.84	338.40	0	D	A	59.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-29.9
4702	536990.29	4816403.84	338.40	0	N	A	-40.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-129.9
4702	536990.29	4816403.84	338.40	0	E	A	-40.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-129.9
4743	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-22.9
4743	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-122.9
4743	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-122.9
4813	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-23.1
4813	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-123.1
4813	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.4	0.0	0.0	-123.1
4823	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.5	0.0	0.0	-24.3
4823	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.5	0.0	0.0	-124.3
4823	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.5	0.0	0.0	-124.3
5049	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-28.0
5049	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-128.0
5049	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-128.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3066	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	7.8	0.0	0.0	1.2
3066	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	7.8	0.0	0.0	-105.8
3066	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	7.8	0.0	0.0	-105.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3448	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.2	0.0	0.0	1.1
3448	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
3448	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
3451	536848.15	4816431.51	340.11	1	D	A	58.4	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	3.9
3451	536848.15	4816431.51	340.11	1	N	A	-48.6	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-103.1
3451	536848.15	4816431.51	340.11	1	E	A	-48.6	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-103.1
3529	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	0.3
3529	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-106.7
3529	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-106.7
3564	536909.59	4816465.40	339.00	0	D	A	58.4	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
3564	536909.59	4816465.40	339.00	0	N	A	-48.6	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3564	536909.59	4816465.40	339.00	0	E	A	-48.6	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3637	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-0.3
3637	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-107.3
3637	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-107.3
3640	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	2.9
3640	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-104.1
3640	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-104.1
3692	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	1.3
3692	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	-105.7
3692	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	-105.7
3694	536851.04	4816438.13	339.77	1	D	A	58.4	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	2.8
3694	536851.04	4816438.13	339.77	1	N	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-104.2
3694	536851.04	4816438.13	339.77	1	E	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-104.2
3760	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
3760	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3760	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3765	536876.66	4816460.04	339.15	1	D	A	58.4	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.1
3765	536876.66	4816460.04	339.15	1	N	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
3765	536876.66	4816460.04	339.15	1	E	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
3768	536877.94	4816456.85	339.24	1	D	A	58.4	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-2.5
3768	536877.94	4816456.85	339.24	1	N	A	-48.6	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-109.5
3768	536877.94	4816456.85	339.24	1	E	A	-48.6	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-109.5
3771	536876.64	4816460.08	339.15	1	D	A	58.4	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-2.2
3771	536876.64	4816460.08	339.15	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-109.2
3771	536876.64	4816460.08	339.15	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-109.2
3775	536876.66	4816460.04	339.15	1	D	A	58.4	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.1
3775	536876.66	4816460.04	339.15	1	N	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
3775	536876.66	4816460.04	339.15	1	E	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
3777	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	4.5
3777	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
3777	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
3781	536831.89	4816436.30	340.12	0	D	A	58.4	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
3781	536831.89	4816436.30	340.12	0	N	A	-48.6	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3781	536831.89	4816436.30	340.12	0	E	A	-48.6	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3785	536833.31	4816435.96	340.12	1	D	A	58.4	3.6	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.1
3785	536833.31	4816435.96	340.12	1	N	A	-48.6	3.6	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
3785	536833.31	4816435.96	340.12	1	E	A	-48.6	3.6	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
3874	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	0.7
3874	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	-106.3
3874	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	-106.3
3875	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	1.9
3875	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.1
3875	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.1
3881	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.1	0.0	0.0	-0.2
3881	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.1	0.0	0.0	-107.2
3881	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.1	0.0	0.0	-107.2
3884	536856.94	4816440.30	339.62	1	D	A	58.4	5.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	0.0
3884	536856.94	4816440.30	339.62	1	N	A	-48.6	5.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-107.0
3884	536856.94	4816440.30	339.62	1	E	A	-48.6	5.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-107.0
3926	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-1.5
3926	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-108.5
3926	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-108.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3929	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	1.2
3929	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.8
3929	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.8
3944	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
3944	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
3944	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
3956	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.4	0.0	0.0	-1.3
3956	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.4	0.0	0.0	-108.3
3956	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.4	0.0	0.0	-108.3
3986	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-1.8
3986	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-108.7
3986	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-108.7
4011	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	2.9
4011	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-104.1
4011	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-104.1
4015	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	0.6
4015	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.4
4015	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.4
4022	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-2.9
4022	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-109.9
4022	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-109.9
4025	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-2.9
4025	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-109.9
4025	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-109.9
4098	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
4098	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	-104.5
4098	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	-104.5
4102	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	0.2
4102	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
4102	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
4124	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-3.4
4124	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-110.4
4124	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-110.4
4183	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-2.4
4183	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-109.4
4183	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-109.4
4212	536894.27	4816470.01	339.05	0	D	A	58.4	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-12.6
4212	536894.27	4816470.01	339.05	0	N	A	-48.6	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-119.6
4212	536894.27	4816470.01	339.05	0	E	A	-48.6	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-119.6
4265	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.4	0.0	0.0	-4.1
4265	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.4	0.0	0.0	-111.1
4265	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.4	0.0	0.0	-111.1
4268	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.1
4268	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
4268	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
4298	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-2.1
4298	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-109.1
4298	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-109.1
4301	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.2
4301	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.2
4301	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.2
4319	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.5	0.0	0.0	-2.6
4319	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.5	0.0	0.0	-109.6
4319	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.5	0.0	0.0	-109.6
4323	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.4
4323	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.4
4323	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.4
4336	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-4.6
4336	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-111.6
4336	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-111.6
4340	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.7
4340	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.6
4340	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4360	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-5.2
4360	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-112.2
4360	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-112.2
4369	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-5.2
4369	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-112.2
4369	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-112.2
4473	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-0.3
4473	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
4473	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
4476	536896.40	4816465.40	339.10	1	D	A	58.4	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.0
4476	536896.40	4816465.40	339.10	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
4476	536896.40	4816465.40	339.10	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
4479	536896.40	4816465.40	339.10	1	D	A	58.4	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.0
4479	536896.40	4816465.40	339.10	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
4479	536896.40	4816465.40	339.10	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
4483	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-0.3
4483	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
4483	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
4493	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	-4.9
4493	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	-111.9
4493	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	-111.9
4496	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-2.5
4496	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.5
4496	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.5
4521	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-0.5
4521	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.5
4521	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-107.5
4527	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-5.1
4527	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-112.1
4527	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-112.1
4530	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-4.9
4530	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-111.9
4530	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-111.9
4539	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-0.7
4539	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-107.7
4539	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-107.7
4541	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.8
4541	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
4541	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
4543	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-2.0
4543	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-109.0
4543	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-109.0
4548	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.8
4548	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
4548	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
4551	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-6.2
4551	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-113.2
4551	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.6	0.0	0.0	-113.2
4555	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	-5.1
4555	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	-112.1
4555	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	-112.1
4559	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-2.9
4559	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.9
4559	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.9
4580	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-5.0
4580	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-112.0
4580	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-112.0
4623	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-8.9
4623	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-115.9
4623	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-115.9
4628	536897.09	4816464.12	339.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-17.0
4628	536897.09	4816464.12	339.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
4628	536897.09	4816464.12	339.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4631	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.7
4631	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.7
4631	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.7
4635	536897.09	4816464.12	339.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-17.0
4635	536897.09	4816464.12	339.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
4635	536897.09	4816464.12	339.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
4651	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-1.1
4651	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.1
4651	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.1
4654	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.3
4654	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.3
4654	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.3
4658	536895.24	4816467.79	339.09	0	D	A	58.4	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-10.5
4658	536895.24	4816467.79	339.09	0	N	A	-48.6	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-117.4
4658	536895.24	4816467.79	339.09	0	E	A	-48.6	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-117.4
4659	536895.63	4816466.91	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-5.2
4659	536895.63	4816466.91	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.2
4659	536895.63	4816466.91	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.2
4684	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.0	0.0	0.0	-5.4
4684	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.0	0.0	0.0	-112.4
4684	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.0	0.0	0.0	-112.4
4687	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.7
4687	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.7
4687	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.7
4706	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.1	0.0	0.0	-4.6
4706	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.1	0.0	0.0	-111.6
4706	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.1	0.0	0.0	-111.6
4708	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.8
4708	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.8
4708	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.8
4719	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-5.6
4719	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-112.6
4719	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-112.6
4721	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.9
4721	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.9
4721	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.9
4746	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	-1.7
4746	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	-108.7
4746	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	-108.7
4750	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.0
4750	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.0
4750	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.0
4761	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.3	0.0	0.0	-5.3
4761	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.3	0.0	0.0	-112.3
4761	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.3	0.0	0.0	-112.3
4765	536878.88	4816454.52	339.31	1	D	A	58.4	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-14.3
4765	536878.88	4816454.52	339.31	1	N	A	-48.6	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-121.3
4765	536878.88	4816454.52	339.31	1	E	A	-48.6	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-121.3
4781	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.3	0.0	0.0	-6.2
4781	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.3	0.0	0.0	-113.2
4781	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.3	0.0	0.0	-113.2
4785	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.3
4785	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
4785	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
4789	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-6.3
4789	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-113.3
4789	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-113.3
4795	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-1.9
4795	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.9
4795	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.9
4799	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.2
4799	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
4799	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4851	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-5.7
4851	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-112.7
4851	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.2	0.0	0.0	-112.7
4856	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.9
4856	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.8
4856	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.8
4893	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.2
4893	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.2
4893	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.2
4897	536827.48	4816435.08	340.26	1	D	A	58.4	-1.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-6.5
4897	536827.48	4816435.08	340.26	1	N	A	-48.6	-1.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-113.5
4897	536827.48	4816435.08	340.26	1	E	A	-48.6	-1.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-113.5
4900	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-7.1
4900	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-114.1
4900	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-114.1
4916	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.3
4916	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.3
4916	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.3
4922	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-6.5
4922	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-113.5
4922	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-113.5
4925	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-5.7
4925	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.7
4925	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.7
4930	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-7.7
4930	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-114.7
4930	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-114.7
4934	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.6
4934	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.6
4934	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.6
4937	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-5.9
4937	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.9
4937	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.9
4948	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-4.2
4948	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
4948	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
4962	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-4.2
4962	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
4962	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
4964	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-8.9
4964	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-115.9
4964	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-115.9
4976	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-4.6
4976	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
4976	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
4981	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-9.1
4981	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-116.1
4981	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-116.1
4987	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-9.3
4987	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-116.2
4987	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.6	0.0	0.0	-116.2
4990	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-4.6
4990	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
4990	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
4993	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.0	0.0	0.0	-7.8
4993	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.0	0.0	0.0	-114.8
4993	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.0	0.0	0.0	-114.8
4998	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-7.0
4998	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-114.0
4998	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-114.0
5013	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-9.3
5013	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-116.2
5013	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	4.3	0.0	0.0	-116.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5017	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-12.9
5017	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-119.9
5017	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-119.9
5022	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-16.0
5022	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-123.0
5022	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-123.0
5026	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-5.3
5026	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.3
5026	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.3
5029	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-5.7
5029	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
5029	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
5033	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-5.7
5033	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
5033	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
5035	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-6.3
5035	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-113.3
5035	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-113.3
5056	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-7.3
5056	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.3
5056	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.3
5059	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-7.8
5059	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.8
5059	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.8
5064	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-8.2
5064	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-115.2
5064	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-115.2
5069	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-13.6
5069	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-120.5
5069	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-120.5
5072	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-10.6
5072	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-117.6
5072	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-117.6
5075	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-9.9
5075	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-116.8
5075	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-116.8
5079	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-11.0
5079	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-118.0
5079	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-118.0

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3151	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-26.8
3151	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-29.8
3151	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-26.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3841	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
3841	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3841	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3902	536958.33	4816510.70	339.51	0	D	A	59.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-6.4
3902	536958.33	4816510.70	339.51	0	N	A	-40.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-106.4
3902	536958.33	4816510.70	339.51	0	E	A	-40.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-106.4
3906	536955.67	4816509.05	339.56	0	D	A	59.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-10.5
3906	536955.67	4816509.05	339.56	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-110.5
3906	536955.67	4816509.05	339.56	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-110.5
3910	536960.06	4816523.96	339.50	0	D	A	59.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-4.9
3910	536960.06	4816523.96	339.50	0	N	A	-40.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-104.9
3910	536960.06	4816523.96	339.50	0	E	A	-40.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-104.9
3968	536963.83	4816506.85	339.51	0	D	A	59.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	1.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3968	536963.83	4816506.85	339.51	0	N	A	-40.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
3968	536963.83	4816506.85	339.51	0	E	A	-40.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
3973	536963.02	4816509.44	339.48	0	D	A	59.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-9.9
3973	536963.02	4816509.44	339.48	0	N	A	-40.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-109.9
3973	536963.02	4816509.44	339.48	0	E	A	-40.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-109.9
3997	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
3997	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
3997	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
4172	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-6.2
4172	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-106.2
4172	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-106.2
4175	536955.69	4816510.42	339.56	0	D	A	59.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-7.7
4175	536955.69	4816510.42	339.56	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-107.7
4175	536955.69	4816510.42	339.56	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-107.7
4217	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-7.4
4217	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-107.4
4217	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-107.4
4220	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	1.0
4220	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
4220	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
4224	536965.49	4816501.47	339.59	1	D	A	59.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-5.5
4224	536965.49	4816501.47	339.59	1	N	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-105.5
4224	536965.49	4816501.47	339.59	1	E	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-105.5
4283	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-7.2
4283	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-107.2
4283	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-107.2
4293	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-8.1
4293	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-108.1
4293	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-108.1
4347	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
4347	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4347	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
4351	536971.67	4816491.16	339.73	0	D	A	59.5	1.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.1
4351	536971.67	4816491.16	339.73	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
4351	536971.67	4816491.16	339.73	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
4353	536970.76	4816492.24	339.73	0	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.7
4353	536970.76	4816492.24	339.73	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
4353	536970.76	4816492.24	339.73	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
4356	536970.28	4816492.81	339.72	0	D	A	59.5	-7.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-12.5
4356	536970.28	4816492.81	339.72	0	N	A	-40.5	-7.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-112.5
4356	536970.28	4816492.81	339.72	0	E	A	-40.5	-7.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-112.5
4393	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.3
4393	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
4393	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
4427	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-8.1
4427	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-108.1
4427	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-108.1
4439	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-5.9
4439	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
4439	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
4488	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
4488	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4488	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4525	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-8.6
4525	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-108.6
4525	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-108.6
4572	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-9.1
4572	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-109.1
4572	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-109.1
4575	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-1.3
4575	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
4575	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
4610	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-8.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4610	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-108.9
4610	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-108.9
4638	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-8.7
4638	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-108.7
4638	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-108.7
4642	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-9.2
4642	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-109.2
4642	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-109.2
4662	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-1.8
4662	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
4662	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
4691	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-9.0
4691	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.0
4691	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.0
4711	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-10.1
4711	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-110.1
4711	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-110.1
4714	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-9.9
4714	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-109.9
4714	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-109.9
4752	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
4752	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4752	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
4773	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.5
4773	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
4773	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
4777	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.3
4777	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.3
4777	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.3
4792	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-10.5
4792	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-110.5
4792	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-110.5
4801	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-10.3
4801	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-110.3
4801	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-110.3
4805	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-9.8
4805	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.8
4805	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.8
4827	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.8
4827	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
4827	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
4829	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.6
4829	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.6
4829	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.6
4832	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-10.2
4832	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-110.2
4832	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-110.2
4835	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.0
4835	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.0
4835	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.0
4840	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.7
4840	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.7
4840	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.7
4844	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.1
4844	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
4844	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
4847	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-10.3
4847	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-110.3
4847	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-110.3
4860	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-10.7
4860	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-110.7
4860	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-110.7
4867	536964.01	4816517.03	339.41	0	D	A	59.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-10.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4867	536964.01	4816517.03	339.41	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-110.6
4867	536964.01	4816517.03	339.41	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-110.6
4870	536963.70	4816516.38	339.41	0	D	A	59.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-30.9
4870	536963.70	4816516.38	339.41	0	N	A	-40.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-130.9
4870	536963.70	4816516.38	339.41	0	E	A	-40.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-130.9
4874	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-11.7
4874	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-111.7
4874	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-111.7
4878	536962.28	4816512.98	339.44	0	D	A	59.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-11.2
4878	536962.28	4816512.98	339.44	0	N	A	-40.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-111.2
4878	536962.28	4816512.98	339.44	0	E	A	-40.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-111.2
4881	536962.19	4816513.66	339.43	0	D	A	59.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-17.3
4881	536962.19	4816513.66	339.43	0	N	A	-40.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-117.3
4881	536962.19	4816513.66	339.43	0	E	A	-40.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-117.3
4884	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.7
4884	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
4884	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
4889	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-11.1
4889	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-111.1
4889	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-111.1
4902	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.8
4902	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.8
4902	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.8
4907	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-11.3
4907	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-111.3
4907	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-111.3
4911	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.9
4911	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
4911	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
4918	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.9
4918	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
4918	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
4943	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-12.3
4943	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.3
4943	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.3
4952	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-12.6
4952	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.6
4952	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.6

Receiver
Name: Building D2 Tower - South Facade
ID: POR
X: 536771.11 m
Y: 4816198.23 m
Z: 372.57 m

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	53.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	43.0
4	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	53.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	40.0
4	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	53.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	43.0
7	536875.58	4816125.19	350.32	1	D	A	94.3	0.0	0.0	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	13.3
7	536875.58	4816125.19	350.32	1	N	A	94.3	0.0	-3.0	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	10.3
7	536875.58	4816125.19	350.32	1	E	A	94.3	0.0	0.0	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	13.3
11	536875.58	4816125.19	350.32	1	D	A	94.3	0.0	0.0	0.0	0.0	60.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
11	536875.58	4816125.19	350.32	1	N	A	94.3	0.0	-3.0	0.0	0.0	60.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.9
11	536875.58	4816125.19	350.32	1	E	A	94.3	0.0	0.0	0.0	0.0	60.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
13	536875.58	4816125.19	350.32	1	D	A	94.3	0.0	0.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	9.4
13	536875.58	4816125.19	350.32	1	N	A	94.3	0.0	-3.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	6.3
13	536875.58	4816125.19	350.32	1	E	A	94.3	0.0	0.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	9.4
17	536875.58	4816125.19	350.32	1	D	A	94.3	0.0	0.0	0.0	0.0	58.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	8.9
17	536875.58	4816125.19	350.32	1	N	A	94.3	0.0	-3.0	0.0	0.0	58.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
17	536875.58	4816125.19	350.32	1	E	A	94.3	0.0	0.0	0.0	0.0	58.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	8.9

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
19	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	46.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.5
19	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	46.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.5
19	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	46.3	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.5
21	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	54.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	4.1
21	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	54.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	4.1
21	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	54.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	4.1
23	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.7
23	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.7
23	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	47.1	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.7
24	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
24	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
24	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
27	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
27	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
27	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	5.9
31	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	53.3	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.2
31	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	53.3	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.2
31	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	53.3	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.2

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
33	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	46.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.1
33	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	46.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.1
33	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	46.6	0.2	-3.0	0.0	0.0	0.0	0.0	0.0	41.1
34	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	54.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
34	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	54.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
34	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	54.6	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
35	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	47.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.6
35	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	47.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.6
35	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	47.2	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	11.6
38	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	52.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	6.2
38	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	52.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	6.2
38	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	52.4	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	6.2

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
41	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.5
41	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.5
41	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	5.5

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
47	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	12.0
47	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	9.0
47	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	12.0
50	536434.35	4816320.06	359.29	1	D	A	100.1	0.0	0.0	0.0	0.0	64.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	7.8
50	536434.35	4816320.06	359.29	1	N	A	100.1	0.0	-3.0	0.0	0.0	64.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	4.8
50	536434.35	4816320.06	359.29	1	E	A	100.1	0.0	0.0	0.0	0.0	64.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	7.8
52	536434.35	4816320.06	359.29	1	D	A	100.1	0.0	0.0	0.0	0.0	64.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	8.1
52	536434.35	4816320.06	359.29	1	N	A	100.1	0.0	-3.0	0.0	0.0	64.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	5.1
52	536434.35	4816320.06	359.29	1	E	A	100.1	0.0	0.0	0.0	0.0	64.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	8.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
55	536660.95	4816008.64	345.75	0	D	A	101.5	0.0	0.0	0.0	0.0	57.9	1.9	-3.0	0.0	0.0	10.8	0.0	0.0	33.9
55	536660.95	4816008.64	345.75	0	N	A	101.5	0.0	-188.0	0.0	0.0	57.9	1.9	-3.0	0.0	0.0	10.8	0.0	0.0	-154.1
55	536660.95	4816008.64	345.75	0	E	A	101.5	0.0	-188.0	0.0	0.0	57.9	1.9	-3.0	0.0	0.0	10.8	0.0	0.0	-154.1
58	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	58.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	15.4
58	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	58.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-172.6
58	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	58.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-172.6
65	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	62.1	2.6	-2.7	0.0	0.0	27.7	0.0	1.0	10.8
65	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	62.1	2.6	-2.7	0.0	0.0	27.7	0.0	1.0	-177.2
65	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	62.1	2.6	-2.7	0.0	0.0	27.7	0.0	1.0	-177.2
67	536660.95	4816008.64	345.75	1	D	A	101.5	0.0	0.0	0.0	0.0	58.6	2.0	-2.5	0.0	0.0	0.0	0.0	2.6	40.8
67	536660.95	4816008.64	345.75	1	N	A	101.5	0.0	-188.0	0.0	0.0	58.6	2.0	-2.5	0.0	0.0	0.0	0.0	2.6	-147.2
67	536660.95	4816008.64	345.75	1	E	A	101.5	0.0	-188.0	0.0	0.0	58.6	2.0	-2.5	0.0	0.0	0.0	0.0	2.6	-147.2

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
69	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	52.7	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	21.9
69	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	52.7	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	-158.3
69	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	52.7	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	21.9
72	536801.75	4816086.63	340.68	1	D	A	97.1	0.0	-7.8	3.0	0.0	53.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	11.5
72	536801.75	4816086.63	340.68	1	N	A	97.1	0.0	-188.0	3.0	0.0	53.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-168.7
72	536801.75	4816086.63	340.68	1	E	A	97.1	0.0	-7.8	3.0	0.0	53.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	11.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
78	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	53.1	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	21.4
78	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	53.1	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	-158.8
78	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	53.1	1.4	-3.0	0.0	0.0	19.4	0.0	0.0	21.4
80	536782.23	4816076.78	341.09	1	D	A	97.1	0.0	-7.8	3.0	0.0	53.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	11.1
80	536782.23	4816076.78	341.09	1	N	A	97.1	0.0	-188.0	3.0	0.0	53.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-169.1
80	536782.23	4816076.78	341.09	1	E	A	97.1	0.0	-7.8	3.0	0.0	53.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	11.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
85	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	13.3
85	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	7.3
85	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	13.3
87	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	6.0
87	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	0.0
87	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	6.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
96	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	55.8	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	13.0
96	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	55.8	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	7.0
96	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	55.8	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	13.0
100	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	5.8
100	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
100	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	5.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
103	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	38.7
103	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
103	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	38.7
107	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	56.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	9.4
107	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	56.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	3.4
107	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	56.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	9.4
111	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
111	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1
111	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
115	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	52.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	40.5
115	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	52.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	-147.5
115	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	52.2	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	40.5
116	536790.71	4816089.26	345.38	1	D	A	90.0	0.0	0.0	0.0	0.0	52.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	10.7
116	536790.71	4816089.26	345.38	1	N	A	90.0	0.0	-188.0	0.0	0.0	52.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	-177.3
116	536790.71	4816089.26	345.38	1	E	A	90.0	0.0	0.0	0.0	0.0	52.9	0.3	-3.0	0.0	0.0	28.0	0.0	1.0	10.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
120	536660.48	4816041.55	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	37.8
120	536660.48	4816041.55	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	31.7
120	536660.48	4816041.55	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	37.8
122	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	8.6
122	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
122	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	8.6
127	536660.48	4816041.55	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.7
127	536660.48	4816041.55	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-2.3
127	536660.48	4816041.55	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	3.7

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
136	536415.97	4816336.50	359.79	0	D	A	97.3	0.0	0.0	0.0	0.0	62.6	1.0	-3.0	0.0	0.0	27.1	0.0	0.0	9.4
136	536415.97	4816336.50	359.79	0	N	A	97.3	0.0	-3.0	0.0	0.0	62.6	1.0	-3.0	0.0	0.0	27.1	0.0	0.0	6.4
136	536415.97	4816336.50	359.79	0	E	A	97.3	0.0	0.0	0.0	0.0	62.6	1.0	-3.0	0.0	0.0	27.1	0.0	0.0	9.4
139	536415.97	4816336.50	359.79	1	D	A	97.3	0.0	0.0	0.0	0.0	64.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	5.5
139	536415.97	4816336.50	359.79	1	N	A	97.3	0.0	-3.0	0.0	0.0	64.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	2.4
139	536415.97	4816336.50	359.79	1	E	A	97.3	0.0	0.0	0.0	0.0	64.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	5.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
142	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
142	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	30.9
142	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
144	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	7.7
144	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	1.7
144	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	7.7
147	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	2.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
147	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.0	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	-3.1
147	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-2.9	0.0	0.0	27.9	0.0	1.0	2.9

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
149	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	37.4
149	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
149	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	37.4
152	536780.92	4816108.90	345.88	1	D	A	85.5	0.0	0.0	0.0	0.0	51.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.6
152	536780.92	4816108.90	345.88	1	N	A	85.5	0.0	-6.0	0.0	0.0	51.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	1.5
152	536780.92	4816108.90	345.88	1	E	A	85.5	0.0	0.0	0.0	0.0	51.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.6

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
164	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	0.0	0.0	0.0	61.7	1.4	-3.0	0.0	0.0	27.9	0.0	0.0	14.0
164	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	61.7	1.4	-3.0	0.0	0.0	27.9	0.0	0.0	-174.0
164	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	61.7	1.4	-3.0	0.0	0.0	27.9	0.0	0.0	-174.0
167	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	10.0
167	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-178.0
167	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-178.0
170	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	10.4
170	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-177.6
170	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-177.6
174	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	61.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	12.4
174	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	61.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-175.6
174	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	61.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-175.6

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
176	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	37.2
176	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.2
176	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	37.2
178	536775.99	4816106.35	345.88	1	D	A	85.5	0.0	0.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.4
178	536775.99	4816106.35	345.88	1	N	A	85.5	0.0	-6.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	1.4
178	536775.99	4816106.35	345.88	1	E	A	85.5	0.0	0.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
184	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	22.7	0.0	0.0	13.9
184	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	22.7	0.0	0.0	7.8
184	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	22.7	0.0	0.0	13.9
187	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.8
187	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
187	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	3.8
189	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	4.1
189	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
189	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	4.1

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
200	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	58.3	1.2	-2.5	0.0	0.0	0.0	0.0	0.0	35.6
200	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	58.3	1.2	-2.5	0.0	0.0	0.0	0.0	0.0	29.5
200	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	58.3	1.2	-2.5	0.0	0.0	0.0	0.0	0.0	35.6
203	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.5	0.0	0.0	27.5	0.0	1.0	6.9
203	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.5	1.2	-2.5	0.0	0.0	27.5	0.0	1.0	0.9
203	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.5	0.0	0.0	27.5	0.0	1.0	6.9
208	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-2.7	0.0	0.0	27.7	0.0	1.0	2.9
208	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.0	1.6	-2.7	0.0	0.0	27.7	0.0	1.0	-3.1

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
208	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-2.7	0.0	0.0	27.7	0.0	1.0	2.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
210	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
210	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
210	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
211	536782.19	4816093.41	346.38	1	D	A	82.1	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.9
211	536782.19	4816093.41	346.38	1	N	A	82.1	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.9
211	536782.19	4816093.41	346.38	1	E	A	82.1	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
216	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	51.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
216	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	51.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
216	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	51.5	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
218	536861.27	4816150.04	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	52.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.8
218	536861.27	4816150.04	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	52.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.8
218	536861.27	4816150.04	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	52.3	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.8
220	536861.27	4816150.04	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
220	536861.27	4816150.04	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
220	536861.27	4816150.04	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
223	536861.27	4816150.04	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5
223	536861.27	4816150.04	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5
223	536861.27	4816150.04	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5
225	536861.27	4816150.04	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
225	536861.27	4816150.04	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
225	536861.27	4816150.04	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
228	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
228	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
228	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
230	536864.23	4816133.04	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
230	536864.23	4816133.04	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
230	536864.23	4816133.04	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
232	536864.23	4816133.04	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
232	536864.23	4816133.04	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
232	536864.23	4816133.04	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
234	536864.23	4816133.04	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
234	536864.23	4816133.04	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
234	536864.23	4816133.04	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
235	536864.23	4816133.04	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
235	536864.23	4816133.04	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
235	536864.23	4816133.04	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
237	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	51.8	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
237	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	51.8	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
237	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	51.8	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
240	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	52.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
240	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	52.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
240	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	52.5	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
243	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
243	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
243	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
246	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
246	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
246	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
248	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1
248	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1
248	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
250	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	50.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.7
250	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	28.6
250	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	50.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.7
252	536787.60	4816112.61	345.63	1	D	A	82.5	0.0	0.0	0.0	0.0	51.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.7
252	536787.60	4816112.61	345.63	1	N	A	82.5	0.0	-6.0	0.0	0.0	51.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3
252	536787.60	4816112.61	345.63	1	E	A	82.5	0.0	0.0	0.0	0.0	51.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.7

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
255	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
255	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
255	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
258	536870.07	4816135.80	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
258	536870.07	4816135.80	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
258	536870.07	4816135.80	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
260	536870.07	4816135.80	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.6
260	536870.07	4816135.80	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.6
260	536870.07	4816135.80	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-5.6
262	536870.07	4816135.80	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
262	536870.07	4816135.80	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
262	536870.07	4816135.80	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
265	536870.07	4816135.80	349.32	1	D	A	82.1	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
265	536870.07	4816135.80	349.32	1	N	A	82.1	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
265	536870.07	4816135.80	349.32	1	E	A	82.1	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
268	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	33.7
268	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	27.7
268	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	33.7
271	537015.74	4816361.58	344.43	1	D	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.6
271	537015.74	4816361.58	344.43	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.4
271	537015.74	4816361.58	344.43	1	E	A	92.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.6
273	537015.74	4816361.58	344.43	1	D	A	92.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
273	537015.74	4816361.58	344.43	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
273	537015.74	4816361.58	344.43	1	E	A	92.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
276	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	52.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
276	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	52.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
276	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	52.0	0.3	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
281	536861.90	4816138.66	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	52.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
281	536861.90	4816138.66	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	52.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
281	536861.90	4816138.66	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	52.8	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.3
283	536861.90	4816138.66	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
283	536861.90	4816138.66	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
283	536861.90	4816138.66	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
284	536861.90	4816138.66	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
284	536861.90	4816138.66	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
284	536861.90	4816138.66	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
338	536861.90	4816138.66	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
338	536861.90	4816138.66	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
338	536861.90	4816138.66	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
342	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	52.7	2.8	-3.0	0.0	0.0	22.0	0.0	0.0	11.6
342	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	52.7	2.8	-3.0	0.0	0.0	22.0	0.0	0.0	-158.6
342	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	52.7	2.8	-3.0	0.0	0.0	22.0	0.0	0.0	11.6
345	536801.75	4816086.63	340.68	1	D	A	101.0	0.0	-17.8	3.0	0.0	53.4	3.0	-3.0	0.0	0.0	28.0	0.0	1.0	3.8
345	536801.75	4816086.63	340.68	1	N	A	101.0	0.0	-188.0	3.0	0.0	53.4	3.0	-3.0	0.0	0.0	28.0	0.0	1.0	-166.4
345	536801.75	4816086.63	340.68	1	E	A	101.0	0.0	-17.8	3.0	0.0	53.4	3.0	-3.0	0.0	0.0	28.0	0.0	1.0	3.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
348	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	52.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
348	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	52.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
348	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	52.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
350	536869.91	4816146.29	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	52.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
350	536869.91	4816146.29	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	52.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
350	536869.91	4816146.29	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	52.9	0.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
351	536869.91	4816146.29	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
351	536869.91	4816146.29	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
351	536869.91	4816146.29	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
352	536869.91	4816146.29	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
352	536869.91	4816146.29	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
352	536869.91	4816146.29	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
354	536869.91	4816146.29	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
354	536869.91	4816146.29	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
354	536869.91	4816146.29	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	57.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
356	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.2
356	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	28.2
356	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	50.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.2
358	536785.32	4816107.57	345.63	1	D	A	82.5	0.0	0.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.4
358	536785.32	4816107.57	345.63	1	N	A	82.5	0.0	-6.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.6
358	536785.32	4816107.57	345.63	1	E	A	82.5	0.0	0.0	0.0	0.0	51.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
359	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	53.1	2.9	-3.0	0.0	0.0	22.2	0.0	0.0	11.0
359	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	53.1	2.9	-3.0	0.0	0.0	22.2	0.0	0.0	-159.2
359	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	53.1	2.9	-3.0	0.0	0.0	22.2	0.0	0.0	11.0
360	536782.23	4816076.78	341.09	1	D	A	101.0	0.0	-17.8	3.0	0.0	53.7	3.1	-3.0	0.0	0.0	28.0	0.0	1.0	3.4
360	536782.23	4816076.78	341.09	1	N	A	101.0	0.0	-188.0	3.0	0.0	53.7	3.1	-3.0	0.0	0.0	28.0	0.0	1.0	-166.8
360	536782.23	4816076.78	341.09	1	E	A	101.0	0.0	-17.8	3.0	0.0	53.7	3.1	-3.0	0.0	0.0	28.0	0.0	1.0	3.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
364	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.9
364	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.9
364	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	33.9
367	536773.39	4816102.37	345.63	1	D	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.1
367	536773.39	4816102.37	345.63	1	N	A	82.5	0.0	-6.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
367	536773.39	4816102.37	345.63	1	E	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	4.1

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
377	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	7.6
377	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	1.5
377	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.7	0.0	0.0	7.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
379	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.1
379	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	27.1
379	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	54.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.1
381	536692.85	4816072.45	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
381	536692.85	4816072.45	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
381	536692.85	4816072.45	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.9
384	536692.85	4816072.45	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
384	536692.85	4816072.45	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.3
384	536692.85	4816072.45	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
387	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
387	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.6
387	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
390	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.9	0.0	0.0	27.9	0.0	1.0	3.4
390	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.9	0.0	0.0	27.9	0.0	1.0	-2.6
390	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.9	0.0	0.0	27.9	0.0	1.0	3.4
395	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-2.2
395	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.4	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-8.3
395	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	60.4	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-2.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
399	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	25.0	0.0	0.0	7.5
399	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	25.0	0.0	0.0	1.5
399	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	25.0	0.0	0.0	7.5
402	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
402	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
402	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
407	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-0.8
407	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
407	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-0.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
417	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	5.8
417	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	-0.2
417	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	5.8
418	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.1
418	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
418	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-1.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
420	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	29.5
420	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	29.5
420	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	51.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	29.5
423	536854.68	4816134.13	351.07	1	D	A	78.6	0.0	0.0	0.0	0.0	52.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.4
423	536854.68	4816134.13	351.07	1	N	A	78.6	0.0	0.0	0.0	0.0	52.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.4
423	536854.68	4816134.13	351.07	1	E	A	78.6	0.0	0.0	0.0	0.0	52.5	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.4
426	536854.68	4816134.13	351.07	1	D	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
426	536854.68	4816134.13	351.07	1	N	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
426	536854.68	4816134.13	351.07	1	E	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
429	536854.68	4816134.13	351.07	1	D	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.1
429	536854.68	4816134.13	351.07	1	N	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.1
429	536854.68	4816134.13	351.07	1	E	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.1
431	536854.68	4816134.13	351.07	1	D	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.3
431	536854.68	4816134.13	351.07	1	N	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.3
431	536854.68	4816134.13	351.07	1	E	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
440	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	25.0	0.0	0.0	6.2
440	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	25.0	0.0	0.0	0.2
440	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	25.0	0.0	0.0	6.2
442	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
442	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7
442	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
450	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	10.0
450	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-175.0
450	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-175.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
453	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	55.8	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	36.5
453	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	55.8	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	-151.5
453	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	55.8	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	-151.5
455	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.0	0.3	-2.6	0.0	0.0	27.6	0.0	1.0	7.8
455	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.6	0.0	0.0	27.6	0.0	1.0	-180.2
455	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.0	0.3	-2.6	0.0	0.0	27.6	0.0	1.0	-180.2
462	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	60.6	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	3.0
462	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.0
462	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
469	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	5.3
469	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-0.7
469	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	5.3
480	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9
480	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
480	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
482	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	56.1	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	36.2
482	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.1	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	-151.8
482	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.1	0.3	-2.5	0.0	0.0	0.0	0.0	0.0	-151.8
485	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	56.3	0.4	-2.6	0.0	0.0	27.6	0.0	1.3	7.2
485	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.3	0.4	-2.6	0.0	0.0	27.6	0.0	1.3	-180.8
485	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.3	0.4	-2.6	0.0	0.0	27.6	0.0	1.3	-180.8
488	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	60.7	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.9
488	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.1
488	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
493	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.7	0.0	0.0	0.0	0.0	0.0	27.7
493	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.7	0.0	0.0	0.0	0.0	0.0	27.7
493	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	56.2	0.9	-2.7	0.0	0.0	0.0	0.0	0.0	27.7
515	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.7	0.0	0.0	27.7	0.0	1.0	-1.2
515	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.7	0.0	0.0	27.7	0.0	1.0	-1.2
515	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.3	0.9	-2.7	0.0	0.0	27.7	0.0	1.0	-1.2
521	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.1
521	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.1
521	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
525	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	56.3	0.4	-2.4	0.0	0.0	0.0	0.0	0.0	35.9
525	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.3	0.4	-2.4	0.0	0.0	0.0	0.0	0.0	-152.1
525	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.3	0.4	-2.4	0.0	0.0	0.0	0.0	0.0	-152.1
529	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	60.8	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.8
529	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.2
529	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
531	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-2.6	0.0	0.0	0.0	0.0	0.0	27.3
531	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-2.6	0.0	0.0	0.0	0.0	0.0	27.3
531	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-2.6	0.0	0.0	0.0	0.0	0.0	27.3
533	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.6	1.0	-2.6	0.0	0.0	27.6	0.0	1.0	-1.5
533	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.6	1.0	-2.6	0.0	0.0	27.6	0.0	1.0	-1.5
533	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.6	1.0	-2.6	0.0	0.0	27.6	0.0	1.0	-1.5
537	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.2
537	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.2
537	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
542	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.7	0.0	0.0	0.0	0.0	0.0	27.2
542	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.7	0.0	0.0	0.0	0.0	0.0	27.2
542	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	56.7	1.0	-2.7	0.0	0.0	0.0	0.0	0.0	27.2
545	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.8
545	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.8
545	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-2.7	0.0	0.0	27.7	0.0	1.0	-1.8
547	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.4
547	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.4
547	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	27.8	0.0	1.0	-6.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
550	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	29.9
550	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
550	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	29.9
552	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	0.6
552	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-5.4
552	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	0.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
558	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	56.8	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	35.5
558	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.8	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	-152.5
558	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.8	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	-152.5
562	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	61.0	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
562	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	61.0	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.5
562	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	61.0	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
568	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	23.2	0.0	0.0	6.7
568	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	23.2	0.0	0.0	0.7
568	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	23.2	0.0	0.0	6.7
570	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
570	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-9.0
570	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	61.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
573	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6
573	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
573	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
581	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	35.5
581	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	-152.5
581	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	-152.5
584	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	6.7
584	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.3
584	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.6	0.0	0.0	27.6	0.0	1.0	-181.3
586	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	61.1	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.4
586	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.6
586	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
593	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	5.9
593	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	-0.1
593	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.8	0.0	0.0	5.9
596	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
596	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
596	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
602	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	5.4
602	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-0.6
602	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	5.4
605	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
605	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
605	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
609	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	0.0	0.0	0.0	35.6
609	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	0.0	0.0	0.0	-152.4
609	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	0.0	0.0	0.0	-152.4
612	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	6.6
612	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	-181.4
612	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.7	0.0	0.0	27.7	0.0	1.0	-181.4
617	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.2
617	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.8
617	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
619	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.1
619	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.1
619	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.1
622	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
622	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
622	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-2.2
626	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-6.8
626	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-6.8
626	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	27.9	0.0	1.0	-6.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
628	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	35.6
628	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-152.4
628	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-152.4
630	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.8	0.0	1.0	6.5
630	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.8	0.0	1.0	-181.5
630	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.8	0.0	1.0	-181.5
635	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	2.1
635	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.9
635	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	27.8	0.0	1.0	-185.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
639	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	25.5	0.0	0.0	4.2
639	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	25.5	0.0	0.0	-1.8
639	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	25.5	0.0	0.0	4.2
642	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
642	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.1
642	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
644	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.7
644	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
644	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
646	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	55.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	35.3
646	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	55.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-152.7
646	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	55.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-152.7
649	536707.14	4816053.41	345.47	1	D	A	85.0	0.0	0.0	3.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	6.0
649	536707.14	4816053.41	345.47	1	N	A	85.0	0.0	-188.0	3.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-182.0
649	536707.14	4816053.41	345.47	1	E	A	85.0	0.0	-188.0	3.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-182.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
652	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	3.0
652	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	-3.0
652	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	3.0
655	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-3.9
655	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
655	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-3.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
659	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	28.8
659	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	22.8
659	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	28.8
662	536970.45	4816325.51	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
662	536970.45	4816325.51	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9
662	536970.45	4816325.51	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.9
663	536970.45	4816325.51	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6
663	536970.45	4816325.51	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
663	536970.45	4816325.51	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
664	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	58.7	1.2	-2.4	0.0	0.0	0.0	0.0	0.0	28.1
664	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.7	1.2	-2.4	0.0	0.0	0.0	0.0	0.0	22.1
664	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	58.7	1.2	-2.4	0.0	0.0	0.0	0.0	0.0	28.1
667	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	58.8	1.2	-2.5	0.0	0.0	27.5	0.0	1.1	-0.6
667	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.8	1.2	-2.5	0.0	0.0	27.5	0.0	1.1	-6.6
667	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	58.8	1.2	-2.5	0.0	0.0	27.5	0.0	1.1	-0.6
671	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-4.2
671	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-10.3
671	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.9	0.0	0.0	27.9	0.0	1.0	-4.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
676	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	7.3	0.0	0.0	21.2
676	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	7.3	0.0	0.0	15.1
676	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	7.3	0.0	0.0	21.2
678	536970.68	4816340.65	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
678	536970.68	4816340.65	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-10.1
678	536970.68	4816340.65	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
682	536970.68	4816340.65	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
682	536970.68	4816340.65	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.8
682	536970.68	4816340.65	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
690	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.0	0.0	0.0	2.7
690	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.0	0.0	0.0	-3.3
690	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.0	0.0	0.0	2.7
692	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2
692	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
692	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
697	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	2.5
697	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	-3.5
697	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	26.2	0.0	0.0	2.5
700	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2
700	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
700	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
704	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	13.5	0.0	0.0	14.9
704	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	13.5	0.0	0.0	8.9
704	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	13.5	0.0	0.0	14.9
707	536966.20	4816349.69	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
707	536966.20	4816349.69	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
707	536966.20	4816349.69	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
709	536966.20	4816349.69	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
709	536966.20	4816349.69	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
709	536966.20	4816349.69	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
714	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	2.7
714	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	-3.4
714	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	25.9	0.0	0.0	2.7
715	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
715	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-10.3
715	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
724	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	2.4
724	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-3.6
724	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
730	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.6	0.0	0.0	5.2
730	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.6	0.0	0.0	-0.9
730	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.6	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
735	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	61.7	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	4.3
735	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	61.7	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-183.7
735	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	61.7	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-183.7
737	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	64.2	2.8	-3.0	0.0	0.0	28.0	0.0	1.0	0.1
737	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	64.2	2.8	-3.0	0.0	0.0	28.0	0.0	1.0	-187.9
737	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	64.2	2.8	-3.0	0.0	0.0	28.0	0.0	1.0	-187.9
741	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	63.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.4
741	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	63.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-187.6
741	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	63.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-187.6
743	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	61.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	3.0
743	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	61.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.0
743	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	61.8	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
748	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	25.3	0.0	0.0	2.7
748	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	25.3	0.0	0.0	-3.3
748	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	25.3	0.0	0.0	2.7
753	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
753	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-10.8
753	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
756	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
756	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	21.8
756	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
758	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5
758	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
758	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
762	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	51.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	29.8
762	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	51.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-158.2
762	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	51.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	29.8
767	536803.93	4816104.60	345.13	1	D	A	78.6	0.0	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0
767	536803.93	4816104.60	345.13	1	N	A	78.6	0.0	-188.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-188.0
767	536803.93	4816104.60	345.13	1	E	A	78.6	0.0	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0
768	536803.93	4816104.60	345.13	1	D	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
768	536803.93	4816104.60	345.13	1	N	A	78.6	0.0	-188.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-196.5
768	536803.93	4816104.60	345.13	1	E	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
774	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	25.1	0.0	0.0	2.5
774	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	25.1	0.0	0.0	-3.5
774	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	25.1	0.0	0.0	2.5
777	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
777	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-11.1
777	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
781	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	24.7	0.0	0.0	2.4
781	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	24.7	0.0	0.0	-3.6
781	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	24.7	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
789	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	5.1
789	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	-0.9
789	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	5.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
799	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.1	0.0	0.0	3.6
799	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.1	0.0	0.0	-2.4
799	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	23.1	0.0	0.0	3.6
802	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
802	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
802	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	61.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
804	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
804	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
804	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
806	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.6
806	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
806	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.6
808	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
808	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
808	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
813	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
813	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	20.2
813	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
816	537024.98	4816371.79	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
816	537024.98	4816371.79	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.8
816	537024.98	4816371.79	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7
817	537024.98	4816371.79	344.18	1	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
817	537024.98	4816371.79	344.18	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
817	537024.98	4816371.79	344.18	1	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
819	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.7
819	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-159.3
819	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.7
822	536792.11	4816086.55	345.13	1	D	A	78.6	0.0	0.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0
822	536792.11	4816086.55	345.13	1	N	A	78.6	0.0	-188.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-189.0
822	536792.11	4816086.55	345.13	1	E	A	78.6	0.0	0.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
825	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
825	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
825	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
827	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
827	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9
827	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
830	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7
830	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
830	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
838	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-1.3
838	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-1.3
838	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
847	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-0.2
847	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-0.2
847	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-0.2
850	536895.88	4816345.38	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	60.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
850	536895.88	4816345.38	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	60.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
850	536895.88	4816345.38	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	60.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
853	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
853	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
853	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
856	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
856	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
856	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
863	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.1
863	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
863	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.1
864	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
864	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
864	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
870	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
870	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	19.8
870	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
874	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
874	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
874	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
892	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	25.5	0.0	0.0	-2.9
892	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	25.5	0.0	0.0	-2.9
892	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	25.5	0.0	0.0	-2.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
897	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	21.5	0.0	0.0	1.5
897	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	21.5	0.0	0.0	1.5
897	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	21.5	0.0	0.0	1.5
901	536924.87	4816349.18	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	61.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
901	536924.87	4816349.18	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	61.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
901	536924.87	4816349.18	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	61.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.6
905	536924.87	4816349.18	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.3
905	536924.87	4816349.18	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.3
905	536924.87	4816349.18	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-9.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
909	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.0	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	24.8
909	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.0	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	18.8
909	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.0	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	24.8
911	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-3.9
911	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.1	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-9.9
911	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-2.5	0.0	0.0	27.5	0.0	1.0	-3.9
914	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-7.6
914	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-13.6
914	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-2.8	0.0	0.0	27.8	0.0	1.0	-7.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
923	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	21.7	0.0	0.0	3.2
923	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	21.7	0.0	0.0	-2.8
923	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	21.7	0.0	0.0	3.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
927	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.4	0.0	0.0	0.0	0.0	0.0	24.4
927	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-2.4	0.0	0.0	0.0	0.0	0.0	18.3
927	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.4	0.0	0.0	0.0	0.0	0.0	24.4
929	536605.83	4815999.22	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.5	0.0	0.0	27.5	0.0	1.1	-4.3
929	536605.83	4815999.22	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.4	1.3	-2.5	0.0	0.0	27.5	0.0	1.1	-10.3
929	536605.83	4815999.22	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.5	0.0	0.0	27.5	0.0	1.1	-4.3
931	536605.83	4815999.22	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7
931	536605.83	4815999.22	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
931	536605.83	4815999.22	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
939	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	61.5	0.8	-3.0	0.0	0.0	23.5	0.0	0.0	7.3
939	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	61.5	0.8	-3.0	0.0	0.0	23.5	0.0	0.0	-180.7
939	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	61.5	0.8	-3.0	0.0	0.0	23.5	0.0	0.0	-180.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
942	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.2	0.0	0.0	0.0	0.0	0.0	24.0
942	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.4	1.3	-2.2	0.0	0.0	0.0	0.0	0.0	18.0
942	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.4	1.3	-2.2	0.0	0.0	0.0	0.0	0.0	24.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
948	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.8	0.0	0.0	0.0	0.0	0.0	24.6
948	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-2.8	0.0	0.0	0.0	0.0	0.0	18.6
948	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.8	0.0	0.0	0.0	0.0	0.0	24.6
951	536613.71	4815987.38	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.6	1.3	-2.6	0.0	0.0	27.6	0.0	1.0	-4.4
951	536613.71	4815987.38	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.6	1.3	-2.6	0.0	0.0	27.6	0.0	1.0	-10.4
951	536613.71	4815987.38	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.6	1.3	-2.6	0.0	0.0	27.6	0.0	1.0	-4.4
957	536613.71	4815987.38	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.9	0.0	0.0	27.9	0.0	1.0	-8.0
957	536613.71	4815987.38	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-2.9	0.0	0.0	27.9	0.0	1.0	-14.0
957	536613.71	4815987.38	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.9	0.0	0.0	27.9	0.0	1.0	-8.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
962	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	61.6	0.8	-3.0	0.0	0.0	23.3	0.0	0.0	7.3
962	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	61.6	0.8	-3.0	0.0	0.0	23.3	0.0	0.0	-180.7
962	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	61.6	0.8	-3.0	0.0	0.0	23.3	0.0	0.0	-180.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
978	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.3	0.0	0.0	0.0	0.0	0.0	24.0
978	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-2.3	0.0	0.0	0.0	0.0	0.0	18.0
978	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-2.3	0.0	0.0	0.0	0.0	0.0	24.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
985	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	61.3	0.9	-3.0	0.0	0.0	23.2	0.0	0.0	-0.9
985	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	61.3	0.9	-3.0	0.0	0.0	23.2	0.0	0.0	-0.9
985	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	61.3	0.9	-3.0	0.0	0.0	23.2	0.0	0.0	-0.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
991	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	6.6
991	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-181.4
991	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-181.4

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
993	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
993	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
993	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
996	536996.51	4816351.84	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
996	536996.51	4816351.84	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
996	536996.51	4816351.84	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
999	536996.51	4816351.84	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
999	536996.51	4816351.84	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.6
999	536996.51	4816351.84	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1000	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	24.0
1000	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	18.0
1000	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.3	-2.6	0.0	0.0	0.0	0.0	0.0	24.0
1002	536602.80	4815982.70	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-4.7
1002	536602.80	4815982.70	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-10.7
1002	536602.80	4815982.70	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-4.7
1004	536602.80	4815982.70	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
1004	536602.80	4815982.70	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
1004	536602.80	4815982.70	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1008	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	6.6
1008	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-181.4
1008	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	61.9	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-181.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1013	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	21.2	0.0	0.0	3.2
1013	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	21.2	0.0	0.0	-2.9
1013	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	21.2	0.0	0.0	3.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1015	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	0.0	0.0	0.0	23.9
1015	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	0.0	0.0	0.0	17.8
1015	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.6	0.0	0.0	0.0	0.0	0.0	23.9
1018	536599.19	4815980.04	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-4.9
1018	536599.19	4815980.04	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.0	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-10.9
1018	536599.19	4815980.04	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-2.6	0.0	0.0	27.6	0.0	1.0	-4.9
1020	536599.19	4815980.04	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
1020	536599.19	4815980.04	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
1020	536599.19	4815980.04	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1026	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	24.3	0.0	0.0	-2.4
1026	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	24.3	0.0	0.0	-2.4
1026	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	24.3	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1030	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	-1.6
1030	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	-1.6
1030	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	-1.6

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1033	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	7.7	0.0	0.0	16.1
1033	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	7.7	0.0	0.0	10.1
1033	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	7.7	0.0	0.0	16.1
1036	537003.16	4816372.32	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.3
1036	537003.16	4816372.32	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3
1036	537003.16	4816372.32	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.3
1038	537003.16	4816372.32	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
1038	537003.16	4816372.32	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.0
1038	537003.16	4816372.32	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1040	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.7
1040	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
1040	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.7
1041	537012.51	4816364.27	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1041	537012.51	4816364.27	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.4
1041	537012.51	4816364.27	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1042	537012.51	4816364.27	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
1042	537012.51	4816364.27	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
1042	537012.51	4816364.27	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1047	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	6.9	0.0	0.0	16.7
1047	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	6.9	0.0	0.0	10.7
1047	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	6.9	0.0	0.0	16.7
1049	537009.03	4816374.15	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1049	537009.03	4816374.15	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1049	537009.03	4816374.15	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
1051	537009.03	4816374.15	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
1051	537009.03	4816374.15	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
1051	537009.03	4816374.15	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1057	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	62.0	0.9	-3.0	0.0	0.0	23.8	0.0	0.0	-2.4
1057	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	62.0	0.9	-3.0	0.0	0.0	23.8	0.0	0.0	-2.4
1057	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	62.0	0.9	-3.0	0.0	0.0	23.8	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1063	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-6.8
1063	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-6.8
1063	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-6.8
1064	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	65.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-11.0
1064	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	65.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-11.0
1064	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	65.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-11.0
1066	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-10.7
1066	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-10.7
1066	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-10.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1074	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	62.1	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	-3.1
1074	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	62.1	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	-3.1
1074	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	62.1	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	-3.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1097	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	18.5
1097	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	12.5
1097	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	4.8	0.0	0.0	18.5
1099	537023.46	4816375.21	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1099	537023.46	4816375.21	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1099	537023.46	4816375.21	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.7
1103	537023.46	4816375.21	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
1103	537023.46	4816375.21	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1103	537023.46	4816375.21	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1110	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.5
1110	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.5
1110	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1118	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	17.3
1118	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	11.3
1118	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	60.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	17.3
1120	537020.87	4816379.70	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
1120	537020.87	4816379.70	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1120	537020.87	4816379.70	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
1121	537020.87	4816379.70	343.93	1	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
1121	537020.87	4816379.70	343.93	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1121	537020.87	4816379.70	343.93	1	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1126	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.0	0.0	0.0	-3.0
1126	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.0	0.0	0.0	-3.0
1126	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	24.0	0.0	0.0	-3.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1128	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	15.0	0.0	0.0	13.0
1128	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	15.0	0.0	0.0	-167.2
1128	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	15.0	0.0	0.0	-167.2
1131	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	58.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3
1131	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	58.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.5
1131	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	58.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1140	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	24.7	0.0	0.0	-4.1
1140	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	24.7	0.0	0.0	-4.1
1140	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	24.7	0.0	0.0	-4.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1147	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	63.0	1.0	-3.0	0.0	0.0	24.3	0.0	0.0	-3.9
1147	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	63.0	1.0	-3.0	0.0	0.0	24.3	0.0	0.0	-3.9
1147	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	63.0	1.0	-3.0	0.0	0.0	24.3	0.0	0.0	-3.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1154	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	63.1	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.5
1154	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	63.1	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.5
1154	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	63.1	1.0	-3.0	0.0	0.0	23.8	0.0	0.0	-3.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1160	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	63.2	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-4.3
1160	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	63.2	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-4.3
1160	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	63.2	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1167	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	24.5	0.0	0.0	-3.4
1167	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	24.5	0.0	0.0	-6.4
1167	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	24.5	0.0	0.0	-3.4

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1174	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-6.6
1174	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-9.6
1174	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-6.6
1176	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.7
1176	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1176	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.7
1179	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5
1179	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1179	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1191	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-6.7
1191	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-9.7
1191	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-6.7
1196	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.8
1196	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-13.8
1196	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	65.1	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-10.8
1200	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5
1200	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1200	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1213	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	19.3	0.0	0.0	0.4
1213	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	19.3	0.0	0.0	0.4
1213	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	19.3	0.0	0.0	0.4

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1221	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	6.8	0.0	0.0	12.9
1221	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	6.8	0.0	0.0	12.9
1221	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	6.8	0.0	0.0	12.9
1224	537019.12	4816382.98	343.43	1	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
1224	537019.12	4816382.98	343.43	1	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
1224	537019.12	4816382.98	343.43	1	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
1227	537019.12	4816382.98	343.43	1	D	A	78.6	0.0	0.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
1227	537019.12	4816382.98	343.43	1	N	A	78.6	0.0	0.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
1227	537019.12	4816382.98	343.43	1	E	A	78.6	0.0	0.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1240	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	63.7	1.1	-3.0	0.0	0.0	24.0	0.0	0.0	-4.4
1240	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	63.7	1.1	-3.0	0.0	0.0	24.0	0.0	0.0	-4.4
1240	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	63.7	1.1	-3.0	0.0	0.0	24.0	0.0	0.0	-4.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1253	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	61.8	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-6.2
1253	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	61.8	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-6.2
1253	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	61.8	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-6.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1265	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-4.0
1265	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-10.0
1265	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-4.0

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1274	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-4.2
1274	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-10.2
1274	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.6	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1282	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-4.5
1282	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-10.6
1282	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-4.5

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1288	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-4.6
1288	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-10.7
1288	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	24.8	0.0	0.0	-4.6

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1294	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	60.8	0.9	-3.0	0.0	0.0	24.4	0.0	0.0	1.9
1294	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	60.8	0.9	-3.0	0.0	0.0	24.4	0.0	0.0	-186.1
1294	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	60.8	0.9	-3.0	0.0	0.0	24.4	0.0	0.0	-186.1

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1307	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	62.5	1.2	-3.0	0.0	0.0	27.4	0.0	0.0	-9.5
1307	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	62.5	1.2	-3.0	0.0	0.0	27.4	0.0	0.0	-9.5
1307	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	62.5	1.2	-3.0	0.0	0.0	27.4	0.0	0.0	-9.5
1311	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1311	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1311	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1313	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1313	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1313	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1323	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	2.7
1323	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	-185.3
1323	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	60.9	0.9	-3.0	0.0	0.0	23.5	0.0	0.0	-185.3

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1327	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	58.5	0.9	-2.4	0.0	0.0	0.0	0.0	0.0	21.6
1327	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.5	0.9	-2.4	0.0	0.0	0.0	0.0	0.0	-166.4
1327	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	58.5	0.9	-2.4	0.0	0.0	0.0	0.0	0.0	21.6
1331	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	58.6	0.9	-2.4	0.0	0.0	27.4	0.0	1.0	-6.9
1331	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	58.6	0.9	-2.4	0.0	0.0	27.4	0.0	1.0	-194.9
1331	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	58.6	0.9	-2.4	0.0	0.0	27.4	0.0	1.0	-6.9
1336	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	-10.6
1336	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	62.1	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	-198.6
1336	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-2.7	0.0	0.0	27.7	0.0	1.0	-10.6

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1350	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	27.4	0.0	0.0	-9.8
1350	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	27.4	0.0	0.0	-9.8
1350	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	27.4	0.0	0.0	-9.8
1354	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	65.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
1354	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	65.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
1354	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	65.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
1357	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1357	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1357	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	64.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1369	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	61.2	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	1.8
1369	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	61.2	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.2
1369	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	61.2	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1379	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	61.3	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	1.6
1379	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	61.3	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.4
1379	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	61.3	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1386	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	61.4	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	1.5
1386	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	61.4	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.5
1386	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	61.4	1.0	-3.0	0.0	0.0	24.1	0.0	0.0	-186.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1393	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	25.1	0.0	0.0	-8.1
1393	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	25.1	0.0	0.0	-8.1
1393	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	25.1	0.0	0.0	-8.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1397	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	63.6	1.4	-3.0	0.0	0.0	24.6	0.0	0.0	-7.9
1397	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	63.6	1.4	-3.0	0.0	0.0	24.6	0.0	0.0	-7.9
1397	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	63.6	1.4	-3.0	0.0	0.0	24.6	0.0	0.0	-7.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1405	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4
1405	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4
1405	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1416	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4
1416	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4
1416	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-10.4

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1430	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	59.6	1.8	-3.0	0.0	0.0	26.4	0.0	0.0	-2.5
1430	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	59.6	1.8	-3.0	0.0	0.0	26.4	0.0	0.0	-179.7

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1430	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	59.6	1.8	-3.0	0.0	0.0	26.4	0.0	0.0	-179.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1435	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	56.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
1435	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	56.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-163.6
1435	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	56.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-163.6
1437	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-4.9
1437	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-192.9
1437	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-192.9

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1448	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	60.5	2.0	-3.0	0.0	0.0	18.8	0.0	0.0	4.1
1448	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	60.5	2.0	-3.0	0.0	0.0	18.8	0.0	0.0	-173.2
1448	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	60.5	2.0	-3.0	0.0	0.0	18.8	0.0	0.0	-173.2
1450	536990.82	4816395.92	338.40	1	D	A	93.1	0.0	-10.8	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-9.4
1450	536990.82	4816395.92	338.40	1	N	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.6
1450	536990.82	4816395.92	338.40	1	E	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.6
1453	536990.82	4816395.92	338.40	1	D	A	93.1	0.0	-10.8	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
1453	536990.82	4816395.92	338.40	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.3
1453	536990.82	4816395.92	338.40	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-186.3

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1459	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	24.1	0.0	0.0	-3.3
1459	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	24.1	0.0	0.0	-180.5
1459	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	24.1	0.0	0.0	-180.5

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1463	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	49.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1463	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	49.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1463	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	49.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1468	536845.26	4816228.12	344.03	1	D	A	60.0	0.0	0.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.1	-23.7
1468	536845.26	4816228.12	344.03	1	N	A	60.0	0.0	-3.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.1	-26.7
1468	536845.26	4816228.12	344.03	1	E	A	60.0	0.0	0.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.1	-23.7
1473	536845.26	4816228.12	344.03	1	D	A	60.0	0.0	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
1473	536845.26	4816228.12	344.03	1	N	A	60.0	0.0	-3.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
1473	536845.26	4816228.12	344.03	1	E	A	60.0	0.0	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1480	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
1480	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1480	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1484	536754.93	4815959.62	343.87	1	D	A	62.5	11.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
1484	536754.93	4815959.62	343.87	1	N	A	-40.5	11.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1484	536754.93	4815959.62	343.87	1	E	A	-40.5	11.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1490	536733.08	4815965.41	344.19	0	D	A	62.5	6.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-1.2
1490	536733.08	4815965.41	344.19	0	N	A	-40.5	6.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-104.2
1490	536733.08	4815965.41	344.19	0	E	A	-40.5	6.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.1	0.0	0.0	-104.2
1494	536730.43	4815966.15	344.24	0	D	A	62.5	1.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-7.1
1494	536730.43	4815966.15	344.24	0	N	A	-40.5	1.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-110.1
1494	536730.43	4815966.15	344.24	0	E	A	-40.5	1.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-110.1
1498	536726.34	4815967.28	344.31	0	D	A	62.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.6	0.0	0.0	-3.2
1498	536726.34	4815967.28	344.31	0	N	A	-40.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.6	0.0	0.0	-106.2
1498	536726.34	4815967.28	344.31	0	E	A	-40.5	8.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.6	0.0	0.0	-106.2

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1502	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
1502	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1502	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1534	536752.27	4815977.12	343.95	0	D	A	62.5	8.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
1534	536752.27	4815977.12	343.95	0	N	A	-40.5	8.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.9
1534	536752.27	4815977.12	343.95	0	E	A	-40.5	8.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.9
1537	536752.27	4815977.12	343.95	1	D	A	62.5	8.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
1537	536752.27	4815977.12	343.95	1	N	A	-40.5	8.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1537	536752.27	4815977.12	343.95	1	E	A	-40.5	8.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1542	536753.06	4815977.54	343.94	1	D	A	62.5	7.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	2.2	11.4
1542	536753.06	4815977.54	343.94	1	N	A	-40.5	7.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	2.2	-91.6
1542	536753.06	4815977.54	343.94	1	E	A	-40.5	7.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	2.2	-91.6
1575	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	14.5
1575	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.5
1575	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.5
1578	536757.21	4815958.18	343.83	1	D	A	62.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1578	536757.21	4815958.18	343.83	1	N	A	-40.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1578	536757.21	4815958.18	343.83	1	E	A	-40.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1607	536727.97	4815967.90	344.28	0	D	A	62.5	5.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.3	0.0	0.0	-5.9
1607	536727.97	4815967.90	344.28	0	N	A	-40.5	5.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.3	0.0	0.0	-108.9
1607	536727.97	4815967.90	344.28	0	E	A	-40.5	5.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	17.3	0.0	0.0	-108.9
1608	536731.20	4815967.61	344.22	0	D	A	62.5	4.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-5.0
1608	536731.20	4815967.61	344.22	0	N	A	-40.5	4.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-108.0
1608	536731.20	4815967.61	344.22	0	E	A	-40.5	4.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	15.6	0.0	0.0	-108.0
1611	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-15.3
1611	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1611	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1750	536743.16	4815962.54	344.03	0	D	A	62.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
1750	536743.16	4815962.54	344.03	0	N	A	-40.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1750	536743.16	4815962.54	344.03	0	E	A	-40.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1753	536740.93	4815963.18	344.06	0	D	A	62.5	4.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	5.6	0.0	0.0	4.6
1753	536740.93	4815963.18	344.06	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	5.6	0.0	0.0	-98.4
1753	536740.93	4815963.18	344.06	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	5.6	0.0	0.0	-98.4
1757	536739.16	4815963.69	344.08	0	D	A	62.5	-0.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	8.4	0.0	0.0	-3.0
1757	536739.16	4815963.69	344.08	0	N	A	-40.5	-0.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	8.4	0.0	0.0	-106.0
1757	536739.16	4815963.69	344.08	0	E	A	-40.5	-0.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	8.4	0.0	0.0	-106.0
1759	536743.44	4815962.46	344.02	1	D	A	62.5	1.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1759	536743.44	4815962.46	344.02	1	N	A	-40.5	1.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1759	536743.44	4815962.46	344.02	1	E	A	-40.5	1.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1762	536741.68	4815962.97	344.05	1	D	A	62.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1762	536741.68	4815962.97	344.05	1	N	A	-40.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1762	536741.68	4815962.97	344.05	1	E	A	-40.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1832	536739.63	4815963.55	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
1832	536739.63	4815963.55	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1832	536739.63	4815963.55	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1838	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	13.1
1838	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1838	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1842	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
1842	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1842	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1959	536737.05	4815967.08	344.15	0	D	A	62.5	3.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-2.8
1959	536737.05	4815967.08	344.15	0	N	A	-40.5	3.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-105.8
1959	536737.05	4815967.08	344.15	0	E	A	-40.5	3.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	12.0	0.0	0.0	-105.8
1964	536739.40	4815966.86	344.12	0	D	A	62.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	9.8	0.0	0.0	0.2
1964	536739.40	4815966.86	344.12	0	N	A	-40.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	9.8	0.0	0.0	-102.8
1964	536739.40	4815966.86	344.12	0	E	A	-40.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	9.8	0.0	0.0	-102.8
1968	536736.60	4815967.12	344.15	1	D	A	62.5	0.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1968	536736.60	4815967.12	344.15	1	N	A	-40.5	0.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
1968	536736.60	4815967.12	344.15	1	E	A	-40.5	0.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
1971	536737.75	4815967.01	344.14	1	D	A	62.5	0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
1971	536737.75	4815967.01	344.14	1	N	A	-40.5	0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
1971	536737.75	4815967.01	344.14	1	E	A	-40.5	0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1975	536739.48	4815966.85	344.12	1	D	A	62.5	3.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1975	536739.48	4815966.85	344.12	1	N	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1975	536739.48	4815966.85	344.12	1	E	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2007	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
2007	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.6
2007	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.6
2011	536757.37	4815979.48	343.87	1	D	A	62.5	5.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
2011	536757.37	4815979.48	343.87	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2011	536757.37	4815979.48	343.87	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2017	536757.37	4815979.48	343.87	1	D	A	62.5	5.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	9.3
2017	536757.37	4815979.48	343.87	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-93.8
2017	536757.37	4815979.48	343.87	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-93.8
2048	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	12.3
2048	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
2048	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
2052	536751.39	4815960.06	343.91	1	D	A	62.5	6.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
2052	536751.39	4815960.06	343.91	1	N	A	-40.5	6.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2052	536751.39	4815960.06	343.91	1	E	A	-40.5	6.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
2147	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
2147	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2147	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2151	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
2151	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2151	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2184	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	11.8
2184	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2184	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2189	536749.67	4815967.29	344.00	1	D	A	62.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
2189	536749.67	4815967.29	344.00	1	N	A	-40.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
2189	536749.67	4815967.29	344.00	1	E	A	-40.5	5.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
2195	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	10.5	0.0	0.0	1.2
2195	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	10.5	0.0	0.0	-101.8
2195	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	10.5	0.0	0.0	-101.8
2200	536737.81	4815964.07	344.11	1	D	A	62.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
2200	536737.81	4815964.07	344.11	1	N	A	-40.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2200	536737.81	4815964.07	344.11	1	E	A	-40.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2203	536735.95	4815964.60	344.14	1	D	A	62.5	2.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
2203	536735.95	4815964.60	344.14	1	N	A	-40.5	2.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2203	536735.95	4815964.60	344.14	1	E	A	-40.5	2.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2229	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	11.7
2229	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2229	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2233	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
2233	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2233	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
2265	536756.66	4815969.66	343.94	0	D	A	62.5	5.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	11.4
2265	536756.66	4815969.66	343.94	0	N	A	-40.5	5.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
2265	536756.66	4815969.66	343.94	0	E	A	-40.5	5.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
2270	536756.66	4815969.66	343.94	1	D	A	62.5	5.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.0
2270	536756.66	4815969.66	343.94	1	N	A	-40.5	5.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
2270	536756.66	4815969.66	343.94	1	E	A	-40.5	5.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
2327	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	19.1	0.0	0.0	-8.2
2327	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	19.1	0.0	0.0	-111.2
2327	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	19.1	0.0	0.0	-111.2
2329	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
2329	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2329	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2447	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.5
2447	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2447	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2451	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
2451	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2451	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2512	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.5
2512	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2512	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2515	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
2515	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2515	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2518	536760.92	4815971.75	343.88	1	D	A	62.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	7.0
2518	536760.92	4815971.75	343.88	1	N	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-96.0
2518	536760.92	4815971.75	343.88	1	E	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-96.0
2519	536762.14	4815972.29	343.86	1	D	A	62.5	-6.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-3.7
2519	536762.14	4815972.29	343.86	1	N	A	-40.5	-6.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-106.7
2519	536762.14	4815972.29	343.86	1	E	A	-40.5	-6.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-106.7
2619	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.1
2619	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2619	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2622	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
2622	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2622	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2657	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.0
2657	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2657	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2661	536748.03	4815974.71	344.03	1	D	A	62.5	3.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
2661	536748.03	4815974.71	344.03	1	N	A	-40.5	3.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2661	536748.03	4815974.71	344.03	1	E	A	-40.5	3.7	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2853	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	9.3
2853	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2853	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2857	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
2857	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2857	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
3067	536758.98	4815970.84	343.92	0	D	A	62.5	2.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
3067	536758.98	4815970.84	343.92	0	N	A	-40.5	2.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
3067	536758.98	4815970.84	343.92	0	E	A	-40.5	2.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
3069	536758.98	4815970.84	343.92	1	D	A	62.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
3069	536758.98	4815970.84	343.92	1	N	A	-40.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3069	536758.98	4815970.84	343.92	1	E	A	-40.5	2.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
3075	536759.69	4815971.20	343.90	1	D	A	62.5	-5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-2.7
3075	536759.69	4815971.20	343.90	1	N	A	-40.5	-5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-105.8
3075	536759.69	4815971.20	343.90	1	E	A	-40.5	-5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	2.6	-105.8
3122	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
3122	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3122	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3127	536742.67	4815966.65	344.08	1	D	A	62.5	0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3127	536742.67	4815966.65	344.08	1	N	A	-40.5	0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3127	536742.67	4815966.65	344.08	1	E	A	-40.5	0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3131	536743.64	4815966.61	344.07	1	D	A	62.5	-0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
3131	536743.64	4815966.61	344.07	1	N	A	-40.5	-0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3131	536743.64	4815966.61	344.07	1	E	A	-40.5	-0.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3165	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.2	0.0	0.0	-5.5
3165	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.2	0.0	0.0	-108.5
3165	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	14.2	0.0	0.0	-108.5
3168	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
3168	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3168	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3198	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
3198	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
3198	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
3203	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
3203	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3203	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3405	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.1
3405	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
3405	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3409	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
3409	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3409	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3514	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.9
3514	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3514	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3517	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
3517	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3517	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3522	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3522	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3522	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3527	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
3527	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3527	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3587	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	6.4	0.0	0.0	1.3
3587	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	6.4	0.0	0.0	-101.7
3587	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	6.4	0.0	0.0	-101.7
3592	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
3592	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3592	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3661	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.2	0.0	0.0	-5.7
3661	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.2	0.0	0.0	-108.7
3661	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	13.2	0.0	0.0	-108.7
3663	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
3663	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3663	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1511	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-12.1
1511	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-115.1
1511	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-115.1
1516	536415.57	4816238.21	352.92	1	D	A	62.5	13.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1516	536415.57	4816238.21	352.92	1	N	A	-40.5	13.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1516	536415.57	4816238.21	352.92	1	E	A	-40.5	13.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1521	536421.73	4816241.16	352.70	1	D	A	62.5	9.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1521	536421.73	4816241.16	352.70	1	N	A	-40.5	9.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1521	536421.73	4816241.16	352.70	1	E	A	-40.5	9.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1527	536411.60	4816236.32	353.05	1	D	A	62.5	11.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1527	536411.60	4816236.32	353.05	1	N	A	-40.5	11.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1527	536411.60	4816236.32	353.05	1	E	A	-40.5	11.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1549	536360.63	4816211.96	354.72	0	D	A	62.5	13.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-13.5
1549	536360.63	4816211.96	354.72	0	N	A	-40.5	13.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-116.5
1549	536360.63	4816211.96	354.72	0	E	A	-40.5	13.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-116.5
1554	536360.63	4816211.96	354.72	1	D	A	62.5	13.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1554	536360.63	4816211.96	354.72	1	N	A	-40.5	13.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1554	536360.63	4816211.96	354.72	1	E	A	-40.5	13.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1560	536368.75	4816215.84	354.58	1	D	A	62.5	6.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1560	536368.75	4816215.84	354.58	1	N	A	-40.5	6.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1560	536368.75	4816215.84	354.58	1	E	A	-40.5	6.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1565	536362.75	4816212.98	354.68	1	D	A	62.5	9.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
1565	536362.75	4816212.98	354.68	1	N	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1565	536362.75	4816212.98	354.68	1	E	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1569	536354.63	4816209.10	354.82	1	D	A	62.5	9.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
1569	536354.63	4816209.10	354.82	1	N	A	-40.5	9.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
1569	536354.63	4816209.10	354.82	1	E	A	-40.5	9.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
1586	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-13.7
1586	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-116.7
1586	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-116.7
1590	536368.61	4816210.13	354.57	1	D	A	62.5	13.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
1590	536368.61	4816210.13	354.57	1	N	A	-40.5	13.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1590	536368.61	4816210.13	354.57	1	E	A	-40.5	13.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
1593	536365.78	4816208.77	354.62	1	D	A	62.5	11.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1593	536365.78	4816208.77	354.62	1	N	A	-40.5	11.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1593	536365.78	4816208.77	354.62	1	E	A	-40.5	11.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1596	536375.07	4816213.24	354.46	1	D	A	62.5	8.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1596	536375.07	4816213.24	354.46	1	N	A	-40.5	8.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1596	536375.07	4816213.24	354.46	1	E	A	-40.5	8.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1620	536439.30	4816249.55	352.18	0	D	A	62.5	7.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-17.2
1620	536439.30	4816249.55	352.18	0	N	A	-40.5	7.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.3
1620	536439.30	4816249.55	352.18	0	E	A	-40.5	7.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.3
1624	536433.52	4816246.79	352.32	0	D	A	62.5	8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-16.9
1624	536433.52	4816246.79	352.32	0	N	A	-40.5	8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-119.9
1624	536433.52	4816246.79	352.32	0	E	A	-40.5	8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-119.9
1627	536436.48	4816248.21	352.25	1	D	A	62.5	10.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
1627	536436.48	4816248.21	352.25	1	N	A	-40.5	10.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1627	536436.48	4816248.21	352.25	1	E	A	-40.5	10.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1631	536430.70	4816245.45	352.39	1	D	A	62.5	-2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.7
1631	536430.70	4816245.45	352.39	1	N	A	-40.5	-2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
1631	536430.70	4816245.45	352.39	1	E	A	-40.5	-2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.7
1635	536436.24	4816248.09	352.25	1	D	A	62.5	11.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
1635	536436.24	4816248.09	352.25	1	N	A	-40.5	11.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1635	536436.24	4816248.09	352.25	1	E	A	-40.5	11.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1664	536460.34	4816259.11	351.50	0	D	A	62.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-22.0
1664	536460.34	4816259.11	351.50	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-125.0
1664	536460.34	4816259.11	351.50	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-125.0
1670	536455.39	4816257.02	351.70	0	D	A	62.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-15.1
1670	536455.39	4816257.02	351.70	0	N	A	-40.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1670	536455.39	4816257.02	351.70	0	E	A	-40.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1674	536457.29	4816257.82	351.62	1	D	A	62.5	9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
1674	536457.29	4816257.82	351.62	1	N	A	-40.5	9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
1674	536457.29	4816257.82	351.62	1	E	A	-40.5	9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
1677	536452.34	4816255.73	351.82	1	D	A	62.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
1677	536452.34	4816255.73	351.82	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1677	536452.34	4816255.73	351.82	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1681	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1681	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
1681	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
1717	536387.33	4816219.28	353.99	0	D	A	62.5	11.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-14.9
1717	536387.33	4816219.28	353.99	0	N	A	-40.5	11.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-117.9
1717	536387.33	4816219.28	353.99	0	E	A	-40.5	11.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-117.9
1720	536393.84	4816222.55	353.68	0	D	A	62.5	-5.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-32.0
1720	536393.84	4816222.55	353.68	0	N	A	-40.5	-5.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-135.0
1720	536393.84	4816222.55	353.68	0	E	A	-40.5	-5.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-135.0
1724	536385.38	4816218.31	354.09	1	D	A	62.5	10.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.9
1724	536385.38	4816218.31	354.09	1	N	A	-40.5	10.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1724	536385.38	4816218.31	354.09	1	E	A	-40.5	10.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1728	536391.89	4816221.58	353.77	1	D	A	62.5	6.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1728	536391.89	4816221.58	353.77	1	N	A	-40.5	6.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
1728	536391.89	4816221.58	353.77	1	E	A	-40.5	6.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
1731	536385.59	4816218.41	354.08	1	D	A	62.5	10.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1731	536385.59	4816218.41	354.08	1	N	A	-40.5	10.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1731	536385.59	4816218.41	354.08	1	E	A	-40.5	10.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1735	536391.08	4816221.17	353.81	1	D	A	62.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
1735	536391.08	4816221.17	353.81	1	N	A	-40.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.7
1735	536391.08	4816221.17	353.81	1	E	A	-40.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.7
1739	536392.94	4816222.10	353.72	1	D	A	62.5	3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
1739	536392.94	4816222.10	353.72	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
1739	536392.94	4816222.10	353.72	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
1874	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-15.1
1874	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1874	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1879	536407.69	4816253.89	353.67	1	D	A	62.5	8.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1879	536407.69	4816253.89	353.67	1	N	A	-40.5	8.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1879	536407.69	4816253.89	353.67	1	E	A	-40.5	8.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1884	536412.92	4816256.75	353.48	1	D	A	62.5	7.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
1884	536412.92	4816256.75	353.48	1	N	A	-40.5	7.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1884	536412.92	4816256.75	353.48	1	E	A	-40.5	7.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1887	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1887	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1887	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1895	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-15.1
1895	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1895	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.1
1899	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1899	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1899	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1903	536434.93	4816268.58	352.69	1	D	A	62.5	3.8	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
1903	536434.93	4816268.58	352.69	1	N	A	-40.5	3.8	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1903	536434.93	4816268.58	352.69	1	E	A	-40.5	3.8	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1907	536439.46	4816271.02	352.51	1	D	A	62.5	9.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1907	536439.46	4816271.02	352.51	1	N	A	-40.5	9.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1907	536439.46	4816271.02	352.51	1	E	A	-40.5	9.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1913	536388.63	4816225.34	354.06	0	D	A	62.5	10.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-16.3
1913	536388.63	4816225.34	354.06	0	N	A	-40.5	10.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-119.3
1913	536388.63	4816225.34	354.06	0	E	A	-40.5	10.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-119.3
1917	536382.85	4816222.58	354.35	0	D	A	62.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-22.6
1917	536382.85	4816222.58	354.35	0	N	A	-40.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-125.6
1917	536382.85	4816222.58	354.35	0	E	A	-40.5	4.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-125.6
1922	536387.50	4816224.80	354.12	1	D	A	62.5	11.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1922	536387.50	4816224.80	354.12	1	N	A	-40.5	11.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1922	536387.50	4816224.80	354.12	1	E	A	-40.5	11.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1927	536387.50	4816224.80	354.12	1	D	A	62.5	11.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1927	536387.50	4816224.80	354.12	1	N	A	-40.5	11.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1927	536387.50	4816224.80	354.12	1	E	A	-40.5	11.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1931	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-15.2
1931	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.2
1931	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.2
1937	536454.50	4816301.36	351.39	1	D	A	62.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
1937	536454.50	4816301.36	351.39	1	N	A	-40.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
1937	536454.50	4816301.36	351.39	1	E	A	-40.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
1940	536456.06	4816298.35	351.39	1	D	A	62.5	5.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
1940	536456.06	4816298.35	351.39	1	N	A	-40.5	5.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1940	536456.06	4816298.35	351.39	1	E	A	-40.5	5.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1944	536457.54	4816295.48	351.39	1	D	A	62.5	4.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
1944	536457.54	4816295.48	351.39	1	N	A	-40.5	4.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
1944	536457.54	4816295.48	351.39	1	E	A	-40.5	4.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
1948	536455.99	4816298.49	351.39	1	D	A	62.5	9.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1948	536455.99	4816298.49	351.39	1	N	A	-40.5	9.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1948	536455.99	4816298.49	351.39	1	E	A	-40.5	9.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1952	536455.23	4816299.95	351.39	1	D	A	62.5	7.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
1952	536455.23	4816299.95	351.39	1	N	A	-40.5	7.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1952	536455.23	4816299.95	351.39	1	E	A	-40.5	7.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1984	536425.93	4816263.83	353.02	0	D	A	62.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-18.9
1984	536425.93	4816263.83	353.02	0	N	A	-40.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-121.9
1984	536425.93	4816263.83	353.02	0	E	A	-40.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-121.9
1992	536430.34	4816266.15	352.86	0	D	A	62.5	7.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-18.1
1992	536430.34	4816266.15	352.86	0	N	A	-40.5	7.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-121.1
1992	536430.34	4816266.15	352.86	0	E	A	-40.5	7.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-121.1
1997	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1997	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
1997	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
2001	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
2001	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2001	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2061	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-15.6
2061	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2061	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.6
2067	536462.44	4816285.53	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
2067	536462.44	4816285.53	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
2067	536462.44	4816285.53	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
2072	536460.27	4816288.99	351.39	1	D	A	62.5	8.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
2072	536460.27	4816288.99	351.39	1	N	A	-40.5	8.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2072	536460.27	4816288.99	351.39	1	E	A	-40.5	8.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2075	536460.76	4816288.21	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2075	536460.76	4816288.21	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2075	536460.76	4816288.21	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2091	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-15.7
2091	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.7
2091	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-118.7
2097	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
2097	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
2097	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
2101	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
2101	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2101	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2130	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-15.7
2130	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.7
2130	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-118.7
2136	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2136	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2136	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2141	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
2141	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2141	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2167	536400.13	4816230.84	353.50	0	D	A	62.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-19.5
2167	536400.13	4816230.84	353.50	0	N	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-122.5
2167	536400.13	4816230.84	353.50	0	E	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-122.5
2172	536395.68	4816228.71	353.72	0	D	A	62.5	7.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-19.0
2172	536395.68	4816228.71	353.72	0	N	A	-40.5	7.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-122.0
2172	536395.68	4816228.71	353.72	0	E	A	-40.5	7.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-122.0
2176	536397.73	4816229.69	353.62	1	D	A	62.5	9.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
2176	536397.73	4816229.69	353.62	1	N	A	-40.5	9.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2176	536397.73	4816229.69	353.62	1	E	A	-40.5	9.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2180	536397.73	4816229.69	353.62	1	D	A	62.5	9.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2180	536397.73	4816229.69	353.62	1	N	A	-40.5	9.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2180	536397.73	4816229.69	353.62	1	E	A	-40.5	9.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2212	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-16.2
2212	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-119.2
2212	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-119.2
2218	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
2218	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2218	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2223	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2223	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2223	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2242	536452.96	4816276.80	351.88	0	D	A	62.5	8.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-16.4
2242	536452.96	4816276.80	351.88	0	N	A	-40.5	8.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-119.4
2242	536452.96	4816276.80	351.88	0	E	A	-40.5	8.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-119.4
2246	536452.96	4816276.80	351.88	1	D	A	62.5	8.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.9
2246	536452.96	4816276.80	351.88	1	N	A	-40.5	8.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2246	536452.96	4816276.80	351.88	1	E	A	-40.5	8.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2249	536452.96	4816276.80	351.88	1	D	A	62.5	8.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
2249	536452.96	4816276.80	351.88	1	N	A	-40.5	8.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2249	536452.96	4816276.80	351.88	1	E	A	-40.5	8.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2338	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-16.9
2338	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-119.9
2338	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-119.9
2343	536462.52	4816286.81	351.38	1	D	A	62.5	1.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
2343	536462.52	4816286.81	351.38	1	N	A	-40.5	1.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2343	536462.52	4816286.81	351.38	1	E	A	-40.5	1.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
2346	536463.82	4816284.19	351.38	1	D	A	62.5	6.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
2346	536463.82	4816284.19	351.38	1	N	A	-40.5	6.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2346	536463.82	4816284.19	351.38	1	E	A	-40.5	6.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2351	536463.54	4816284.75	351.38	1	D	A	62.5	7.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
2351	536463.54	4816284.75	351.38	1	N	A	-40.5	7.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2351	536463.54	4816284.75	351.38	1	E	A	-40.5	7.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2383	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-17.1
2383	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-120.1
2383	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-120.1
2388	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
2388	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2388	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2391	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
2391	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
2391	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
2459	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-17.4
2459	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.4
2459	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.4
2464	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
2464	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2464	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2468	536458.01	4816292.83	351.40	1	D	A	62.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
2468	536458.01	4816292.83	351.40	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2468	536458.01	4816292.83	351.40	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2472	536456.75	4816295.30	351.40	1	D	A	62.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
2472	536456.75	4816295.30	351.40	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2472	536456.75	4816295.30	351.40	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2477	536456.17	4816296.43	351.40	1	D	A	62.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
2477	536456.17	4816296.43	351.40	1	N	A	-40.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
2477	536456.17	4816296.43	351.40	1	E	A	-40.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
2485	536346.64	4816205.27	354.92	0	D	A	62.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-23.6
2485	536346.64	4816205.27	354.92	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
2485	536346.64	4816205.27	354.92	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
2490	536343.28	4816203.67	354.96	0	D	A	62.5	7.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-20.3
2490	536343.28	4816203.67	354.96	0	N	A	-40.5	7.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.3
2490	536343.28	4816203.67	354.96	0	E	A	-40.5	7.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.3
2498	536340.12	4816202.16	354.99	0	D	A	62.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-24.6
2498	536340.12	4816202.16	354.99	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.6
2498	536340.12	4816202.16	354.99	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.6
2503	536343.48	4816203.77	354.95	1	D	A	62.5	9.7	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
2503	536343.48	4816203.77	354.95	1	N	A	-40.5	9.7	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2503	536343.48	4816203.77	354.95	1	E	A	-40.5	9.7	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
2507	536343.48	4816203.77	354.95	1	D	A	62.5	9.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
2507	536343.48	4816203.77	354.95	1	N	A	-40.5	9.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2507	536343.48	4816203.77	354.95	1	E	A	-40.5	9.7	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2548	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-17.5
2548	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.5
2548	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-120.5
2552	536455.16	4816298.38	351.40	1	D	A	62.5	6.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2552	536455.16	4816298.38	351.40	1	N	A	-40.5	6.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2552	536455.16	4816298.38	351.40	1	E	A	-40.5	6.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2557	536453.88	4816300.82	351.40	1	D	A	62.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
2557	536453.88	4816300.82	351.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
2557	536453.88	4816300.82	351.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
2560	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
2560	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2560	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2562	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
2562	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2562	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
2696	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-18.2
2696	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-121.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2696	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-121.2
2700	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
2700	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2700	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2703	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
2703	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2703	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2711	536348.69	4816200.62	354.86	0	D	A	62.5	8.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-18.3
2711	536348.69	4816200.62	354.86	0	N	A	-40.5	8.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-121.3
2711	536348.69	4816200.62	354.86	0	E	A	-40.5	8.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-121.3
2716	536346.85	4816199.75	354.88	1	D	A	62.5	5.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2716	536346.85	4816199.75	354.88	1	N	A	-40.5	5.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2716	536346.85	4816199.75	354.88	1	E	A	-40.5	5.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2720	536350.36	4816201.41	354.84	1	D	A	62.5	6.1	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
2720	536350.36	4816201.41	354.84	1	N	A	-40.5	6.1	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
2720	536350.36	4816201.41	354.84	1	E	A	-40.5	6.1	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
2726	536347.07	4816199.85	354.88	1	D	A	62.5	6.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
2726	536347.07	4816199.85	354.88	1	N	A	-40.5	6.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2726	536347.07	4816199.85	354.88	1	E	A	-40.5	6.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2730	536350.58	4816201.51	354.84	1	D	A	62.5	5.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2730	536350.58	4816201.51	354.84	1	N	A	-40.5	5.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
2730	536350.58	4816201.51	354.84	1	E	A	-40.5	5.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
2757	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-18.4
2757	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-121.4
2757	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-121.4
2761	536452.21	4816304.07	351.42	1	D	A	62.5	0.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
2761	536452.21	4816304.07	351.42	1	N	A	-40.5	0.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2761	536452.21	4816304.07	351.42	1	E	A	-40.5	0.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2764	536451.66	4816305.32	351.43	1	D	A	62.5	2.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
2764	536451.66	4816305.32	351.43	1	N	A	-40.5	2.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
2764	536451.66	4816305.32	351.43	1	E	A	-40.5	2.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
2767	536450.87	4816307.07	351.44	1	D	A	62.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
2767	536450.87	4816307.07	351.44	1	N	A	-40.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2767	536450.87	4816307.07	351.44	1	E	A	-40.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2772	536452.09	4816304.35	351.42	1	D	A	62.5	2.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
2772	536452.09	4816304.35	351.42	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
2772	536452.09	4816304.35	351.42	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
2775	536451.11	4816306.54	351.43	1	D	A	62.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
2775	536451.11	4816306.54	351.43	1	N	A	-40.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2775	536451.11	4816306.54	351.43	1	E	A	-40.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2780	536450.46	4816308.00	351.45	1	D	A	62.5	-8.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.6
2780	536450.46	4816308.00	351.45	1	N	A	-40.5	-8.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.6
2780	536450.46	4816308.00	351.45	1	E	A	-40.5	-8.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.6
2784	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2784	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2784	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2921	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-18.7
2921	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-121.7
2921	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-121.7
2926	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2926	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2926	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2930	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2930	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2930	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2967	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-18.8
2967	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-121.8
2967	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-121.8
2971	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2971	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2971	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2975	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2975	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2975	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3001	536450.02	4816309.07	351.45	0	D	A	62.5	3.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-22.0
3001	536450.02	4816309.07	351.45	0	N	A	-40.5	3.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.0
3001	536450.02	4816309.07	351.45	0	E	A	-40.5	3.4	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.0
3007	536449.23	4816311.01	351.47	0	D	A	62.5	3.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-22.4
3007	536449.23	4816311.01	351.47	0	N	A	-40.5	3.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.4
3007	536449.23	4816311.01	351.47	0	E	A	-40.5	3.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.4
3012	536449.67	4816309.93	351.46	1	D	A	62.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
3012	536449.67	4816309.93	351.46	1	N	A	-40.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3012	536449.67	4816309.93	351.46	1	E	A	-40.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3017	536448.88	4816311.87	351.47	1	D	A	62.5	-7.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-36.9
3017	536448.88	4816311.87	351.47	1	N	A	-40.5	-7.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
3017	536448.88	4816311.87	351.47	1	E	A	-40.5	-7.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
3022	536450.00	4816309.11	351.45	1	D	A	62.5	3.5	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
3022	536450.00	4816309.11	351.45	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3022	536450.00	4816309.11	351.45	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3028	536449.36	4816310.68	351.46	1	D	A	62.5	0.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
3028	536449.36	4816310.68	351.46	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3028	536449.36	4816310.68	351.46	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3032	536448.99	4816311.59	351.47	1	D	A	62.5	-1.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
3032	536448.99	4816311.59	351.47	1	N	A	-40.5	-1.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
3032	536448.99	4816311.59	351.47	1	E	A	-40.5	-1.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
3036	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
3036	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3036	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3082	536449.31	4816311.18	351.46	0	D	A	62.5	2.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-22.9
3082	536449.31	4816311.18	351.46	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
3082	536449.31	4816311.18	351.46	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
3087	536450.36	4816309.43	351.43	0	D	A	62.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-21.8
3087	536450.36	4816309.43	351.43	0	N	A	-40.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-124.8
3087	536450.36	4816309.43	351.43	0	E	A	-40.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-124.8
3090	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3090	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3090	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3094	536449.40	4816311.03	351.46	1	D	A	62.5	3.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
3094	536449.40	4816311.03	351.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3094	536449.40	4816311.03	351.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3098	536450.46	4816309.28	351.43	1	D	A	62.5	2.8	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3098	536450.46	4816309.28	351.43	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3098	536450.46	4816309.28	351.43	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3102	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
3102	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3102	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
3139	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-19.3
3139	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-122.3
3139	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-122.3
3143	536396.16	4816223.72	353.57	1	D	A	62.5	6.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
3143	536396.16	4816223.72	353.57	1	N	A	-40.5	6.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3143	536396.16	4816223.72	353.57	1	E	A	-40.5	6.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3146	536396.16	4816223.72	353.57	1	D	A	62.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3146	536396.16	4816223.72	353.57	1	N	A	-40.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3146	536396.16	4816223.72	353.57	1	E	A	-40.5	6.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3262	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-19.7
3262	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-122.7
3262	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-122.7
3267	536374.13	4816218.41	354.55	1	D	A	62.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3267	536374.13	4816218.41	354.55	1	N	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3267	536374.13	4816218.41	354.55	1	E	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3270	536374.13	4816218.41	354.55	1	D	A	62.5	7.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
3270	536374.13	4816218.41	354.55	1	N	A	-40.5	7.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
3270	536374.13	4816218.41	354.55	1	E	A	-40.5	7.1	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
3325	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-19.6
3325	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-122.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3325	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-122.6
3330	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
3330	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3330	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
3334	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3334	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3334	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3351	536356.96	4816204.53	354.77	0	D	A	62.5	7.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-19.9
3351	536356.96	4816204.53	354.77	0	N	A	-40.5	7.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-122.9
3351	536356.96	4816204.53	354.77	0	E	A	-40.5	7.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-122.9
3356	536356.96	4816204.53	354.77	1	D	A	62.5	7.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3356	536356.96	4816204.53	354.77	1	N	A	-40.5	7.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3356	536356.96	4816204.53	354.77	1	E	A	-40.5	7.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3361	536356.96	4816204.53	354.77	1	D	A	62.5	7.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3361	536356.96	4816204.53	354.77	1	N	A	-40.5	7.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3361	536356.96	4816204.53	354.77	1	E	A	-40.5	7.2	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3378	536468.03	4816272.53	351.38	0	D	A	62.5	4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-19.6
3378	536468.03	4816272.53	351.38	0	N	A	-40.5	4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-122.6
3378	536468.03	4816272.53	351.38	0	E	A	-40.5	4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-122.6
3383	536468.03	4816272.53	351.38	1	D	A	62.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3383	536468.03	4816272.53	351.38	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3383	536468.03	4816272.53	351.38	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3388	536468.03	4816272.53	351.38	1	D	A	62.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3388	536468.03	4816272.53	351.38	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3388	536468.03	4816272.53	351.38	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3417	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-19.7
3417	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-122.7
3417	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-122.7
3422	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3422	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3422	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3427	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3427	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3427	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3462	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-20.1
3462	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-123.1
3462	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-123.1
3468	536379.69	4816221.07	354.50	1	D	A	62.5	6.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
3468	536379.69	4816221.07	354.50	1	N	A	-40.5	6.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
3468	536379.69	4816221.07	354.50	1	E	A	-40.5	6.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
3472	536380.34	4816221.38	354.47	1	D	A	62.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3472	536380.34	4816221.38	354.47	1	N	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3472	536380.34	4816221.38	354.47	1	E	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3475	536378.31	4816220.41	354.57	1	D	A	62.5	1.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
3475	536378.31	4816220.41	354.57	1	N	A	-40.5	1.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3475	536378.31	4816220.41	354.57	1	E	A	-40.5	1.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3503	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-19.9
3503	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.0
3503	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.0
3506	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
3506	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3506	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3509	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3509	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3509	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
3542	536444.00	4816273.35	352.33	0	D	A	62.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-21.3
3542	536444.00	4816273.35	352.33	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-124.3
3542	536444.00	4816273.35	352.33	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-124.3
3549	536445.45	4816273.97	352.28	0	D	A	62.5	-1.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-26.0
3549	536445.45	4816273.97	352.28	0	N	A	-40.5	-1.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-129.0
3549	536445.45	4816273.97	352.28	0	E	A	-40.5	-1.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-129.0
3553	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
3553	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3553	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3558	536444.20	4816273.43	352.33	1	D	A	62.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3558	536444.20	4816273.43	352.33	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3558	536444.20	4816273.43	352.33	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3561	536445.65	4816274.06	352.27	1	D	A	62.5	-4.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
3561	536445.65	4816274.06	352.27	1	N	A	-40.5	-4.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.6
3561	536445.65	4816274.06	352.27	1	E	A	-40.5	-4.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.6
3623	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-20.2
3623	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.2
3623	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.2
3628	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3628	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3628	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3632	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
3632	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
3632	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
3638	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-20.4
3638	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3638	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3642	536403.87	4816232.62	353.33	1	D	A	62.5	5.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
3642	536403.87	4816232.62	353.33	1	N	A	-40.5	5.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3642	536403.87	4816232.62	353.33	1	E	A	-40.5	5.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3646	536402.24	4816231.84	353.40	1	D	A	62.5	-8.4	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-38.9
3646	536402.24	4816231.84	353.40	1	N	A	-40.5	-8.4	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-141.9
3646	536402.24	4816231.84	353.40	1	E	A	-40.5	-8.4	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-141.9
3650	536403.80	4816232.59	353.33	1	D	A	62.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
3650	536403.80	4816232.59	353.33	1	N	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3650	536403.80	4816232.59	353.33	1	E	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
3680	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-20.4
3680	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3680	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3684	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3684	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3684	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3687	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
3687	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3687	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3696	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-20.4
3696	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3696	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.4
3701	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3701	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3701	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3704	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
3704	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3704	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3776	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-20.7
3776	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.7
3776	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-123.7
3779	536460.30	4816278.45	351.51	1	D	A	62.5	3.9	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
3779	536460.30	4816278.45	351.51	1	N	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3779	536460.30	4816278.45	351.51	1	E	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3784	536460.30	4816278.45	351.51	1	D	A	62.5	3.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
3784	536460.30	4816278.45	351.51	1	N	A	-40.5	3.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3784	536460.30	4816278.45	351.51	1	E	A	-40.5	3.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3917	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-21.0
3917	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.0
3917	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.0
3921	536468.54	4816270.03	351.38	1	D	A	62.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
3921	536468.54	4816270.03	351.38	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3921	536468.54	4816270.03	351.38	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3925	536468.54	4816270.03	351.38	1	D	A	62.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
3925	536468.54	4816270.03	351.38	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3925	536468.54	4816270.03	351.38	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
3950	536403.89	4816228.79	353.25	0	D	A	62.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-24.8
3950	536403.89	4816228.79	353.25	0	N	A	-40.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-127.8
3950	536403.89	4816228.79	353.25	0	E	A	-40.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-127.8
3955	536404.69	4816230.01	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
3955	536404.69	4816230.01	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.9
3955	536404.69	4816230.01	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.9
3959	536404.33	4816229.46	353.24	1	D	A	62.5	4.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3959	536404.33	4816229.46	353.24	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3959	536404.33	4816229.46	353.24	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3963	536404.33	4816229.46	353.24	1	D	A	62.5	4.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3963	536404.33	4816229.46	353.24	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3963	536404.33	4816229.46	353.24	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3984	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-21.3
3984	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-124.3
3984	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-124.3
3988	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
3988	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3988	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3992	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3992	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3992	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
4023	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-21.4
4023	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-124.5
4023	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-124.5
4028	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
4028	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
4028	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
4031	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
4031	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
4031	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
4033	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
4033	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
4033	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
4059	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-21.3
4059	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.4
4059	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.4
4062	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4062	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
4062	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
4067	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
4067	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
4067	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
4085	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-21.7
4085	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-124.7
4085	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-124.7
4089	536452.25	4816305.83	351.40	1	D	A	62.5	2.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4089	536452.25	4816305.83	351.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4089	536452.25	4816305.83	351.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4093	536452.76	4816304.81	351.39	1	D	A	62.5	-4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-34.0
4093	536452.76	4816304.81	351.39	1	N	A	-40.5	-4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
4093	536452.76	4816304.81	351.39	1	E	A	-40.5	-4.6	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-137.0
4097	536452.24	4816305.87	351.40	1	D	A	62.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
4097	536452.24	4816305.87	351.40	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
4097	536452.24	4816305.87	351.40	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
4101	536452.74	4816304.84	351.39	1	D	A	62.5	-3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
4101	536452.74	4816304.84	351.39	1	N	A	-40.5	-3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4101	536452.74	4816304.84	351.39	1	E	A	-40.5	-3.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4104	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
4104	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4104	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4150	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-21.7
4150	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-124.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4150	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-124.7
4156	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
4156	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4156	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4159	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
4159	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
4159	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
4163	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
4163	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
4163	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
4206	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-21.6
4206	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.7
4206	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.7
4210	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
4210	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4210	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4215	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
4215	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4215	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4222	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-21.9
4222	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-124.9
4222	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-124.9
4227	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
4227	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4227	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4230	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
4230	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4230	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4277	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-21.8
4277	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.8
4277	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.8
4280	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
4280	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
4280	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
4284	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4284	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
4284	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
4342	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-22.0
4342	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.1
4342	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.1
4345	536400.70	4816226.18	353.36	1	D	A	62.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4345	536400.70	4816226.18	353.36	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4345	536400.70	4816226.18	353.36	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4349	536400.70	4816226.18	353.36	1	D	A	62.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
4349	536400.70	4816226.18	353.36	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4349	536400.70	4816226.18	353.36	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4357	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-21.9
4357	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.9
4357	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-124.9
4362	536464.89	4816261.59	351.39	1	D	A	62.5	0.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4362	536464.89	4816261.59	351.39	1	N	A	-40.5	0.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
4362	536464.89	4816261.59	351.39	1	E	A	-40.5	0.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
4365	536464.14	4816261.14	351.40	1	D	A	62.5	-1.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
4365	536464.14	4816261.14	351.40	1	N	A	-40.5	-1.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
4365	536464.14	4816261.14	351.40	1	E	A	-40.5	-1.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
4370	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
4370	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4370	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4376	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-22.2
4376	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-125.3
4376	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-125.3
4381	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4381	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4381	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4384	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
4384	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4384	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4419	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-22.4
4419	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.4
4419	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-125.4
4424	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
4424	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4424	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4428	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4428	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4428	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
4432	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
4432	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
4432	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
4447	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-22.4
4447	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.4
4447	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.4
4453	536402.65	4816227.52	353.28	1	D	A	62.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
4453	536402.65	4816227.52	353.28	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4453	536402.65	4816227.52	353.28	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4456	536402.65	4816227.52	353.28	1	D	A	62.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4456	536402.65	4816227.52	353.28	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4456	536402.65	4816227.52	353.28	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4466	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-22.4
4466	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.4
4466	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.4
4470	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
4470	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4470	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4474	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4474	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4474	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4513	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-22.5
4513	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.5
4513	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.5
4516	536405.48	4816237.96	353.37	1	D	A	62.5	3.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4516	536405.48	4816237.96	353.37	1	N	A	-40.5	3.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4516	536405.48	4816237.96	353.37	1	E	A	-40.5	3.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4519	536405.51	4816237.89	353.37	1	D	A	62.5	3.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4519	536405.51	4816237.89	353.37	1	N	A	-40.5	3.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4519	536405.51	4816237.89	353.37	1	E	A	-40.5	3.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4523	536405.12	4816238.91	353.42	1	D	A	62.5	-8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.6
4523	536405.12	4816238.91	353.42	1	N	A	-40.5	-8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
4523	536405.12	4816238.91	353.42	1	E	A	-40.5	-8.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
4554	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-22.7
4554	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.7
4554	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-125.7
4558	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
4558	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4558	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4561	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
4561	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4561	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
4577	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-22.6
4577	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-125.6
4577	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-125.6
4582	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4582	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
4582	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
4583	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4583	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4583	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4596	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-22.9
4596	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-125.9
4596	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-125.9
4601	536352.80	4816202.56	354.82	1	D	A	62.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
4601	536352.80	4816202.56	354.82	1	N	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
4601	536352.80	4816202.56	354.82	1	E	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
4604	536354.00	4816203.13	354.81	1	D	A	62.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
4604	536354.00	4816203.13	354.81	1	N	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
4604	536354.00	4816203.13	354.81	1	E	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
4607	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4607	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4607	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
4612	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-23.0
4612	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-126.0
4612	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-126.0
4616	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4616	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
4616	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
4621	536379.78	4816215.52	354.35	1	D	A	62.5	3.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
4621	536379.78	4816215.52	354.35	1	N	A	-40.5	3.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4621	536379.78	4816215.52	354.35	1	E	A	-40.5	3.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4626	536380.82	4816216.02	354.30	1	D	A	62.5	-6.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-36.8
4626	536380.82	4816216.02	354.30	1	N	A	-40.5	-6.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
4626	536380.82	4816216.02	354.30	1	E	A	-40.5	-6.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
4693	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-23.0
4693	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.0
4693	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.0
4697	536405.40	4816231.38	353.22	1	D	A	62.5	1.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
4697	536405.40	4816231.38	353.22	1	N	A	-40.5	1.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4697	536405.40	4816231.38	353.22	1	E	A	-40.5	1.8	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4700	536405.75	4816232.29	353.22	1	D	A	62.5	-3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
4700	536405.75	4816232.29	353.22	1	N	A	-40.5	-3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
4700	536405.75	4816232.29	353.22	1	E	A	-40.5	-3.3	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
4703	536405.48	4816231.60	353.22	1	D	A	62.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
4703	536405.48	4816231.60	353.22	1	N	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4703	536405.48	4816231.60	353.22	1	E	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
4804	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-23.3
4804	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.3
4804	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.3
4808	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4808	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4808	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4811	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
4811	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4811	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4819	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-23.3
4819	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.3
4819	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.3
4822	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4822	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4822	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4825	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
4825	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4825	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
4927	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.5
4927	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.5
4927	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.5
4933	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
4933	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4933	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4936	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
4936	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4936	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4942	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.5
4942	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.5
4942	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.5
4946	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
4946	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4946	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4950	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4950	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4950	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
5014	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
5014	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5014	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5019	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5019	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5019	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
5023	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5023	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5023	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
5038	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.7
5038	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.7
5038	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.7
5042	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
5042	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5042	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5046	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5046	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5046	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5058	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.7
5058	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.7
5058	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.7
5063	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5063	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5063	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5067	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5067	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5067	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
5098	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
5098	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5098	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5101	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5101	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5101	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5103	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5103	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5103	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5117	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
5117	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5117	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5119	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5119	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5119	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5122	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5122	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5122	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5135	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-23.8
5135	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5135	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-126.8
5139	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5139	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5139	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
5141	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
5141	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5141	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
5248	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-24.2
5248	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-127.2
5248	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-127.2
5251	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5251	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5251	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
5253	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
5253	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5253	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
5296	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-24.5
5296	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-127.5
5296	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	27.6	0.0	0.0	-127.5
5298	536398.99	4816225.19	353.43	1	D	A	62.5	1.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
5298	536398.99	4816225.19	353.43	1	N	A	-40.5	1.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5298	536398.99	4816225.19	353.43	1	E	A	-40.5	1.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
5302	536398.99	4816225.19	353.43	1	D	A	62.5	1.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
5302	536398.99	4816225.19	353.43	1	N	A	-40.5	1.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5302	536398.99	4816225.19	353.43	1	E	A	-40.5	1.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
5347	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-24.4
5347	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-127.4
5347	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-127.4
5351	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5351	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5351	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5353	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5353	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5353	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5384	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-24.6
5384	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-127.6
5384	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-127.6
5386	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5386	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5386	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
5390	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5390	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5390	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5396	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-24.6
5396	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-127.6
5396	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-127.6
5398	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
5398	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5398	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
5402	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5402	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5402	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
5425	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-24.6
5425	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-127.7
5425	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-127.7
5428	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5428	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5428	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
5431	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
5431	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
5431	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
5570	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-25.3
5570	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-128.3
5570	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-128.3
5573	536377.04	4816219.80	354.59	1	D	A	62.5	1.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5573	536377.04	4816219.80	354.59	1	N	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5573	536377.04	4816219.80	354.59	1	E	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5575	536377.04	4816219.80	354.59	1	D	A	62.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
5575	536377.04	4816219.80	354.59	1	N	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5575	536377.04	4816219.80	354.59	1	E	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
5580	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-25.2
5580	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-128.2
5580	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-128.2
5583	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
5583	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5583	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5586	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
5586	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
5586	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
5618	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-25.3
5618	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5618	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5622	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5622	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
5622	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
5625	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5625	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
5625	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
5639	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-25.3
5639	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5639	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5643	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5643	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5643	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
5645	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5645	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
5645	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
5666	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-25.3
5666	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5666	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-128.3
5669	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5669	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5669	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5670	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
5670	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5670	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
5732	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-25.9
5732	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-128.9
5732	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-128.9
5733	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5733	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
5733	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
5735	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5735	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5735	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5770	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-25.9
5770	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.9
5770	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.9
5772	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
5772	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
5772	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
5773	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
5773	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
5773	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
5775	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-25.8
5775	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-128.8
5775	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-128.8
5777	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
5777	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
5777	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
5778	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
5778	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5778	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
6065	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-29.2
6065	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-132.2
6065	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-132.2
6067	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
6067	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
6067	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
6069	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-33.4
6069	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
6069	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
6080	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-30.2
6080	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-133.2
6080	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-133.2
6082	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
6082	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
6082	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
6084	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
6084	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3
6084	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.3
6099	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-30.7
6099	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-133.7
6099	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-133.7
6100	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-35.1
6100	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
6100	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
6102	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-34.8
6102	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.8
6102	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-137.8
6116	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.1
6116	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6116	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6117	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.7
6117	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6117	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6118	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
6118	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6118	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6122	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.1
6122	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6122	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6124	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.7
6124	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6124	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6125	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
6125	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6125	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6128	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.1
6128	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6128	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6129	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.8
6129	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6129	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6130	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
6130	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6130	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6135	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.1
6135	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6135	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.1
6138	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.8
6138	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6138	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6139	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
6139	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6139	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.4
6143	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.4
6143	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.4
6143	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.4
6145	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.0
6145	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6145	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6147	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.7
6147	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6147	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
6149	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.5
6149	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.5
6149	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.5
6152	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.1
6152	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6152	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
6154	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.8
6154	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6154	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.8
6158	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.6
6158	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.6
6158	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.6
6160	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.2
6160	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.2
6160	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.2
6162	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-36.9
6162	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
6162	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
6164	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-32.7
6164	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.7
6164	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-135.7
6166	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.3
6166	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.3
6166	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.3
6167	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-37.0
6167	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6167	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
6187	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-35.9
6187	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-138.9
6187	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-138.9
6189	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-40.2
6189	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.3
6189	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.3
6190	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-39.9
6190	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.0
6190	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.0
6193	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-36.4
6193	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-139.4
6193	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.6	0.0	0.0	-139.4
6195	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-40.8
6195	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.8
6195	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.8
6196	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-40.5
6196	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.5
6196	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-143.5
6199	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-36.4
6199	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-139.4
6199	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-139.4
6202	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-41.1
6202	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.1
6202	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.1
6203	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-40.7
6203	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-143.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6203	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-143.7
6206	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-36.6
6206	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-139.6
6206	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	27.5	0.0	0.0	-139.6
6207	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-41.2
6207	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.3
6207	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-144.3
6209	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-40.9
6209	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-143.9
6209	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-143.9
6210	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-40.9
6210	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-143.9
6210	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-143.9
6212	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-45.1
6212	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-148.1
6212	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-148.1
6214	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-44.8
6214	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-147.8
6214	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-147.8
6216	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-42.4
6216	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-145.4
6216	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-145.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1603	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-13.4
1603	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-113.4
1603	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-113.4
1686	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-14.0
1686	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-114.0
1686	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-114.0
1698	536558.11	4816077.62	348.76	0	D	A	59.5	7.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	23.0	0.0	0.0	-12.7
1698	536558.11	4816077.62	348.76	0	N	A	-40.5	7.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	23.0	0.0	0.0	-112.7
1698	536558.11	4816077.62	348.76	0	E	A	-40.5	7.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	23.0	0.0	0.0	-112.7
1703	536556.27	4816081.39	348.93	0	D	A	59.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	-18.5
1703	536556.27	4816081.39	348.93	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	-118.5
1703	536556.27	4816081.39	348.93	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	-118.5
1708	536554.89	4816084.24	349.06	0	D	A	59.5	6.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-16.9
1708	536554.89	4816084.24	349.06	0	N	A	-40.5	6.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-116.9
1708	536554.89	4816084.24	349.06	0	E	A	-40.5	6.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-116.9
1850	536550.95	4816084.35	349.19	0	D	A	59.5	9.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-14.0
1850	536550.95	4816084.35	349.19	0	N	A	-40.5	9.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-114.0
1850	536550.95	4816084.35	349.19	0	E	A	-40.5	9.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-114.0
1858	536553.10	4816079.67	348.92	0	D	A	59.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	-18.1
1858	536553.10	4816079.67	348.92	0	N	A	-40.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	-118.1
1858	536553.10	4816079.67	348.92	0	E	A	-40.5	3.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	-118.1
1865	536553.81	4816078.11	348.84	0	D	A	59.5	0.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-21.1
1865	536553.81	4816078.11	348.84	0	N	A	-40.5	0.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-121.1
1865	536553.81	4816078.11	348.84	0	E	A	-40.5	0.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-121.1
2024	536555.57	4816074.26	348.66	0	D	A	59.5	8.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	21.4	0.0	0.0	-10.3
2024	536555.57	4816074.26	348.66	0	N	A	-40.5	8.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	21.4	0.0	0.0	-110.3
2024	536555.57	4816074.26	348.66	0	E	A	-40.5	8.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	21.4	0.0	0.0	-110.3
2029	536557.64	4816069.75	348.45	0	D	A	59.5	4.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.9	0.0	0.0	-8.6
2029	536557.64	4816069.75	348.45	0	N	A	-40.5	4.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.9	0.0	0.0	-108.6
2029	536557.64	4816069.75	348.45	0	E	A	-40.5	4.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.9	0.0	0.0	-108.6
2035	536557.60	4816069.83	348.45	1	D	A	59.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	2.0	-27.0
2035	536557.60	4816069.83	348.45	1	N	A	-40.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	2.0	-127.0
2035	536557.60	4816069.83	348.45	1	E	A	-40.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	2.0	-127.0
2038	536557.57	4816069.91	348.46	1	D	A	59.5	0.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
2038	536557.57	4816069.91	348.46	1	N	A	-40.5	0.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2038	536557.57	4816069.91	348.46	1	E	A	-40.5	0.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2043	536557.83	4816069.33	348.43	1	D	A	59.5	-6.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2043	536557.83	4816069.33	348.43	1	N	A	-40.5	-6.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
2043	536557.83	4816069.33	348.43	1	E	A	-40.5	-6.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
2082	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-15.2
2082	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-115.2
2082	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-115.2
2259	536503.76	4816091.81	350.60	0	D	A	59.5	10.2	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-16.0
2259	536503.76	4816091.81	350.60	0	N	A	-40.5	10.2	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-116.0
2259	536503.76	4816091.81	350.60	0	E	A	-40.5	10.2	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-116.0
2277	536484.76	4816090.94	350.70	0	D	A	59.5	6.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	26.1	0.0	0.0	-19.7
2277	536484.76	4816090.94	350.70	0	N	A	-40.5	6.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	26.1	0.0	0.0	-119.7
2277	536484.76	4816090.94	350.70	0	E	A	-40.5	6.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	26.1	0.0	0.0	-119.7
2284	536480.21	4816094.53	350.78	0	D	A	59.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-17.1
2284	536480.21	4816094.53	350.78	0	N	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-117.1
2284	536480.21	4816094.53	350.78	0	E	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-117.1
2293	536484.76	4816090.94	350.70	1	D	A	59.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-25.1
2293	536484.76	4816090.94	350.70	1	N	A	-40.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-125.1
2293	536484.76	4816090.94	350.70	1	E	A	-40.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-125.1
2297	536485.71	4816090.19	350.69	1	D	A	59.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-35.1
2297	536485.71	4816090.19	350.69	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-135.1
2297	536485.71	4816090.19	350.69	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-135.1
2301	536484.44	4816091.20	350.71	1	D	A	59.5	2.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-35.0
2301	536484.44	4816091.20	350.71	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-135.0
2301	536484.44	4816091.20	350.71	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-135.0
2305	536482.42	4816092.78	350.74	1	D	A	59.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-31.8
2305	536482.42	4816092.78	350.74	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-131.8
2305	536482.42	4816092.78	350.74	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-131.8
2359	536488.50	4816087.68	350.64	0	D	A	59.5	10.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-16.5
2359	536488.50	4816087.68	350.64	0	N	A	-40.5	10.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-116.5
2359	536488.50	4816087.68	350.64	0	E	A	-40.5	10.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-116.5
2365	536487.93	4816088.12	350.65	1	D	A	59.5	9.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-21.6
2365	536487.93	4816088.12	350.65	1	N	A	-40.5	9.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-121.6
2365	536487.93	4816088.12	350.65	1	E	A	-40.5	9.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-121.6
2370	536485.44	4816090.05	350.69	1	D	A	59.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-33.1
2370	536485.44	4816090.05	350.69	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-133.1
2370	536485.44	4816090.05	350.69	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-133.1
2533	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-16.0
2533	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-116.0
2533	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-116.0
2571	536480.08	4816094.49	350.78	0	D	A	59.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-17.2
2571	536480.08	4816094.49	350.78	0	N	A	-40.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-117.2
2571	536480.08	4816094.49	350.78	0	E	A	-40.5	8.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-117.2
2576	536483.68	4816091.47	350.72	0	D	A	59.5	2.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-22.9
2576	536483.68	4816091.47	350.72	0	N	A	-40.5	2.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-122.9
2576	536483.68	4816091.47	350.72	0	E	A	-40.5	2.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-122.9
2582	536483.71	4816091.44	350.72	1	D	A	59.5	2.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-28.4
2582	536483.71	4816091.44	350.72	1	N	A	-40.5	2.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.4
2582	536483.71	4816091.44	350.72	1	E	A	-40.5	2.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.4
2587	536482.27	4816092.65	350.74	1	D	A	59.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-31.8
2587	536482.27	4816092.65	350.74	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-131.8
2587	536482.27	4816092.65	350.74	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-131.8
2592	536484.01	4816091.19	350.71	1	D	A	59.5	0.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-36.8
2592	536484.01	4816091.19	350.71	1	N	A	-40.5	0.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-136.8
2592	536484.01	4816091.19	350.71	1	E	A	-40.5	0.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-136.8
2630	536561.52	4816071.44	348.47	0	D	A	59.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-6.9
2630	536561.52	4816071.44	348.47	0	N	A	-40.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-106.9
2630	536561.52	4816071.44	348.47	0	E	A	-40.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.8	0.0	0.0	-106.9
2636	536560.03	4816073.91	348.59	0	D	A	59.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	20.0	0.0	0.0	-13.8
2636	536560.03	4816073.91	348.59	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	20.0	0.0	0.0	-113.8
2636	536560.03	4816073.91	348.59	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	20.0	0.0	0.0	-113.8
2671	536500.08	4816091.63	350.62	0	D	A	59.5	8.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-17.5
2671	536500.08	4816091.63	350.62	0	N	A	-40.5	8.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-117.5
2671	536500.08	4816091.63	350.62	0	E	A	-40.5	8.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-117.5
2676	536496.95	4816090.16	350.62	1	D	A	59.5	-1.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-32.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2676	536496.95	4816090.16	350.62	1	N	A	-40.5	-1.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-132.6
2676	536496.95	4816090.16	350.62	1	E	A	-40.5	-1.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-132.6
2881	536545.79	4816102.93	349.95	0	D	A	59.5	1.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-22.6
2881	536545.79	4816102.93	349.95	0	N	A	-40.5	1.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-122.6
2881	536545.79	4816102.93	349.95	0	E	A	-40.5	1.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-122.6
2888	536544.72	4816105.02	350.05	0	D	A	59.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-19.1
2888	536544.72	4816105.02	350.05	0	N	A	-40.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
2888	536544.72	4816105.02	350.05	0	E	A	-40.5	5.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
2897	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-17.4
2897	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-117.4
2897	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-117.4
2952	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-17.4
2952	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-117.4
2952	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-117.4
3107	536496.05	4816079.98	350.48	0	D	A	59.5	6.9	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-19.5
3107	536496.05	4816079.98	350.48	0	N	A	-40.5	6.9	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.5
3107	536496.05	4816079.98	350.48	0	E	A	-40.5	6.9	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.5
3113	536497.64	4816077.48	350.44	0	D	A	59.5	0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-26.4
3113	536497.64	4816077.48	350.44	0	N	A	-40.5	0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
3113	536497.64	4816077.48	350.44	0	E	A	-40.5	0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
3118	536498.02	4816076.87	350.43	0	D	A	59.5	-3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-30.3
3118	536498.02	4816076.87	350.43	0	N	A	-40.5	-3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
3118	536498.02	4816076.87	350.43	0	E	A	-40.5	-3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
3219	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-18.8
3219	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-118.8
3219	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-118.8
3235	536502.26	4816068.17	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-18.6
3235	536502.26	4816068.17	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3235	536502.26	4816068.17	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3253	536502.28	4816068.16	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-18.6
3253	536502.28	4816068.16	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3253	536502.28	4816068.16	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
3297	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-17.9
3297	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-117.9
3297	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-117.9
3570	536498.67	4816076.26	350.42	0	D	A	59.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-23.3
3570	536498.67	4816076.26	350.42	0	N	A	-40.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
3570	536498.67	4816076.26	350.42	0	E	A	-40.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
3575	536498.04	4816077.65	350.44	0	D	A	59.5	0.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-26.4
3575	536498.04	4816077.65	350.44	0	N	A	-40.5	0.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
3575	536498.04	4816077.65	350.44	0	E	A	-40.5	0.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-126.4
3581	536497.46	4816078.97	350.46	0	D	A	59.5	2.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-23.7
3581	536497.46	4816078.97	350.46	0	N	A	-40.5	2.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-123.7
3581	536497.46	4816078.97	350.46	0	E	A	-40.5	2.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-123.7
3614	536500.08	4816073.10	350.28	0	D	A	59.5	6.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-19.5
3614	536500.08	4816073.10	350.28	0	N	A	-40.5	6.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.5
3614	536500.08	4816073.10	350.28	0	E	A	-40.5	6.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.5
3657	536499.95	4816073.00	350.28	0	D	A	59.5	6.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-19.6
3657	536499.95	4816073.00	350.28	0	N	A	-40.5	6.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.6
3657	536499.95	4816073.00	350.28	0	E	A	-40.5	6.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-119.6
3673	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-19.9
3673	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-119.9
3673	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-119.9
3820	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-18.9
3820	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-118.9
3820	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-118.9
3880	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-20.0
3880	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
3880	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
3894	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-19.5
3894	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-119.5
3894	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-119.5
3901	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-20.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3901	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-120.6
3901	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	27.2	0.0	0.0	-120.6
3907	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-19.9
3907	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-119.9
3907	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-119.9
4004	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-20.1
4004	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-120.1
4004	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-120.1
4137	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-21.0
4137	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-121.0
4137	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-121.0
4142	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-25.5
4142	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-125.5
4142	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-125.5
4296	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-21.4
4296	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-121.4
4296	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.3	0.0	0.0	-121.4
4315	536493.58	4816083.37	350.54	0	D	A	59.5	4.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-21.7
4315	536493.58	4816083.37	350.54	0	N	A	-40.5	4.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-121.7
4315	536493.58	4816083.37	350.54	0	E	A	-40.5	4.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-121.7
4320	536494.66	4816082.13	350.52	0	D	A	59.5	-6.4	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-32.9
4320	536494.66	4816082.13	350.52	0	N	A	-40.5	-6.4	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-132.9
4320	536494.66	4816082.13	350.52	0	E	A	-40.5	-6.4	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-132.9
4334	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-20.2
4334	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-120.2
4334	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-120.2
4507	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.2	0.0	0.0	-8.8
4507	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.2	0.0	0.0	-108.8
4507	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	14.2	0.0	0.0	-108.8
4533	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-21.3
4533	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
4533	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
4568	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-21.6
4568	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.6
4568	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-121.6
4643	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-21.7
4643	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
4643	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
4653	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-20.9
4653	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-120.9
4653	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-120.9
4779	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-22.1
4779	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-122.1
4779	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-122.1
4963	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-22.3
4963	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.3
4963	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.3
4970	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-23.1
4970	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-123.1
4970	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-123.1
4977	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-22.4
4977	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-122.4
4977	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-122.4
5052	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.0	0.0	0.0	-9.9
5052	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.0	0.0	0.0	-109.9
5052	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	14.0	0.0	0.0	-109.9
5148	536487.31	4816089.23	350.66	0	D	A	59.5	3.3	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-23.3
5148	536487.31	4816089.23	350.66	0	N	A	-40.5	3.3	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-123.3
5148	536487.31	4816089.23	350.66	0	E	A	-40.5	3.3	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-123.3
5155	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-27.8
5155	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-127.8
5155	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-127.8
5156	536486.54	4816089.60	350.67	1	D	A	59.5	-3.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-40.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5156	536486.54	4816089.60	350.67	1	N	A	-40.5	-3.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-140.8
5156	536486.54	4816089.60	350.67	1	E	A	-40.5	-3.6	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-140.8
5177	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-22.7
5177	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.7
5177	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-122.7
5200	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-23.0
5200	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
5200	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
5275	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-23.1
5275	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-123.1
5275	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-123.1
5339	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-23.9
5339	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-123.9
5339	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-123.9
5342	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-28.4
5342	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.4
5342	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.4
5419	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-24.0
5419	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.0
5419	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.0
5438	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-24.0
5438	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.0
5438	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.0
5482	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-24.2
5482	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
5482	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
5487	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-28.7
5487	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.7
5487	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.7
5492	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-23.7
5492	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.7
5492	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.7
5501	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-23.6
5501	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-123.6
5501	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-123.6
5550	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-24.4
5550	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-124.4
5550	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-124.4
5553	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-28.9
5553	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.9
5553	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	3.3	-128.9
5606	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-24.6
5606	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
5606	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-124.6
5632	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-24.2
5632	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-124.2
5632	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-124.2
5699	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-24.4
5699	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-124.4
5699	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-124.4
5752	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-25.2
5752	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-125.2
5752	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-125.2
5816	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-25.7
5816	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
5816	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
5854	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-26.5
5854	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
5854	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
5858	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-26.5
5858	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
5858	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.5
5950	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-27.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5950	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.6
5950	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1640	537009.41	4816419.03	338.70	0	D	A	59.5	10.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	15.7	0.0	0.0	-5.2
1640	537009.41	4816419.03	338.70	0	N	A	-40.5	10.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	15.7	0.0	0.0	-105.2
1640	537009.41	4816419.03	338.70	0	E	A	-40.5	10.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	15.7	0.0	0.0	-105.2
1645	537017.70	4816422.98	338.82	0	D	A	59.5	8.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.3	0.0	0.0	-7.7
1645	537017.70	4816422.98	338.82	0	N	A	-40.5	8.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.3	0.0	0.0	-107.7
1645	537017.70	4816422.98	338.82	0	E	A	-40.5	8.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.3	0.0	0.0	-107.7
1650	537022.84	4816425.43	338.89	0	D	A	59.5	7.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.0	0.0	0.0	-8.7
1650	537022.84	4816425.43	338.89	0	N	A	-40.5	7.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.0	0.0	0.0	-108.7
1650	537022.84	4816425.43	338.89	0	E	A	-40.5	7.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.0	0.0	0.0	-108.7
1653	537014.55	4816421.48	338.77	1	D	A	59.5	13.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1653	537014.55	4816421.48	338.77	1	N	A	-40.5	13.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1653	537014.55	4816421.48	338.77	1	E	A	-40.5	13.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1657	537014.55	4816421.48	338.77	1	D	A	59.5	13.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
1657	537014.55	4816421.48	338.77	1	N	A	-40.5	13.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1657	537014.55	4816421.48	338.77	1	E	A	-40.5	13.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
2403	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	16.0	0.0	0.0	-5.9
2403	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	16.0	0.0	0.0	-105.9
2403	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	16.0	0.0	0.0	-105.9
2407	537009.05	4816421.12	338.76	1	D	A	59.5	10.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
2407	537009.05	4816421.12	338.76	1	N	A	-40.5	10.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
2407	537009.05	4816421.12	338.76	1	E	A	-40.5	10.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
2410	537009.05	4816421.12	338.76	1	D	A	59.5	10.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2410	537009.05	4816421.12	338.76	1	N	A	-40.5	10.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2410	537009.05	4816421.12	338.76	1	E	A	-40.5	10.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2416	537021.84	4816426.78	338.92	0	D	A	59.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.2	0.0	0.0	-8.1
2416	537021.84	4816426.78	338.92	0	N	A	-40.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.2	0.0	0.0	-108.1
2416	537021.84	4816426.78	338.92	0	E	A	-40.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	15.2	0.0	0.0	-108.1
2422	537016.57	4816424.38	338.86	0	D	A	59.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.5	0.0	0.0	-8.7
2422	537016.57	4816424.38	338.86	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.5	0.0	0.0	-108.7
2422	537016.57	4816424.38	338.86	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	15.5	0.0	0.0	-108.7
2427	537019.34	4816425.64	338.89	1	D	A	59.5	10.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
2427	537019.34	4816425.64	338.89	1	N	A	-40.5	10.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
2427	537019.34	4816425.64	338.89	1	E	A	-40.5	10.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
2431	537019.34	4816425.64	338.89	1	D	A	59.5	10.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2431	537019.34	4816425.64	338.89	1	N	A	-40.5	10.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2431	537019.34	4816425.64	338.89	1	E	A	-40.5	10.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2736	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.8	0.0	0.0	-7.4
2736	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.8	0.0	0.0	-107.4
2736	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.8	0.0	0.0	-107.4
2740	536997.67	4816416.08	338.68	1	D	A	59.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2740	536997.67	4816416.08	338.68	1	N	A	-40.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2740	536997.67	4816416.08	338.68	1	E	A	-40.5	6.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2744	536993.98	4816414.12	338.63	1	D	A	59.5	6.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2744	536993.98	4816414.12	338.63	1	N	A	-40.5	6.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2744	536993.98	4816414.12	338.63	1	E	A	-40.5	6.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2748	536995.92	4816415.15	338.66	1	D	A	59.5	9.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
2748	536995.92	4816415.15	338.66	1	N	A	-40.5	9.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2748	536995.92	4816415.15	338.66	1	E	A	-40.5	9.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
2981	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.9	0.0	0.0	-9.3
2981	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.9	0.0	0.0	-109.3
2981	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.9	0.0	0.0	-109.3
2984	536986.60	4816410.56	338.57	1	D	A	59.5	4.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
2984	536986.60	4816410.56	338.57	1	N	A	-40.5	4.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2984	536986.60	4816410.56	338.57	1	E	A	-40.5	4.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2989	536983.66	4816409.18	338.51	1	D	A	59.5	5.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
2989	536983.66	4816409.18	338.51	1	N	A	-40.5	5.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2989	536983.66	4816409.18	338.51	1	E	A	-40.5	5.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2992	536984.93	4816409.78	338.54	1	D	A	59.5	8.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2992	536984.93	4816409.78	338.54	1	N	A	-40.5	8.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2992	536984.93	4816409.78	338.54	1	E	A	-40.5	8.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
3042	536980.40	4816407.80	338.46	0	D	A	59.5	5.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.0	0.0	0.0	-13.1
3042	536980.40	4816407.80	338.46	0	N	A	-40.5	5.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.0	0.0	0.0	-113.1
3042	536980.40	4816407.80	338.46	0	E	A	-40.5	5.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.0	0.0	0.0	-113.1
3048	536977.51	4816406.69	338.42	0	D	A	59.5	4.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.6	0.0	0.0	-14.4
3048	536977.51	4816406.69	338.42	0	N	A	-40.5	4.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.6	0.0	0.0	-114.4
3048	536977.51	4816406.69	338.42	0	E	A	-40.5	4.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.6	0.0	0.0	-114.4
3052	536979.10	4816407.30	338.44	1	D	A	59.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
3052	536979.10	4816407.30	338.44	1	N	A	-40.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3052	536979.10	4816407.30	338.44	1	E	A	-40.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
3057	536979.10	4816407.30	338.44	1	D	A	59.5	7.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
3057	536979.10	4816407.30	338.44	1	N	A	-40.5	7.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
3057	536979.10	4816407.30	338.44	1	E	A	-40.5	7.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
3274	536989.73	4816398.00	338.40	0	D	A	59.5	4.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-12.9
3274	536989.73	4816398.00	338.40	0	N	A	-40.5	4.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-112.9
3274	536989.73	4816398.00	338.40	0	E	A	-40.5	4.0	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-112.9
3279	536990.97	4816395.51	338.40	0	D	A	59.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-11.7
3279	536990.97	4816395.51	338.40	0	N	A	-40.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-111.7
3279	536990.97	4816395.51	338.40	0	E	A	-40.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-111.7
3284	536990.42	4816396.62	338.40	1	D	A	59.5	7.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
3284	536990.42	4816396.62	338.40	1	N	A	-40.5	7.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
3284	536990.42	4816396.62	338.40	1	E	A	-40.5	7.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
3289	536990.42	4816396.62	338.40	1	D	A	59.5	7.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
3289	536990.42	4816396.62	338.40	1	N	A	-40.5	7.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3289	536990.42	4816396.62	338.40	1	E	A	-40.5	7.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
3482	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.3	0.0	0.0	-8.7
3482	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.3	0.0	0.0	-108.7
3482	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	16.3	0.0	0.0	-108.7
3487	536998.27	4816413.19	338.58	1	D	A	59.5	7.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3487	536998.27	4816413.19	338.58	1	N	A	-40.5	7.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3487	536998.27	4816413.19	338.58	1	E	A	-40.5	7.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3492	536998.27	4816413.19	338.58	1	D	A	59.5	7.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
3492	536998.27	4816413.19	338.58	1	N	A	-40.5	7.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
3492	536998.27	4816413.19	338.58	1	E	A	-40.5	7.5	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
3710	536991.14	4816395.66	338.40	0	D	A	59.5	5.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-11.5
3710	536991.14	4816395.66	338.40	0	N	A	-40.5	5.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-111.5
3710	536991.14	4816395.66	338.40	0	E	A	-40.5	5.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.2	0.0	0.0	-111.5
3715	536990.42	4816397.77	338.40	0	D	A	59.5	0.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.4	0.0	0.0	-15.9
3715	536990.42	4816397.77	338.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.4	0.0	0.0	-115.9
3715	536990.42	4816397.77	338.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.4	0.0	0.0	-115.9
3719	536990.94	4816396.24	338.40	1	D	A	59.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
3719	536990.94	4816396.24	338.40	1	N	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3719	536990.94	4816396.24	338.40	1	E	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3724	536990.94	4816396.24	338.40	1	D	A	59.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
3724	536990.94	4816396.24	338.40	1	N	A	-40.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3724	536990.94	4816396.24	338.40	1	E	A	-40.5	6.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
3791	537003.23	4816418.65	338.70	0	D	A	59.5	2.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-14.1
3791	537003.23	4816418.65	338.70	0	N	A	-40.5	2.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-114.1
3791	537003.23	4816418.65	338.70	0	E	A	-40.5	2.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-114.1
3796	537001.04	4816417.72	338.71	0	D	A	59.5	4.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.5	0.0	0.0	-11.7
3796	537001.04	4816417.72	338.71	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.5	0.0	0.0	-111.7
3796	537001.04	4816417.72	338.71	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.5	0.0	0.0	-111.7
3800	536999.62	4816417.12	338.71	0	D	A	59.5	-15.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	-31.8
3800	536999.62	4816417.12	338.71	0	N	A	-40.5	-15.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	-131.8
3800	536999.62	4816417.12	338.71	0	E	A	-40.5	-15.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	-131.8
3804	537001.82	4816418.05	338.70	1	D	A	59.5	6.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
3804	537001.82	4816418.05	338.70	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3804	537001.82	4816418.05	338.70	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3807	537001.82	4816418.05	338.70	1	D	A	59.5	6.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3807	537001.82	4816418.05	338.70	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3807	537001.82	4816418.05	338.70	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3937	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-10.0
3937	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-110.0
3937	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-110.0
3940	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3940	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3940	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3943	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
3943	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3943	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
4237	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.1	0.0	0.0	-10.3
4237	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.1	0.0	0.0	-110.3
4237	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	16.1	0.0	0.0	-110.3
4240	537002.30	4816415.64	338.63	1	D	A	59.5	5.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4240	537002.30	4816415.64	338.63	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4240	537002.30	4816415.64	338.63	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4245	537002.30	4816415.64	338.63	1	D	A	59.5	5.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
4245	537002.30	4816415.64	338.63	1	N	A	-40.5	5.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
4245	537002.30	4816415.64	338.63	1	E	A	-40.5	5.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
4251	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.8	0.0	0.0	-12.0
4251	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.8	0.0	0.0	-112.0
4251	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.8	0.0	0.0	-112.0
4256	536988.29	4816400.52	338.40	1	D	A	59.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
4256	536988.29	4816400.52	338.40	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4256	536988.29	4816400.52	338.40	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
4259	536988.29	4816400.52	338.40	1	D	A	59.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
4259	536988.29	4816400.52	338.40	1	N	A	-40.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4259	536988.29	4816400.52	338.40	1	E	A	-40.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
4388	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.1	0.0	0.0	-11.6
4388	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.1	0.0	0.0	-111.6
4388	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.1	0.0	0.0	-111.6
4391	536989.37	4816411.85	338.59	1	D	A	59.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
4391	536989.37	4816411.85	338.59	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4391	536989.37	4816411.85	338.59	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
4395	536989.37	4816411.85	338.59	1	D	A	59.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
4395	536989.37	4816411.85	338.59	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4395	536989.37	4816411.85	338.59	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
4665	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	20.0	0.0	0.0	-15.3
4665	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	20.0	0.0	0.0	-115.3
4665	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	20.0	0.0	0.0	-115.3
4670	536975.72	4816406.01	338.40	1	D	A	59.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
4670	536975.72	4816406.01	338.40	1	N	A	-40.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4670	536975.72	4816406.01	338.40	1	E	A	-40.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
4673	536974.57	4816405.57	338.40	1	D	A	59.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
4673	536974.57	4816405.57	338.40	1	N	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4673	536974.57	4816405.57	338.40	1	E	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4676	536975.68	4816405.99	338.40	1	D	A	59.5	0.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
4676	536975.68	4816405.99	338.40	1	N	A	-40.5	0.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
4676	536975.68	4816405.99	338.40	1	E	A	-40.5	0.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
4680	536974.52	4816405.55	338.40	1	D	A	59.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
4680	536974.52	4816405.55	338.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4680	536974.52	4816405.55	338.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4724	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.2	0.0	0.0	-14.5
4724	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.2	0.0	0.0	-114.5
4724	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	19.2	0.0	0.0	-114.5
4728	536979.87	4816405.35	338.40	1	D	A	59.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
4728	536979.87	4816405.35	338.40	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4728	536979.87	4816405.35	338.40	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
4733	536981.09	4816405.18	338.40	1	D	A	59.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
4733	536981.09	4816405.18	338.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
4733	536981.09	4816405.18	338.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
4737	536980.54	4816405.26	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
4737	536980.54	4816405.26	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
4737	536980.54	4816405.26	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4759	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.7	0.0	0.0	-14.3
4759	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.7	0.0	0.0	-114.3
4759	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.7	0.0	0.0	-114.3
4763	536982.48	4816404.91	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
4763	536982.48	4816404.91	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4763	536982.48	4816404.91	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
4767	536983.65	4816404.62	338.40	1	D	A	59.5	-0.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
4767	536983.65	4816404.62	338.40	1	N	A	-40.5	-0.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4767	536983.65	4816404.62	338.40	1	E	A	-40.5	-0.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
4771	536982.93	4816404.80	338.40	1	D	A	59.5	3.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
4771	536982.93	4816404.80	338.40	1	N	A	-40.5	3.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
4771	536982.93	4816404.80	338.40	1	E	A	-40.5	3.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
4786	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.9	0.0	0.0	-15.5
4786	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.9	0.0	0.0	-115.5
4786	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.9	0.0	0.0	-115.5
4790	536975.53	4816405.38	338.40	1	D	A	59.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
4790	536975.53	4816405.38	338.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4790	536975.53	4816405.38	338.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4793	536976.68	4816405.45	338.40	1	D	A	59.5	-0.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
4793	536976.68	4816405.45	338.40	1	N	A	-40.5	-0.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
4793	536976.68	4816405.45	338.40	1	E	A	-40.5	-0.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
4797	536975.96	4816405.40	338.40	1	D	A	59.5	3.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4797	536975.96	4816405.40	338.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4797	536975.96	4816405.40	338.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4883	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-16.2
4883	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-116.2
4883	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-116.2
4887	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4887	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4887	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4890	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
4890	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
4890	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
4904	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.5	0.0	0.0	-15.4
4904	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.5	0.0	0.0	-115.4
4904	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	19.5	0.0	0.0	-115.4
4908	536978.21	4816405.45	338.40	1	D	A	59.5	3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4908	536978.21	4816405.45	338.40	1	N	A	-40.5	3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4908	536978.21	4816405.45	338.40	1	E	A	-40.5	3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4912	536978.21	4816405.45	338.40	1	D	A	59.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
4912	536978.21	4816405.45	338.40	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
4912	536978.21	4816405.45	338.40	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
4991	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.1	0.0	0.0	-14.2
4991	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.1	0.0	0.0	-114.2
4991	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.1	0.0	0.0	-114.2
4994	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
4994	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
4994	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
5000	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
5000	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5000	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
5073	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-13.7
5073	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-113.7
5073	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-113.7
5077	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5077	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5077	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5081	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
5081	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5081	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5085	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.4	0.0	0.0	-14.6
5085	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.4	0.0	0.0	-114.6
5085	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	18.4	0.0	0.0	-114.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5087	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5087	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5087	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5090	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
5090	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5090	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
5127	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-16.7
5127	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-116.7
5127	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.4	0.0	0.0	-116.7
5129	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5129	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5129	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5131	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5131	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5131	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5167	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-13.7
5167	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-113.7
5167	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-113.7
5168	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
5168	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5168	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
5171	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5171	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5171	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5208	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-13.9
5208	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-113.9
5208	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	17.5	0.0	0.0	-113.9
5211	536990.04	4816399.31	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
5211	536990.04	4816399.31	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5211	536990.04	4816399.31	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
5213	536990.04	4816399.31	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
5213	536990.04	4816399.31	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5213	536990.04	4816399.31	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
5407	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-13.4
5407	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-113.4
5407	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	16.4	0.0	0.0	-113.4
5409	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
5409	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5409	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5412	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
5412	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5412	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
5465	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-14.5
5465	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-114.5
5465	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	17.4	0.0	0.0	-114.5
5467	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
5467	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5467	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
5469	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
5469	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5469	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
5505	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-17.4
5505	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-117.4
5505	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-117.4
5508	536973.95	4816405.09	338.40	1	D	A	59.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
5508	536973.95	4816405.09	338.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5508	536973.95	4816405.09	338.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
5510	536974.70	4816405.31	338.40	1	D	A	59.5	-6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-37.7
5510	536974.70	4816405.31	338.40	1	N	A	-40.5	-6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.7
5510	536974.70	4816405.31	338.40	1	E	A	-40.5	-6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-137.7
5512	536973.92	4816405.08	338.40	1	D	A	59.5	1.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
5512	536973.92	4816405.08	338.40	1	N	A	-40.5	1.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
5512	536973.92	4816405.08	338.40	1	E	A	-40.5	1.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5515	536974.67	4816405.30	338.40	1	D	A	59.5	-5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-36.3
5515	536974.67	4816405.30	338.40	1	N	A	-40.5	-5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
5515	536974.67	4816405.30	338.40	1	E	A	-40.5	-5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
5687	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	19.0	0.0	0.0	-16.9
5687	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	19.0	0.0	0.0	-116.9
5687	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	19.0	0.0	0.0	-116.9
5688	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5688	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5688	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5690	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5690	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5690	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5708	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.0	0.0	0.0	-14.9
5708	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.0	0.0	0.0	-114.9
5708	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	17.0	0.0	0.0	-114.9
5711	536991.55	4816412.87	338.60	1	D	A	59.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
5711	536991.55	4816412.87	338.60	1	N	A	-40.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5711	536991.55	4816412.87	338.60	1	E	A	-40.5	1.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
5713	536991.55	4816412.87	338.60	1	D	A	59.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5713	536991.55	4816412.87	338.60	1	N	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5713	536991.55	4816412.87	338.60	1	E	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
6086	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-22.6
6086	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-122.6
6086	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	20.2	0.0	0.0	-122.6
6088	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
6088	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6088	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
6089	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
6089	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
6089	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1692	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-13.0
1692	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-113.0
1692	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-113.0
2112	536905.81	4816461.03	340.40	0	D	A	59.5	4.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-18.6
2112	536905.81	4816461.03	340.40	0	N	A	-40.5	4.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-118.6
2112	536905.81	4816461.03	340.40	0	E	A	-40.5	4.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-118.6
2119	536911.77	4816464.13	340.40	0	D	A	59.5	10.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	23.9	0.0	0.0	-13.2
2119	536911.77	4816464.13	340.40	0	N	A	-40.5	10.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	23.9	0.0	0.0	-113.2
2119	536911.77	4816464.13	340.40	0	E	A	-40.5	10.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	23.9	0.0	0.0	-113.2
2159	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	24.3	0.0	0.0	-12.7
2159	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	24.3	0.0	0.0	-112.7
2159	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	24.3	0.0	0.0	-112.7
2311	536806.73	4816467.88	341.19	0	D	A	59.5	9.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-15.2
2311	536806.73	4816467.88	341.19	0	N	A	-40.5	9.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-115.2
2311	536806.73	4816467.88	341.19	0	E	A	-40.5	9.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-115.2
2319	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	24.5	0.0	0.0	-13.8
2319	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	24.5	0.0	0.0	-113.8
2319	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	24.5	0.0	0.0	-113.8
2376	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-17.2
2376	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-117.2
2376	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-117.2
2399	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-16.5
2399	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-116.5
2399	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-116.5
2526	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-16.2
2526	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-116.2
2526	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-116.2
2540	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.6	0.0	0.0	-13.6
2540	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.6	0.0	0.0	-113.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2540	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	23.6	0.0	0.0	-113.6
2599	536842.67	4816432.16	341.55	0	D	A	59.5	7.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-16.9
2599	536842.67	4816432.16	341.55	0	N	A	-40.5	7.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-116.9
2599	536842.67	4816432.16	341.55	0	E	A	-40.5	7.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-116.9
2605	536845.61	4816432.43	341.50	0	D	A	59.5	-1.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-25.9
2605	536845.61	4816432.43	341.50	0	N	A	-40.5	-1.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-125.9
2605	536845.61	4816432.43	341.50	0	E	A	-40.5	-1.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.6	0.0	0.0	-125.9
2612	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-14.2
2612	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-114.2
2612	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	24.1	0.0	0.0	-114.2
2645	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-16.5
2645	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-116.5
2645	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-116.5
2682	536809.90	4816456.07	341.21	0	D	A	59.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-22.3
2682	536809.90	4816456.07	341.21	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
2682	536809.90	4816456.07	341.21	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
2688	536810.95	4816453.32	341.27	0	D	A	59.5	6.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-19.0
2688	536810.95	4816453.32	341.27	0	N	A	-40.5	6.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-119.0
2688	536810.95	4816453.32	341.27	0	E	A	-40.5	6.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-119.0
2791	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	23.2	0.0	0.0	-13.9
2791	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	23.2	0.0	0.0	-113.9
2791	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	23.2	0.0	0.0	-113.9
2803	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-17.0
2803	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-117.0
2803	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-117.0
2825	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-12.0
2825	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-112.0
2825	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-112.0
2829	536989.46	4816484.70	339.63	1	D	A	59.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
2829	536989.46	4816484.70	339.63	1	N	A	-40.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2829	536989.46	4816484.70	339.63	1	E	A	-40.5	6.0	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2832	536994.94	4816485.38	339.55	1	D	A	59.5	8.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2832	536994.94	4816485.38	339.55	1	N	A	-40.5	8.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2832	536994.94	4816485.38	339.55	1	E	A	-40.5	8.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2847	536804.98	4816475.13	341.21	0	D	A	59.5	7.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	26.0	0.0	0.0	-16.9
2847	536804.98	4816475.13	341.21	0	N	A	-40.5	7.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	26.0	0.0	0.0	-116.9
2847	536804.98	4816475.13	341.21	0	E	A	-40.5	7.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	26.0	0.0	0.0	-116.9
2867	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-17.1
2867	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-117.1
2867	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-117.1
2874	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-15.8
2874	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-115.8
2874	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-115.8
2914	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-18.9
2914	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-118.9
2914	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-118.9
2936	536944.19	4816478.43	340.18	0	D	A	59.5	6.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	23.0	0.0	0.0	-16.4
2936	536944.19	4816478.43	340.18	0	N	A	-40.5	6.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	23.0	0.0	0.0	-116.4
2936	536944.19	4816478.43	340.18	0	E	A	-40.5	6.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	23.0	0.0	0.0	-116.4
2943	536948.06	4816479.70	340.14	0	D	A	59.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.9	0.0	0.0	-18.3
2943	536948.06	4816479.70	340.14	0	N	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.9	0.0	0.0	-118.3
2943	536948.06	4816479.70	340.14	0	E	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.9	0.0	0.0	-118.3
2961	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-18.1
2961	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-118.1
2961	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-118.1
3062	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-17.3
3062	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-117.3
3062	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-117.3
3154	536785.91	4816520.23	341.00	0	D	A	59.5	0.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-25.5
3154	536785.91	4816520.23	341.00	0	N	A	-40.5	0.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-125.5
3154	536785.91	4816520.23	341.00	0	E	A	-40.5	0.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-125.5
3161	536787.36	4816517.04	340.98	0	D	A	59.5	7.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-18.6
3161	536787.36	4816517.04	340.98	0	N	A	-40.5	7.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-118.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3161	536787.36	4816517.04	340.98	0	E	A	-40.5	7.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-118.6
3226	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-18.0
3226	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-118.0
3226	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-118.0
3308	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-18.1
3308	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-118.1
3308	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-118.1
3316	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	24.7	0.0	0.0	-16.6
3316	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	24.7	0.0	0.0	-116.6
3316	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	24.7	0.0	0.0	-116.6
3369	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-18.5
3369	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-118.5
3369	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-118.5
3394	536955.07	4816481.70	340.05	0	D	A	59.5	8.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	22.6	0.0	0.0	-15.0
3394	536955.07	4816481.70	340.05	0	N	A	-40.5	8.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	22.6	0.0	0.0	-115.0
3394	536955.07	4816481.70	340.05	0	E	A	-40.5	8.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	22.6	0.0	0.0	-115.0
3400	536958.38	4816482.61	340.02	0	D	A	59.5	-9.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-32.6
3400	536958.38	4816482.61	340.02	0	N	A	-40.5	-9.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-132.6
3400	536958.38	4816482.61	340.02	0	E	A	-40.5	-9.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-132.6
3497	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-20.1
3497	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-120.1
3497	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-120.1
3536	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-19.1
3536	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1
3536	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1
3605	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-17.2
3605	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.2
3605	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.2
3742	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-19.4
3742	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-119.4
3742	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-119.4
3748	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	21.8	0.0	0.0	-15.0
3748	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	21.8	0.0	0.0	-115.0
3748	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	21.8	0.0	0.0	-115.0
3753	536977.13	4816484.34	339.79	1	D	A	59.5	6.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
3753	536977.13	4816484.34	339.79	1	N	A	-40.5	6.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3753	536977.13	4816484.34	339.79	1	E	A	-40.5	6.0	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
3813	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-19.6
3813	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-119.6
3813	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-119.6
3827	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-20.0
3827	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-120.0
3827	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-120.0
3833	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-19.8
3833	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-119.8
3833	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-119.8
3863	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-15.1
3863	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-115.1
3863	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-115.1
3865	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
3865	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3865	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
3932	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-19.9
3932	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-119.9
3932	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-119.9
3972	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-20.1
3972	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-120.1
3972	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-120.1
3978	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-19.9
3978	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-119.9
3978	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-119.9
3998	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-20.1
3998	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-120.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3998	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-120.1
4017	536833.33	4816432.35	341.74	0	D	A	59.5	3.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-20.3
4017	536833.33	4816432.35	341.74	0	N	A	-40.5	3.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-120.3
4017	536833.33	4816432.35	341.74	0	E	A	-40.5	3.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.7	0.0	0.0	-120.3
4038	536931.30	4816473.51	340.33	0	D	A	59.5	5.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-17.8
4038	536931.30	4816473.51	340.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-117.8
4038	536931.30	4816473.51	340.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-117.8
4043	536933.24	4816474.28	340.31	0	D	A	59.5	-2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	23.3	0.0	0.0	-26.3
4043	536933.24	4816474.28	340.31	0	N	A	-40.5	-2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	23.3	0.0	0.0	-126.3
4043	536933.24	4816474.28	340.31	0	E	A	-40.5	-2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	23.3	0.0	0.0	-126.3
4072	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	22.1	0.0	0.0	-16.0
4072	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	22.1	0.0	0.0	-116.0
4072	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	22.1	0.0	0.0	-116.0
4116	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-20.5
4116	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-120.5
4116	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-120.5
4121	536909.97	4816644.63	339.64	0	D	A	59.5	2.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-28.4
4121	536909.97	4816644.63	339.64	0	N	A	-40.5	2.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
4121	536909.97	4816644.63	339.64	0	E	A	-40.5	2.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
4130	536905.75	4816643.91	339.72	0	D	A	59.5	8.4	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-22.3
4130	536905.75	4816643.91	339.72	0	N	A	-40.5	8.4	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-122.3
4130	536905.75	4816643.91	339.72	0	E	A	-40.5	8.4	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-122.3
4170	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-20.8
4170	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-120.8
4170	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-120.8
4176	536830.99	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-20.6
4176	536830.99	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-120.6
4176	536830.99	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-120.6
4181	536832.11	4816432.55	341.75	0	D	A	59.5	-19.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-43.5
4181	536832.11	4816432.55	341.75	0	N	A	-40.5	-19.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-143.5
4181	536832.11	4816432.55	341.75	0	E	A	-40.5	-19.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-143.5
4188	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-20.2
4188	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-120.2
4188	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-120.2
4194	536863.34	4816439.73	341.00	0	D	A	59.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-21.6
4194	536863.34	4816439.73	341.00	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-121.6
4194	536863.34	4816439.73	341.00	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-121.6
4199	536864.49	4816440.32	341.01	0	D	A	59.5	-1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-26.1
4199	536864.49	4816440.32	341.01	0	N	A	-40.5	-1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
4199	536864.49	4816440.32	341.01	0	E	A	-40.5	-1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
4263	536915.74	4816645.94	339.54	0	D	A	59.5	8.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-22.7
4263	536915.74	4816645.94	339.54	0	N	A	-40.5	8.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
4263	536915.74	4816645.94	339.54	0	E	A	-40.5	8.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
4269	536911.75	4816644.99	339.61	0	D	A	59.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-27.8
4269	536911.75	4816644.99	339.61	0	N	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-127.8
4269	536911.75	4816644.99	339.61	0	E	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.8	0.0	0.0	-127.8
4291	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-21.1
4291	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.1
4291	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-121.1
4309	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-17.8
4309	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-117.8
4309	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.4	0.0	0.0	-117.8
4327	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-22.1
4327	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.1
4327	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.1
4402	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-22.2
4402	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.2
4402	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.2
4410	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-21.1
4410	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-121.1
4410	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	26.8	0.0	0.0	-121.1
4438	536808.59	4816617.40	340.40	0	D	A	59.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-25.1
4438	536808.59	4816617.40	340.40	0	N	A	-40.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-125.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4438	536808.59	4816617.40	340.40	0	E	A	-40.5	5.0	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-125.1
4443	536805.85	4816616.17	340.40	0	D	A	59.5	4.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-25.6
4443	536805.85	4816616.17	340.40	0	N	A	-40.5	4.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
4443	536805.85	4816616.17	340.40	0	E	A	-40.5	4.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
4538	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-22.7
4538	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.7
4538	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-122.7
4744	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-22.9
4744	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-122.9
4744	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.9	0.0	0.0	-122.9
4749	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-21.3
4749	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-121.3
4749	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-121.3
4754	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.4	0.0	0.0	-18.1
4754	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.4	0.0	0.0	-118.1
4754	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.4	0.0	0.0	-118.1
4838	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-21.8
4838	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-121.8
4838	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-121.8
4852	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-23.4
4852	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-123.4
4852	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-123.4
4859	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-22.1
4859	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-122.1
4859	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-122.1
4877	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.2	0.0	0.0	-18.2
4877	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.2	0.0	0.0	-118.2
4877	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.2	0.0	0.0	-118.2
4898	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-22.2
4898	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-122.2
4898	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-122.2
4957	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-22.3
4957	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-122.3
4957	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-122.3
4985	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-23.8
4985	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
4985	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-123.8
5109	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-22.4
5109	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-122.4
5109	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-122.4
5188	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-22.6
5188	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-122.6
5188	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-122.6
5195	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-24.2
5195	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-124.2
5195	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-124.2
5217	536891.10	4816642.04	339.91	0	D	A	59.5	5.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-25.4
5217	536891.10	4816642.04	339.91	0	N	A	-40.5	5.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
5217	536891.10	4816642.04	339.91	0	E	A	-40.5	5.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
5221	536888.78	4816641.85	339.91	0	D	A	59.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-29.9
5221	536888.78	4816641.85	339.91	0	N	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-129.9
5221	536888.78	4816641.85	339.91	0	E	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-129.9
5232	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-24.3
5232	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.3
5232	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.3
5268	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-18.4
5268	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-118.4
5268	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-118.4
5270	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
5270	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5270	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
5282	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-23.1
5282	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5282	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.1
5323	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.8	0.0	0.0	-19.6
5323	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.8	0.0	0.0	-119.6
5323	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	22.8	0.0	0.0	-119.6
5359	536779.77	4816603.24	340.72	0	D	A	59.5	4.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
5359	536779.77	4816603.24	340.72	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5359	536779.77	4816603.24	340.72	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5366	536778.52	4816602.14	340.75	0	D	A	59.5	-3.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-33.1
5366	536778.52	4816602.14	340.75	0	N	A	-40.5	-3.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-133.1
5366	536778.52	4816602.14	340.75	0	E	A	-40.5	-3.4	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-133.1
5379	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-24.5
5379	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-124.5
5379	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-124.5
5455	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-24.3
5455	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-124.3
5455	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-124.3
5460	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-23.2
5460	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-123.2
5460	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-123.2
5476	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-24.8
5476	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5476	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5523	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-23.6
5523	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-123.6
5523	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-123.6
5545	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-23.7
5545	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5545	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5556	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-23.8
5556	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.8
5556	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.8
5564	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-25.2
5564	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
5564	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
5591	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
5591	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5591	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5595	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
5595	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5595	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5612	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-23.7
5612	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5612	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
5656	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-24.0
5656	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-124.0
5656	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-124.0
5682	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-24.1
5682	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-124.1
5682	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	25.9	0.0	0.0	-124.1
5724	536925.42	4816471.15	340.40	0	D	A	59.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-22.5
5724	536925.42	4816471.15	340.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-122.5
5724	536925.42	4816471.15	340.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-122.5
5727	536926.12	4816471.43	340.40	0	D	A	59.5	-5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-29.1
5727	536926.12	4816471.43	340.40	0	N	A	-40.5	-5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-129.1
5727	536926.12	4816471.43	340.40	0	E	A	-40.5	-5.6	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	23.5	0.0	0.0	-129.1
5747	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.8
5747	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.8
5747	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.8
5768	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-25.8
5768	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-125.8
5768	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-125.8
5774	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-20.9
5774	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-120.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5774	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	22.5	0.0	0.0	-120.9
5783	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.0
5783	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5783	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
5785	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	-20.8
5785	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	-120.8
5785	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	-120.8
5787	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-26.1
5787	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.1
5787	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-126.1
5791	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.1
5791	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.1
5791	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.1
5793	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.2
5793	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.2
5793	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.2
5796	536777.79	4816601.37	340.76	0	D	A	59.5	2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.5
5796	536777.79	4816601.37	340.76	0	N	A	-40.5	2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
5796	536777.79	4816601.37	340.76	0	E	A	-40.5	2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
5798	536777.03	4816600.53	340.78	0	D	A	59.5	-2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-32.0
5798	536777.03	4816600.53	340.78	0	N	A	-40.5	-2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-132.0
5798	536777.03	4816600.53	340.78	0	E	A	-40.5	-2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-132.0
5806	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-24.7
5806	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-124.7
5806	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.1	0.0	0.0	-124.7
5811	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-25.0
5811	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-125.0
5811	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-125.0
5898	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-26.3
5898	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
5898	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
5906	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-26.4
5906	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
5906	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
5914	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-26.5
5914	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-126.5
5914	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-126.5
5922	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-27.9
5922	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-127.9
5922	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-127.9
5946	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-28.3
5946	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-128.3
5946	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.3	0.0	0.0	-128.3
6048	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-28.6
6048	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-128.6
6048	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-128.6
6075	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-29.6
6075	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
6075	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
6095	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-30.4
6095	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-130.4
6095	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.1	0.0	0.0	-130.4
6171	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-31.5
6171	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-131.5
6171	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.2	0.0	0.0	-131.5
6175	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-32.2
6175	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-132.2
6175	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-132.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1745	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-10.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	I/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1745	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-117.6
1745	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-117.6
2436	536848.22	4816431.54	340.11	0	D	A	58.4	9.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-15.7
2436	536848.22	4816431.54	340.11	0	N	A	-48.6	9.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-122.7
2436	536848.22	4816431.54	340.11	0	E	A	-48.6	9.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-122.7
2442	536844.48	4816430.06	340.21	0	D	A	58.4	-8.1	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-32.7
2442	536844.48	4816430.06	340.21	0	N	A	-48.6	-8.1	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-139.7
2442	536844.48	4816430.06	340.21	0	E	A	-48.6	-8.1	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-139.7
2652	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-15.6
2652	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-122.5
2652	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-122.5
2811	536906.97	4816464.17	339.00	0	D	A	58.4	6.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-17.7
2811	536906.97	4816464.17	339.00	0	N	A	-48.6	6.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-124.7
2811	536906.97	4816464.17	339.00	0	E	A	-48.6	6.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-124.7
2818	536911.47	4816466.28	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.3	0.0	0.0	-16.3
2818	536911.47	4816466.28	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.3	0.0	0.0	-123.2
2818	536911.47	4816466.28	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.3	0.0	0.0	-123.2
2838	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-16.4
2838	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-123.4
2838	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-123.4
2907	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-16.9
2907	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.9
2907	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.9
3177	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	24.2	0.0	0.0	-15.7
3177	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	24.2	0.0	0.0	-122.6
3177	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	24.2	0.0	0.0	-122.6
3182	536876.32	4816460.89	339.12	1	D	A	58.4	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-32.2
3182	536876.32	4816460.89	339.12	1	N	A	-48.6	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-139.2
3182	536876.32	4816460.89	339.12	1	E	A	-48.6	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-139.2
3185	536877.59	4816457.73	339.21	1	D	A	58.4	8.2	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-21.2
3185	536877.59	4816457.73	339.21	1	N	A	-48.6	8.2	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-128.2
3185	536877.59	4816457.73	339.21	1	E	A	-48.6	8.2	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-128.2
3189	536876.29	4816460.96	339.12	1	D	A	58.4	-4.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-33.6
3189	536876.29	4816460.96	339.12	1	N	A	-48.6	-4.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-140.6
3189	536876.29	4816460.96	339.12	1	E	A	-48.6	-4.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-140.6
3193	536876.32	4816460.89	339.12	1	D	A	58.4	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-32.2
3193	536876.32	4816460.89	339.12	1	N	A	-48.6	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-139.2
3193	536876.32	4816460.89	339.12	1	E	A	-48.6	-2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-139.2
3211	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-14.8
3211	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-121.7
3211	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-121.7
3242	536831.18	4816436.47	340.12	0	D	A	58.4	5.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-19.2
3242	536831.18	4816436.47	340.12	0	N	A	-48.6	5.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-126.2
3242	536831.18	4816436.47	340.12	0	E	A	-48.6	5.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-126.2
3246	536833.72	4816435.86	340.13	0	D	A	58.4	1.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-23.3
3246	536833.72	4816435.86	340.13	0	N	A	-48.6	1.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-130.3
3246	536833.72	4816435.86	340.13	0	E	A	-48.6	1.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-130.3
3339	536844.98	4816436.00	339.95	0	D	A	58.4	5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-19.6
3339	536844.98	4816436.00	339.95	0	N	A	-48.6	5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.6
3339	536844.98	4816436.00	339.95	0	E	A	-48.6	5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.6
3344	536847.32	4816436.78	339.88	0	D	A	58.4	1.9	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-23.0
3344	536847.32	4816436.78	339.88	0	N	A	-48.6	1.9	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-130.0
3344	536847.32	4816436.78	339.88	0	E	A	-48.6	1.9	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-130.0
3452	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-18.0
3452	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-125.0
3452	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-125.0
3600	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-18.4
3600	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-125.4
3600	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-125.4
3732	536908.21	4816461.30	339.00	0	D	A	58.4	6.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-17.7
3732	536908.21	4816461.30	339.00	0	N	A	-48.6	6.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-124.7
3732	536908.21	4816461.30	339.00	0	E	A	-48.6	6.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-124.7
3736	536905.69	4816459.97	339.00	0	D	A	58.4	2.3	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-21.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3736	536905.69	4816459.97	339.00	0	N	A	-48.6	2.3	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-128.4
3736	536905.69	4816459.97	339.00	0	E	A	-48.6	2.3	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.4	0.0	0.0	-128.4
3761	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-18.6
3761	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-125.6
3761	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-125.6
3851	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-18.9
3851	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-125.9
3851	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-125.9
3857	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-19.0
3857	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-126.0
3857	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-126.0
3872	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-19.5
3872	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-126.5
3872	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-126.5
3887	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-18.8
3887	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-125.8
3887	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	59.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-125.8
4078	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-19.9
4078	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-126.9
4078	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-126.9
4109	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-19.4
4109	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-126.4
4109	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-126.4
4303	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-19.9
4303	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-126.9
4303	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-126.9
4480	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-20.5
4480	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-127.5
4480	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-127.5
4487	536894.14	4816470.31	339.04	0	D	A	58.4	4.9	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-21.7
4487	536894.14	4816470.31	339.04	0	N	A	-48.6	4.9	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-128.7
4487	536894.14	4816470.31	339.04	0	E	A	-48.6	4.9	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-128.7
4494	536894.89	4816468.61	339.08	0	D	A	58.4	-1.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	24.0	0.0	0.0	-26.1
4494	536894.89	4816468.61	339.08	0	N	A	-48.6	-1.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	24.0	0.0	0.0	-133.1
4494	536894.89	4816468.61	339.08	0	E	A	-48.6	-1.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	24.0	0.0	0.0	-133.1
4499	536893.87	4816470.92	339.02	1	D	A	58.4	2.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
4499	536893.87	4816470.92	339.02	1	N	A	-48.6	2.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
4499	536893.87	4816470.92	339.02	1	E	A	-48.6	2.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
4590	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-21.1
4590	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-128.0
4590	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-128.0
4710	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-21.3
4710	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-128.3
4710	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-128.3
4717	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-21.1
4717	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-128.1
4717	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-128.1
4845	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-21.3
4845	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-128.2
4845	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-128.2
4866	536864.19	4816438.65	339.65	0	D	A	58.4	2.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-22.8
4866	536864.19	4816438.65	339.65	0	N	A	-48.6	2.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-129.8
4866	536864.19	4816438.65	339.65	0	E	A	-48.6	2.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-129.8
4871	536863.18	4816438.14	339.65	0	D	A	58.4	-1.8	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-26.7
4871	536863.18	4816438.14	339.65	0	N	A	-48.6	-1.8	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-133.7
4871	536863.18	4816438.14	339.65	0	E	A	-48.6	-1.8	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-133.7
5183	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-22.2
5183	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-129.2
5183	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-129.2
5226	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.5	0.0	0.0	-19.9
5226	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.5	0.0	0.0	-126.9
5226	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.5	0.0	0.0	-126.9
5228	536903.17	4816462.55	339.01	1	D	A	58.4	-0.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-30.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5228	536903.17	4816462.55	339.01	1	N	A	-48.6	-0.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.6
5228	536903.17	4816462.55	339.01	1	E	A	-48.6	-0.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.6
5237	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-20.2
5237	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-127.2
5237	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-127.2
5240	536896.84	4816464.57	339.10	1	D	A	58.4	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-33.2
5240	536896.84	4816464.57	339.10	1	N	A	-48.6	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
5240	536896.84	4816464.57	339.10	1	E	A	-48.6	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
5243	536896.84	4816464.57	339.10	1	D	A	58.4	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
5243	536896.84	4816464.57	339.10	1	N	A	-48.6	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
5243	536896.84	4816464.57	339.10	1	E	A	-48.6	-3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
5290	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-22.1
5290	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-129.1
5290	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-129.1
5308	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-20.2
5308	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-127.1
5308	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-127.1
5311	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-26.1
5311	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.1
5311	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.1
5314	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-22.4
5314	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-129.4
5314	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-129.4
5318	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-22.7
5318	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-129.7
5318	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-129.7
5328	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-22.2
5328	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-129.2
5328	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-129.2
5375	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-22.6
5375	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-129.6
5375	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-129.6
5444	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	24.3	0.0	0.0	-21.2
5444	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	24.3	0.0	0.0	-128.2
5444	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	24.3	0.0	0.0	-128.2
5446	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-26.3
5446	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.3
5446	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.3
5449	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
5449	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5449	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
5452	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-26.3
5452	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.3
5452	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-133.3
5529	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-20.9
5529	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-127.9
5529	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-127.9
5531	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-26.4
5531	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
5531	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
5535	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-26.4
5535	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
5535	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
5560	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-23.6
5560	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-130.6
5560	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-130.6
5601	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-23.6
5601	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-130.6
5601	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-130.6
5650	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-21.4
5650	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-128.4
5650	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-128.4
5675	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-23.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5675	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-130.8
5675	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-130.8
5694	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-23.6
5694	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-130.6
5694	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-130.6
5720	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-24.0
5720	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-131.0
5720	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-131.0
5739	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-24.1
5739	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-131.1
5739	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-131.1
5757	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-22.2
5757	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-129.1
5757	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-129.1
5762	536865.13	4816443.82	339.51	0	D	A	58.4	1.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-24.1
5762	536865.13	4816443.82	339.51	0	N	A	-48.6	1.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-131.1
5762	536865.13	4816443.82	339.51	0	E	A	-48.6	1.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-131.1
5764	536865.74	4816444.10	339.51	0	D	A	58.4	-10.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-35.4
5764	536865.74	4816444.10	339.51	0	N	A	-48.6	-10.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-142.3
5764	536865.74	4816444.10	339.51	0	E	A	-48.6	-10.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-142.3
5779	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-24.4
5779	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-131.4
5779	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	26.4	0.0	0.0	-131.4
5820	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-24.8
5820	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-131.7
5820	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-131.7
5862	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-23.5
5862	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-130.5
5862	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.2	0.0	0.0	-130.5
5865	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-25.8
5865	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-132.8
5865	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-132.8
5874	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-25.6
5874	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-132.6
5874	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-132.6
5881	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-25.9
5881	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-132.9
5881	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-132.9
5887	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-23.8
5887	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-130.8
5887	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-130.8
5903	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-26.2
5903	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-133.2
5903	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-133.2
5926	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-23.9
5926	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-130.9
5926	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-130.9
5927	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-29.8
5927	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-136.8
5927	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-136.8
5928	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-29.8
5928	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-136.8
5928	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-136.8
5942	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-25.9
5942	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-132.9
5942	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-132.9
5954	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-26.8
5954	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-133.8
5954	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-133.8
6030	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-26.1
6030	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-133.1
6030	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-133.1
6034	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-24.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
6034	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-131.3
6034	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.6	0.0	0.0	-131.3
6035	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-30.2
6035	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.2
6035	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	60.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.2
6039	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-26.2
6039	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-133.2
6039	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-133.2
6044	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-27.0
6044	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-134.0
6044	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.3	0.0	0.0	-134.0
6050	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-27.2
6050	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-134.2
6050	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-134.2
6053	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-25.1
6053	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-132.0
6053	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	59.9	1.1	-3.0	0.0	0.0	24.1	0.0	0.0	-132.0
6058	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-24.9
6058	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-131.9
6058	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	23.7	0.0	0.0	-131.9
6059	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-30.7
6059	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.7
6059	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.3	-137.7
6061	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-30.5
6061	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-137.5
6061	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-137.5
6064	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-24.6
6064	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-131.6
6064	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-131.6
6072	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-25.0
6072	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-132.0
6072	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-132.0
6078	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-28.3
6078	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-135.3
6078	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-135.3
6093	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-25.6
6093	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-132.6
6093	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-132.6
6104	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-26.6
6104	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-133.5
6104	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-133.5
6107	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-27.0
6107	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-134.0
6107	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-134.0
6110	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-30.0
6110	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-137.0
6110	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-137.0
6113	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-27.5
6113	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-134.5
6113	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.2	0.0	0.0	-134.5
6179	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-29.0
6179	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-136.0
6179	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-136.0
6182	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-30.2
6182	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-137.2
6182	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	60.8	1.2	-3.0	0.0	0.0	23.1	0.0	0.0	-137.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3435	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-13.6
3435	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-113.6
3435	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.1	0.0	0.0	-113.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3440	536995.34	4816487.48	339.50	1	D	A	59.5	6.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3440	536995.34	4816487.48	339.50	1	N	A	-40.5	6.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3440	536995.34	4816487.48	339.50	1	E	A	-40.5	6.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3444	536991.60	4816486.45	339.57	1	D	A	59.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
3444	536991.60	4816486.45	339.57	1	N	A	-40.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
3444	536991.60	4816486.45	339.57	1	E	A	-40.5	5.5	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
3769	536957.48	4816510.17	339.53	0	D	A	59.5	8.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-16.5
3769	536957.48	4816510.17	339.53	0	N	A	-40.5	8.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-116.5
3769	536957.48	4816510.17	339.53	0	E	A	-40.5	8.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-116.5
3839	536959.70	4816522.32	339.50	0	D	A	59.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-20.0
3839	536959.70	4816522.32	339.50	0	N	A	-40.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-120.0
3839	536959.70	4816522.32	339.50	0	E	A	-40.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-120.0
3844	536960.40	4816525.46	339.50	0	D	A	59.5	5.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-19.7
3844	536960.40	4816525.46	339.50	0	N	A	-40.5	5.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-119.7
3844	536960.40	4816525.46	339.50	0	E	A	-40.5	5.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-119.7
4009	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-15.3
4009	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-115.3
4009	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	21.4	0.0	0.0	-115.3
4012	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
4012	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4012	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
4049	536964.17	4816505.73	339.53	0	D	A	59.5	3.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-20.3
4049	536964.17	4816505.73	339.53	0	N	A	-40.5	3.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-120.3
4049	536964.17	4816505.73	339.53	0	E	A	-40.5	3.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-120.3
4053	536963.37	4816508.33	339.50	0	D	A	59.5	4.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-19.4
4053	536963.37	4816508.33	339.50	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-119.4
4053	536963.37	4816508.33	339.50	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-119.4
4529	536955.69	4816510.42	339.56	0	D	A	59.5	6.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-18.3
4529	536955.69	4816510.42	339.56	0	N	A	-40.5	6.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-118.3
4529	536955.69	4816510.42	339.56	0	E	A	-40.5	6.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-118.3
4547	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-18.4
4547	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-118.4
4547	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-118.4
4636	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.7	0.0	0.0	-18.0
4636	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.7	0.0	0.0	-118.0
4636	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.7	0.0	0.0	-118.0
4686	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-18.7
4686	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-118.7
4686	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-118.7
4831	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-19.1
4831	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-119.1
4831	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-119.1
4919	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-19.2
4919	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-119.2
4919	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-119.2
5005	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.8	0.0	0.0	-18.1
5005	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.8	0.0	0.0	-118.1
5005	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.8	0.0	0.0	-118.1
5008	536979.00	4816487.24	339.71	1	D	A	59.5	3.2	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
5008	536979.00	4816487.24	339.71	1	N	A	-40.5	3.2	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5008	536979.00	4816487.24	339.71	1	E	A	-40.5	3.2	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5030	536971.19	4816491.72	339.73	0	D	A	59.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.2	0.0	0.0	-18.6
5030	536971.19	4816491.72	339.73	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.2	0.0	0.0	-118.6
5030	536971.19	4816491.72	339.73	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.2	0.0	0.0	-118.6
5161	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-18.1
5161	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-118.1
5161	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.6	0.0	0.0	-118.1
5163	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
5163	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5163	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
5333	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-18.9
5333	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-118.9
5333	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-118.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5357	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-20.1
5357	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-120.1
5357	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-120.1
5370	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.9	0.0	0.0	-20.0
5370	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.9	0.0	0.0	-120.0
5370	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.9	0.0	0.0	-120.0
5519	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-20.7
5519	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-120.7
5519	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-120.7
5540	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.3	0.0	0.0	-19.9
5540	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.3	0.0	0.0	-119.9
5540	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.3	0.0	0.0	-119.9
5661	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-21.3
5661	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-121.3
5661	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-121.3
5678	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-21.2
5678	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-121.2
5678	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-121.2
5704	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-21.1
5704	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-121.1
5704	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-121.1
5716	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.4	0.0	0.0	-20.5
5716	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.4	0.0	0.0	-120.5
5716	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.4	0.0	0.0	-120.5
5743	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-21.4
5743	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-121.4
5743	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-121.4
5781	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-21.6
5781	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-121.6
5781	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-121.6
5786	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.0	0.0	0.0	-20.6
5786	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.0	0.0	0.0	-120.6
5786	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.0	0.0	0.0	-120.6
5801	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-21.9
5801	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-121.9
5801	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-121.9
5804	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-22.2
5804	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-122.2
5804	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.3	0.0	0.0	-122.2
5809	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.6	0.0	0.0	-21.5
5809	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.6	0.0	0.0	-121.5
5809	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	22.6	0.0	0.0	-121.5
5824	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-21.6
5824	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-121.6
5824	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-121.6
5828	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-22.4
5828	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-122.4
5828	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.1	0.0	0.0	-122.4
5831	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.5	0.0	0.0	-20.7
5831	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.5	0.0	0.0	-120.7
5831	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	21.5	0.0	0.0	-120.7
5832	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
5832	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5832	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
5836	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-22.3
5836	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.3
5836	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.3
5840	536964.98	4816533.19	339.45	0	D	A	59.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-23.0
5840	536964.98	4816533.19	339.45	0	N	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-123.0
5840	536964.98	4816533.19	339.45	0	E	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-123.0
5841	536965.78	4816533.63	339.43	0	D	A	59.5	-7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-32.8
5841	536965.78	4816533.63	339.43	0	N	A	-40.5	-7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-132.8
5841	536965.78	4816533.63	339.43	0	E	A	-40.5	-7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-132.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5844	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-21.8
5844	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-121.8
5844	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-121.8
5846	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-22.5
5846	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.5
5846	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.5
5850	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-22.7
5850	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.7
5850	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-122.7
5870	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-23.0
5870	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.0
5870	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.0
5878	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.1	0.0	0.0	-22.0
5878	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.1	0.0	0.0	-122.0
5878	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.1	0.0	0.0	-122.0
5884	536964.01	4816517.02	339.41	0	D	A	59.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-23.0
5884	536964.01	4816517.02	339.41	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.0
5884	536964.01	4816517.02	339.41	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.0
5891	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-23.3
5891	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-123.3
5891	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.2	0.0	0.0	-123.3
5895	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-23.1
5895	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.1
5895	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.1
5910	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-23.4
5910	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.4
5910	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.4
5918	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-23.6
5918	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.6
5918	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	23.0	0.0	0.0	-123.6
5933	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-23.9
5933	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-123.9
5933	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-123.9
5935	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-24.0
5935	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.0
5935	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.0
5939	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-23.9
5939	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-123.9
5939	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-123.9
6041	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-24.4
6041	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.4
6041	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.4
6055	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-24.7
6055	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.7
6055	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	23.2	0.0	0.0	-124.7

Receiver
Name: Building B2 Tower - East Facade
ID: POR
X: 536806.01 m
Y: 4816325.88 m
Z: 372.57 m

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	47.1
2	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	41.1
2	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	48.0	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	47.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
57	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	48.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	46.7
57	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	48.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	40.6
57	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	48.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	46.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
62	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	52.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
62	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	52.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	36.0
62	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	52.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	42.0
66	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	6.4
66	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	0.4
66	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	6.4

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
75	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.6	0.0	0.0	15.5
75	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.6	0.0	0.0	12.5
75	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.6	0.0	0.0	15.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
83	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	13.0	0.0	0.0	25.3
83	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	13.0	0.0	0.0	22.3
83	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	57.6	1.4	-3.0	0.0	0.0	13.0	0.0	0.0	25.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
90	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	40.4
90	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	34.4
90	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	47.7	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	40.4
93	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
93	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
93	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	56.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	1.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
97	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	48.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	39.3
97	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	48.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	33.3
97	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	48.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	39.3

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
106	536415.97	4816336.50	359.79	0	D	A	97.3	0.0	0.0	0.0	0.0	62.8	1.1	-3.0	0.0	0.0	21.5	0.0	0.0	14.8
106	536415.97	4816336.50	359.79	0	N	A	97.3	0.0	-3.0	0.0	0.0	62.8	1.1	-3.0	0.0	0.0	21.5	0.0	0.0	11.8
106	536415.97	4816336.50	359.79	0	E	A	97.3	0.0	0.0	0.0	0.0	62.8	1.1	-3.0	0.0	0.0	21.5	0.0	0.0	14.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
109	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.1
109	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
109	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
114	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.0
114	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	32.0
114	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.0
117	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	0.8
117	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
117	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	0.8

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
130	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	52.6	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.3
130	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	52.6	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.3
130	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	52.6	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
135	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.6
135	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.6
135	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.6
138	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0
138	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
138	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
141	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
141	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	30.8
141	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
156	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.9
156	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.9
156	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	53.1	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.9
158	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	54.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.8	2.9
158	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	54.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.8	2.9
158	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	54.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.8	2.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
160	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	47.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.3
160	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	47.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.3
160	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	47.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.3
162	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
162	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
162	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
168	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	13.8
168	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-174.2
168	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-174.2
171	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	0.0	0.0	0.0	62.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	12.1
171	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	62.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-175.9
171	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	62.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-175.9

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
175	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.1
175	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.1
175	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.1
179	536912.04	4816588.26	347.50	1	D	A	94.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	6.5
179	536912.04	4816588.26	347.50	1	N	A	94.5	0.0	-6.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	0.5
179	536912.04	4816588.26	347.50	1	E	A	94.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	6.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
181	536660.95	4816008.64	345.75	0	D	A	101.5	0.0	0.0	0.0	0.0	61.9	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	12.5
181	536660.95	4816008.64	345.75	0	N	A	101.5	0.0	-188.0	0.0	0.0	61.9	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-175.5
181	536660.95	4816008.64	345.75	0	E	A	101.5	0.0	-188.0	0.0	0.0	61.9	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-175.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
185	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
185	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.8
185	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
190	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
190	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.8
190	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
192	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3
192	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
192	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
195	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.6
195	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	30.6
195	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.6
197	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.4
197	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.4
197	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
198	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.8
198	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	29.8
198	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.8
201	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
201	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.3
201	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
205	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.6
205	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	29.6
205	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.6
207	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
207	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.3
207	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
209	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.5
209	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	29.5
209	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
212	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.1
212	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	29.1
212	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.1
215	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1
215	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
215	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.1

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
226	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	8.3
226	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	-172.0
226	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	8.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
229	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.3
229	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	28.3
229	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	50.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.3
231	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
231	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-8.5
231	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
245	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.2	0.0	0.0	8.1
245	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.2	0.0	0.0	2.1
245	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.2	0.0	0.0	8.1

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
256	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	59.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	7.4
256	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	59.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	-172.8
256	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	59.1	2.2	-3.0	0.0	0.0	26.6	0.0	0.0	7.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
269	536660.48	4816041.55	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	25.6	0.0	0.0	7.2
269	536660.48	4816041.55	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	25.6	0.0	0.0	1.2
269	536660.48	4816041.55	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	61.1	1.5	-2.9	0.0	0.0	25.6	0.0	0.0	7.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
280	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	7.8
280	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	1.8
280	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	7.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
285	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	50.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.4
285	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	50.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.4
285	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	50.8	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.4

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
297	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.7	0.0	0.0	5.7
297	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.7	0.0	0.0	-0.3
297	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.7	0.0	0.0	5.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
301	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
301	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
301	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
304	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
304	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.1
304	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
306	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
306	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.1
306	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
309	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
309	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.2
309	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.3
313	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
313	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
313	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
323	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	22.3	0.0	0.0	11.5
323	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	22.3	0.0	0.0	-176.5
323	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	22.3	0.0	0.0	11.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
325	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2
325	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2
325	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	53.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
328	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.7
328	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.7
328	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.7
330	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.6
330	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.6
330	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	56.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.6

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
335	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	22.8	0.0	0.0	4.7
335	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	22.8	0.0	0.0	4.7
335	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.4	0.5	-3.0	0.0	0.0	22.8	0.0	0.0	4.7

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
346	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	17.5	0.0	0.0	9.4
346	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	17.5	0.0	0.0	9.4
346	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	17.5	0.0	0.0	9.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
357	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	17.7	0.0	0.0	9.2
357	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	17.7	0.0	0.0	9.2
357	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	17.7	0.0	0.0	9.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
365	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.2	0.0	0.0	5.2
365	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.2	0.0	0.0	5.2
365	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.2	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
370	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.3
370	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.7
370	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.7
373	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	57.6	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.7
373	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	57.6	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.3
373	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	57.6	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.3

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
383	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.9	0.0	0.0	4.7
383	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.9	0.0	0.0	-1.3
383	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.9	0.0	0.0	4.7

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
394	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.7	0.5	-3.0	0.0	0.0	19.2	0.0	0.0	8.0
394	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.7	0.5	-3.0	0.0	0.0	19.2	0.0	0.0	8.0
394	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.7	0.5	-3.0	0.0	0.0	19.2	0.0	0.0	8.0

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
401	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	4.4
401	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-1.6

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
401	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	4.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
404	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.1
404	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.9
404	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.9
408	536867.83	4816521.17	347.00	1	D	A	90.0	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.5
408	536867.83	4816521.17	347.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.5
408	536867.83	4816521.17	347.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
411	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
411	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
411	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
422	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	20.1	0.0	0.0	6.8
422	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	20.1	0.0	0.0	6.8
422	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	20.1	0.0	0.0	6.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
425	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
425	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
425	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	56.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
428	536904.16	4816494.80	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	57.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
428	536904.16	4816494.80	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	57.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7
428	536904.16	4816494.80	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	57.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
430	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.7
430	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
430	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
432	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.0
432	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-184.0
432	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-184.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
434	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.6
434	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.4
434	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.4
437	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	58.3	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.0
437	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	58.3	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-184.0
437	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	58.3	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-184.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
441	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
441	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
441	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
443	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.5
443	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
443	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
444	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
444	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
444	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
446	536895.35	4816513.18	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
446	536895.35	4816513.18	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2
446	536895.35	4816513.18	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
456	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	6.6
456	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-178.4
456	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-178.4
460	536507.11	4816057.67	350.67	1	D	A	98.0	0.0	-3.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	4.3
460	536507.11	4816057.67	350.67	1	N	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	-180.7
460	536507.11	4816057.67	350.67	1	E	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	-180.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
468	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	1.2
468	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	1.2
468	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	24.3	0.0	0.0	1.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
472	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
472	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
472	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
479	536885.33	4816534.46	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3
479	536885.33	4816534.46	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3
479	536885.33	4816534.46	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
481	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.6
481	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.6
481	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.6
484	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3
484	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3
484	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
492	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	58.7	4.4	-3.0	0.0	0.0	27.4	0.0	0.0	-1.3
492	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	58.7	4.4	-3.0	0.0	0.0	27.4	0.0	0.0	-171.5
492	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	58.7	4.4	-3.0	0.0	0.0	27.4	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
500	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	3.8
500	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-184.2
500	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-184.2
502	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	62.2	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
502	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-185.5

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
502	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-185.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
505	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.7
505	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	21.7
505	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
508	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
508	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
508	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
511	536842.61	4816561.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.1
511	536842.61	4816561.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.1
511	536842.61	4816561.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
514	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
514	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
514	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
518	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.8
518	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.8
518	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
530	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	1.1
530	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	-4.9
530	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	26.2	0.0	0.0	1.1

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
538	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-2.0
538	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-172.2
538	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-2.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
549	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.8	0.0	0.0	26.2	0.0	0.0	0.7
549	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.8	0.0	0.0	26.2	0.0	0.0	-5.4
549	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.8	0.0	0.0	26.2	0.0	0.0	0.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
551	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.2
551	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	21.2
551	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
556	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
556	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.9
556	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
560	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
560	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.9
560	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
563	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.3
563	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.3
563	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.3
565	536831.48	4816585.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.9
565	536831.48	4816585.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.9
565	536831.48	4816585.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.9

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
577	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	2.0
577	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	-4.0
577	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	2.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
580	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
580	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
580	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
583	536866.53	4816583.53	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.7
583	536866.53	4816583.53	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.7
583	536866.53	4816583.53	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.7

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
590	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	1.8
590	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	-4.2
590	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	24.7	0.0	0.0	1.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
595	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
595	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
595	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
598	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.9
598	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.9
598	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
599	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
599	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	22.1
599	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
600	536918.59	4816552.53	345.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.4
600	536918.59	4816552.53	345.25	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.4
600	536918.59	4816552.53	345.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.4

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
601	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
601	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
601	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
607	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
607	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
607	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
610	536845.16	4816595.57	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.3
610	536845.16	4816595.57	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.3
610	536845.16	4816595.57	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.1	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
620	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	18.2	0.0	0.0	5.6
620	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	18.2	0.0	0.0	5.6
620	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	18.2	0.0	0.0	5.6

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
623	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
623	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
623	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	26.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
636	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	60.5	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	6.6
636	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.5	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.4
636	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.5	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
643	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	1.2
643	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-4.8
643	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	1.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
650	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	6.5
650	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.5
650	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
656	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.8	0.0	0.0	25.8	0.0	0.0	-3.0
656	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.8	0.0	0.0	25.8	0.0	0.0	-3.0
656	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	60.7	1.4	-2.8	0.0	0.0	25.8	0.0	0.0	-3.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
665	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	6.4
665	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.6
665	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	25.1	0.0	0.0	-181.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
675	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.7	0.0	0.0	-3.2
675	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.7	0.0	0.0	-3.2
675	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.7	0.0	0.0	-3.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
684	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-2.8	0.0	0.0	25.6	0.0	0.0	-3.2
684	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-2.8	0.0	0.0	25.6	0.0	0.0	-3.2
684	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	61.0	1.4	-2.8	0.0	0.0	25.6	0.0	0.0	-3.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
694	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.9	0.0	0.0	6.3
694	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.9	0.0	0.0	-181.7
694	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.9	0.0	0.0	-181.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
702	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	57.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
702	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	57.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
702	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	57.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
703	536869.70	4816527.58	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4
703	536869.70	4816527.58	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4
703	536869.70	4816527.58	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
711	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	6.4
711	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	-181.6
711	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	-181.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
717	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	20.9	0.0	0.0	4.3
717	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	20.9	0.0	0.0	-1.7
717	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	20.9	0.0	0.0	4.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
721	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
721	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.6
721	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.6
723	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	56.5	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-1.0
723	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	56.5	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-189.0
723	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	56.5	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-189.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
725	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
725	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
725	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
726	536886.90	4816613.22	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.8
726	536886.90	4816613.22	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.8
726	536886.90	4816613.22	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
732	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.5	0.0	0.0	6.5
732	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.5	0.0	0.0	-181.5
732	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.5	0.0	0.0	-181.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
738	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	25.2	0.0	0.0	-3.0
738	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	25.2	0.0	0.0	-3.0
738	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	61.3	1.5	-2.9	0.0	0.0	25.2	0.0	0.0	-3.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
749	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	6.6
749	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	-181.4
749	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	-181.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
752	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.2
752	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
752	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
763	536871.56	4816492.87	346.00	1	D	A	85.0	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	0.7
763	536871.56	4816492.87	346.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	-187.3
763	536871.56	4816492.87	346.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	-187.3

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
766	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.8
766	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.8
766	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.8

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
775	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.8	0.0	0.0	-1.7
775	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.8	0.0	0.0	-7.7
775	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.8	0.0	0.0	-1.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
782	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-2.6
782	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-8.6
782	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-2.6
784	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.6
784	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-10.6
784	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.6

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
787	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	30.3
787	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-146.9
787	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	53.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-146.9
794	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	54.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	0.6
794	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	54.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-176.6
794	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	54.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-176.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
835	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-2.6
835	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-8.6
835	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-2.6
839	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.7
839	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-10.7
839	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
842	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	30.7
842	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-157.3
842	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-157.3
844	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.3
844	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.7
844	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
845	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	30.5
845	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.5
845	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.5
848	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.2
848	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.8
848	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
859	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-3.0
859	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-9.0
859	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-3.0
862	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-5.7
862	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-11.7
862	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.8	-5.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
865	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	30.4
865	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.6
865	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	57.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.6
867	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.1
867	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.9
867	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
872	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.5
872	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	18.5
872	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.5
875	536917.05	4816573.37	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.1
875	536917.05	4816573.37	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-11.1
875	536917.05	4816573.37	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
882	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0
882	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-9.0
882	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0
885	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.2
885	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-11.2
885	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
888	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
888	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
888	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
890	536918.65	4816580.36	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.3

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
890	536918.65	4816580.36	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-11.3
890	536918.65	4816580.36	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
899	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	60.3	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	5.3
899	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	60.3	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	-182.7
899	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	60.3	0.9	-3.0	0.0	0.0	24.5	0.0	0.0	-182.7

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
903	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
903	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.1
903	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	60.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
907	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.4
907	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-11.5
907	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.4

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
910	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
910	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
910	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
912	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.1	-5.7
912	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.1	-11.7
912	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.1	-5.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
921	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	62.2	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.1
921	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	62.2	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.1
921	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	62.2	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.1
924	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.6	-10.0
924	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.6	-10.0
924	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.6	-10.0

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
933	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.6	0.0	0.0	-3.6
933	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.6	0.0	0.0	-3.6
933	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.6	0.0	0.0	-3.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
936	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
936	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
936	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.6
937	536861.54	4816601.66	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9
937	536861.54	4816601.66	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9
937	536861.54	4816601.66	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
950	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	23.7	0.0	0.0	-0.9
950	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	23.7	0.0	0.0	-6.9
950	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	23.7	0.0	0.0	-0.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
953	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.2
953	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.2
953	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.2
955	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	60.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.4
955	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	60.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.4
955	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	60.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
958	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
958	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
958	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
959	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
959	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
959	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
960	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
960	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
960	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
963	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.6
963	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.6
963	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
968	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	4.7
968	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	-1.3
968	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	4.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
973	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-0.6
973	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-6.6
973	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	22.5	0.0	0.0	-0.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
981	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.7	0.0	0.0	3.1
981	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.7	0.0	0.0	-2.9
981	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.7	0.0	0.0	3.1

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
986	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.8	0.0	0.0	-3.4
986	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.8	0.0	0.0	-6.4
986	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	23.8	0.0	0.0	-3.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
994	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	19.0	0.0	0.0	2.6
994	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	19.0	0.0	0.0	-3.4
994	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	19.0	0.0	0.0	2.6

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1001	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.7	0.0	0.0	-3.4
1001	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.7	0.0	0.0	-6.4
1001	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.7	0.0	0.0	-3.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1007	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-5.7
1007	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-11.8
1007	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-5.7
1010	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-7.6
1010	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-13.6
1010	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-7.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1016	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	0.4
1016	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	-5.6
1016	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	0.4

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1019	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	57.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	26.8
1019	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	57.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-150.4
1019	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	57.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-150.4
1021	536990.82	4816395.92	338.40	1	D	A	93.1	0.0	-10.8	0.0	0.0	61.3	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
1021	536990.82	4816395.92	338.40	1	N	A	93.1	0.0	-188.0	0.0	0.0	61.3	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-184.4
1021	536990.82	4816395.92	338.40	1	E	A	93.1	0.0	-188.0	0.0	0.0	61.3	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-184.4

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1027	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	-4.8
1027	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.5	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	-10.8
1027	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	-4.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1032	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-5.8
1032	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-11.9
1032	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-5.8
1034	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-8.0
1034	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-14.0
1034	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-8.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1045	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-5.2
1045	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-11.2
1045	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-5.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1053	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.7	0.0	0.0	26.1	0.0	0.0	-5.3
1053	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-2.7	0.0	0.0	26.1	0.0	0.0	-11.3
1053	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.7	0.0	0.0	26.1	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1061	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.5	0.0	0.0	25.9	0.0	0.0	-5.4
1061	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-2.5	0.0	0.0	25.9	0.0	0.0	-11.4
1061	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.5	0.0	0.0	25.9	0.0	0.0	-5.4

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1072	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	25.6	0.0	0.0	-5.0
1072	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	25.6	0.0	0.0	-11.0
1072	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	25.6	0.0	0.0	-5.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1081	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-5.3
1081	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.0	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-11.4
1081	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	63.0	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1085	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-5.5
1085	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-11.5
1085	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.7	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1105	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-0.7
1105	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-188.7
1105	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	23.6	0.0	0.0	-0.7

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1107	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
1107	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-152.1
1107	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-152.1
1108	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
1108	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.3
1108	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.3

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1115	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.3
1115	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.3
1115	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1127	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	23.9	0.0	0.0	-1.9
1127	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	23.9	0.0	0.0	-189.9
1127	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	23.9	0.0	0.0	-1.9

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1138	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.4
1138	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.4
1138	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.5	0.0	0.0	-6.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1149	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
1149	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
1149	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
1150	536503.25	4816045.85	353.78	1	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3
1150	536503.25	4816045.85	353.78	1	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3
1150	536503.25	4816045.85	353.78	1	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1157	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	24.4	0.0	0.0	-0.9
1157	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	24.4	0.0	0.0	-181.1
1157	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	24.4	0.0	0.0	-181.1

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1166	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.4	0.0	0.0	-7.8
1166	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.4	0.0	0.0	-195.8
1166	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.4	0.0	0.0	-7.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1175	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-5.7
1175	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-193.7
1175	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-193.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1180	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	18.5
1180	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.5
1180	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.5
1183	536900.41	4816457.17	339.12	1	D	A	58.4	10.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
1183	536900.41	4816457.17	339.12	1	N	A	-48.6	10.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1183	536900.41	4816457.17	339.12	1	E	A	-48.6	10.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1184	536891.52	4816452.47	339.34	1	D	A	58.4	9.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1184	536891.52	4816452.47	339.34	1	N	A	-48.6	9.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1184	536891.52	4816452.47	339.34	1	E	A	-48.6	9.9	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1188	536891.10	4816452.25	339.35	1	D	A	58.4	1.2	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-22.9
1188	536891.10	4816452.25	339.35	1	N	A	-48.6	1.2	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-129.9
1188	536891.10	4816452.25	339.35	1	E	A	-48.6	1.2	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-129.9
1192	536888.94	4816451.10	339.41	1	D	A	58.4	5.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-18.5
1192	536888.94	4816451.10	339.41	1	N	A	-48.6	5.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-125.5
1192	536888.94	4816451.10	339.41	1	E	A	-48.6	5.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-125.5
1194	536887.26	4816450.21	339.45	1	D	A	58.4	-6.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.4
1194	536887.26	4816450.21	339.45	1	N	A	-48.6	-6.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.4
1194	536887.26	4816450.21	339.45	1	E	A	-48.6	-6.5	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.4
1197	536904.09	4816459.12	339.02	1	D	A	58.4	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	5.5
1197	536904.09	4816459.12	339.02	1	N	A	-48.6	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.5
1197	536904.09	4816459.12	339.02	1	E	A	-48.6	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.5
1199	536900.38	4816457.16	339.12	1	D	A	58.4	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.8
1199	536900.38	4816457.16	339.12	1	N	A	-48.6	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
1199	536900.38	4816457.16	339.12	1	E	A	-48.6	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
1204	536904.09	4816459.12	339.02	1	D	A	58.4	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	5.5
1204	536904.09	4816459.12	339.02	1	N	A	-48.6	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.5
1204	536904.09	4816459.12	339.02	1	E	A	-48.6	2.9	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.5
1206	536900.38	4816457.16	339.12	1	D	A	58.4	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.8
1206	536900.38	4816457.16	339.12	1	N	A	-48.6	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
1206	536900.38	4816457.16	339.12	1	E	A	-48.6	8.1	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
1211	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.3
1211	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1211	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7
1215	536848.15	4816431.51	340.11	1	D	A	58.4	9.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-12.6
1215	536848.15	4816431.51	340.11	1	N	A	-48.6	9.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-119.6
1215	536848.15	4816431.51	340.11	1	E	A	-48.6	9.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-119.6
1300	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	16.0
1300	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.0
1300	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.0
1302	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
1302	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1302	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1304	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-14.0
1304	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0
1304	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0
1309	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
1309	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
1309	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
1315	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1315	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1315	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1317	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-14.1
1317	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-121.1
1317	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-121.1
1320	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.8
1320	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
1320	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
1322	536851.04	4816438.13	339.77	1	D	A	58.4	8.0	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-14.1
1322	536851.04	4816438.13	339.77	1	N	A	-48.6	8.0	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.1
1322	536851.04	4816438.13	339.77	1	E	A	-48.6	8.0	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.1
1365	536831.89	4816436.30	340.12	0	D	A	58.4	7.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.5
1365	536831.89	4816436.30	340.12	0	N	A	-48.6	7.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
1365	536831.89	4816436.30	340.12	0	E	A	-48.6	7.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
1367	536830.65	4816436.59	340.12	1	D	A	58.4	4.3	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.4
1367	536830.65	4816436.59	340.12	1	N	A	-48.6	4.3	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.4
1367	536830.65	4816436.59	340.12	1	E	A	-48.6	4.3	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.4
1370	536833.20	4816435.98	340.12	1	D	A	58.4	4.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.7
1370	536833.20	4816435.98	340.12	1	N	A	-48.6	4.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.7
1370	536833.20	4816435.98	340.12	1	E	A	-48.6	4.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.7
1406	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.9
1406	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
1406	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
1407	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.3	-15.2
1407	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.3	-122.2
1407	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.3	-122.2
1426	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
1426	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
1426	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
1429	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.4
1429	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.4
1429	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.4
1432	536909.59	4816465.40	339.00	0	D	A	58.4	10.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
1432	536909.59	4816465.40	339.00	0	N	A	-48.6	10.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
1432	536909.59	4816465.40	339.00	0	E	A	-48.6	10.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
1436	536909.59	4816465.40	339.00	1	D	A	58.4	10.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1436	536909.59	4816465.40	339.00	1	N	A	-48.6	10.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1436	536909.59	4816465.40	339.00	1	E	A	-48.6	10.0	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1439	536905.53	4816463.50	339.00	1	D	A	58.4	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	2.4
1439	536905.53	4816463.50	339.00	1	N	A	-48.6	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-104.6
1439	536905.53	4816463.50	339.00	1	E	A	-48.6	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-104.6
1442	536905.53	4816463.50	339.00	1	D	A	58.4	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.0
1442	536905.53	4816463.50	339.00	1	N	A	-48.6	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.0
1442	536905.53	4816463.50	339.00	1	E	A	-48.6	-0.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.0
1446	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1446	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1446	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
1447	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-15.5
1447	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
1447	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
1451	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1451	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
1451	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
1454	536878.06	4816456.56	339.25	1	D	A	58.4	6.1	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1454	536878.06	4816456.56	339.25	1	N	A	-48.6	6.1	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
1454	536878.06	4816456.56	339.25	1	E	A	-48.6	6.1	0.0	0.0	0.0	59.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
1458	536877.52	4816457.90	339.21	1	D	A	58.4	8.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-15.5
1458	536877.52	4816457.90	339.21	1	N	A	-48.6	8.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
1458	536877.52	4816457.90	339.21	1	E	A	-48.6	8.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
1462	536876.40	4816460.68	339.13	1	D	A	58.4	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	4.3
1462	536876.40	4816460.68	339.13	1	N	A	-48.6	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.7
1462	536876.40	4816460.68	339.13	1	E	A	-48.6	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.7
1467	536877.65	4816457.56	339.22	1	D	A	58.4	8.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	12.1
1467	536877.65	4816457.56	339.22	1	N	A	-48.6	8.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-94.9
1467	536877.65	4816457.56	339.22	1	E	A	-48.6	8.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-94.9
1472	536876.35	4816460.80	339.13	1	D	A	58.4	-1.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	3.0
1472	536876.35	4816460.80	339.13	1	N	A	-48.6	-1.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-104.0
1472	536876.35	4816460.80	339.13	1	E	A	-48.6	-1.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-104.0
1476	536876.40	4816460.68	339.13	1	D	A	58.4	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	4.3
1476	536876.40	4816460.68	339.13	1	N	A	-48.6	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.7
1476	536876.40	4816460.68	339.13	1	E	A	-48.6	-0.2	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.7
1524	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	13.9
1524	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
1524	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
1528	536830.89	4816430.54	340.48	1	D	A	58.4	1.8	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.5
1528	536830.89	4816430.54	340.48	1	N	A	-48.6	1.8	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
1528	536830.89	4816430.54	340.48	1	E	A	-48.6	1.8	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
1531	536829.46	4816431.39	340.46	1	D	A	58.4	2.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.8
1531	536829.46	4816431.39	340.46	1	N	A	-48.6	2.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.8
1531	536829.46	4816431.39	340.46	1	E	A	-48.6	2.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.8
1623	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1623	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
1623	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
1626	536913.43	4816464.20	339.00	1	D	A	58.4	9.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1626	536913.43	4816464.20	339.00	1	N	A	-48.6	9.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1626	536913.43	4816464.20	339.00	1	E	A	-48.6	9.0	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1630	536910.52	4816462.55	339.00	1	D	A	58.4	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	3.3
1630	536910.52	4816462.55	339.00	1	N	A	-48.6	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.7
1630	536910.52	4816462.55	339.00	1	E	A	-48.6	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.7
1632	536910.52	4816462.55	339.00	1	D	A	58.4	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.9
1632	536910.52	4816462.55	339.00	1	N	A	-48.6	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.1
1632	536910.52	4816462.55	339.00	1	E	A	-48.6	1.0	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.1
1665	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.3
1665	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
1665	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
1668	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
1668	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
1668	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
1671	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-16.6
1671	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.6
1671	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.6
1675	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.3
1675	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
1675	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
1679	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.7
1679	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
1679	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
1738	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.0
1738	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1738	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
1742	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1742	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1742	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1746	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-16.9
1746	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.9
1746	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.9
1760	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.9
1760	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
1760	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
1765	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1765	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1765	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1768	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.0
1768	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.0
1768	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.0
1789	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
1789	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
1789	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
1791	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
1791	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
1791	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
1795	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.2
1795	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.2
1795	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.2
1833	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
1833	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1833	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1837	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
1837	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1837	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1841	536907.54	4816460.95	339.00	1	D	A	58.4	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	9.8
1841	536907.54	4816460.95	339.00	1	N	A	-48.6	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-97.2
1841	536907.54	4816460.95	339.00	1	E	A	-48.6	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-97.2
1844	536905.02	4816459.62	339.00	1	D	A	58.4	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-5.0
1844	536905.02	4816459.62	339.00	1	N	A	-48.6	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-112.0
1844	536905.02	4816459.62	339.00	1	E	A	-48.6	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-112.0
1848	536907.54	4816460.95	339.00	1	D	A	58.4	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	9.8
1848	536907.54	4816460.95	339.00	1	N	A	-48.6	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-97.2
1848	536907.54	4816460.95	339.00	1	E	A	-48.6	7.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-97.2
1852	536905.02	4816459.62	339.00	1	D	A	58.4	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-5.0
1852	536905.02	4816459.62	339.00	1	N	A	-48.6	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-112.0
1852	536905.02	4816459.62	339.00	1	E	A	-48.6	-7.5	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-112.0
1863	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
1863	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1863	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1868	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1868	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
1868	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
1872	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.5
1872	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.5
1872	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.5
1929	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.2
1929	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1929	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1932	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1932	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
1932	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
1936	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.7
1936	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.6
1936	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.6
1943	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1943	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1943	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
1947	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	58.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1947	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	58.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
1947	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	58.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
1953	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-17.8
1953	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-124.8
1953	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-124.8
1957	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1957	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
1957	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
1961	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.0
1961	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
1961	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
1988	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1988	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
1988	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
1991	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.1
1991	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
1991	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
2064	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.6
2064	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.4
2064	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.4
2069	536853.25	4816433.53	339.96	1	D	A	58.4	2.2	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
2069	536853.25	4816433.53	339.96	1	N	A	-48.6	2.2	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
2069	536853.25	4816433.53	339.96	1	E	A	-48.6	2.2	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
2073	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-18.3
2073	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.3
2073	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.3
2190	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
2190	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
2190	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
2194	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.1
2194	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
2194	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
2258	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
2258	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2258	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2262	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2262	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2262	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2267	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-19.0
2267	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-126.0
2267	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-126.0
2271	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
2271	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2271	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2275	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2275	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2275	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2280	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-19.1
2280	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-126.1
2280	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-126.1
2309	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	10.7
2309	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2309	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2313	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.5
2313	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
2313	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
2344	536894.25	4816470.07	339.04	0	D	A	58.4	5.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	0.3
2344	536894.25	4816470.07	339.04	0	N	A	-48.6	5.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	-106.7
2344	536894.25	4816470.07	339.04	0	E	A	-48.6	5.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	-106.7
2347	536894.99	4816468.36	339.09	0	D	A	58.4	-9.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-4.1
2347	536894.99	4816468.36	339.09	0	N	A	-48.6	-9.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-111.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2347	536894.99	4816468.36	339.09	0	E	A	-48.6	-9.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-111.1
2352	536893.80	4816471.07	339.02	1	D	A	58.4	1.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
2352	536893.80	4816471.07	339.02	1	N	A	-48.6	1.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
2352	536893.80	4816471.07	339.02	1	E	A	-48.6	1.5	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
2354	536894.55	4816469.37	339.06	1	D	A	58.4	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2354	536894.55	4816469.37	339.06	1	N	A	-48.6	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
2354	536894.55	4816469.37	339.06	1	E	A	-48.6	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
2361	536894.27	4816470.01	339.05	1	D	A	58.4	5.7	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-19.2
2361	536894.27	4816470.01	339.05	1	N	A	-48.6	5.7	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-126.2
2361	536894.27	4816470.01	339.05	1	E	A	-48.6	5.7	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-126.2
2363	536893.77	4816471.15	339.02	1	D	A	58.4	0.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-16.0
2363	536893.77	4816471.15	339.02	1	N	A	-48.6	0.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-123.0
2363	536893.77	4816471.15	339.02	1	E	A	-48.6	0.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-123.0
2567	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
2567	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2567	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2570	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.2
2570	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
2570	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
2575	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
2575	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2575	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2579	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.3
2579	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.3
2579	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.3
2632	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.7
2632	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2632	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2634	536861.31	4816442.03	339.49	1	D	A	58.4	-1.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2634	536861.31	4816442.03	339.49	1	N	A	-48.6	-1.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
2634	536861.31	4816442.03	339.49	1	E	A	-48.6	-1.8	0.0	0.0	0.0	58.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
2639	536860.82	4816441.81	339.51	1	D	A	58.4	2.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.2
2639	536860.82	4816441.81	339.51	1	N	A	-48.6	2.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.2
2639	536860.82	4816441.81	339.51	1	E	A	-48.6	2.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.2
2647	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.7
2647	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2647	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2651	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2651	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2651	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2654	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.2
2654	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.2
2654	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.2
2658	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.7
2658	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2658	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
2662	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.4
2662	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.4
2662	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.4
2666	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.6
2666	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2666	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2670	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2670	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2670	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2675	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.3
2675	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.3
2675	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.3
2741	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	9.5
2741	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2741	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2745	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2745	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2745	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2750	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.4
2750	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.4
2750	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.4
2786	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.3
2786	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
2786	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
2789	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.8
2789	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2789	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2863	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.1
2863	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2863	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2866	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.9
2866	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.9
2866	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.9
2883	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.1
2883	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2883	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2886	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-21.0
2886	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2886	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2938	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2938	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2938	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2941	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-21.0
2941	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0
2941	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0
2951	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2951	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2951	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2954	536896.25	4816465.69	339.10	1	D	A	58.4	2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
2954	536896.25	4816465.69	339.10	1	N	A	-48.6	2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
2954	536896.25	4816465.69	339.10	1	E	A	-48.6	2.9	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
2958	536896.83	4816464.61	339.10	1	D	A	58.4	-3.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.0
2958	536896.83	4816464.61	339.10	1	N	A	-48.6	-3.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.0
2958	536896.83	4816464.61	339.10	1	E	A	-48.6	-3.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.0
2962	536896.37	4816465.47	339.10	1	D	A	58.4	3.9	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-20.9
2962	536896.37	4816465.47	339.10	1	N	A	-48.6	3.9	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2962	536896.37	4816465.47	339.10	1	E	A	-48.6	3.9	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2965	536896.71	4816464.83	339.10	1	D	A	58.4	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	3.8
2965	536896.71	4816464.83	339.10	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-103.2
2965	536896.71	4816464.83	339.10	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-103.2
2969	536896.71	4816464.83	339.10	1	D	A	58.4	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	3.9
2969	536896.71	4816464.83	339.10	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	-103.1
2969	536896.71	4816464.83	339.10	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	-103.1
2972	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2972	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2972	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2976	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
2976	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
2976	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
2980	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.2
2980	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2980	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2983	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.2
2983	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2983	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2996	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2996	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2996	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2998	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-21.0
2998	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2998	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0
3002	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	7.5
3002	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.5
3002	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.5
3005	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	7.6
3005	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-99.3
3005	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-99.3
3009	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	7.5
3009	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.5
3009	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.5
3047	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
3047	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3
3047	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3
3051	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
3051	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3051	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3056	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.1
3056	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3056	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3060	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.1
3060	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3060	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.9
3209	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3209	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.7
3209	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.7
3212	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-21.8
3212	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.8
3212	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.8
3220	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3220	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.7
3220	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.7
3224	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3224	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
3224	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	59.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
3227	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-21.6
3227	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.6
3227	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.6
3285	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.1
3285	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
3285	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
3290	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
3290	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3290	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3292	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-21.7
3292	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.7
3292	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.7
3294	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	6.6
3294	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-100.4
3294	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-100.4
3296	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	6.8
3296	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-100.2
3296	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-100.2
3389	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3389	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
3389	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
3393	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3393	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3393	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3397	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-22.1
3397	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-129.1
3397	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-129.1
3402	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	5.2
3402	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-101.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3402	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-101.8
3413	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
3413	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
3413	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
3415	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
3415	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3415	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3418	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-22.1
3418	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-129.1
3418	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-129.1
3513	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
3513	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
3513	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
3516	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.4
3516	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
3516	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
3590	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
3590	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3590	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3595	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.6
3595	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
3595	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
3599	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.4
3599	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3599	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.5
3603	536827.69	4816435.96	340.20	1	D	A	58.4	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.6
3603	536827.69	4816435.96	340.20	1	N	A	-48.6	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
3603	536827.69	4816435.96	340.20	1	E	A	-48.6	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
3672	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.2
3672	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
3672	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
3676	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.8
3676	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.8
3676	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.8
3916	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
3916	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.5
3916	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.5
3919	536828.55	4816436.86	340.14	1	D	A	58.4	-1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.5
3919	536828.55	4816436.86	340.14	1	N	A	-48.6	-1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.5
3919	536828.55	4816436.86	340.14	1	E	A	-48.6	-1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.5
3971	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
3971	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
3971	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
3974	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
3974	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3974	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3977	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-23.4
3977	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.4
3977	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.4
3979	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	3.7
3979	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.3
3979	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.3
4132	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	6.2
4132	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4132	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4133	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
4133	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
4133	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
4135	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-23.7
4135	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.7
4135	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.7
4139	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	3.4
4139	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4139	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6
4151	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
4151	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4151	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
4155	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.9
4155	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.9
4155	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.9
4169	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
4169	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.9
4169	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-100.9
4171	536828.03	4816436.56	340.16	1	D	A	58.4	-2.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.9
4171	536828.03	4816436.56	340.16	1	N	A	-48.6	-2.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.9
4171	536828.03	4816436.56	340.16	1	E	A	-48.6	-2.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.9
4329	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
4329	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.5
4329	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.5
4333	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
4333	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4333	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
4338	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.4
4338	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.4
4338	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.4
4429	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
4429	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
4429	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
4433	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4433	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
4433	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
4435	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.5
4435	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.4
4435	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.4
4495	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.3
4495	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.7
4495	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.7
4500	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
4500	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4500	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
4502	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.6
4502	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.6
4502	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.6
4588	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
4588	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.9
4588	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.9
4591	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4591	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
4591	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
4595	536898.69	4816462.10	339.09	1	D	A	58.4	-5.3	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
4595	536898.69	4816462.10	339.09	1	N	A	-48.6	-5.3	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
4595	536898.69	4816462.10	339.09	1	E	A	-48.6	-5.3	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
4599	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.4
4599	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.5
4599	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.5
4603	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.4
4603	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.5
4603	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.5
4613	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
4613	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.0
4613	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.0
4614	536829.11	4816436.92	340.12	1	D	A	58.4	-3.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.0
4614	536829.11	4816436.92	340.12	1	N	A	-48.6	-3.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-132.0
4614	536829.11	4816436.92	340.12	1	E	A	-48.6	-3.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-132.0
4660	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
4660	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	I/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4660	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
4663	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
4663	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
4663	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	59.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
4667	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.9
4667	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.9
4667	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.9
4671	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	2.1
4671	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-104.9
4671	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-104.9
4713	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
4713	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
4713	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
4716	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
4716	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
4716	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
4720	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.0
4720	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.9
4720	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.9
4723	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.0
4723	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.9
4723	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.9
4917	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	4.1
4917	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.9
4917	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.9
4920	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
4920	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.9
4920	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.9
4924	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-25.7
4924	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.7
4924	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.7
4928	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	2.5
4928	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.5
4928	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.5
4932	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	2.5
4932	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.5
4932	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.5
5065	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	3.6
5065	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.4
5065	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.4
5068	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
5068	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.2
5068	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.2
5150	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
5150	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
5150	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
5152	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
5152	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5152	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.6
5235	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
5235	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-104.3
5235	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-104.3
5238	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5238	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
5238	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	58.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-139.3
5242	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-27.3
5242	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
5242	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
5255	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
5255	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-104.4
5255	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-104.4
5257	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.2
5257	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5257	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.2
5392	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.5
5392	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.5
5392	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.5
5394	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
5394	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.2
5394	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.2
5448	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
5448	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.9
5448	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.9
5451	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.7
5451	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
5451	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.7
5532	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	0.6
5532	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-106.3
5532	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-106.3
5536	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
5536	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
5536	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.1
5617	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-1.0
5617	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.9
5617	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.9
5620	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-34.8
5620	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-141.8
5620	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-141.8
5659	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-2.1
5659	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-109.1
5659	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-109.1
5660	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
5660	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9
5660	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	60.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-142.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1209	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
1209	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.8
1209	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.8
1217	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	17.2
1217	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.8
1217	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.8
1220	536892.28	4816454.14	340.71	1	D	A	59.5	10.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
1220	536892.28	4816454.14	340.71	1	N	A	-40.5	10.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1220	536892.28	4816454.14	340.71	1	E	A	-40.5	10.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1222	536889.66	4816452.85	340.78	1	D	A	59.5	7.3	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6
1222	536889.66	4816452.85	340.78	1	N	A	-40.5	7.3	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1222	536889.66	4816452.85	340.78	1	E	A	-40.5	7.3	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1223	536892.66	4816454.32	340.70	1	D	A	59.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1223	536892.66	4816454.32	340.70	1	N	A	-40.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1223	536892.66	4816454.32	340.70	1	E	A	-40.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1228	536896.59	4816456.26	340.60	1	D	A	59.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	5.7
1228	536896.59	4816456.26	340.60	1	N	A	-40.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-94.3
1228	536896.59	4816456.26	340.60	1	E	A	-40.5	1.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-94.3
1229	536897.24	4816456.58	340.58	1	D	A	59.5	-7.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-2.5
1229	536897.24	4816456.58	340.58	1	N	A	-40.5	-7.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-102.5
1229	536897.24	4816456.58	340.58	1	E	A	-40.5	-7.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-102.5
1232	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.3
1232	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1232	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1235	536818.02	4816441.62	341.54	1	D	A	59.5	6.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.2	-14.1
1235	536818.02	4816441.62	341.54	1	N	A	-40.5	6.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.2	-114.1
1235	536818.02	4816441.62	341.54	1	E	A	-40.5	6.6	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.2	-114.1
1237	536820.25	4816439.30	341.58	1	D	A	59.5	2.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1237	536820.25	4816439.30	341.58	1	N	A	-40.5	2.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.8
1237	536820.25	4816439.30	341.58	1	E	A	-40.5	2.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.8
1248	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	17.0
1248	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1248	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1251	536910.45	4816463.44	340.40	1	D	A	59.5	11.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
1251	536910.45	4816463.44	340.40	1	N	A	-40.5	11.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
1251	536910.45	4816463.44	340.40	1	E	A	-40.5	11.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
1255	536907.12	4816461.71	340.40	1	D	A	59.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	11.5
1255	536907.12	4816461.71	340.40	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.5
1255	536907.12	4816461.71	340.40	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.5
1258	536907.12	4816461.71	340.40	1	D	A	59.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	11.9
1258	536907.12	4816461.71	340.40	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.1
1258	536907.12	4816461.71	340.40	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.1
1261	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.2
1261	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.8
1261	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.8
1264	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-12.9
1264	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.9
1264	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.9
1267	536806.73	4816467.88	341.19	0	D	A	59.5	9.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
1267	536806.73	4816467.88	341.19	0	N	A	-40.5	9.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1267	536806.73	4816467.88	341.19	0	E	A	-40.5	9.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1268	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-13.2
1268	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-113.2
1268	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-113.2
1270	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.6
1270	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.4
1270	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.4
1271	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1271	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1271	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1276	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
1276	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.3
1276	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.3
1278	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	16.5
1278	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1278	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1280	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1280	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1280	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1281	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.4
1281	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.4
1281	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.4
1295	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.0
1295	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1295	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1298	536810.61	4816454.21	341.25	1	D	A	59.5	7.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-14.1
1298	536810.61	4816454.21	341.25	1	N	A	-40.5	7.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.1
1298	536810.61	4816454.21	341.25	1	E	A	-40.5	7.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.1
1325	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.5
1325	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1325	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1330	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-14.7
1330	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.7
1330	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.7
1333	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
1333	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1333	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1337	536898.02	4816456.99	340.56	1	D	A	59.5	1.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
1337	536898.02	4816456.99	340.56	1	N	A	-40.5	1.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1337	536898.02	4816456.99	340.56	1	E	A	-40.5	1.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1340	536901.60	4816458.84	340.47	1	D	A	59.5	8.1	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1340	536901.60	4816458.84	340.47	1	N	A	-40.5	8.1	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1340	536901.60	4816458.84	340.47	1	E	A	-40.5	8.1	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1343	536902.00	4816459.05	340.46	1	D	A	59.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	11.5
1343	536902.00	4816459.05	340.46	1	N	A	-40.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.5
1343	536902.00	4816459.05	340.46	1	E	A	-40.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.5
1346	536898.42	4816457.19	340.55	1	D	A	59.5	3.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	8.4
1346	536898.42	4816457.19	340.55	1	N	A	-40.5	3.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.6
1346	536898.42	4816457.19	340.55	1	E	A	-40.5	3.9	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.6
1347	536902.00	4816459.05	340.46	1	D	A	59.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	11.9
1347	536902.00	4816459.05	340.46	1	N	A	-40.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.1
1347	536902.00	4816459.05	340.46	1	E	A	-40.5	7.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.1
1351	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.4
1351	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
1351	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
1353	536847.92	4816433.01	341.45	1	D	A	59.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1353	536847.92	4816433.01	341.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1353	536847.92	4816433.01	341.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1356	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
1356	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1356	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1359	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1359	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1359	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1362	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1362	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1362	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
1372	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
1372	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
1372	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
1375	536919.45	4816468.11	340.40	1	D	A	59.5	8.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1375	536919.45	4816468.11	340.40	1	N	A	-40.5	8.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1375	536919.45	4816468.11	340.40	1	E	A	-40.5	8.4	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1377	536923.67	4816470.30	340.40	1	D	A	59.5	4.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1377	536923.67	4816470.30	340.40	1	N	A	-40.5	4.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1377	536923.67	4816470.30	340.40	1	E	A	-40.5	4.2	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1400	536804.98	4816475.13	341.21	0	D	A	59.5	7.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
1400	536804.98	4816475.13	341.21	0	N	A	-40.5	7.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
1400	536804.98	4816475.13	341.21	0	E	A	-40.5	7.9	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
1402	536805.62	4816472.85	341.20	1	D	A	59.5	1.7	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-21.2
1402	536805.62	4816472.85	341.20	1	N	A	-40.5	1.7	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-121.2
1402	536805.62	4816472.85	341.20	1	E	A	-40.5	1.7	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.6	-121.2
1410	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.9
1410	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1410	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1413	536808.33	4816461.22	341.17	1	D	A	59.5	7.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-15.2
1413	536808.33	4816461.22	341.17	1	N	A	-40.5	7.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-115.2
1413	536808.33	4816461.22	341.17	1	E	A	-40.5	7.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-115.2
1417	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
1417	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1417	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1421	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.8
1421	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
1421	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
1423	536824.47	4816435.94	341.66	1	D	A	59.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.2
1423	536824.47	4816435.94	341.66	1	N	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.2
1423	536824.47	4816435.94	341.66	1	E	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.2
1443	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1443	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
1443	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
1481	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1481	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.7
1481	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.7
1485	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1485	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.7
1485	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.7
1488	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
1488	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1488	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1492	536830.58	4816627.41	340.21	1	D	A	59.5	13.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-16.3
1492	536830.58	4816627.41	340.21	1	N	A	-40.5	13.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-116.3
1492	536830.58	4816627.41	340.21	1	E	A	-40.5	13.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-116.3
1496	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.1
1496	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.9
1496	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.9
1500	536876.80	4816446.51	340.88	1	D	A	59.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1500	536876.80	4816446.51	340.88	1	N	A	-40.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1500	536876.80	4816446.51	340.88	1	E	A	-40.5	4.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1503	536878.83	4816447.50	340.88	1	D	A	59.5	1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1503	536878.83	4816447.50	340.88	1	N	A	-40.5	1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1503	536878.83	4816447.50	340.88	1	E	A	-40.5	1.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1506	536877.46	4816446.83	340.88	1	D	A	59.5	6.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1506	536877.46	4816446.83	340.88	1	N	A	-40.5	6.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1506	536877.46	4816446.83	340.88	1	E	A	-40.5	6.5	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1508	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.9
1508	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1508	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1513	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
1513	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1513	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
1535	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
1535	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1535	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1552	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.9
1552	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1552	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.1
1557	536821.99	4816437.72	341.61	1	D	A	59.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.0
1557	536821.99	4816437.72	341.61	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.0
1557	536821.99	4816437.72	341.61	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.0
1566	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1566	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1566	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1571	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1571	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1571	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1576	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1576	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1576	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1579	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
1579	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.2
1579	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.2
1601	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1601	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1601	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1605	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
1605	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.2
1605	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.2
1617	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1617	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1617	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1619	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.4
1619	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.4
1619	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.4
1636	536833.33	4816432.35	341.74	0	D	A	59.5	3.9	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
1636	536833.33	4816432.35	341.74	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1636	536833.33	4816432.35	341.74	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.4
1639	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1639	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.5
1639	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.5
1646	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.1
1646	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.9
1646	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.9
1649	536945.70	4816478.92	340.16	1	D	A	59.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1649	536945.70	4816478.92	340.16	1	N	A	-40.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1649	536945.70	4816478.92	340.16	1	E	A	-40.5	9.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1652	536946.99	4816479.35	340.15	1	D	A	59.5	7.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-22.7
1652	536946.99	4816479.35	340.15	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.7
1652	536946.99	4816479.35	340.15	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.7
1655	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	13.2
1655	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1655	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1658	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.4
1658	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.6
1658	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.6
1661	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.6
1661	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.6
1661	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.6
1687	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.3
1687	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.7
1687	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.7
1690	536830.39	4816433.00	341.75	1	D	A	59.5	0.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.1
1690	536830.39	4816433.00	341.75	1	N	A	-40.5	0.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-120.1
1690	536830.39	4816433.00	341.75	1	E	A	-40.5	0.3	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-120.1
1693	536831.51	4816432.71	341.75	1	D	A	59.5	1.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.4
1693	536831.51	4816432.71	341.75	1	N	A	-40.5	1.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-119.4
1693	536831.51	4816432.71	341.75	1	E	A	-40.5	1.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-119.4
1695	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	12.9
1695	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1695	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1699	536992.95	4816485.13	339.58	1	D	A	59.5	10.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-20.8
1699	536992.95	4816485.13	339.58	1	N	A	-40.5	10.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-120.8
1699	536992.95	4816485.13	339.58	1	E	A	-40.5	10.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-120.8
1701	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.2
1701	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1701	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1704	536855.89	4816436.04	341.22	1	D	A	59.5	4.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1704	536855.89	4816436.04	341.22	1	N	A	-40.5	4.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1704	536855.89	4816436.04	341.22	1	E	A	-40.5	4.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1707	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1707	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1707	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1749	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.9
1749	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1749	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1752	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-17.3
1752	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.3
1752	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.3
1783	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1783	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1783	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1786	536826.80	4816434.55	341.70	1	D	A	59.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.2
1786	536826.80	4816434.55	341.70	1	N	A	-40.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.2
1786	536826.80	4816434.55	341.70	1	E	A	-40.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.2
1798	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.6
1798	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1798	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1802	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-17.6
1802	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.6
1802	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.6
1815	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1815	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.5
1815	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.5
1817	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
1817	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1817	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1820	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1820	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1820	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1823	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
1823	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
1823	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
1827	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1827	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1827	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1828	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1828	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1828	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1855	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
1855	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-88.1
1855	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-88.1
1859	536846.85	4816634.93	340.08	1	D	A	59.5	11.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-18.0
1859	536846.85	4816634.93	340.08	1	N	A	-40.5	11.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-118.0
1859	536846.85	4816634.93	340.08	1	E	A	-40.5	11.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-118.0
1911	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1911	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1911	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1916	536955.13	4816481.72	340.05	1	D	A	59.5	8.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-21.9
1916	536955.13	4816481.72	340.05	1	N	A	-40.5	8.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.9
1916	536955.13	4816481.72	340.05	1	E	A	-40.5	8.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.9
1939	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1939	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1939	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
2095	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
2095	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2095	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2154	536779.79	4816533.72	341.05	0	D	A	59.5	4.6	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2154	536779.79	4816533.72	341.05	0	N	A	-40.5	4.6	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2154	536779.79	4816533.72	341.05	0	E	A	-40.5	4.6	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2158	536780.65	4816531.82	341.05	0	D	A	59.5	1.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.1
2158	536780.65	4816531.82	341.05	0	N	A	-40.5	1.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
2158	536780.65	4816531.82	341.05	0	E	A	-40.5	1.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
2162	536781.06	4816530.91	341.05	0	D	A	59.5	-1.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
2162	536781.06	4816530.91	341.05	0	N	A	-40.5	-1.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2162	536781.06	4816530.91	341.05	0	E	A	-40.5	-1.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2165	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.1
2165	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
2165	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
2169	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
2169	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
2169	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
2181	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.8
2181	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
2181	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
2186	536976.07	4816484.33	339.81	1	D	A	59.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.0
2186	536976.07	4816484.33	339.81	1	N	A	-40.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
2186	536976.07	4816484.33	339.81	1	E	A	-40.5	7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
2209	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
2209	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2209	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2213	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2213	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2213	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2248	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	10.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2248	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2248	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2251	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-19.2
2251	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-119.2
2251	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-119.2
2254	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.6
2254	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
2254	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
2367	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.4
2367	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.6
2367	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.6
2372	536927.90	4816472.14	340.38	1	D	A	59.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2372	536927.90	4816472.14	340.38	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2372	536927.90	4816472.14	340.38	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2375	536929.57	4816472.81	340.36	1	D	A	59.5	-12.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-41.3
2375	536929.57	4816472.81	340.36	1	N	A	-40.5	-12.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-141.3
2375	536929.57	4816472.81	340.36	1	E	A	-40.5	-12.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-141.3
2380	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
2380	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2380	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2385	536984.62	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.5
2385	536984.62	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
2385	536984.62	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
2389	536987.45	4816484.45	339.66	1	D	A	59.5	-12.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-43.9
2389	536987.45	4816484.45	339.66	1	N	A	-40.5	-12.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-143.9
2389	536987.45	4816484.45	339.66	1	E	A	-40.5	-12.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-143.9
2392	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
2392	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2392	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2434	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.1
2434	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
2434	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
2440	536968.77	4816484.11	339.91	1	D	A	59.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-29.2
2440	536968.77	4816484.11	339.91	1	N	A	-40.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
2440	536968.77	4816484.11	339.91	1	E	A	-40.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
2444	536971.26	4816484.22	339.87	1	D	A	59.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.2
2444	536971.26	4816484.22	339.87	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
2444	536971.26	4816484.22	339.87	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
2642	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	9.6
2642	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.4
2642	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.4
2773	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	0.9
2773	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-99.1
2773	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-99.1
2777	536907.38	4816644.18	339.69	1	D	A	59.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-21.7
2777	536907.38	4816644.18	339.69	1	N	A	-40.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.7
2777	536907.38	4816644.18	339.69	1	E	A	-40.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.7
2782	536903.15	4816643.46	339.76	1	D	A	59.5	2.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.0
2782	536903.15	4816643.46	339.76	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2782	536903.15	4816643.46	339.76	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2793	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2793	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2793	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2794	536820.10	4816622.57	340.31	1	D	A	59.5	3.5	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-25.8
2794	536820.10	4816622.57	340.31	1	N	A	-40.5	3.5	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-125.8
2794	536820.10	4816622.57	340.31	1	E	A	-40.5	3.5	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-125.8
2809	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2809	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2809	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2827	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	9.1
2827	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2827	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
2871	536917.36	4816646.32	339.51	0	D	A	59.5	4.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-3.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2871	536917.36	4816646.32	339.51	0	N	A	-40.5	4.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-103.7
2871	536917.36	4816646.32	339.51	0	E	A	-40.5	4.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-103.7
2873	536913.37	4816645.38	339.58	0	D	A	59.5	7.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-1.2
2873	536913.37	4816645.38	339.58	0	N	A	-40.5	7.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-101.2
2873	536913.37	4816645.38	339.58	0	E	A	-40.5	7.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-101.2
2876	536915.42	4816645.87	339.55	1	D	A	59.5	8.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-21.8
2876	536915.42	4816645.87	339.55	1	N	A	-40.5	8.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.8
2876	536915.42	4816645.87	339.55	1	E	A	-40.5	8.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.8
2880	536911.43	4816644.92	339.62	1	D	A	59.5	1.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.1
2880	536911.43	4816644.92	339.62	1	N	A	-40.5	1.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.1
2880	536911.43	4816644.92	339.62	1	E	A	-40.5	1.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.1
2900	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2900	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2900	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
3033	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
3033	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3033	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3037	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.4
3037	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.4
3037	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.4
3084	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3084	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
3084	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
3156	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
3156	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3156	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3200	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.2
3200	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.8
3200	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.8
3205	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.7
3205	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
3205	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
3216	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3216	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3216	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3231	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3231	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3231	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3314	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3314	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3314	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3319	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.6	0.0	0.0	-1.1
3319	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.6	0.0	0.0	-101.1
3319	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.6	0.0	0.0	-101.1
3321	536899.35	4816642.94	339.82	1	D	A	59.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-22.2
3321	536899.35	4816642.94	339.82	1	N	A	-40.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
3321	536899.35	4816642.94	339.82	1	E	A	-40.5	7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
3423	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-0.6
3423	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.6
3423	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.6
3428	536872.81	4816641.92	339.96	1	D	A	59.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-22.4
3428	536872.81	4816641.92	339.96	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.4
3428	536872.81	4816641.92	339.96	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.4
3476	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
3476	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3476	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3480	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
3480	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3480	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3484	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.5
3484	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
3484	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
3574	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	7.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3574	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3574	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
3607	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.1
3607	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
3607	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
3610	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.6
3610	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
3610	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
3622	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-0.9
3622	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.9
3622	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.9
3626	536868.41	4816641.51	339.97	1	D	A	59.5	5.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.4
3626	536868.41	4816641.51	339.97	1	N	A	-40.5	5.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.4
3626	536868.41	4816641.51	339.97	1	E	A	-40.5	5.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.4
3631	536865.93	4816641.18	339.98	1	D	A	59.5	2.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.6
3631	536865.93	4816641.18	339.98	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
3631	536865.93	4816641.18	339.98	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
3634	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
3634	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
3634	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
3689	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
3689	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
3689	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
3758	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3758	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3758	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3762	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
3762	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
3762	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
3766	536859.13	4816639.87	340.00	1	D	A	59.5	6.5	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-23.6
3766	536859.13	4816639.87	340.00	1	N	A	-40.5	6.5	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.6
3766	536859.13	4816639.87	340.00	1	E	A	-40.5	6.5	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.6
3770	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-1.6
3770	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-101.6
3770	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-101.6
3773	536890.49	4816641.99	339.91	1	D	A	59.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.2
3773	536890.49	4816641.99	339.91	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.2
3773	536890.49	4816641.99	339.91	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.2
3794	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
3794	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
3794	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
3799	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
3799	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3799	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3802	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3802	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3802	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3854	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
3854	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3854	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3856	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
3856	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
3856	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
3923	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.2
3923	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
3923	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
3927	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-1.8
3927	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.8
3927	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.8
3931	536880.59	4816642.00	339.94	1	D	A	59.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.6
3931	536880.59	4816642.00	339.94	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
3931	536880.59	4816642.00	339.94	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
3954	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3954	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
3954	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
3957	536767.13	4816577.67	341.04	1	D	A	59.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	3.4
3957	536767.13	4816577.67	341.04	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.6
3957	536767.13	4816577.67	341.04	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.6
3967	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
3967	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
3967	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
3980	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
3980	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3980	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
3981	536863.20	4816640.73	339.99	1	D	A	59.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.2
3981	536863.20	4816640.73	339.99	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.2
3981	536863.20	4816640.73	339.99	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.2
4074	536773.71	4816596.30	340.86	0	D	A	59.5	0.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
4074	536773.71	4816596.30	340.86	0	N	A	-40.5	0.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4074	536773.71	4816596.30	340.86	0	E	A	-40.5	0.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
4076	536773.04	4816595.28	340.87	0	D	A	59.5	1.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.0
4076	536773.04	4816595.28	340.87	0	N	A	-40.5	1.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
4076	536773.04	4816595.28	340.87	0	E	A	-40.5	1.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
4080	536772.58	4816594.58	340.88	0	D	A	59.5	-5.4	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-3.8
4080	536772.58	4816594.58	340.88	0	N	A	-40.5	-5.4	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
4080	536772.58	4816594.58	340.88	0	E	A	-40.5	-5.4	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-103.8
4092	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-2.2
4092	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.2
4092	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.2
4096	536921.25	4816647.25	339.44	1	D	A	59.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-24.8
4096	536921.25	4816647.25	339.44	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
4096	536921.25	4816647.25	339.44	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
4100	536919.16	4816646.75	339.48	1	D	A	59.5	-1.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-31.6
4100	536919.16	4816646.75	339.48	1	N	A	-40.5	-1.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.6
4100	536919.16	4816646.75	339.48	1	E	A	-40.5	-1.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.6
4111	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
4111	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4111	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4165	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	5.7
4165	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
4165	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
4208	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
4208	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4208	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4214	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.1
4214	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.1
4214	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.1
4218	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
4218	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
4218	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
4221	536855.32	4816638.72	340.02	1	D	A	59.5	5.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.5
4221	536855.32	4816638.72	340.02	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.5
4221	536855.32	4816638.72	340.02	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.5
4225	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.7
4225	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
4225	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
4254	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.6
4254	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
4254	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
4257	536964.13	4816483.77	339.95	1	D	A	59.5	2.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.2
4257	536964.13	4816483.77	339.95	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.2
4257	536964.13	4816483.77	339.95	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.2
4302	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.3
4302	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
4302	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
4399	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	5.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4399	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
4399	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
4478	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
4478	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
4478	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
4489	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
4489	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
4489	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
4492	536767.00	4816575.72	341.05	1	D	A	59.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	3.2
4492	536767.00	4816575.72	341.05	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.8
4492	536767.00	4816575.72	341.05	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.8
4506	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
4506	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4506	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4508	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
4508	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4508	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4528	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-3.2
4528	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.2
4528	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.2
4532	536885.32	4816641.86	339.92	1	D	A	59.5	4.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.9
4532	536885.32	4816641.86	339.92	1	N	A	-40.5	4.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.9
4532	536885.32	4816641.86	339.92	1	E	A	-40.5	4.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.9
4618	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-3.3
4618	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.3
4618	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.3
4622	536877.02	4816642.10	339.95	1	D	A	59.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.1
4622	536877.02	4816642.10	339.95	1	N	A	-40.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
4622	536877.02	4816642.10	339.95	1	E	A	-40.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
4780	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	4.3
4780	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
4780	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
4995	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.6
4995	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.4
4995	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.4
4999	536766.99	4816573.85	341.06	1	D	A	59.5	0.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	0.9
4999	536766.99	4816573.85	341.06	1	N	A	-40.5	0.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-99.1
4999	536766.99	4816573.85	341.06	1	E	A	-40.5	0.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-99.1
5179	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
5179	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
5179	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
5182	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-5.6
5182	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-105.6
5182	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-105.6
5185	536893.75	4816642.26	339.91	1	D	A	59.5	2.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.1
5185	536893.75	4816642.26	339.91	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
5185	536893.75	4816642.26	339.91	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
5292	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-6.4
5292	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-106.4
5292	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-106.4
5293	536895.52	4816642.44	339.88	1	D	A	59.5	2.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.8
5293	536895.52	4816642.44	339.88	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
5293	536895.52	4816642.44	339.88	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
5413	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-7.0
5413	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-107.0
5413	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-107.0
5416	536887.53	4816641.81	339.90	1	D	A	59.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.7
5416	536887.53	4816641.81	339.90	1	N	A	-40.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
5416	536887.53	4816641.81	339.90	1	E	A	-40.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
5539	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-7.7
5539	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-107.7
5539	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-107.7
5541	536883.22	4816641.91	339.94	1	D	A	59.5	0.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5541	536883.22	4816641.91	339.94	1	N	A	-40.5	0.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
5541	536883.22	4816641.91	339.94	1	E	A	-40.5	0.3	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
5605	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
5605	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
5605	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
5647	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-2.2
5647	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
5647	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
5649	536766.99	4816574.58	341.06	1	D	A	59.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-3.9
5649	536766.99	4816574.58	341.06	1	N	A	-40.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-103.9
5649	536766.99	4816574.58	341.06	1	E	A	-40.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-103.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1241	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
1241	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
1241	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
1518	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1518	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1518	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1561	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1561	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1561	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1642	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.1
1642	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.9
1642	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.9
1756	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
1756	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1756	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1778	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.6
1778	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1778	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1966	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
1966	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.1
1966	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.1
1970	536990.42	4816396.62	338.40	1	D	A	59.5	7.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
1970	536990.42	4816396.62	338.40	1	N	A	-40.5	7.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1970	536990.42	4816396.62	338.40	1	E	A	-40.5	7.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
2077	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.4
2077	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.6
2077	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.6
2081	536997.41	4816412.58	338.56	1	D	A	59.5	5.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
2081	536997.41	4816412.58	338.56	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2081	536997.41	4816412.58	338.56	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2199	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
2199	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2199	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
2205	536990.94	4816396.24	338.40	1	D	A	59.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2205	536990.94	4816396.24	338.40	1	N	A	-40.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2205	536990.94	4816396.24	338.40	1	E	A	-40.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2285	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.4
2285	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.6
2285	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.6
2396	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
2396	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2396	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
2398	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2398	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2398	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2584	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.7
2584	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
2584	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2590	536988.29	4816400.52	338.40	1	D	A	59.5	5.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2590	536988.29	4816400.52	338.40	1	N	A	-40.5	5.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2590	536988.29	4816400.52	338.40	1	E	A	-40.5	5.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2618	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.5
2618	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2618	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2694	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.4
2694	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.6
2694	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.6
2904	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2904	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2904	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2988	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
2988	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2988	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2993	536981.36	4816405.14	338.40	1	D	A	59.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
2993	536981.36	4816405.14	338.40	1	N	A	-40.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
2993	536981.36	4816405.14	338.40	1	E	A	-40.5	-1.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
3063	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
3063	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
3063	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
3129	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
3129	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3129	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
3134	536982.93	4816404.80	338.40	1	D	A	59.5	3.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
3134	536982.93	4816404.80	338.40	1	N	A	-40.5	3.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3134	536982.93	4816404.80	338.40	1	E	A	-40.5	3.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
3160	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.4
3160	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
3160	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.6
3195	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
3195	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
3195	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
3300	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
3300	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3300	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
3333	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
3333	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3333	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
3338	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
3338	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3338	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
3379	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
3379	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3379	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3384	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
3384	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3384	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3406	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
3406	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
3406	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
3410	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
3410	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3410	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3489	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
3489	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3489	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3493	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
3493	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3493	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
3578	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.4
3578	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
3578	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3583	536990.12	4816398.91	338.40	1	D	A	59.5	0.6	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
3583	536990.12	4816398.91	338.40	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3583	536990.12	4816398.91	338.40	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3585	536989.93	4816399.87	338.40	1	D	A	59.5	-0.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
3585	536989.93	4816399.87	338.40	1	N	A	-40.5	-0.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
3585	536989.93	4816399.87	338.40	1	E	A	-40.5	-0.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
3744	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3744	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3744	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3749	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
3749	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
3749	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
3754	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
3754	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3754	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3786	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
3786	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3786	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
3789	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
3789	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3789	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4143	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
4143	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
4143	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
4147	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
4147	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
4147	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
4186	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
4186	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4186	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
5355	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.8
5355	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
5355	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1290	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	23.3	0.0	0.0	-12.7
1290	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	23.3	0.0	0.0	-15.7
1290	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	23.3	0.0	0.0	-12.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1387	536416.04	4816238.44	352.90	0	D	A	62.5	13.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-10.2
1387	536416.04	4816238.44	352.90	0	N	A	-40.5	13.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-113.2
1387	536416.04	4816238.44	352.90	0	E	A	-40.5	13.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-113.2
1395	536405.90	4816233.59	353.25	0	D	A	62.5	0.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-23.6
1395	536405.90	4816233.59	353.25	0	N	A	-40.5	0.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-126.6
1395	536405.90	4816233.59	353.25	0	E	A	-40.5	0.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-126.6
1540	536361.70	4816212.47	354.70	0	D	A	62.5	13.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-11.9
1540	536361.70	4816212.47	354.70	0	N	A	-40.5	13.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-114.9
1540	536361.70	4816212.47	354.70	0	E	A	-40.5	13.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-114.9
1546	536351.61	4816207.65	354.87	0	D	A	62.5	3.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-21.4
1546	536351.61	4816207.65	354.87	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-124.4
1546	536351.61	4816207.65	354.87	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.3	0.0	0.0	-124.4
1612	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	26.3	0.0	0.0	-13.7
1612	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	26.3	0.0	0.0	-116.7
1612	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	26.3	0.0	0.0	-116.7
1713	536439.86	4816249.82	352.16	0	D	A	62.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-16.1
1713	536439.86	4816249.82	352.16	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-119.1
1713	536439.86	4816249.82	352.16	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-119.1
1716	536434.09	4816247.06	352.31	0	D	A	62.5	9.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-14.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1716	536434.09	4816247.06	352.31	0	N	A	-40.5	9.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-117.0
1716	536434.09	4816247.06	352.31	0	E	A	-40.5	9.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-117.0
1772	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-12.1
1772	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-115.1
1772	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-115.1
1808	536387.45	4816219.34	353.99	0	D	A	62.5	11.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-12.8
1808	536387.45	4816219.34	353.99	0	N	A	-40.5	11.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-115.8
1808	536387.45	4816219.34	353.99	0	E	A	-40.5	11.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-115.8
1880	536454.48	4816301.40	351.39	0	D	A	62.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-20.8
1880	536454.48	4816301.40	351.39	0	N	A	-40.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
1880	536454.48	4816301.40	351.39	0	E	A	-40.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
1885	536455.38	4816299.66	351.39	0	D	A	62.5	0.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-24.9
1885	536455.38	4816299.66	351.39	0	N	A	-40.5	0.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
1885	536455.38	4816299.66	351.39	0	E	A	-40.5	0.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
1892	536456.89	4816296.74	351.39	0	D	A	62.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-14.5
1892	536456.89	4816296.74	351.39	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.5
1892	536456.89	4816296.74	351.39	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.5
1897	536455.81	4816298.83	351.39	1	D	A	62.5	9.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1897	536455.81	4816298.83	351.39	1	N	A	-40.5	9.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1897	536455.81	4816298.83	351.39	1	E	A	-40.5	9.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1904	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-12.5
1904	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.5
1904	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.5
1923	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-12.7
1923	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-115.7
1923	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-115.7
1978	536391.47	4816226.70	353.93	0	D	A	62.5	6.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-18.2
1978	536391.47	4816226.70	353.93	0	N	A	-40.5	6.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-121.2
1978	536391.47	4816226.70	353.93	0	E	A	-40.5	6.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-121.2
1982	536385.70	4816223.94	354.21	0	D	A	62.5	9.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-14.9
1982	536385.70	4816223.94	354.21	0	N	A	-40.5	9.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-117.9
1982	536385.70	4816223.94	354.21	0	E	A	-40.5	9.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-117.9
1998	536427.57	4816264.69	352.96	0	D	A	62.5	9.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-13.8
1998	536427.57	4816264.69	352.96	0	N	A	-40.5	9.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-116.8
1998	536427.57	4816264.69	352.96	0	E	A	-40.5	9.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-116.8
2004	536431.98	4816267.02	352.80	0	D	A	62.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-20.6
2004	536431.98	4816267.02	352.80	0	N	A	-40.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-123.6
2004	536431.98	4816267.02	352.80	0	E	A	-40.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-123.6
2012	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-12.7
2012	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-115.8
2012	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-115.8
2021	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-12.8
2021	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-115.8
2021	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-115.8
2088	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-13.5
2088	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-116.5
2088	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-116.5
2116	536465.89	4816280.79	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-16.0
2116	536465.89	4816280.79	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.0
2116	536465.89	4816280.79	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.0
2121	536463.84	4816283.53	351.38	0	D	A	62.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-17.0
2121	536463.84	4816283.53	351.38	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.0
2121	536463.84	4816283.53	351.38	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.0
2175	536397.73	4816229.69	353.62	0	D	A	62.5	9.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-14.1
2175	536397.73	4816229.69	353.62	0	N	A	-40.5	9.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-117.1
2175	536397.73	4816229.69	353.62	0	E	A	-40.5	9.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-117.1
2234	536452.96	4816276.80	351.88	0	D	A	62.5	8.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-13.7
2234	536452.96	4816276.80	351.88	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-116.8
2234	536452.96	4816276.80	351.88	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-116.8
2406	536463.49	4816284.84	351.38	0	D	A	62.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-14.3
2406	536463.49	4816284.84	351.38	0	N	A	-40.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-117.3
2406	536463.49	4816284.84	351.38	0	E	A	-40.5	7.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-117.3
2413	536464.79	4816282.22	351.38	0	D	A	62.5	-6.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-28.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2413	536464.79	4816282.22	351.38	0	N	A	-40.5	-6.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-131.6
2413	536464.79	4816282.22	351.38	0	E	A	-40.5	-6.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-131.6
2463	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-14.6
2463	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-117.7
2463	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-117.7
2523	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-14.4
2523	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.5
2523	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.5
2528	536456.65	4816295.49	351.40	1	D	A	62.5	4.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2528	536456.65	4816295.49	351.40	1	N	A	-40.5	4.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2528	536456.65	4816295.49	351.40	1	E	A	-40.5	4.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2536	536455.43	4816297.86	351.40	0	D	A	62.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-17.4
2536	536455.43	4816297.86	351.40	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-120.4
2536	536455.43	4816297.86	351.40	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-120.4
2542	536454.52	4816299.59	351.40	0	D	A	62.5	0.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-24.9
2542	536454.52	4816299.59	351.40	0	N	A	-40.5	0.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
2542	536454.52	4816299.59	351.40	0	E	A	-40.5	0.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
2547	536453.89	4816300.80	351.40	0	D	A	62.5	2.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.3
2547	536453.89	4816300.80	351.40	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.3
2547	536453.89	4816300.80	351.40	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.3
2553	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
2553	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2553	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
2626	536343.48	4816203.77	354.95	0	D	A	62.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-15.6
2626	536343.48	4816203.77	354.95	0	N	A	-40.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-118.6
2626	536343.48	4816203.77	354.95	0	E	A	-40.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-118.6
2758	536451.60	4816305.45	351.43	0	D	A	62.5	6.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-19.6
2758	536451.60	4816305.45	351.43	0	N	A	-40.5	6.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-122.6
2758	536451.60	4816305.45	351.43	0	E	A	-40.5	6.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-122.6
2763	536450.59	4816307.70	351.44	0	D	A	62.5	-1.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-26.8
2763	536450.59	4816307.70	351.44	0	N	A	-40.5	-1.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.8
2763	536450.59	4816307.70	351.44	0	E	A	-40.5	-1.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.8
2769	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
2769	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2769	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2892	536404.50	4816240.28	353.49	0	D	A	62.5	4.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-19.2
2892	536404.50	4816240.28	353.49	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.2
2892	536404.50	4816240.28	353.49	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.2
2896	536403.27	4816243.03	353.65	0	D	A	62.5	5.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-18.7
2896	536403.27	4816243.03	353.65	0	N	A	-40.5	5.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-121.7
2896	536403.27	4816243.03	353.65	0	E	A	-40.5	5.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-121.7
2918	536348.69	4816200.62	354.86	0	D	A	62.5	8.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-18.3
2918	536348.69	4816200.62	354.86	0	N	A	-40.5	8.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-121.3
2918	536348.69	4816200.62	354.86	0	E	A	-40.5	8.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-121.3
3071	536449.82	4816309.57	351.46	0	D	A	62.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-20.8
3071	536449.82	4816309.57	351.46	0	N	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-123.8
3071	536449.82	4816309.57	351.46	0	E	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-123.8
3077	536449.03	4816311.51	351.47	0	D	A	62.5	-0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-26.0
3077	536449.03	4816311.51	351.47	0	N	A	-40.5	-0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.1
3077	536449.03	4816311.51	351.47	0	E	A	-40.5	-0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.1
3081	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
3081	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3081	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
3124	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-16.0
3124	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.0
3124	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.0
3141	536449.11	4816311.51	351.47	0	D	A	62.5	0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-25.7
3141	536449.11	4816311.51	351.47	0	N	A	-40.5	0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-128.7
3141	536449.11	4816311.51	351.47	0	E	A	-40.5	0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-128.7
3149	536450.16	4816309.76	351.44	0	D	A	62.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-21.0
3149	536450.16	4816309.76	351.44	0	N	A	-40.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-124.0
3149	536450.16	4816309.76	351.44	0	E	A	-40.5	4.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-124.0
3152	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3152	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3152	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3180	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-16.2
3180	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.2
3180	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-119.2
3345	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-17.3
3345	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-120.3
3345	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-120.3
3498	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-17.0
3498	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.0
3498	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.0
3545	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-17.6
3545	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-120.6
3545	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-120.6
3554	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-17.1
3554	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-120.1
3554	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-120.1
3562	536467.84	4816273.20	351.39	0	D	A	62.5	1.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-19.9
3562	536467.84	4816273.20	351.39	0	N	A	-40.5	1.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.9
3562	536467.84	4816273.20	351.39	0	E	A	-40.5	1.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.9
3568	536468.24	4816271.77	351.38	0	D	A	62.5	1.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-20.4
3568	536468.24	4816271.77	351.38	0	N	A	-40.5	1.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-123.4
3568	536468.24	4816271.77	351.38	0	E	A	-40.5	1.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-123.4
3617	536356.96	4816204.53	354.77	0	D	A	62.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-19.8
3617	536356.96	4816204.53	354.77	0	N	A	-40.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-122.9
3617	536356.96	4816204.53	354.77	0	E	A	-40.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-122.9
3641	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-17.4
3641	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.4
3641	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.4
3651	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-17.5
3651	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-120.5
3651	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-120.5
3683	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-18.0
3683	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-121.0
3683	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-121.0
3739	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-17.6
3739	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.6
3739	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.6
3780	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-17.8
3780	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.8
3780	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-120.8
3809	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-18.3
3809	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-121.3
3809	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-121.3
3826	536427.77	4816244.04	352.50	0	D	A	62.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-21.0
3826	536427.77	4816244.04	352.50	0	N	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-124.0
3826	536427.77	4816244.04	352.50	0	E	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-124.0
3831	536426.36	4816243.37	352.54	0	D	A	62.5	1.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-21.6
3831	536426.36	4816243.37	352.54	0	N	A	-40.5	1.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-124.6
3831	536426.36	4816243.37	352.54	0	E	A	-40.5	1.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-124.6
3869	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-18.1
3869	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-121.1
3869	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-121.1
4060	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-21.7
4060	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
4060	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
4065	536453.15	4816302.20	351.40	1	D	A	62.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
4065	536453.15	4816302.20	351.40	1	N	A	-40.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4065	536453.15	4816302.20	351.40	1	E	A	-40.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4070	536452.61	4816303.23	351.41	1	D	A	62.5	-1.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
4070	536452.61	4816303.23	351.41	1	N	A	-40.5	-1.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4070	536452.61	4816303.23	351.41	1	E	A	-40.5	-1.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4161	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-18.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4161	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-121.6
4161	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-121.6
4200	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-22.2
4200	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.2
4200	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.2
4205	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
4205	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4205	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
4231	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-21.9
4231	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.9
4231	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.9
4235	536453.11	4816304.11	351.39	1	D	A	62.5	0.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
4235	536453.11	4816304.11	351.39	1	N	A	-40.5	0.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4235	536453.11	4816304.11	351.39	1	E	A	-40.5	0.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
4244	536453.60	4816303.12	351.39	1	D	A	62.5	0.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
4244	536453.60	4816303.12	351.39	1	N	A	-40.5	0.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
4244	536453.60	4816303.12	351.39	1	E	A	-40.5	0.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
4249	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-19.0
4249	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.0
4249	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.0
4262	536403.89	4816228.79	353.25	0	D	A	62.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-22.7
4262	536403.89	4816228.79	353.25	0	N	A	-40.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-125.7
4262	536403.89	4816228.79	353.25	0	E	A	-40.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-125.7
4267	536404.69	4816230.01	353.23	0	D	A	62.5	2.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-21.8
4267	536404.69	4816230.01	353.23	0	N	A	-40.5	2.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-124.8
4267	536404.69	4816230.01	353.23	0	E	A	-40.5	2.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-124.8
4281	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-19.1
4281	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.1
4281	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.1
4383	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-19.4
4383	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-122.4
4383	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-122.4
4392	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-22.9
4392	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
4392	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
4397	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
4397	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
4397	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
4441	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-21.8
4441	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.8
4441	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.8
4449	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-19.5
4449	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.5
4449	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.5
4536	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-19.7
4536	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.7
4536	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-122.7
4570	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-20.0
4570	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.0
4570	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.0
4584	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-20.2
4584	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-123.2
4584	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-123.2
4677	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-20.1
4677	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-123.1
4677	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-123.1
4690	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-20.4
4690	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.4
4690	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.4
4704	536405.49	4816237.94	353.37	0	D	A	62.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-20.4
4704	536405.49	4816237.94	353.37	0	N	A	-40.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.4
4704	536405.49	4816237.94	353.37	0	E	A	-40.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.4
4709	536405.10	4816238.96	353.42	0	D	A	62.5	-13.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-37.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4709	536405.10	4816238.96	353.42	0	N	A	-40.5	-13.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-140.1
4709	536405.10	4816238.96	353.42	0	E	A	-40.5	-13.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-140.1
4738	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-20.3
4738	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-123.3
4738	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-123.3
4747	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-20.2
4747	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-123.2
4747	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-123.2
4794	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-22.9
4794	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-125.9
4794	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.2	0.0	0.0	-125.9
4802	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-20.9
4802	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-123.9
4802	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-123.9
4846	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-20.9
4846	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.9
4846	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.3	0.0	0.0	-123.9
4989	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-21.0
4989	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.0
4989	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.0
5018	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-21.2
5018	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-124.2
5018	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-124.2
5027	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-20.8
5027	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.8
5027	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.8
5036	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-20.9
5036	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.9
5036	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.9
5076	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.2
5076	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.2
5076	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.2
5105	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.3
5105	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.3
5105	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.3
5115	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-21.4
5115	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.4
5115	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.4
5124	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-21.7
5124	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-124.7
5124	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-124.7
5130	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-21.4
5130	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.4
5130	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.4
5137	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-21.4
5137	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.5
5137	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-124.5
5157	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-21.7
5157	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-124.7
5157	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-124.7
5201	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-22.4
5201	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-125.4
5201	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.4	0.0	0.0	-125.4
5209	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.9
5209	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.9
5209	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.9
5215	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-22.1
5215	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-125.1
5215	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-125.1
5231	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-22.2
5231	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.2
5231	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.2
5273	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-22.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5273	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-125.5
5273	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-125.5
5334	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-22.9
5334	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.9
5334	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.9
5341	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-23.2
5341	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-126.2
5341	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-126.2
5349	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-23.0
5349	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-126.1
5349	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-126.1
5369	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-23.0
5369	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-126.0
5369	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-126.0
5377	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-23.1
5377	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-126.2
5377	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.2	0.0	0.0	-126.2
5408	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-23.3
5408	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-126.3
5408	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-126.3
5420	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-23.8
5420	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-126.9
5420	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-126.9
5435	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-23.5
5435	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-126.5
5435	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.2	0.0	0.0	-126.5
5653	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-26.8
5653	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-129.8
5653	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-129.8
5674	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-28.2
5674	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-131.2
5674	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-131.2
5679	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-28.7
5679	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-131.7
5679	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-131.7
5685	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.5
5685	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.5
5685	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.5
5692	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.5
5692	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.5
5692	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.5
5697	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.5
5697	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.6
5697	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.6
5703	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.6
5703	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.6
5703	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.6
5709	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.8
5709	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.8
5709	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.8
5715	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-29.9
5715	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.9
5715	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-132.9
5721	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-30.0
5721	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-133.0
5721	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-133.0
5726	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-30.1
5726	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-133.1
5726	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-133.1
5731	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-33.8
5731	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-136.9
5731	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-136.9
5738	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-34.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5738	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-137.4
5738	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.3	0.0	0.0	-137.4
5744	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-33.9
5744	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-136.9
5744	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-136.9
5750	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-34.0
5750	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-137.1
5750	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-137.1
5758	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-41.4
5758	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-144.5
5758	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.7	0.0	0.0	-144.5
5761	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-43.0
5761	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-146.0
5761	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-146.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1684	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.6	0.0	0.0	-3.0
1684	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.6	0.0	0.0	-106.0
1684	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.6	0.0	0.0	-106.0
1725	536732.52	4815965.56	344.20	0	D	A	62.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-14.1
1725	536732.52	4815965.56	344.20	0	N	A	-40.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-117.1
1725	536732.52	4815965.56	344.20	0	E	A	-40.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-117.1
1729	536729.04	4815966.53	344.26	0	D	A	62.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-19.4
1729	536729.04	4815966.53	344.26	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
1729	536729.04	4815966.53	344.26	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
1733	536725.51	4815967.51	344.33	0	D	A	62.5	7.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.0	0.0	0.0	-16.3
1733	536725.51	4815967.51	344.33	0	N	A	-40.5	7.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.0	0.0	0.0	-119.3
1733	536725.51	4815967.51	344.33	0	E	A	-40.5	7.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.0	0.0	0.0	-119.3
2100	536752.27	4815977.12	343.95	0	D	A	62.5	8.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.4	0.0	0.0	-13.7
2100	536752.27	4815977.12	343.95	0	N	A	-40.5	8.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.4	0.0	0.0	-116.7
2100	536752.27	4815977.12	343.95	0	E	A	-40.5	8.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.4	0.0	0.0	-116.7
2108	536753.27	4815977.66	343.94	1	D	A	62.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	2.7	-21.4
2108	536753.27	4815977.66	343.94	1	N	A	-40.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	2.7	-124.4
2108	536753.27	4815977.66	343.94	1	E	A	-40.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.5	0.0	2.7	-124.4
2243	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.2	0.0	0.0	-4.9
2243	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.2	0.0	0.0	-107.9
2243	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	15.2	0.0	0.0	-107.9
2423	536727.77	4815967.92	344.29	0	D	A	62.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.7	0.0	0.0	-18.0
2423	536727.77	4815967.92	344.29	0	N	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.7	0.0	0.0	-121.0
2423	536727.77	4815967.92	344.29	0	E	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.7	0.0	0.0	-121.0
2429	536731.00	4815967.63	344.23	0	D	A	62.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.8	0.0	0.0	-17.0
2429	536731.00	4815967.63	344.23	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.8	0.0	0.0	-120.0
2429	536731.00	4815967.63	344.23	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	23.8	0.0	0.0	-120.0
2683	536742.72	4815962.67	344.03	0	D	A	62.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	17.5	0.0	0.0	-11.5
2683	536742.72	4815962.67	344.03	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	17.5	0.0	0.0	-114.5
2683	536742.72	4815962.67	344.03	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	17.5	0.0	0.0	-114.5
2689	536740.05	4815963.43	344.07	0	D	A	62.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.0	0.0	0.0	-12.1
2689	536740.05	4815963.43	344.07	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.0	0.0	0.0	-115.1
2689	536740.05	4815963.43	344.07	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.0	0.0	0.0	-115.1
2735	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-8.0
2735	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-111.0
2735	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-111.0
2911	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	19.9	0.0	0.0	-11.5
2911	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	19.9	0.0	0.0	-114.6
2911	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	19.9	0.0	0.0	-114.6
3043	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.1	0.0	0.0	-8.0
3043	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.1	0.0	0.0	-111.0
3043	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.1	0.0	0.0	-111.0
3169	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.3	0.0	0.0	-16.4
3169	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.3	0.0	0.0	-119.4
3169	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.3	0.0	0.0	-119.4

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3271	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-16.8
3271	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-119.8
3271	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-119.8
3280	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-16.9
3280	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-119.9
3280	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-119.9
3309	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	20.0	0.0	0.0	-12.6
3309	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	20.0	0.0	0.0	-115.6
3309	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	20.0	0.0	0.0	-115.6
3328	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-17.2
3328	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-120.2
3328	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.5	0.0	0.0	-120.2
3508	536756.66	4815969.66	343.94	0	D	A	62.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-17.2
3508	536756.66	4815969.66	343.94	0	N	A	-40.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-120.3
3508	536756.66	4815969.66	343.94	0	E	A	-40.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-120.3
3658	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.3	0.0	0.0	-18.6
3658	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.3	0.0	0.0	-121.6
3658	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	25.3	0.0	0.0	-121.6
3840	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-18.1
3840	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-121.1
3840	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-121.1
3848	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-18.5
3848	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-121.5
3848	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-121.5
3964	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-18.8
3964	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-121.8
3964	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-121.8
4106	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-18.9
4106	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-121.9
4106	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.4	0.0	0.0	-121.9
4297	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-11.9
4297	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-114.9
4297	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.9	0.0	0.0	-114.9
4556	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.1	0.0	0.0	-13.6
4556	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.1	0.0	0.0	-116.6
4556	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.1	0.0	0.0	-116.6
4562	536758.98	4815970.84	343.92	0	D	A	62.5	2.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-19.7
4562	536758.98	4815970.84	343.92	0	N	A	-40.5	2.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-122.8
4562	536758.98	4815970.84	343.92	0	E	A	-40.5	2.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.2	0.0	0.0	-122.8
4578	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-18.3
4578	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-121.4
4578	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	22.8	0.0	0.0	-121.4
4657	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-20.3
4657	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-123.3
4657	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-123.3
4753	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.6	0.0	0.0	-13.8
4753	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.6	0.0	0.0	-116.8
4753	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.6	0.0	0.0	-116.8
4834	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	-13.7
4834	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	-116.7
4834	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	17.3	0.0	0.0	-116.7
4903	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-21.1
4903	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-124.1
4903	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.6	0.0	0.0	-124.1
4940	536741.35	4815966.71	344.10	0	D	A	62.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-15.4
4940	536741.35	4815966.71	344.10	0	N	A	-40.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-118.4
4940	536741.35	4815966.71	344.10	0	E	A	-40.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-118.4
4947	536742.10	4815966.68	344.09	0	D	A	62.5	-8.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-24.8
4947	536742.10	4815966.68	344.09	0	N	A	-40.5	-8.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-127.8
4947	536742.10	4815966.68	344.09	0	E	A	-40.5	-8.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-127.8
5010	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-18.7
5010	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-121.7
5010	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	21.9	0.0	0.0	-121.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2032	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-5.8
2032	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-105.8
2032	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-105.8
2036	536518.42	4816100.15	350.54	1	D	A	59.5	10.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-20.9
2036	536518.42	4816100.15	350.54	1	N	A	-40.5	10.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-120.9
2036	536518.42	4816100.15	350.54	1	E	A	-40.5	10.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-120.9
2042	536513.01	4816097.64	350.58	1	D	A	59.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.4	-31.7
2042	536513.01	4816097.64	350.58	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.4	-131.7
2042	536513.01	4816097.64	350.58	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.4	-131.7
2047	536509.86	4816096.18	350.60	1	D	A	59.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-25.7
2047	536509.86	4816096.18	350.60	1	N	A	-40.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-125.7
2047	536509.86	4816096.18	350.60	1	E	A	-40.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-125.7
2132	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-6.4
2132	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-106.4
2132	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-106.4
2137	536515.40	4816097.59	350.55	1	D	A	59.5	9.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-21.9
2137	536515.40	4816097.59	350.55	1	N	A	-40.5	9.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-121.9
2137	536515.40	4816097.59	350.55	1	E	A	-40.5	9.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-121.9
2142	536521.72	4816100.27	350.50	1	D	A	59.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.9
2142	536521.72	4816100.27	350.50	1	N	A	-40.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.9
2142	536521.72	4816100.27	350.50	1	E	A	-40.5	7.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.9
2146	536524.68	4816101.53	350.48	1	D	A	59.5	1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-30.0
2146	536524.68	4816101.53	350.48	1	N	A	-40.5	1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.0
2146	536524.68	4816101.53	350.48	1	E	A	-40.5	1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.0
2321	536557.21	4816079.46	348.84	0	D	A	59.5	10.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-18.0
2321	536557.21	4816079.46	348.84	0	N	A	-40.5	10.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-118.0
2321	536557.21	4816079.46	348.84	0	E	A	-40.5	10.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-118.0
2326	536554.51	4816085.01	349.09	0	D	A	59.5	3.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-24.6
2326	536554.51	4816085.01	349.09	0	N	A	-40.5	3.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
2326	536554.51	4816085.01	349.09	0	E	A	-40.5	3.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-124.6
2331	536557.65	4816078.55	348.80	1	D	A	59.5	9.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-21.2
2331	536557.65	4816078.55	348.80	1	N	A	-40.5	9.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.2
2331	536557.65	4816078.55	348.80	1	E	A	-40.5	9.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.2
2335	536554.95	4816084.10	349.05	1	D	A	59.5	6.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.0
2335	536554.95	4816084.10	349.05	1	N	A	-40.5	6.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.0
2335	536554.95	4816084.10	349.05	1	E	A	-40.5	6.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.0
2482	536550.27	4816085.85	349.28	0	D	A	59.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-21.5
2482	536550.27	4816085.85	349.28	0	N	A	-40.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-121.5
2482	536550.27	4816085.85	349.28	0	E	A	-40.5	6.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-121.5
2495	536551.76	4816082.58	349.09	0	D	A	59.5	4.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-24.0
2495	536551.76	4816082.58	349.09	0	N	A	-40.5	4.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-124.0
2495	536551.76	4816082.58	349.09	0	E	A	-40.5	4.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-124.0
2501	536553.16	4816079.53	348.92	0	D	A	59.5	6.2	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-22.0
2501	536553.16	4816079.53	348.92	0	N	A	-40.5	6.2	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2501	536553.16	4816079.53	348.92	0	E	A	-40.5	6.2	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2504	536549.91	4816086.63	349.32	1	D	A	59.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.7
2504	536549.91	4816086.63	349.32	1	N	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
2504	536549.91	4816086.63	349.32	1	E	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
2508	536551.84	4816082.42	349.08	1	D	A	59.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.3
2508	536551.84	4816082.42	349.08	1	N	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.3
2508	536551.84	4816082.42	349.08	1	E	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.3
2511	536553.59	4816078.59	348.86	1	D	A	59.5	3.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-27.2
2511	536553.59	4816078.59	348.86	1	N	A	-40.5	3.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
2511	536553.59	4816078.59	348.86	1	E	A	-40.5	3.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
2600	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-7.7
2600	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-107.7
2600	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-107.7
2604	536530.59	4816106.09	350.45	1	D	A	59.5	6.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.6
2604	536530.59	4816106.09	350.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.6
2604	536530.59	4816106.09	350.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.6
2608	536525.98	4816103.77	350.48	1	D	A	59.5	7.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.0
2608	536525.98	4816103.77	350.48	1	N	A	-40.5	7.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.0
2608	536525.98	4816103.77	350.48	1	E	A	-40.5	7.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2613	536528.11	4816104.84	350.47	1	D	A	59.5	9.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-45.0
2613	536528.11	4816104.84	350.47	1	N	A	-40.5	9.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-145.0
2613	536528.11	4816104.84	350.47	1	E	A	-40.5	9.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-145.0
2701	536555.26	4816074.94	348.69	0	D	A	59.5	7.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-20.4
2701	536555.26	4816074.94	348.69	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-120.4
2701	536555.26	4816074.94	348.69	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-120.4
2708	536556.92	4816071.31	348.52	0	D	A	59.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.0
2708	536556.92	4816071.31	348.52	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.0
2708	536556.92	4816071.31	348.52	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.0
2715	536557.75	4816069.51	348.44	0	D	A	59.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.2
2715	536557.75	4816069.51	348.44	0	N	A	-40.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.2
2715	536557.75	4816069.51	348.44	0	E	A	-40.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-125.2
2721	536555.44	4816074.56	348.67	1	D	A	59.5	8.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.1
2721	536555.44	4816074.56	348.67	1	N	A	-40.5	8.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.1
2721	536555.44	4816074.56	348.67	1	E	A	-40.5	8.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.1
2724	536557.51	4816070.04	348.46	1	D	A	59.5	5.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.5
2724	536557.51	4816070.04	348.46	1	N	A	-40.5	5.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.5
2724	536557.51	4816070.04	348.46	1	E	A	-40.5	5.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.5
2816	536503.76	4816091.81	350.60	0	D	A	59.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-8.3
2816	536503.76	4816091.81	350.60	0	N	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-108.3
2816	536503.76	4816091.81	350.60	0	E	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-108.3
2821	536503.76	4816091.81	350.60	1	D	A	59.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-23.1
2821	536503.76	4816091.81	350.60	1	N	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-123.1
2821	536503.76	4816091.81	350.60	1	E	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-123.1
2835	536482.39	4816092.81	350.74	0	D	A	59.5	10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.5	0.0	0.0	-13.8
2835	536482.39	4816092.81	350.74	0	N	A	-40.5	10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.5	0.0	0.0	-113.8
2835	536482.39	4816092.81	350.74	0	E	A	-40.5	10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.5	0.0	0.0	-113.8
2842	536477.83	4816096.41	350.82	0	D	A	59.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-22.7
2842	536477.83	4816096.41	350.82	0	N	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-122.7
2842	536477.83	4816096.41	350.82	0	E	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-122.7
2845	536485.03	4816090.72	350.70	1	D	A	59.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.5
2845	536485.03	4816090.72	350.70	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.5
2845	536485.03	4816090.72	350.70	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.5
2848	536482.26	4816092.91	350.75	1	D	A	59.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.1
2848	536482.26	4816092.91	350.75	1	N	A	-40.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.1
2848	536482.26	4816092.91	350.75	1	E	A	-40.5	5.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.1
2852	536479.01	4816095.48	350.80	1	D	A	59.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-33.6
2852	536479.01	4816095.48	350.80	1	N	A	-40.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-133.6
2852	536479.01	4816095.48	350.80	1	E	A	-40.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-133.6
2860	536478.65	4816095.77	350.81	1	D	A	59.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-94.9
2860	536478.65	4816095.77	350.81	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-194.9
2860	536478.65	4816095.77	350.81	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-194.9
3089	536485.17	4816090.26	350.69	0	D	A	59.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	-20.6
3089	536485.17	4816090.26	350.69	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	-120.6
3089	536485.17	4816090.26	350.69	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.1	0.0	0.0	-120.6
3095	536489.06	4816087.24	350.63	0	D	A	59.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-13.9
3095	536489.06	4816087.24	350.63	0	N	A	-40.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-113.9
3095	536489.06	4816087.24	350.63	0	E	A	-40.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-113.9
3101	536492.38	4816084.66	350.57	0	D	A	59.5	-3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-22.1
3101	536492.38	4816084.66	350.57	0	N	A	-40.5	-3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-122.1
3101	536492.38	4816084.66	350.57	0	E	A	-40.5	-3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-122.1
3106	536485.64	4816089.90	350.68	1	D	A	59.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.9
3106	536485.64	4816089.90	350.68	1	N	A	-40.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.9
3106	536485.64	4816089.90	350.68	1	E	A	-40.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.9
3109	536487.63	4816088.36	350.65	1	D	A	59.5	2.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.9
3109	536487.63	4816088.36	350.65	1	N	A	-40.5	2.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.9
3109	536487.63	4816088.36	350.65	1	E	A	-40.5	2.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.9
3111	536489.94	4816086.56	350.61	1	D	A	59.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-27.8
3111	536489.94	4816086.56	350.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-127.8
3111	536489.94	4816086.56	350.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-127.8
3115	536492.03	4816084.93	350.58	1	D	A	59.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-32.4
3115	536492.03	4816084.93	350.58	1	N	A	-40.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.4
3115	536492.03	4816084.93	350.58	1	E	A	-40.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3238	536477.81	4816096.39	350.82	0	D	A	59.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-22.8
3238	536477.81	4816096.39	350.82	0	N	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-122.8
3238	536477.81	4816096.39	350.82	0	E	A	-40.5	1.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-122.8
3244	536481.41	4816093.37	350.76	0	D	A	59.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.7	0.0	0.0	-15.0
3244	536481.41	4816093.37	350.76	0	N	A	-40.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.7	0.0	0.0	-115.0
3244	536481.41	4816093.37	350.76	0	E	A	-40.5	9.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	21.7	0.0	0.0	-115.0
3247	536478.96	4816095.43	350.80	1	D	A	59.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-33.7
3247	536478.96	4816095.43	350.80	1	N	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-133.7
3247	536478.96	4816095.43	350.80	1	E	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	9.9	-133.7
3251	536482.08	4816092.81	350.75	1	D	A	59.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.2
3251	536482.08	4816092.81	350.75	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
3251	536482.08	4816092.81	350.75	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
3255	536483.95	4816091.24	350.71	1	D	A	59.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-32.9
3255	536483.95	4816091.24	350.71	1	N	A	-40.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.9
3255	536483.95	4816091.24	350.71	1	E	A	-40.5	0.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.9
3263	536478.58	4816095.75	350.81	1	D	A	59.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-95.0
3263	536478.58	4816095.75	350.81	1	N	A	-40.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-195.0
3263	536478.58	4816095.75	350.81	1	E	A	-40.5	5.4	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	69.9	-195.0
3445	536544.78	4816097.33	349.89	0	D	A	59.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.2
3445	536544.78	4816097.33	349.89	0	N	A	-40.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
3445	536544.78	4816097.33	349.89	0	E	A	-40.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
3453	536546.22	4816094.81	349.78	0	D	A	59.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-24.0
3453	536546.22	4816094.81	349.78	0	N	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.0
3453	536546.22	4816094.81	349.78	0	E	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.0
3459	536547.00	4816093.45	349.73	0	D	A	59.5	-3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-31.2
3459	536547.00	4816093.45	349.73	0	N	A	-40.5	-3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-131.2
3459	536547.00	4816093.45	349.73	0	E	A	-40.5	-3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-131.2
3463	536544.91	4816097.10	349.88	1	D	A	59.5	5.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-25.0
3463	536544.91	4816097.10	349.88	1	N	A	-40.5	5.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.0
3463	536544.91	4816097.10	349.88	1	E	A	-40.5	5.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.0
3467	536546.48	4816094.37	349.76	1	D	A	59.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.0
3467	536546.48	4816094.37	349.76	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.0
3467	536546.48	4816094.37	349.76	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.0
3526	536500.08	4816091.63	350.62	0	D	A	59.5	8.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-13.7
3526	536500.08	4816091.63	350.62	0	N	A	-40.5	8.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-113.7
3526	536500.08	4816091.63	350.62	0	E	A	-40.5	8.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-113.7
3531	536500.92	4816092.02	350.62	1	D	A	59.5	7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-25.8
3531	536500.92	4816092.02	350.62	1	N	A	-40.5	7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-125.8
3531	536500.92	4816092.02	350.62	1	E	A	-40.5	7.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-125.8
3535	536497.49	4816090.42	350.62	1	D	A	59.5	2.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.8
3535	536497.49	4816090.42	350.62	1	N	A	-40.5	2.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.8
3535	536497.49	4816090.42	350.62	1	E	A	-40.5	2.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.8
3698	536561.36	4816071.70	348.48	0	D	A	59.5	6.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-21.9
3698	536561.36	4816071.70	348.48	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-121.9
3698	536561.36	4816071.70	348.48	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-121.9
3705	536559.87	4816074.17	348.60	0	D	A	59.5	2.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-25.7
3705	536559.87	4816074.17	348.60	0	N	A	-40.5	2.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-125.7
3705	536559.87	4816074.17	348.60	0	E	A	-40.5	2.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-125.7
3709	536561.05	4816072.22	348.51	1	D	A	59.5	7.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
3709	536561.05	4816072.22	348.51	1	N	A	-40.5	7.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
3709	536561.05	4816072.22	348.51	1	E	A	-40.5	7.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
3713	536559.55	4816074.69	348.62	1	D	A	59.5	-3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-33.5
3713	536559.55	4816074.69	348.62	1	N	A	-40.5	-3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.5
3713	536559.55	4816074.69	348.62	1	E	A	-40.5	-3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.5
3878	536496.43	4816079.37	350.47	0	D	A	59.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-10.8
3878	536496.43	4816079.37	350.47	0	N	A	-40.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-110.8
3878	536496.43	4816079.37	350.47	0	E	A	-40.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-110.8
3882	536495.39	4816081.01	350.50	1	D	A	59.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.0
3882	536495.39	4816081.01	350.50	1	N	A	-40.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.0
3882	536495.39	4816081.01	350.50	1	E	A	-40.5	3.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.0
3885	536496.49	4816079.28	350.47	1	D	A	59.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.8
3885	536496.49	4816079.28	350.47	1	N	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8
3885	536496.49	4816079.28	350.47	1	E	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3889	536497.53	4816077.65	350.44	1	D	A	59.5	3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.5
3889	536497.53	4816077.65	350.44	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.5
3889	536497.53	4816077.65	350.44	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.5
3899	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-21.4
3899	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-121.4
3899	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-121.4
3904	536545.23	4816104.02	350.00	1	D	A	59.5	5.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.6
3904	536545.23	4816104.02	350.00	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.6
3904	536545.23	4816104.02	350.00	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.6
3908	536544.16	4816106.12	350.10	1	D	A	59.5	-0.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-31.4
3908	536544.16	4816106.12	350.10	1	N	A	-40.5	-0.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3908	536544.16	4816106.12	350.10	1	E	A	-40.5	-0.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3912	536544.01	4816106.43	350.11	1	D	A	59.5	-9.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-47.7
3912	536544.01	4816106.43	350.11	1	N	A	-40.5	-9.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-147.7
3912	536544.01	4816106.43	350.11	1	E	A	-40.5	-9.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-147.7
3939	536548.46	4816097.60	349.73	0	D	A	59.5	1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.6
3939	536548.46	4816097.60	349.73	0	N	A	-40.5	1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3939	536548.46	4816097.60	349.73	0	E	A	-40.5	1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3945	536547.41	4816099.68	349.81	0	D	A	59.5	5.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.0
3945	536547.41	4816099.68	349.81	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
3945	536547.41	4816099.68	349.81	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
3948	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-23.8
3948	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.8
3948	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.8
3989	536550.02	4816094.36	349.61	0	D	A	59.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-22.9
3989	536550.02	4816094.36	349.61	0	N	A	-40.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-122.9
3989	536550.02	4816094.36	349.61	0	E	A	-40.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-122.9
3995	536549.04	4816096.40	349.68	0	D	A	59.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-27.1
3995	536549.04	4816096.40	349.68	0	N	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
3995	536549.04	4816096.40	349.68	0	E	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
3999	536550.40	4816093.55	349.58	1	D	A	59.5	1.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.4
3999	536550.40	4816093.55	349.58	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.4
3999	536550.40	4816093.55	349.58	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.4
4003	536549.43	4816095.59	349.65	1	D	A	59.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.3
4003	536549.43	4816095.59	349.65	1	N	A	-40.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
4003	536549.43	4816095.59	349.65	1	E	A	-40.5	4.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
4010	536501.28	4816070.32	350.13	0	D	A	59.5	1.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.6
4010	536501.28	4816070.32	350.13	0	N	A	-40.5	1.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.6
4010	536501.28	4816070.32	350.13	0	E	A	-40.5	1.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.6
4016	536502.48	4816067.68	350.01	0	D	A	59.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-23.0
4016	536502.48	4816067.68	350.01	0	N	A	-40.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
4016	536502.48	4816067.68	350.01	0	E	A	-40.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
4021	536503.46	4816065.52	349.92	0	D	A	59.5	-7.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-37.0
4021	536503.46	4816065.52	349.92	0	N	A	-40.5	-7.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-137.0
4021	536503.46	4816065.52	349.92	0	E	A	-40.5	-7.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-137.0
4024	536501.41	4816070.05	350.12	1	D	A	59.5	2.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.3
4024	536501.41	4816070.05	350.12	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
4024	536501.41	4816070.05	350.12	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
4027	536502.64	4816067.32	350.00	1	D	A	59.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.9
4027	536502.64	4816067.32	350.00	1	N	A	-40.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.9
4027	536502.64	4816067.32	350.00	1	E	A	-40.5	6.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.9
4034	536502.53	4816067.61	350.01	0	D	A	59.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.8
4034	536502.53	4816067.61	350.01	0	N	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.8
4034	536502.53	4816067.61	350.01	0	E	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.8
4042	536501.32	4816070.33	350.13	0	D	A	59.5	0.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.7
4042	536501.32	4816070.33	350.13	0	N	A	-40.5	0.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.7
4042	536501.32	4816070.33	350.13	0	E	A	-40.5	0.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.7
4046	536502.82	4816066.96	349.98	1	D	A	59.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-26.8
4046	536502.82	4816066.96	349.98	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.8
4046	536502.82	4816066.96	349.98	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.8
4048	536501.61	4816069.68	350.10	1	D	A	59.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-27.8
4048	536501.61	4816069.68	350.10	1	N	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8
4048	536501.61	4816069.68	350.10	1	E	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4177	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-11.2
4177	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-111.2
4177	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-111.2
4180	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.3
4180	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
4180	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
4317	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-22.3
4317	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-122.3
4317	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-122.3
4321	536547.39	4816092.58	349.68	1	D	A	59.5	1.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.7
4321	536547.39	4816092.58	349.68	1	N	A	-40.5	1.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
4321	536547.39	4816092.58	349.68	1	E	A	-40.5	1.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
4324	536548.12	4816090.78	349.57	1	D	A	59.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.3
4324	536548.12	4816090.78	349.57	1	N	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
4324	536548.12	4816090.78	349.57	1	E	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
4344	536498.84	4816075.87	350.41	0	D	A	59.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.8
4344	536498.84	4816075.87	350.41	0	N	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
4344	536498.84	4816075.87	350.41	0	E	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
4350	536497.84	4816078.11	350.45	0	D	A	59.5	5.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-13.1
4350	536497.84	4816078.11	350.45	0	N	A	-40.5	5.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-113.1
4350	536497.84	4816078.11	350.45	0	E	A	-40.5	5.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.6	0.0	0.0	-113.1
4354	536498.26	4816077.17	350.43	1	D	A	59.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.9
4354	536498.26	4816077.17	350.43	1	N	A	-40.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.9
4354	536498.26	4816077.17	350.43	1	E	A	-40.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.9
4358	536497.26	4816079.41	350.47	1	D	A	59.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-32.4
4358	536497.26	4816079.41	350.47	1	N	A	-40.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.4
4358	536497.26	4816079.41	350.47	1	E	A	-40.5	-0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.4
4406	536500.70	4816071.70	350.20	0	D	A	59.5	2.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.0
4406	536500.70	4816071.70	350.20	0	N	A	-40.5	2.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.0
4406	536500.70	4816071.70	350.20	0	E	A	-40.5	2.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.0
4412	536499.71	4816073.92	350.32	0	D	A	59.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.7
4412	536499.71	4816073.92	350.32	0	N	A	-40.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
4412	536499.71	4816073.92	350.32	0	E	A	-40.5	4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
4414	536500.17	4816072.89	350.27	1	D	A	59.5	6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.5
4414	536500.17	4816072.89	350.27	1	N	A	-40.5	6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.5
4414	536500.17	4816072.89	350.27	1	E	A	-40.5	6.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.5
4416	536499.18	4816075.12	350.39	1	D	A	59.5	-3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-35.3
4416	536499.18	4816075.12	350.39	1	N	A	-40.5	-3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-135.3
4416	536499.18	4816075.12	350.39	1	E	A	-40.5	-3.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-135.3
4457	536499.56	4816073.77	350.32	0	D	A	59.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.8
4457	536499.56	4816073.77	350.32	0	N	A	-40.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.8
4457	536499.56	4816073.77	350.32	0	E	A	-40.5	4.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.8
4463	536500.63	4816071.66	350.20	0	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.1
4463	536500.63	4816071.66	350.20	0	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
4463	536500.63	4816071.66	350.20	0	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
4468	536499.82	4816073.27	350.29	1	D	A	59.5	6.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.8
4468	536499.82	4816073.27	350.29	1	N	A	-40.5	6.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.8
4468	536499.82	4816073.27	350.29	1	E	A	-40.5	6.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.8
4472	536500.89	4816071.16	350.17	1	D	A	59.5	-2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-34.2
4472	536500.89	4816071.16	350.17	1	N	A	-40.5	-2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-134.2
4472	536500.89	4816071.16	350.17	1	E	A	-40.5	-2.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-134.2
4514	536505.70	4816094.25	350.62	0	D	A	59.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-12.9
4514	536505.70	4816094.25	350.62	0	N	A	-40.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-112.9
4514	536505.70	4816094.25	350.62	0	E	A	-40.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-112.9
4520	536503.79	4816093.37	350.62	0	D	A	59.5	-2.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-20.6
4520	536503.79	4816093.37	350.62	0	N	A	-40.5	-2.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-120.6
4520	536503.79	4816093.37	350.62	0	E	A	-40.5	-2.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-120.6
4524	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-27.0
4524	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-127.0
4524	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-127.0
4762	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-13.0
4762	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-113.0
4762	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-113.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4768	536508.96	4816094.81	350.60	1	D	A	59.5	1.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-31.5
4768	536508.96	4816094.81	350.60	1	N	A	-40.5	1.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-131.5
4768	536508.96	4816094.81	350.60	1	E	A	-40.5	1.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-131.5
4772	536510.23	4816095.38	350.59	1	D	A	59.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-32.0
4772	536510.23	4816095.38	350.59	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-132.0
4772	536510.23	4816095.38	350.59	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-132.0
4775	536511.14	4816095.78	350.58	1	D	A	59.5	-1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-34.7
4775	536511.14	4816095.78	350.58	1	N	A	-40.5	-1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-134.7
4775	536511.14	4816095.78	350.58	1	E	A	-40.5	-1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	3.5	-134.7
4818	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-13.1
4818	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-113.1
4818	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-113.1
4821	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-26.1
4821	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.1
4821	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.1
4826	536532.62	4816107.11	350.43	1	D	A	59.5	-3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	25.5	-58.1
4826	536532.62	4816107.11	350.43	1	N	A	-40.5	-3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	25.5	-158.1
4826	536532.62	4816107.11	350.43	1	E	A	-40.5	-3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	25.5	-158.1
4869	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-23.6
4869	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.6
4869	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.6
4873	536553.59	4816086.92	349.19	1	D	A	59.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.2
4873	536553.59	4816086.92	349.19	1	N	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
4873	536553.59	4816086.92	349.19	1	E	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
4876	536552.98	4816088.17	349.27	1	D	A	59.5	-1.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-31.3
4876	536552.98	4816088.17	349.27	1	N	A	-40.5	-1.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.3
4876	536552.98	4816088.17	349.27	1	E	A	-40.5	-1.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.3
4888	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.8
4888	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
4888	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
4891	536538.84	4816102.54	350.24	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-26.3
4891	536538.84	4816102.54	350.24	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.3
4891	536538.84	4816102.54	350.24	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.3
4895	536540.10	4816101.95	350.17	1	D	A	59.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-40.5
4895	536540.10	4816101.95	350.17	1	N	A	-40.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.5
4895	536540.10	4816101.95	350.17	1	E	A	-40.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.5
4909	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-17.3
4909	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-117.3
4909	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-117.3
4913	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.2
4913	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
4913	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
4955	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.8
4955	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
4955	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
4959	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
4959	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
4959	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
4968	536536.10	4816103.20	350.36	0	D	A	59.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-24.6
4968	536536.10	4816103.20	350.36	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
4968	536536.10	4816103.20	350.36	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
4975	536537.45	4816103.12	350.31	0	D	A	59.5	-4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-32.8
4975	536537.45	4816103.12	350.31	0	N	A	-40.5	-4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-132.8
4975	536537.45	4816103.12	350.31	0	E	A	-40.5	-4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-132.8
4979	536536.08	4816103.20	350.36	1	D	A	59.5	3.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-27.1
4979	536536.08	4816103.20	350.36	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.1
4979	536536.08	4816103.20	350.36	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.1
4983	536537.42	4816103.12	350.31	1	D	A	59.5	-4.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-34.7
4983	536537.42	4816103.12	350.31	1	N	A	-40.5	-4.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-134.7
4983	536537.42	4816103.12	350.31	1	E	A	-40.5	-4.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-134.7
5044	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-13.7
5044	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-113.7
5044	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-113.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5048	536493.42	4816083.55	350.55	1	D	A	59.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-29.6
5048	536493.42	4816083.55	350.55	1	N	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-129.6
5048	536493.42	4816083.55	350.55	1	E	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-129.6
5050	536494.50	4816082.31	350.52	1	D	A	59.5	-1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-35.2
5050	536494.50	4816082.31	350.52	1	N	A	-40.5	-1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-135.2
5050	536494.50	4816082.31	350.52	1	E	A	-40.5	-1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-135.2
5082	536530.47	4816102.83	350.43	0	D	A	59.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-16.2
5082	536530.47	4816102.83	350.43	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-116.2
5082	536530.47	4816102.83	350.43	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	16.7	0.0	0.0	-116.2
5089	536531.69	4816103.04	350.42	0	D	A	59.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-28.5
5089	536531.69	4816103.04	350.42	0	N	A	-40.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.5
5089	536531.69	4816103.04	350.42	0	E	A	-40.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-128.5
5092	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-26.9
5092	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.9
5092	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.9
5165	536552.35	4816089.48	349.34	0	D	A	59.5	3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-24.8
5165	536552.35	4816089.48	349.34	0	N	A	-40.5	3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5165	536552.35	4816089.48	349.34	0	E	A	-40.5	3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-124.8
5173	536551.88	4816090.46	349.40	0	D	A	59.5	-13.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-41.3
5173	536551.88	4816090.46	349.40	0	N	A	-40.5	-13.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-141.3
5173	536551.88	4816090.46	349.40	0	E	A	-40.5	-13.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-141.3
5175	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.8
5175	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
5175	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
5222	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
5222	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5222	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
5224	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-27.6
5224	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.6
5224	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.6
5247	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-14.6
5247	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-114.6
5247	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-114.6
5250	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
5250	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
5250	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
5262	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-25.1
5262	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-125.1
5262	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-125.1
5264	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
5264	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
5264	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
5280	536539.56	4816108.87	350.31	0	D	A	59.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-25.8
5280	536539.56	4816108.87	350.31	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-125.8
5280	536539.56	4816108.87	350.31	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-125.8
5284	536538.64	4816108.96	350.35	0	D	A	59.5	-8.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-36.7
5284	536538.64	4816108.96	350.35	0	N	A	-40.5	-8.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-136.7
5284	536538.64	4816108.96	350.35	0	E	A	-40.5	-8.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-136.7
5286	536539.76	4816108.86	350.31	1	D	A	59.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.4
5286	536539.76	4816108.86	350.31	1	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.4
5286	536539.76	4816108.86	350.31	1	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.4
5287	536538.84	4816108.94	350.34	1	D	A	59.5	-2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-33.2
5287	536538.84	4816108.94	350.34	1	N	A	-40.5	-2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
5287	536538.84	4816108.94	350.34	1	E	A	-40.5	-2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
5301	536548.92	4816088.86	349.46	0	D	A	59.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-25.9
5301	536548.92	4816088.86	349.46	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.9
5301	536548.92	4816088.86	349.46	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.9
5307	536549.28	4816088.01	349.40	0	D	A	59.5	-8.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-36.3
5307	536549.28	4816088.01	349.40	0	N	A	-40.5	-8.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-136.3
5307	536549.28	4816088.01	349.40	0	E	A	-40.5	-8.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-136.3
5309	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.6
5309	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
5309	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5316	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-15.2
5316	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-115.2
5316	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	16.7	0.0	0.0	-115.2
5319	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-28.2
5319	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
5319	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
5325	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-15.4
5325	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-115.4
5325	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-115.4
5327	536498.37	4816088.48	350.58	1	D	A	59.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.2
5327	536498.37	4816088.48	350.58	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.2
5327	536498.37	4816088.48	350.58	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.2
5360	536487.31	4816089.23	350.66	0	D	A	59.5	3.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.9	0.0	0.0	-19.8
5360	536487.31	4816089.23	350.66	0	N	A	-40.5	3.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.9	0.0	0.0	-119.8
5360	536487.31	4816089.23	350.66	0	E	A	-40.5	3.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.9	0.0	0.0	-119.8
5362	536487.79	4816089.00	350.66	1	D	A	59.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-33.4
5362	536487.79	4816089.00	350.66	1	N	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.4
5362	536487.79	4816089.00	350.66	1	E	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.4
5364	536486.82	4816089.46	350.67	1	D	A	59.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-33.5
5364	536486.82	4816089.46	350.67	1	N	A	-40.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.5
5364	536486.82	4816089.46	350.67	1	E	A	-40.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.5
5385	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.3
5385	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.3
5385	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.3
5388	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-28.7
5388	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
5388	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
5399	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.4
5399	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.4
5399	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.4
5403	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-28.8
5403	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.8
5403	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.8
5427	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.5
5427	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
5427	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
5430	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-29.0
5430	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.0
5430	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.0
5440	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-20.2
5440	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-120.2
5440	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-120.2
5443	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-31.0
5443	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.0
5443	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.0
5457	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-26.8
5457	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-126.8
5457	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-126.8
5459	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.2
5459	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.2
5459	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.2
5462	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-52.7
5462	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-152.7
5462	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-152.7
5470	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-26.4
5470	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-126.4
5470	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-126.4
5472	536562.78	4816069.35	348.40	1	D	A	59.5	1.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
5472	536562.78	4816069.35	348.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5472	536562.78	4816069.35	348.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
5479	536498.48	4816075.95	350.41	0	D	A	59.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.3
5479	536498.48	4816075.95	350.41	0	N	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.3
5479	536498.48	4816075.95	350.41	0	E	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5484	536498.86	4816075.16	350.40	0	D	A	59.5	-9.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-39.3
5484	536498.86	4816075.16	350.40	0	N	A	-40.5	-9.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.3
5484	536498.86	4816075.16	350.40	0	E	A	-40.5	-9.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.3
5486	536498.50	4816075.92	350.41	1	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.6
5486	536498.50	4816075.92	350.41	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
5486	536498.50	4816075.92	350.41	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
5488	536498.87	4816075.12	350.39	1	D	A	59.5	-14.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-46.2
5488	536498.87	4816075.12	350.39	1	N	A	-40.5	-14.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-146.2
5488	536498.87	4816075.12	350.39	1	E	A	-40.5	-14.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-146.2
5490	536498.19	4816076.57	350.42	1	D	A	59.5	-5.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-36.6
5490	536498.19	4816076.57	350.42	1	N	A	-40.5	-5.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.6
5490	536498.19	4816076.57	350.42	1	E	A	-40.5	-5.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.6
5496	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-16.4
5496	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-116.4
5496	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-116.4
5498	536496.74	4816080.62	350.49	1	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.5
5498	536496.74	4816080.62	350.49	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.5
5498	536496.74	4816080.62	350.49	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.5
5507	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-20.4
5507	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-120.4
5507	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	20.7	0.0	0.0	-120.4
5511	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-31.3
5511	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.3
5511	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.3
5518	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-27.0
5518	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.0
5518	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.0
5520	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.4
5520	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.4
5520	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.4
5525	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.8	0.0	0.0	-20.8
5525	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.8	0.0	0.0	-120.8
5525	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	20.8	0.0	0.0	-120.8
5528	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-31.6
5528	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.6
5528	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.6
5546	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-27.4
5546	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
5546	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
5549	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.8
5549	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8
5549	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8
5555	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-27.5
5555	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
5555	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
5558	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.8
5558	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8
5558	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.8
5561	536541.31	4816108.60	350.25	1	D	A	59.5	-3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-57.4
5561	536541.31	4816108.60	350.25	1	N	A	-40.5	-3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-157.4
5561	536541.31	4816108.60	350.25	1	E	A	-40.5	-3.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-157.4
5566	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-17.0
5566	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-117.0
5566	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-117.0
5569	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-31.8
5569	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.8
5569	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.8
5576	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-28.0
5576	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.0
5576	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.0
5579	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.4
5579	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4
5579	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5582	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-53.9
5582	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-153.9
5582	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.2	-153.9
5588	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-17.5
5588	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-117.5
5588	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-117.5
5590	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-32.3
5590	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.3
5590	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-132.3
5596	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-28.2
5596	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.2
5596	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.2
5599	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.6
5599	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
5599	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
5604	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-38.4
5604	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-138.4
5604	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-138.4
5610	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-18.1
5610	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.1
5610	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.1
5613	536496.29	4816082.00	350.51	1	D	A	59.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-31.2
5613	536496.29	4816082.00	350.51	1	N	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.2
5613	536496.29	4816082.00	350.51	1	E	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.2
5627	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-18.9
5627	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.9
5627	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.9
5630	536496.14	4816083.07	350.52	1	D	A	59.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-33.7
5630	536496.14	4816083.07	350.52	1	N	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.7
5630	536496.14	4816083.07	350.52	1	E	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.7
5638	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-18.9
5638	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.9
5638	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-118.9
5642	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-33.7
5642	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.7
5642	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.7
5664	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-20.0
5664	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-120.0
5664	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	16.7	0.0	0.0	-120.0
5667	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-34.8
5667	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-134.8
5667	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-134.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2054	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.3
2054	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2054	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
2059	536993.65	4816487.02	339.53	1	D	A	59.5	8.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-22.3
2059	536993.65	4816487.02	339.53	1	N	A	-40.5	8.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-122.3
2059	536993.65	4816487.02	339.53	1	E	A	-40.5	8.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-122.3
2219	536957.48	4816510.17	339.53	0	D	A	59.5	8.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.7
2219	536957.48	4816510.17	339.53	0	N	A	-40.5	8.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2219	536957.48	4816510.17	339.53	0	E	A	-40.5	8.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
2224	536958.02	4816510.51	339.51	1	D	A	59.5	7.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
2224	536958.02	4816510.51	339.51	1	N	A	-40.5	7.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2224	536958.02	4816510.51	339.51	1	E	A	-40.5	7.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
2228	536955.35	4816508.86	339.57	1	D	A	59.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
2228	536955.35	4816508.86	339.57	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2228	536955.35	4816508.86	339.57	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2291	536959.85	4816523.01	339.50	0	D	A	59.5	6.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	1.0
2291	536959.85	4816523.01	339.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-99.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2291	536959.85	4816523.01	339.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-99.0
2295	536960.55	4816526.15	339.50	0	D	A	59.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.1
2295	536960.55	4816526.15	339.50	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
2295	536960.55	4816526.15	339.50	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
2300	536959.88	4816523.14	339.50	1	D	A	59.5	6.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
2300	536959.88	4816523.14	339.50	1	N	A	-40.5	6.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2300	536959.88	4816523.14	339.50	1	E	A	-40.5	6.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
2304	536960.58	4816526.27	339.50	1	D	A	59.5	2.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
2304	536960.58	4816526.27	339.50	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2304	536960.58	4816526.27	339.50	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2449	536963.72	4816507.19	339.51	0	D	A	59.5	7.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.0
2449	536963.72	4816507.19	339.51	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
2449	536963.72	4816507.19	339.51	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
2454	536964.35	4816505.17	339.53	1	D	A	59.5	0.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
2454	536964.35	4816505.17	339.53	1	N	A	-40.5	0.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2454	536964.35	4816505.17	339.53	1	E	A	-40.5	0.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2457	536963.54	4816507.76	339.50	1	D	A	59.5	6.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2457	536963.54	4816507.76	339.50	1	N	A	-40.5	6.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2457	536963.54	4816507.76	339.50	1	E	A	-40.5	6.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2469	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	9.9
2469	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.1
2469	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.1
2474	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-23.7
2474	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
2474	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
2798	536955.33	4816509.64	339.57	0	D	A	59.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
2798	536955.33	4816509.64	339.57	0	N	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
2798	536955.33	4816509.64	339.57	0	E	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
2801	536956.21	4816511.54	339.55	0	D	A	59.5	2.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	1.8
2801	536956.21	4816511.54	339.55	0	N	A	-40.5	2.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	-98.2
2801	536956.21	4816511.54	339.55	0	E	A	-40.5	2.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	-98.2
2805	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
2805	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2805	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2925	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
2925	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2925	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2929	536965.34	4816501.96	339.59	1	D	A	59.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
2929	536965.34	4816501.96	339.59	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2929	536965.34	4816501.96	339.59	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
2934	536964.76	4816503.84	339.55	1	D	A	59.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
2934	536964.76	4816503.84	339.55	1	N	A	-40.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2934	536964.76	4816503.84	339.55	1	E	A	-40.5	2.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2944	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2944	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2944	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2947	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
2947	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2947	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
3014	536958.10	4816516.51	339.51	0	D	A	59.5	2.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	0.3
3014	536958.10	4816516.51	339.51	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	-99.7
3014	536958.10	4816516.51	339.51	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	-99.7
3018	536958.66	4816518.42	339.50	0	D	A	59.5	3.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	0.5
3018	536958.66	4816518.42	339.50	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	-99.5
3018	536958.66	4816518.42	339.50	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	-99.5
3023	536958.18	4816516.77	339.51	1	D	A	59.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
3023	536958.18	4816516.77	339.51	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3023	536958.18	4816516.77	339.51	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
3027	536958.73	4816518.68	339.50	1	D	A	59.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
3027	536958.73	4816518.68	339.50	1	N	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3027	536958.73	4816518.68	339.50	1	E	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3187	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	4.3
3187	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-95.7


Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3187	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-95.7
3191	536957.21	4816513.99	339.53	1	D	A	59.5	5.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3191	536957.21	4816513.99	339.53	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3191	536957.21	4816513.99	339.53	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3349	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
3349	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
3349	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
3354	536970.36	4816535.46	339.40	1	D	A	59.5	2.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
3354	536970.36	4816535.46	339.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3354	536970.36	4816535.46	339.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3359	536972.20	4816536.13	339.40	1	D	A	59.5	3.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
3359	536972.20	4816536.13	339.40	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3359	536972.20	4816536.13	339.40	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3363	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
3363	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3363	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3367	536978.53	4816487.38	339.72	1	D	A	59.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.1
3367	536978.53	4816487.38	339.72	1	N	A	-40.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
3367	536978.53	4816487.38	339.72	1	E	A	-40.5	4.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
3371	536971.19	4816491.72	339.73	0	D	A	59.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
3371	536971.19	4816491.72	339.73	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3371	536971.19	4816491.72	339.73	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
3375	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.1
3375	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
3375	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
3432	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
3432	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3432	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
3437	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.3
3437	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
3437	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
3662	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
3662	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
3662	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
3667	536976.09	4816488.11	339.73	1	D	A	59.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-27.8
3667	536976.09	4816488.11	339.73	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
3667	536976.09	4816488.11	339.73	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
3669	536974.85	4816488.52	339.74	1	D	A	59.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-33.2
3669	536974.85	4816488.52	339.74	1	N	A	-40.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.2
3669	536974.85	4816488.52	339.74	1	E	A	-40.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.2
3718	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3718	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3718	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3723	536962.05	4816516.74	339.44	1	D	A	59.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
3723	536962.05	4816516.74	339.44	1	N	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3723	536962.05	4816516.74	339.44	1	E	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3727	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
3727	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3727	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
3731	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
3731	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3731	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
3815	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
3815	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
3815	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
3819	536968.90	4816494.48	339.70	1	D	A	59.5	-3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-33.9
3819	536968.90	4816494.48	339.70	1	N	A	-40.5	-3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
3819	536968.90	4816494.48	339.70	1	E	A	-40.5	-3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
3821	536969.49	4816493.76	339.71	1	D	A	59.5	3.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-27.2
3821	536969.49	4816493.76	339.71	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
3821	536969.49	4816493.76	339.71	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
3823	536969.04	4816494.31	339.70	1	D	A	59.5	-0.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	0.4
3823	536969.04	4816494.31	339.70	1	N	A	-40.5	-0.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-99.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3823	536969.04	4816494.31	339.70	1	E	A	-40.5	-0.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-99.6
3859	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
3859	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3859	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
3862	536963.11	4816522.94	339.45	1	D	A	59.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3862	536963.11	4816522.94	339.45	1	N	A	-40.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3862	536963.11	4816522.94	339.45	1	E	A	-40.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
4052	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
4052	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4052	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4055	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
4055	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
4055	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
4083	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
4083	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4083	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4087	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4087	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4087	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4113	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
4113	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4113	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
4117	536968.43	4816495.20	339.69	1	D	A	59.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
4117	536968.43	4816495.20	339.69	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
4117	536968.43	4816495.20	339.69	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
4120	536967.90	4816496.06	339.67	1	D	A	59.5	-1.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
4120	536967.90	4816496.06	339.67	1	N	A	-40.5	-1.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4120	536967.90	4816496.06	339.67	1	E	A	-40.5	-1.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
4125	536968.23	4816495.51	339.68	1	D	A	59.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-27.8
4125	536968.23	4816495.51	339.68	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
4125	536968.23	4816495.51	339.68	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
4128	536968.45	4816495.16	339.69	1	D	A	59.5	0.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	1.7
4128	536968.45	4816495.16	339.69	1	N	A	-40.5	0.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-98.3
4128	536968.45	4816495.16	339.69	1	E	A	-40.5	0.8	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-98.3
4192	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
4192	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4192	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
4195	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
4195	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4195	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
4273	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
4273	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
4273	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
4276	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
4276	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4276	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
4286	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
4286	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
4286	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
4290	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
4290	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
4290	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
4307	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
4307	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
4307	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
4311	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.3
4311	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
4311	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
4363	536962.02	4816518.72	339.45	0	D	A	59.5	0.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	-0.0
4363	536962.02	4816518.72	339.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	-100.0
4363	536962.02	4816518.72	339.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	-100.0
4368	536962.11	4816519.68	339.45	0	D	A	59.5	-1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.4	0.0	0.0	-2.3
4368	536962.11	4816519.68	339.45	0	N	A	-40.5	-1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.4	0.0	0.0	-102.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4368	536962.11	4816519.68	339.45	0	E	A	-40.5	-1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	3.4	0.0	0.0	-102.3
4372	536962.04	4816518.95	339.45	1	D	A	59.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
4372	536962.04	4816518.95	339.45	1	N	A	-40.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4372	536962.04	4816518.95	339.45	1	E	A	-40.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4375	536962.13	4816519.91	339.45	1	D	A	59.5	-5.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-35.8
4375	536962.13	4816519.91	339.45	1	N	A	-40.5	-5.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
4375	536962.13	4816519.91	339.45	1	E	A	-40.5	-5.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
4421	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.2
4421	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
4421	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
4425	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
4425	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
4425	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
4481	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
4481	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
4481	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
4485	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
4485	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4485	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
4542	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
4542	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
4542	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
4546	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
4546	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4546	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4549	536967.53	4816496.73	339.66	1	D	A	59.5	-1.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-31.9
4549	536967.53	4816496.73	339.66	1	N	A	-40.5	-1.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-131.9
4549	536967.53	4816496.73	339.66	1	E	A	-40.5	-1.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-131.9
4606	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
4606	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4606	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
4611	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
4611	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4611	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
4627	536962.32	4816520.69	339.45	0	D	A	59.5	1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-4.3
4627	536962.32	4816520.69	339.45	0	N	A	-40.5	1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-104.3
4627	536962.32	4816520.69	339.45	0	E	A	-40.5	1.2	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-104.3
4629	536962.55	4816521.53	339.45	0	D	A	59.5	-3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-1.3
4629	536962.55	4816521.53	339.45	0	N	A	-40.5	-3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
4629	536962.55	4816521.53	339.45	0	E	A	-40.5	-3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
4633	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
4633	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
4633	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
4637	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
4637	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.3
4637	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.3
4640	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
4640	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4640	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4644	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
4644	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.3
4644	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.3
4648	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-29.0
4648	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.0
4648	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.0
4682	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.5
4682	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
4682	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
4685	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
4685	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4685	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
4694	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.4
4694	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
4694	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.6
4698	536964.51	4816518.46	339.41	1	D	A	59.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
4698	536964.51	4816518.46	339.41	1	N	A	-40.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4698	536964.51	4816518.46	339.41	1	E	A	-40.5	2.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
4727	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.3
4727	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
4727	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
4732	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
4732	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
4732	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
4784	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.1
4784	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.9
4784	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.9
4787	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-29.6
4787	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
4787	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
4807	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.0
4807	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
4807	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
4810	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
4810	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
4810	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
4839	536964.01	4816517.02	339.41	0	D	A	59.5	1.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.9
4839	536964.01	4816517.02	339.41	0	N	A	-40.5	1.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
4839	536964.01	4816517.02	339.41	0	E	A	-40.5	1.6	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
4842	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
4842	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4842	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
4849	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	3.9
4849	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
4849	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
4853	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4853	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4853	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4857	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	5.7	0.0	0.0	-1.9
4857	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	5.7	0.0	0.0	-101.9
4857	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	5.7	0.0	0.0	-101.9
4861	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
4861	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
4861	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
5003	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.6
5003	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.4
5003	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.4
5006	536965.18	4816521.17	339.41	1	D	A	59.5	1.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
5006	536965.18	4816521.17	339.41	1	N	A	-40.5	1.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5006	536965.18	4816521.17	339.41	1	E	A	-40.5	1.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
5057	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.3
5057	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
5057	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
5060	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
5060	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5060	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
5097	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.1
5097	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
5097	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
5099	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5099	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5099	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5110	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.1
5110	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
5110	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
5111	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
5111	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																			
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5111	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
5144	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.0
5144	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
5144	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
5146	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
5146	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
5146	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
5187	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
5187	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
5187	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
5189	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
5189	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5189	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
5192	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.4
5192	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
5192	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
5196	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
5196	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
5196	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3

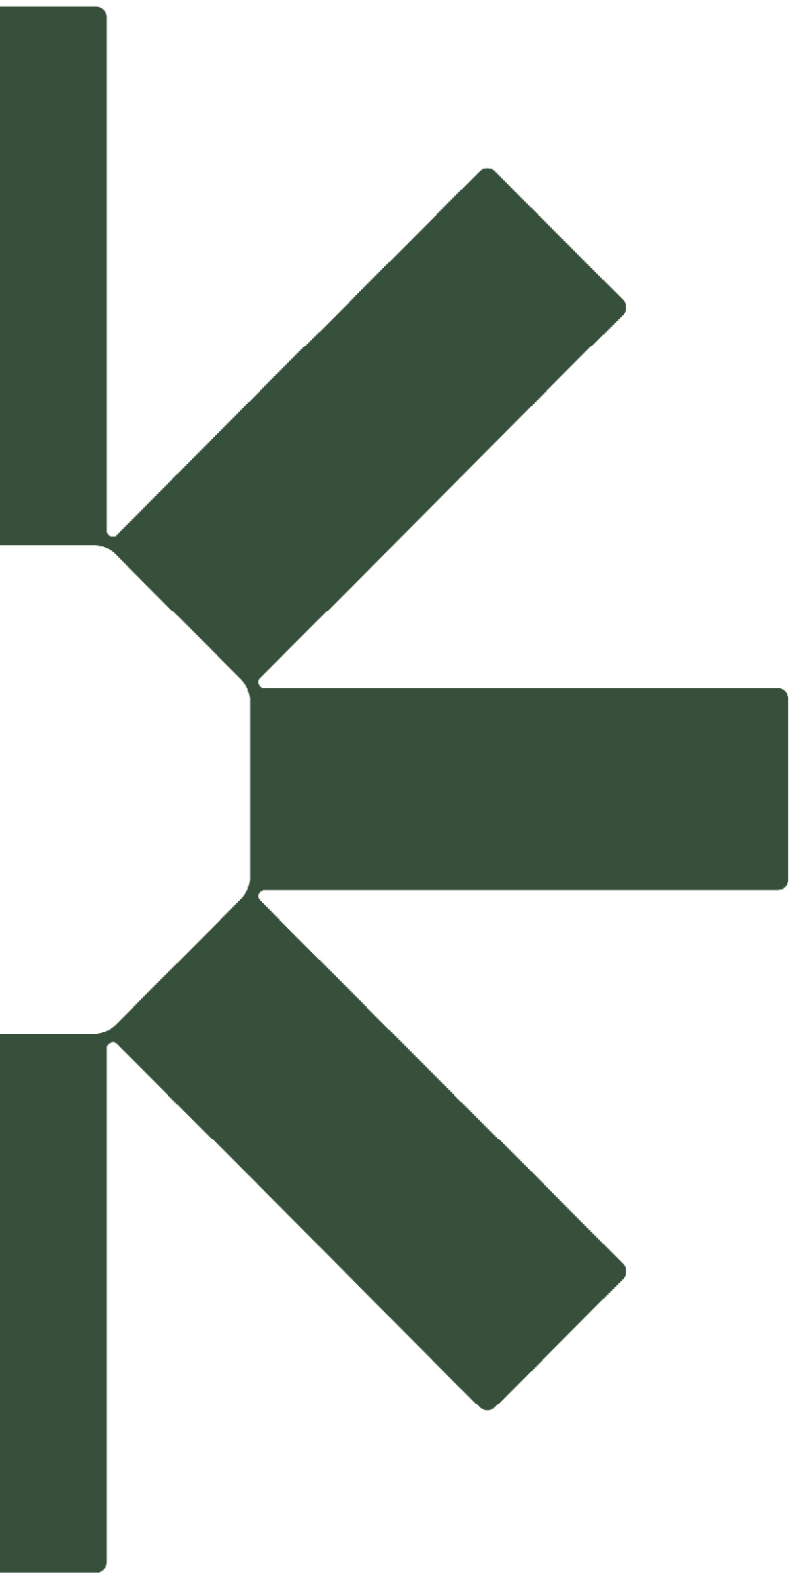

Making Sustainability Happen