Appendix A Declaration Statements

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

CANADA	)	In the Matter of the
	)	Environmental Protection
PROVINCE OF ONTARIO	)	Act and the Planning Act
	)	
	)	And in the Matter of 170 Northfield
	)	Drive West in the City of Waterloo
	)	in the Regional Municipality
	)	of Waterloo

I, Keni Mallinen, P.Eng., of the City of Guelph, in Wellington County, SOLEMNLY DECLARE THAT:

1. I am a Professional Engineer employed by SLR Consulting (Canada) Ltd., which holds a Certificate of Authorization from the Association of Professional Engineers of Ontario and have personal knowledge of the matters set out below.
2. I was retained or employed as the principal consultant to undertake the assessment of noise impacts and recommendation of noise mitigation measures for the property described as 170 Northfield Drive West in Waterloo, Ontario.
3. I have the expertise required to perform these services. Any assessment activities or recommendations requiring the application of engineering principles have been undertaken or supervised by an engineer qualified to perform such services.
4. The information used in the study entitled:

   "Updated Environmental Noise & Vibration Assessment, 170 Northfield Drive West, Waterloo", SLR Project No: 241.030968.00001"

   and dated April 2, 2024 is based on the best information available as of the date of the study.
5. The noise level calculations, the interpretation of noise attenuation requirements, and the recommended measures are in accordance with Ministry of Environment guidelines, Regional Municipality of Waterloo policies, and any applicable policy or guidelines of the Area Municipality, and any other applicable policy or guideline.
6. The physical noise attenuation measures proposed in this study are feasible to implement and will provide the level of attenuation indicated in the study.
7. I acknowledge that this study may be subject to a peer review conducted at my cost.
8. I acknowledge that public authorities and future owners, occupants and others may rely on this statement.

AND I make this solemn Declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

DECLARED remotely by Keni Mallinen before me at the City of Guelph, in the County of Wellington,in the Province of Ontario on the 2nd day of April , 2025, in accordance with O.Reg 431/20.

Keni Mallinen

Administering Oath or Declaration Remotely

Wanda-Lee Harris

A Notary Public

ONTARIO NOTARY PUBLIC WANDA-LEE HARRIS

Wanda-Lee Harris, Notary Public,
County of Wellington, limited to the attestation of instruments and the taking of affidavits, for SLR Consulting (Canada) Ltd. and Novus Environmental.
Expires January 14, 2026

CANADA	)	In the Matter of the
	)	Environmental Protection
PROVINCE OF ONTARIO	)	Act and the Planning Act
	)	
	)	And in the Matter of 170 Northfield
	)	Drive West in the City of Waterloo
	)	in the Regional Municipality
	)	of Waterloo

I, Sheldon Dobsi, of the City of Toronto, in the

County of Canada, SOLEMNLY DECLARE THAT:

1. I am the owner of the property, or the owner's agent, and that I understand and agree with the noise attenuation measures proposed in the study:

   "Updated Environmental Noise & Vibration Assessment, 170 Northfield Drive West, Waterloo", SLR Project No: 241.030968.00001"

   and dated April 2, 2024

2. The application has been designed to avoid the use of berms or walls as noise attenuation features where feasible. Where berms or walls are recommended, the Noise Study provides economic, planning and engineering justification.

3. If the application is changed in a way that may affect the noise level calculations, I will have a revised noise study submitted to the Region.

AND I make this solemn Declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

DECLARED before me at the City	)	
	)	
of Toronto, in the	)	
	)	
County of Canada,	)	Sheldon Dobsi
	)	
this 4th day of April, 2025	)	

Appendix B Development Drawings

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025



TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of original drawings issued to other parties. Refer to the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRD
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

CONTEXT PLAN

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 2500

ONTARIO ASSOCIATION OF ARCHITECTS
M. RAZA MEHDI
LICENCE
9452

DRAWING NO. RZ010

REV. 2

2025-03-04 4:39:53 PM

ADJACENT LANDS:
± 50,107.29m²

DEVELOPMENT LANDS:
± 74,470.61m²

GROSS SITE AREA:
± 161,728.4m²

BUILDING K
INDUSTRIAL
1 STOREY

BUILDING L
INDUSTRIAL
1 STOREY

BUILDING L - TRAIL AREA: 1,850.5m²

TRAIL TOTAL AREA: 4,434.49m²

EXISTING PRIVATE ROAD

PROPOSED PUBLIC ROAD

BUILDING I1
FLEX COMMERCIAL
1 STOREY

BUILDING I2
FLEX COMMERCIAL
1 STOREY

BUILDING J
FLEX COMMERCIAL
1 STOREY

BUILDING J - TRAIL AREA: 885.75m²

WEBER ST N

BUILDING F1
25 STOREY

BUILDING E
26 STOREY

BUILDING A
20 STOREY

BUILDING B1
36 STOREY

BUILDING B2
36 STOREY

BUILDING B - TRAIL AREA: 808.99m²

BUILDING F2
28 STOREY

PROPOSED POPS
AREA: 2,258.94m²

PROPOSED POPS
AREA: 1,876.94m²

BUILDING C1
31 STOREY

BUILDING C2
32 STOREY

BUILDING C - TRAIL AREA: 889.26m²

PROPOSED PRIVATE DRIVEWAY

BUILDING G1
26 STOREY

BUILDING G2
26 STOREY

BUILDING H1
27 STOREY

BUILDING D1
35 STOREY

BUILDING D2
28 STOREY

TOWER SEPARATION

TEMPORARY EASMENT 87.37m²

EXTENT OF EXPROPRIATED LAND 1026.63m²

EXISTING EASMENT 309.92m²

WATERLOO FIRE STATION 3

ROAD WIDENING 759.94m²

NORTHFIELD DR. W

ADJACENT LANDS:
± 50,107.29m²

OFFICE LANDS:
± 28,482.11m²

DEVELOPMENT LANDS:
±74,470.61m²

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON. M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of original drawings issued previously. Refer to the drawings of the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

OVERALL SITE PLAN

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1:750

ONTARIO ASSOCIATION OF ARCHITECTS
M. ROZA MEHDI
LICENCE 9452

DRAWING NO. RZ013
REV. 2

2025-03-04 4:40:01 PM

EXISTING PRIVATE ROAD

BUILDING I

OUTLINE OF EXISTING BUILDING

EXTENTS OF UNDERGROUND GARAGE

BUILDING F

BUILDING I1
FLEX COMMERCIAL
1 STOREY

BUILDING I2
FLEX COMMERCIAL
1 STOREY

BUILDING J
FLEX COMMERCIAL
1 STOREY

BUILDING J - TRAIL AREA: 885.75m²

BUILDING J

BUILDING F1
25 STOREY

BUILDING E
26 STOREY

5 STOREY

1 STOREY

BUILDING A
20 STOREY

5 STOREY

1 STOREY

BUILDING B1
36 STOREY

6 STOREY

5 STOREY

BUILDING B2
36 STOREY

BUILDING B - TRAIL AREA: 808.99m²

BUILDING B

BUILDING F2
28 STOREY

BUILDING E
PROPOSED POPS AREA: 2,258.94m²

BUILDING A
PROPOSED POPS AREA: 1,876.94m²

BUILDING C1
31 STOREY

5 STOREY

BUILDING C2
32 STOREY

BUILDING C - TRAIL AREA: 889.26m²

BUILDING C

PROPOSED PRIVATE ROAD

PROPOSED PRIVATE DRIVEWAY

PROPOSED PRIVATE DRIVEWAY

OUTLINE OF EXISTING BUILDING

BUILDING G1
26 STOREY

BUILDING G2
26 STOREY

BUILDING H1
27 STOREY

BUILDING D1
35 STOREY

BUILDING D2
28 STOREY

5 STOREY

5 STOREY

TEMPORARY EASMENT 87.37m²

EXTENT OF EXPROPRIATED LAND 1026.63m²

EXISTING EASMENT 309.92m²

WATERLOO FIRE STATION 3

BUILDING G

BUILDING H

BUILDING D

ROAD WIDENING 759.94m²

NORTHFIELD DR. W

ADJACENT LANDS: ± 50,107.29m²

OFFICE LANDS: ± 28,482.11m²

DEVELOPMENT LANDS: ±74,470.61m²

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical or electrical drawings, specifications or designs not prepared by the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario


DRAWING

SITE PLAN / ROOF PLAN - RESIDENTIAL

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

DRAWING NO. RZ014 | REV. 2

2025-03-04 4:40:06 PM

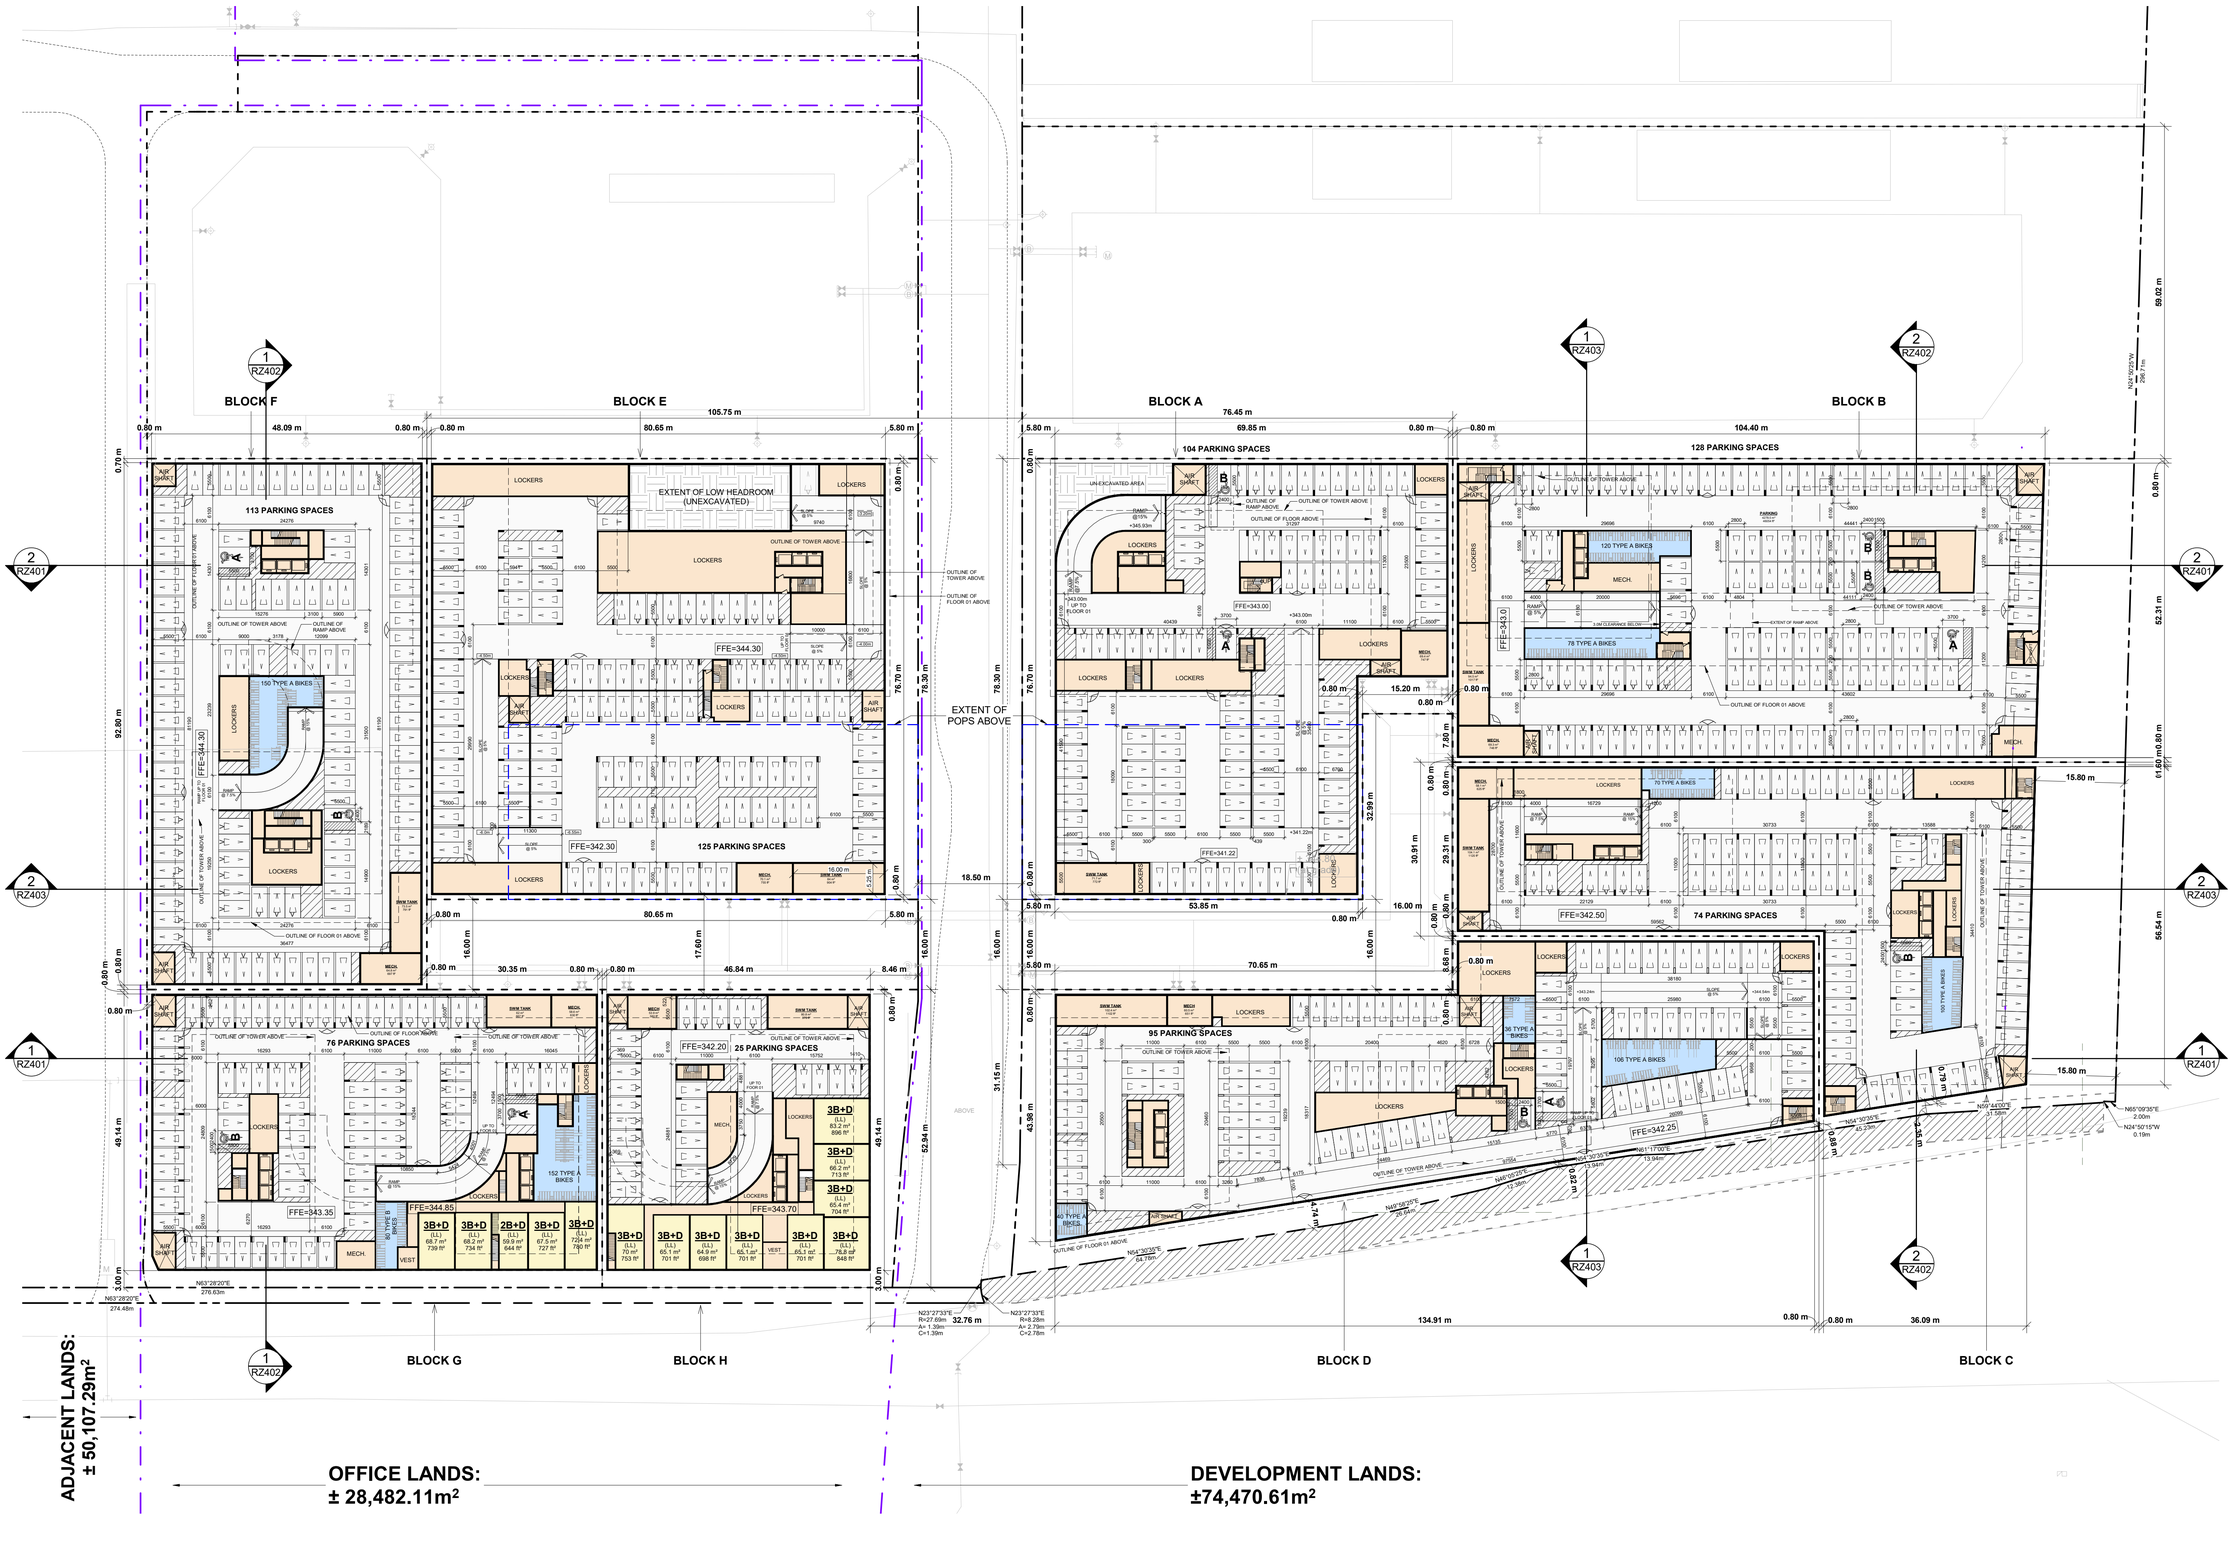

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files transmitted to consultants and contractors. Contractors must use only the most appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


UNDERGROUND LEVEL 01

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
9612

DRAWING NO. RZ101 REV. 2

2025-03-04 4:40:17 PM

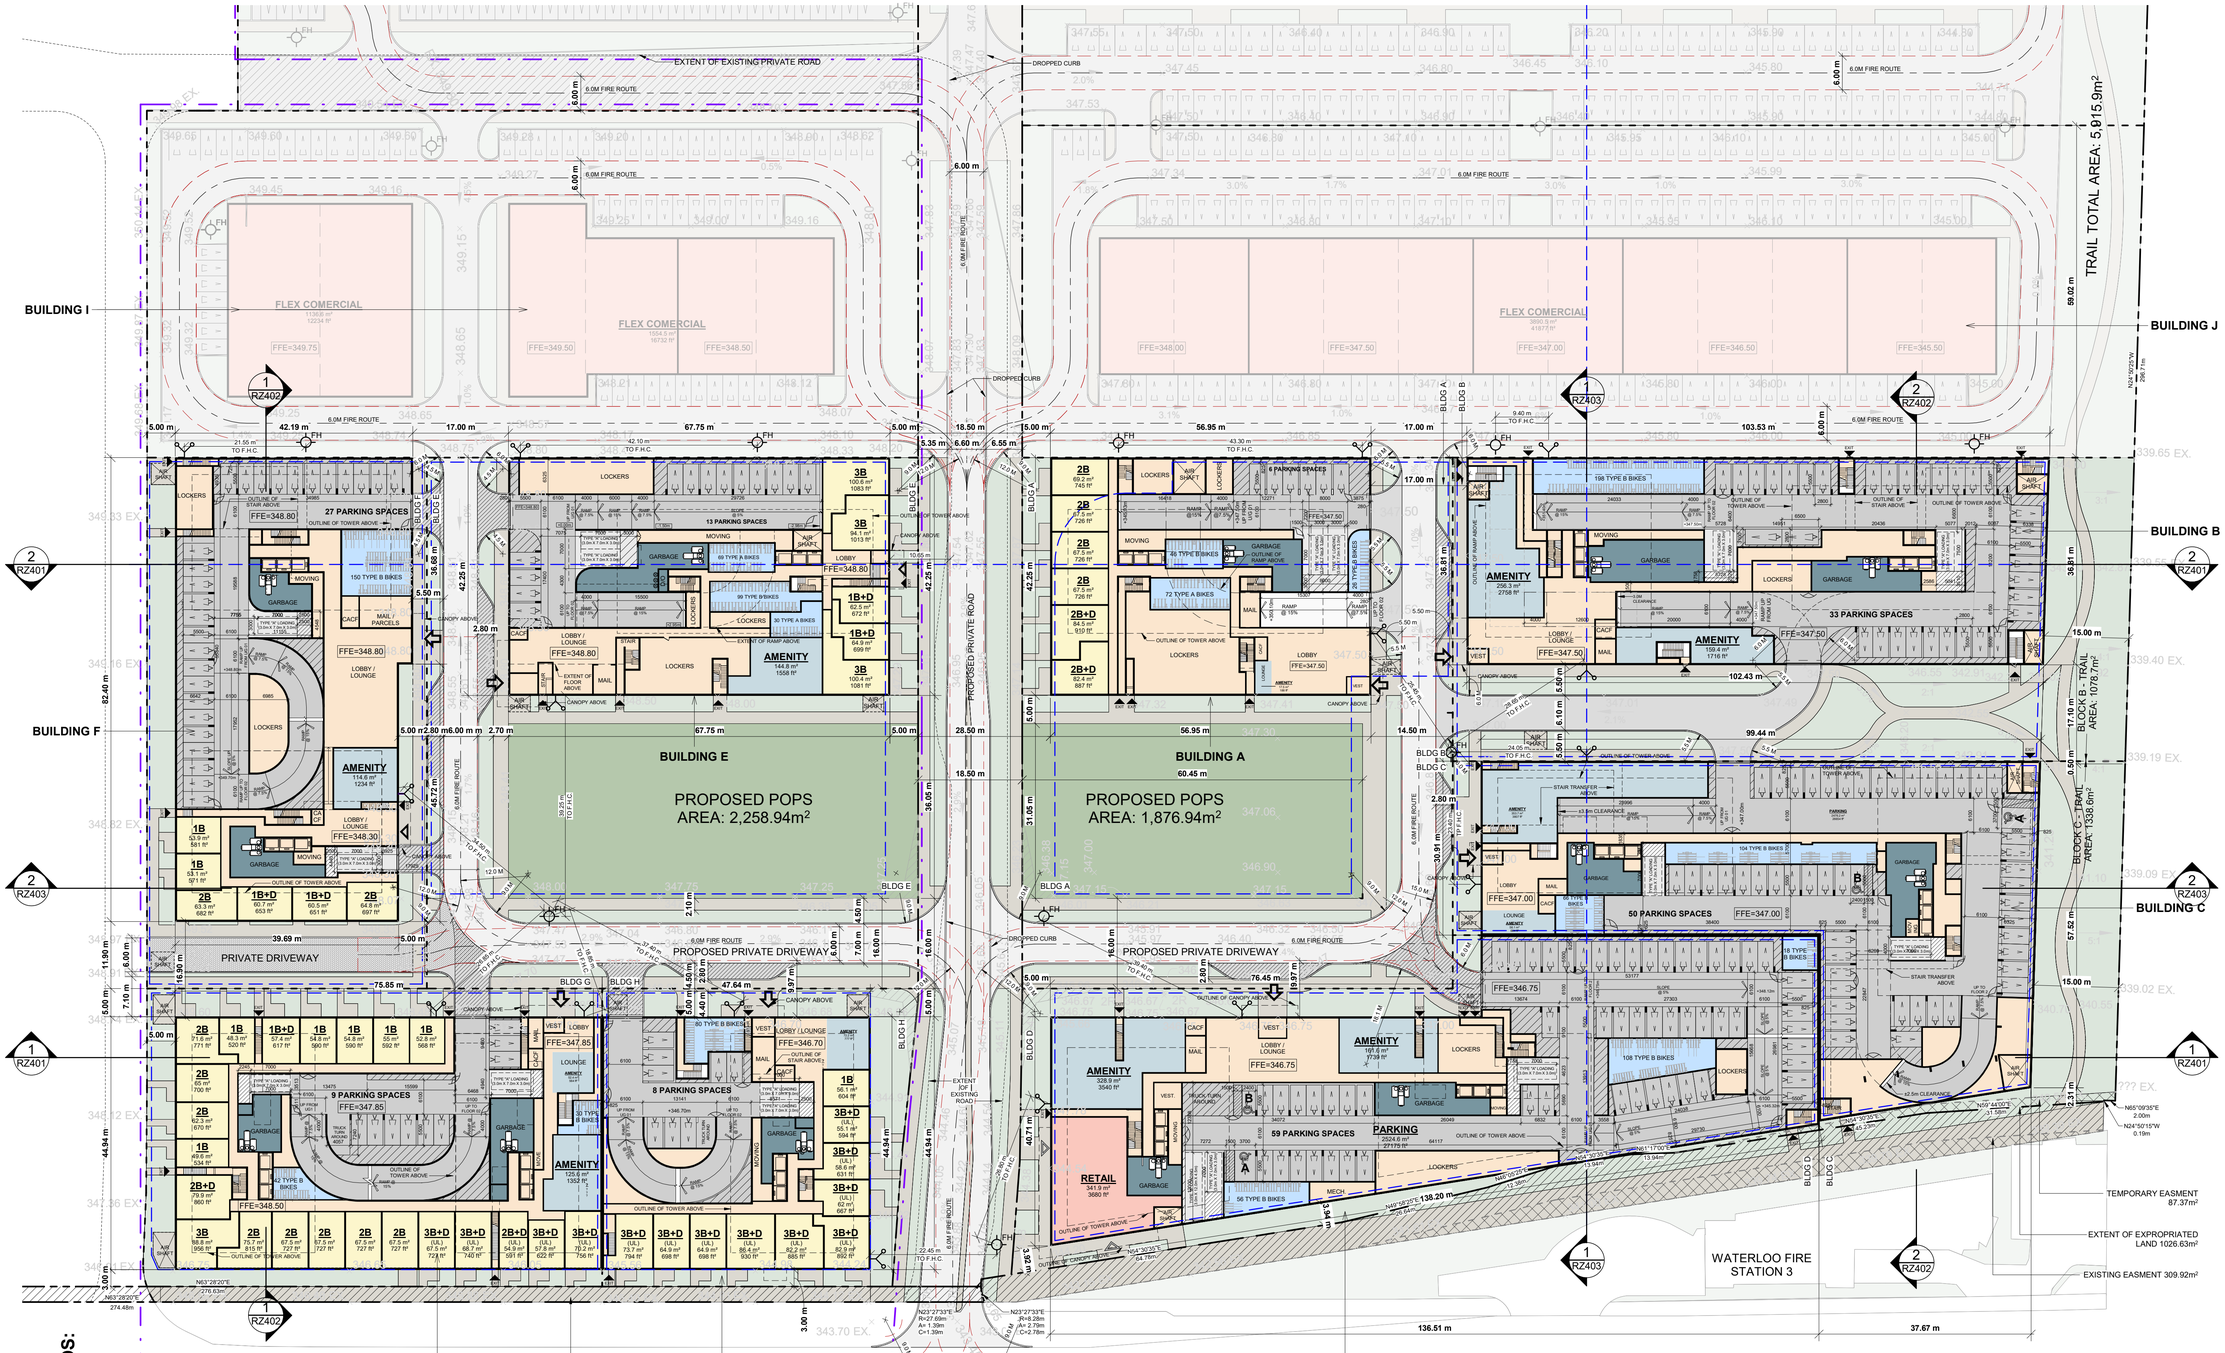

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON. M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of original drawings developed by the architect. The contractor is to coordinate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:


AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


FLOOR 01

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS — M. REZA MEHDI — LICENCE 9452

DRAWING NO. RZ151 — REV. 2

2025-03-04 4:40:22 PM

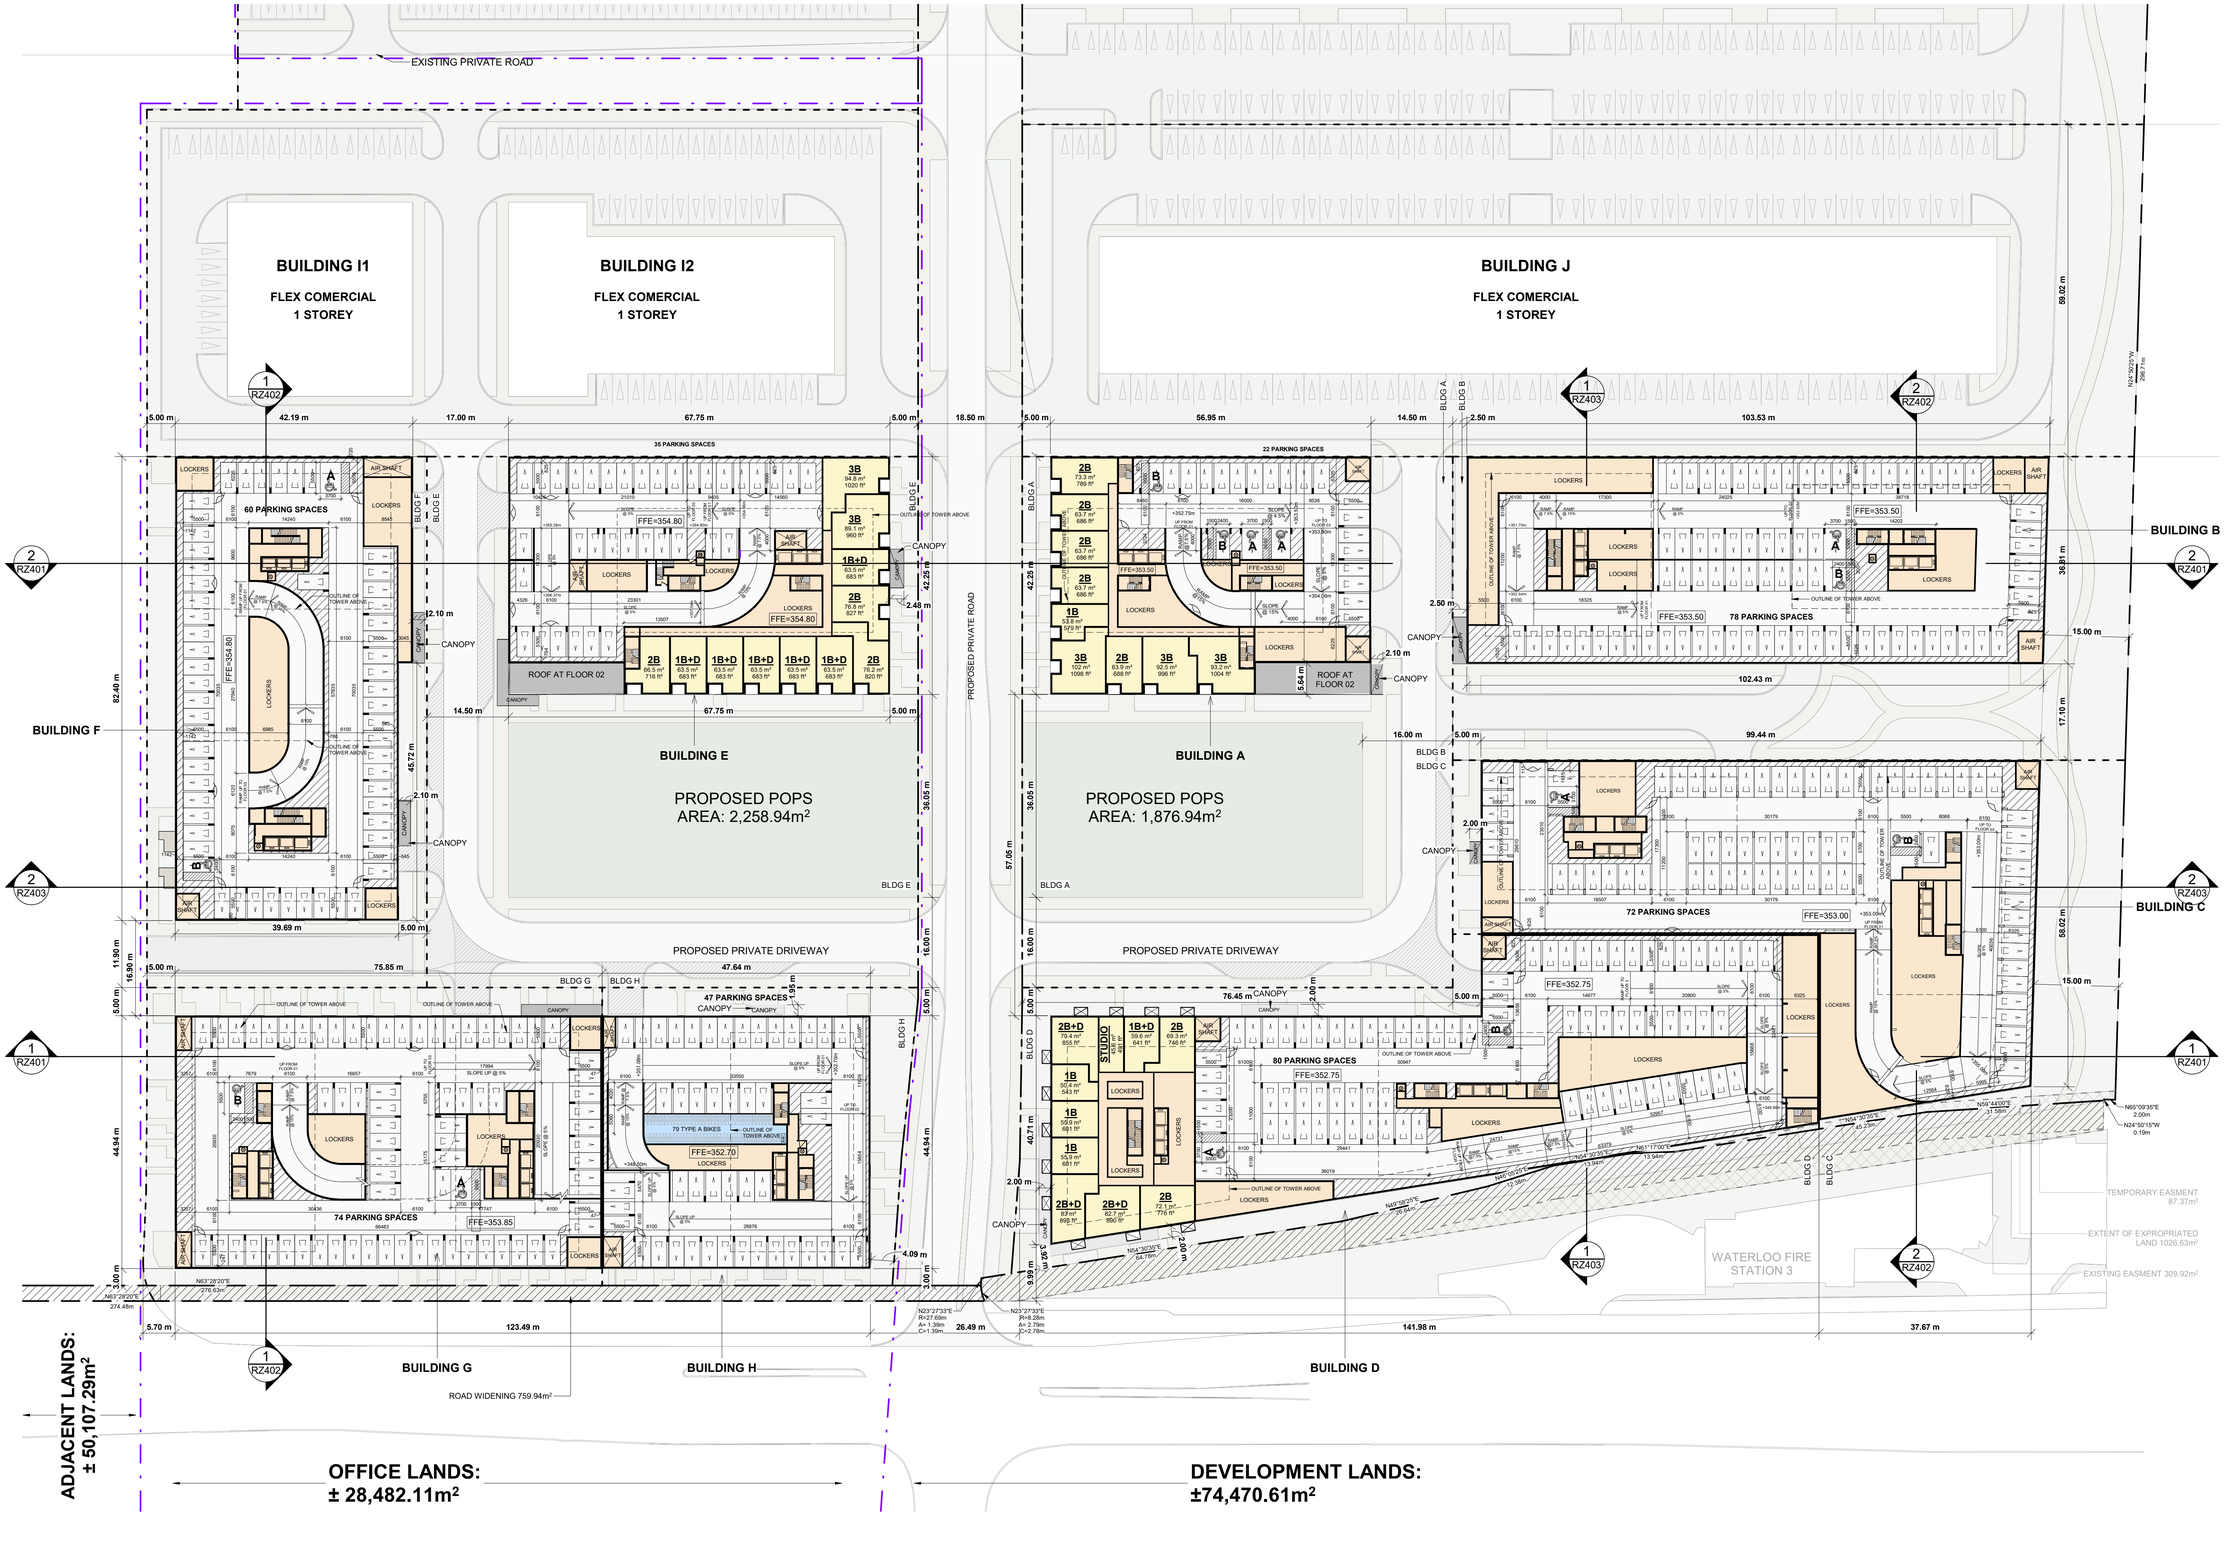

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical or electrical drawings. The contractor must review all shop drawings with appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-26	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


FLOOR 02

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
3452

DRAWING NO. RZ152 | REV. 2

2025-03-04 4:40:27 PM

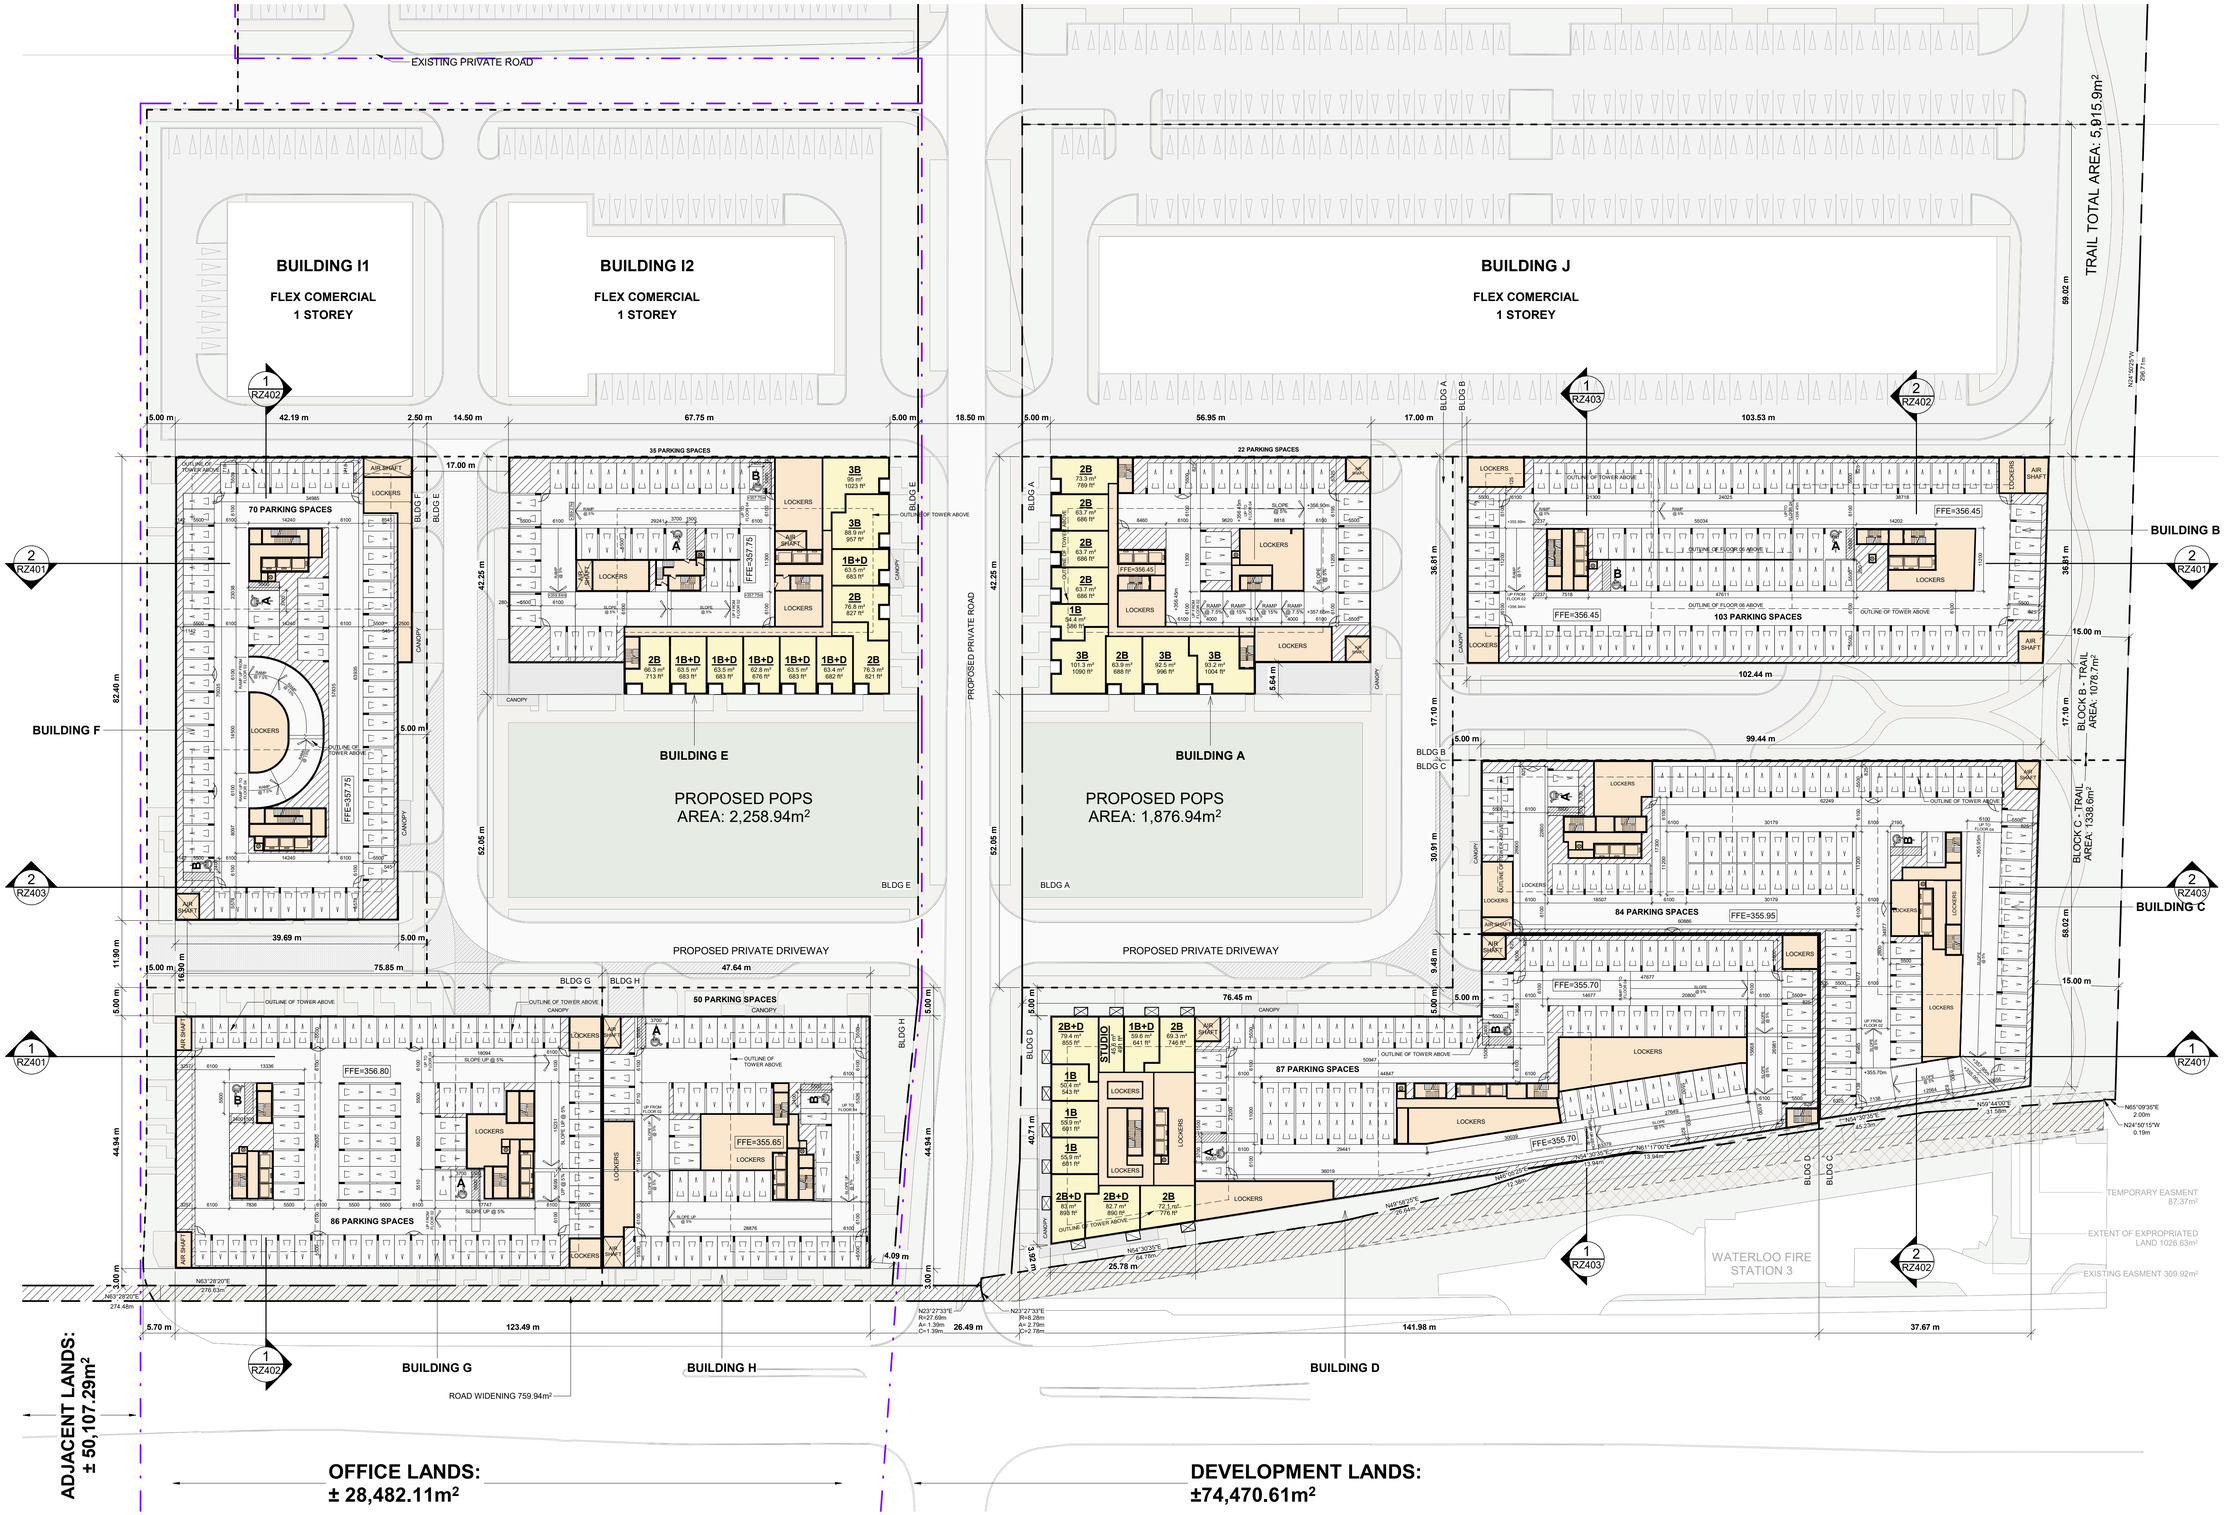

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical or electrical drawings. The contractor must review all shop drawings with appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

TYPICAL PARKING DIMENSIONS:


AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH



#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRD
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


FLOOR 03-05 (TYPICAL)

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS — M. RAZA MEHDI — LICENCE 9452

DRAWING NO. RZ153 | REV. 2

2025-03-04 4:40:33 PM

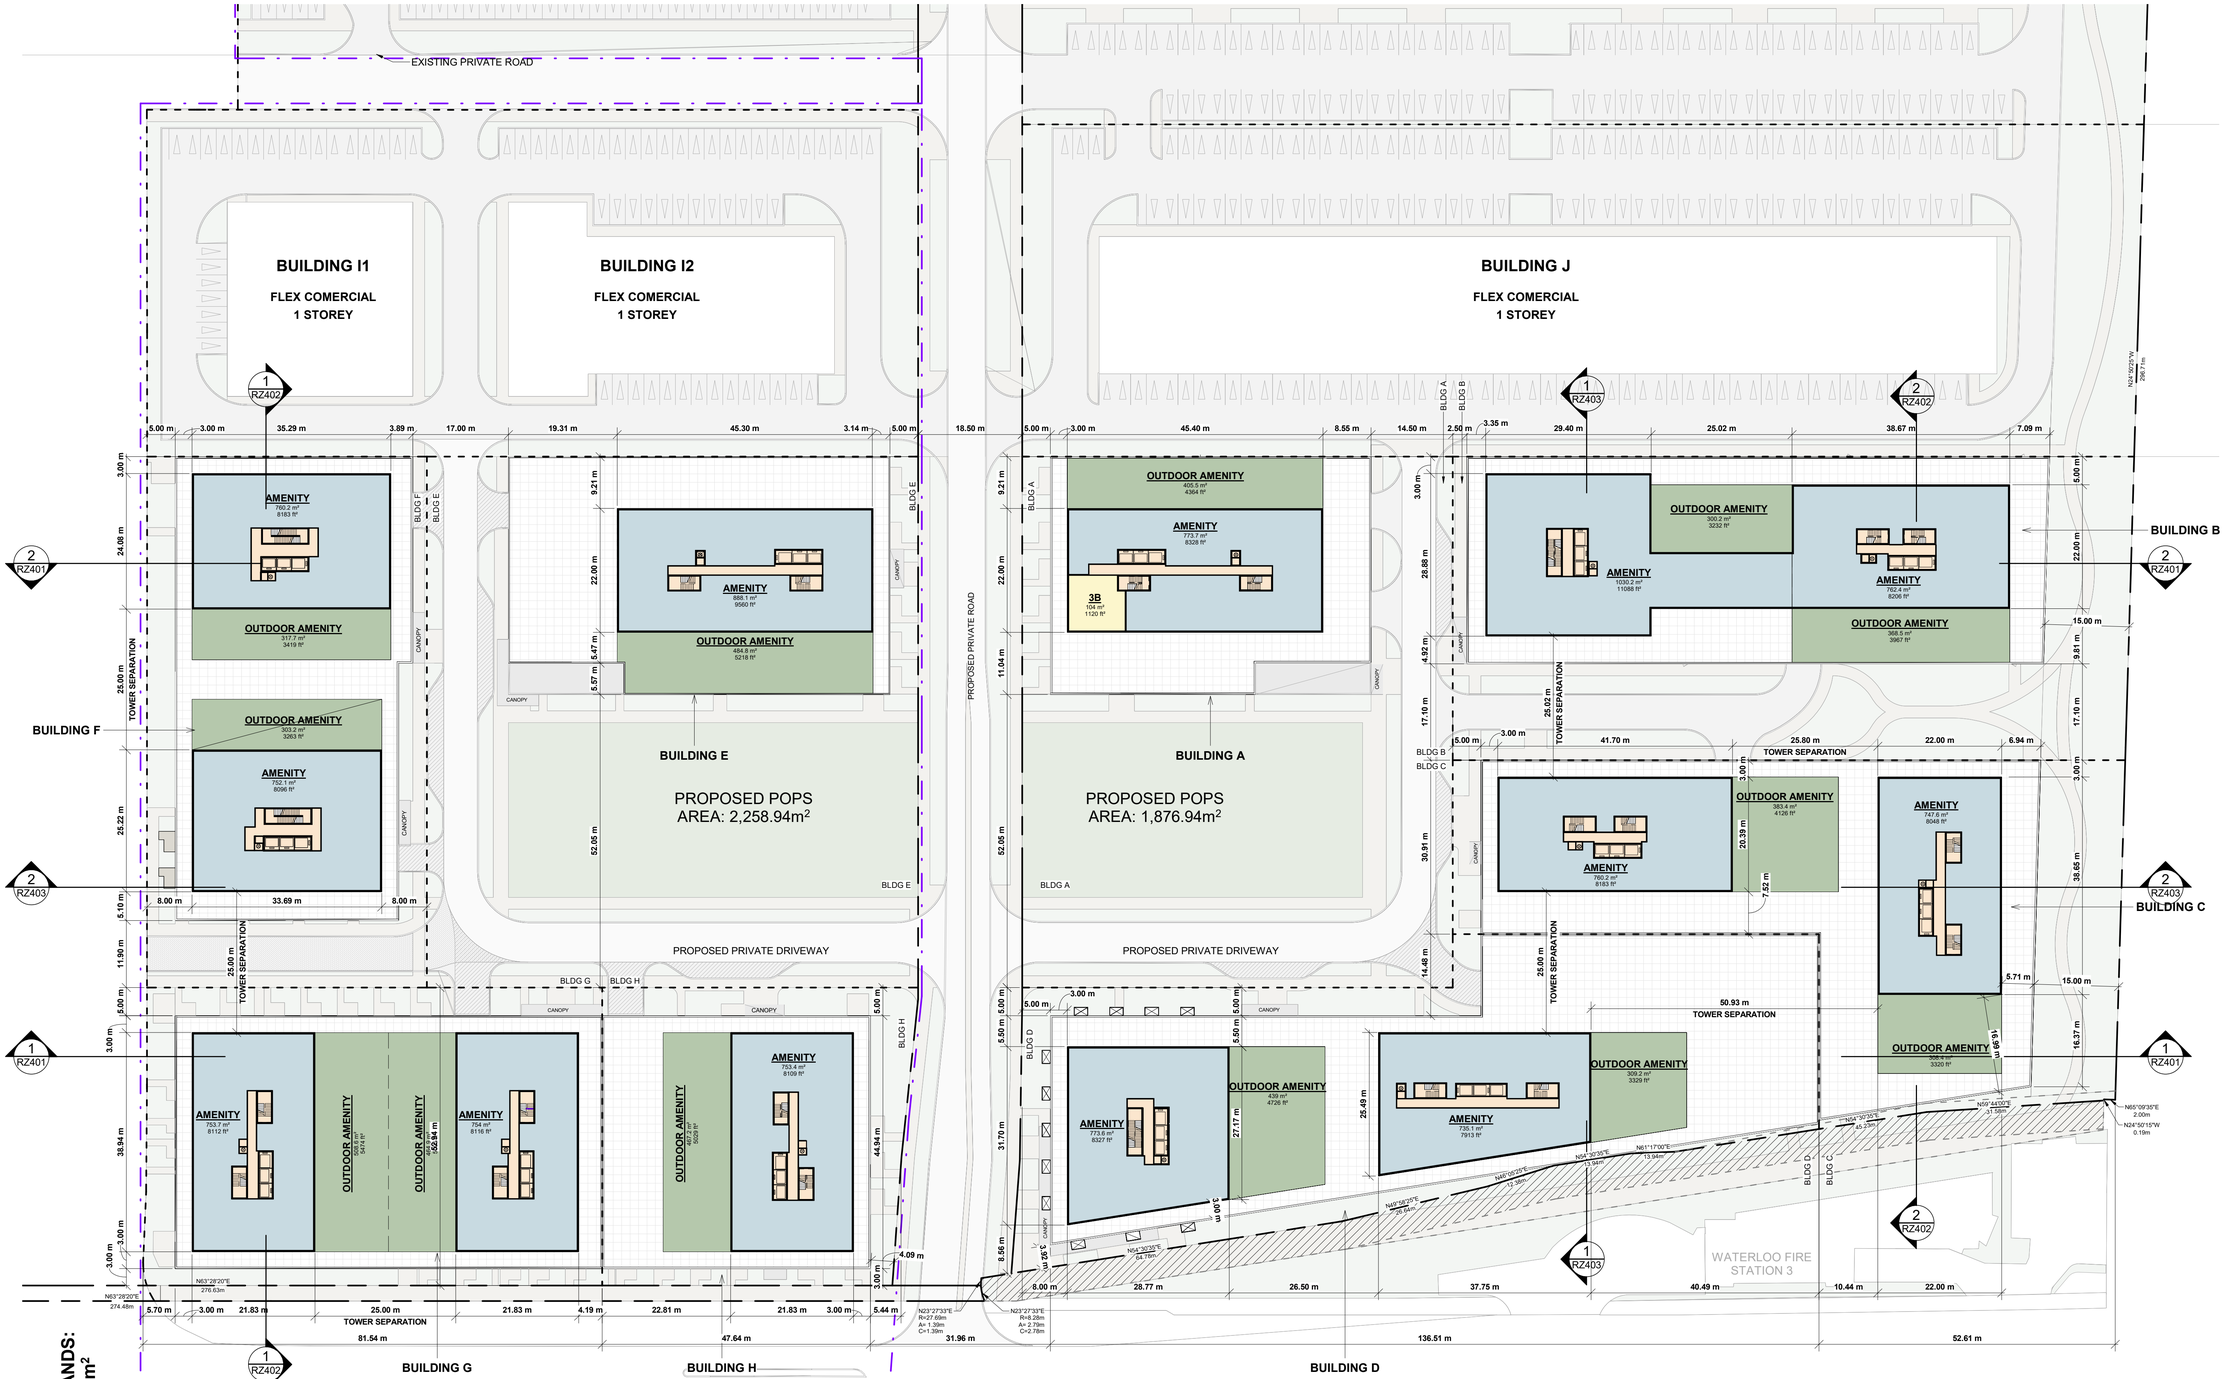

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of this drawing. Refer to consultant's drawings for all work by the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

FLOOR 06

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS — M. REZA MEHDI — LICENCE 3452

DRAWING NO. RZ154 | REV. 2

2025-03-04 4:40:38 PM

EXISTING PRIVATE ROAD

BUILDING I1
FLEX COMERCIAL
1 STOREY

BUILDING I2
FLEX COMERCIAL
1 STOREY

BUILDING J
FLEX COMERCIAL
1 STOREY

BUILDING F

BUILDING E

PROPOSED POPS
AREA: 2,258.94m²

BUILDING A

PROPOSED POPS
AREA: 1,876.94m²

BUILDING B

BUILDING C

PROPOSED PRIVATE DRIVEWAY

PROPOSED PRIVATE DRIVEWAY

BUILDING G

BUILDING H

BUILDING D

PROPOSED PRIVATE ROAD

WATERLOO FIRE
STATION 3

ADJACENT LANDS:
± 50,107.29m²

OFFICE LANDS:
± 28,482.11m²

DEVELOPMENT LANDS:
±74,470.61m²

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical, electrical, plumbing, civil, landscape or other drawings by the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- EXTENT OF UNDERGROUND PARKING BELOW

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

FLOOR 07 (TYPICAL)

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
9612

DRAWING NO. RZ155 | REV. 2

2025-03-04 4:40:44 PM

ADJACENT LANDS: ± 50,107.29m²

DEVELOPMENT LANDS: ± 74,470.61m²

GROSS SITE AREA: ± 161,728.4m²

OFFICE LANDS: ± 28,482.110m²

BUILDING K

BUILDING L

BUILDING I

BUILDING J

BUILDING F

BUILDING B

N63°28'25"E

505.33m

PROPOSED PUBLIC ROAD

EXISTING PRIVATE ROAD

INDUSTRIAL
4855.5 m²
52264 ft²

INDUSTRIAL
10460.4 m²
112595 ft²

FLEX COMERCIAL
1136.8 m²
12234 ft²

FLEX COMERCIAL
1554.5 m²
16732 ft²

FLEX COMERCIAL
3890.9 m²
41877 ft²

69 PARKING SPACES
REQUIRED (1.5/100 SQ M) : 73

104 PARKING SPACES
REQUIRED (1.5/100 SQ M) : 157

73 PARKING SPACES
REQUIRED (1.5/100 SQ M) : 41

157 PARKING SPACES
REQUIRED (1.5/100 SQ M) : 59

6.0M FIRE ROUTE

1 RZ402

2 RZ402

2 RZ401

1 RZ403

2 RZ402


LEGEND

- PRIMARY RESIDENTIAL ENTRANCE
- SECONDARY RESIDENTIAL ENTRANCE
- RETAIL ENTRANCE
- EXIT
- FIRE HYDRANT
- SIAMESE CONNECTION
- PROPERTY BOUNDARY
- BUILDING DELINEATION
- EASMENT DELINEATION
- PARKING BELOW GROUND
- PARKING BELOW

TYPICAL PARKING DIMENSIONS

AISLE WIDTH: MIN 6.1m

TYPICAL PARKING SPACE:
MIN 2.8 x 5.5 x 2.0m HIGH



TYPICAL BARRIER FREE SPACE:

TYPE A: MIN 3.7 x 5.5 x 2.1m HIGH
TYPE B: MIN 2.4 x 5.5 x 2.1m HIGH

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of this drawing. Refer to consultant's drawings for all work not shown on the architectural drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


FLOOR 01 - COMMERCIAL

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500


ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
9612

DRAWING NO. RZ162 REV. 2

2025-03-04 4:40:52 PM

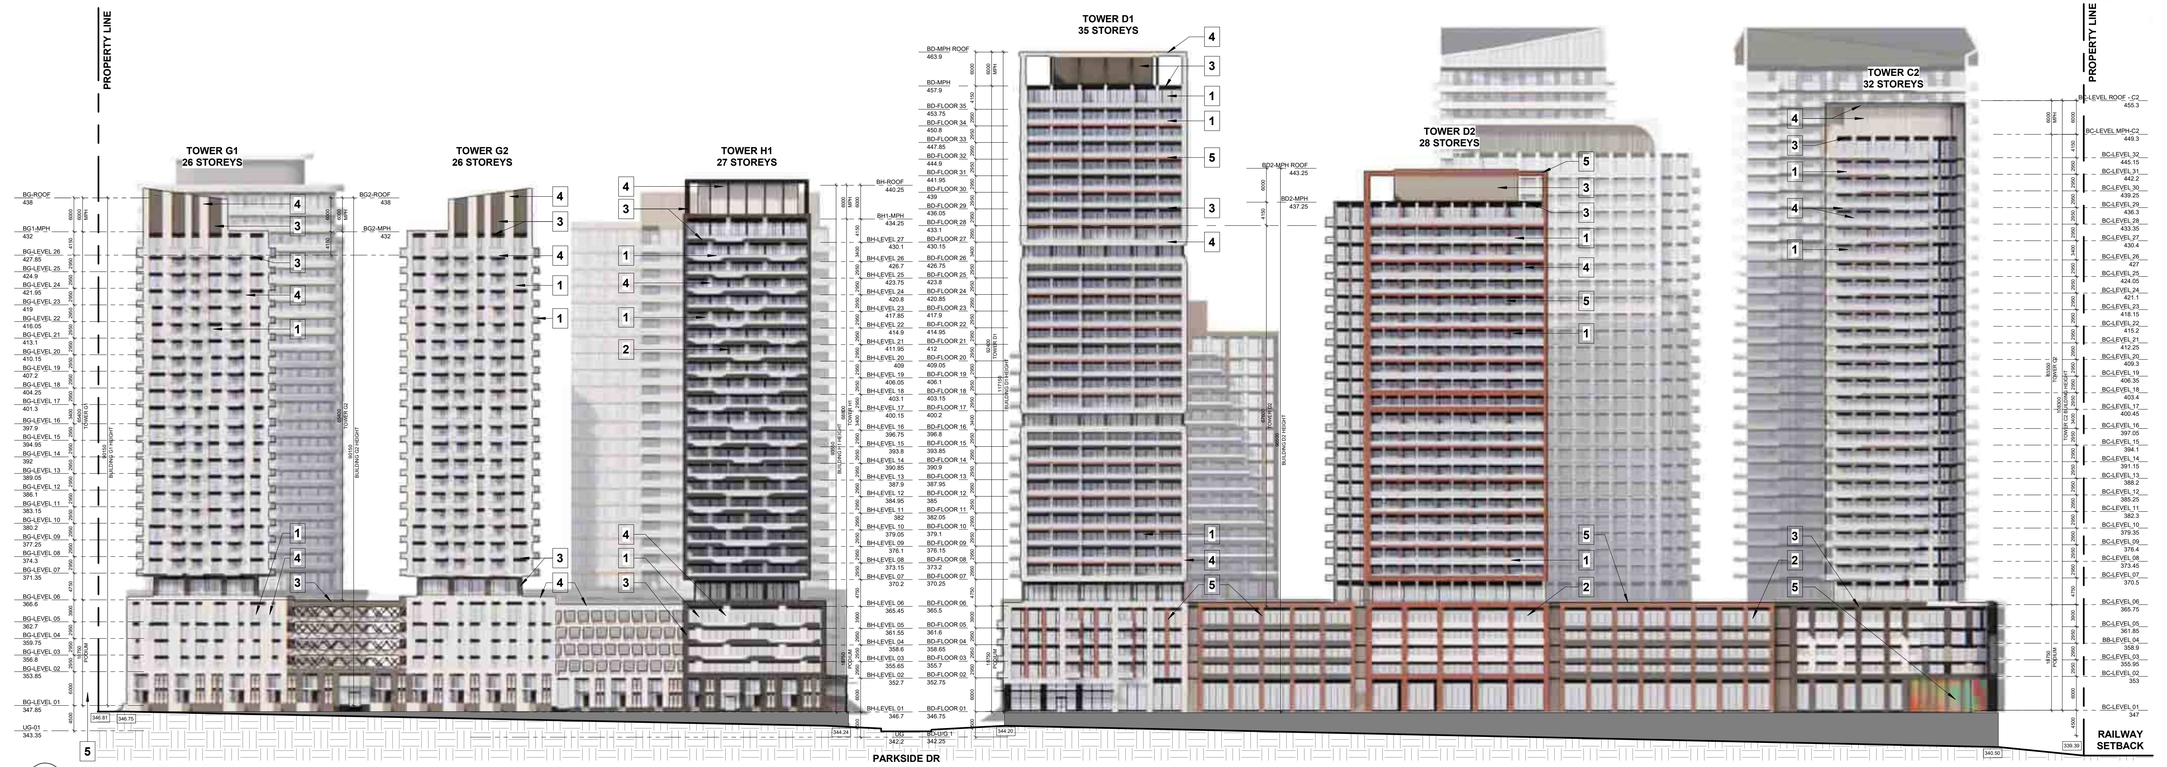

1 SOUTH SITE ELEVATION
RZ301 1 : 500

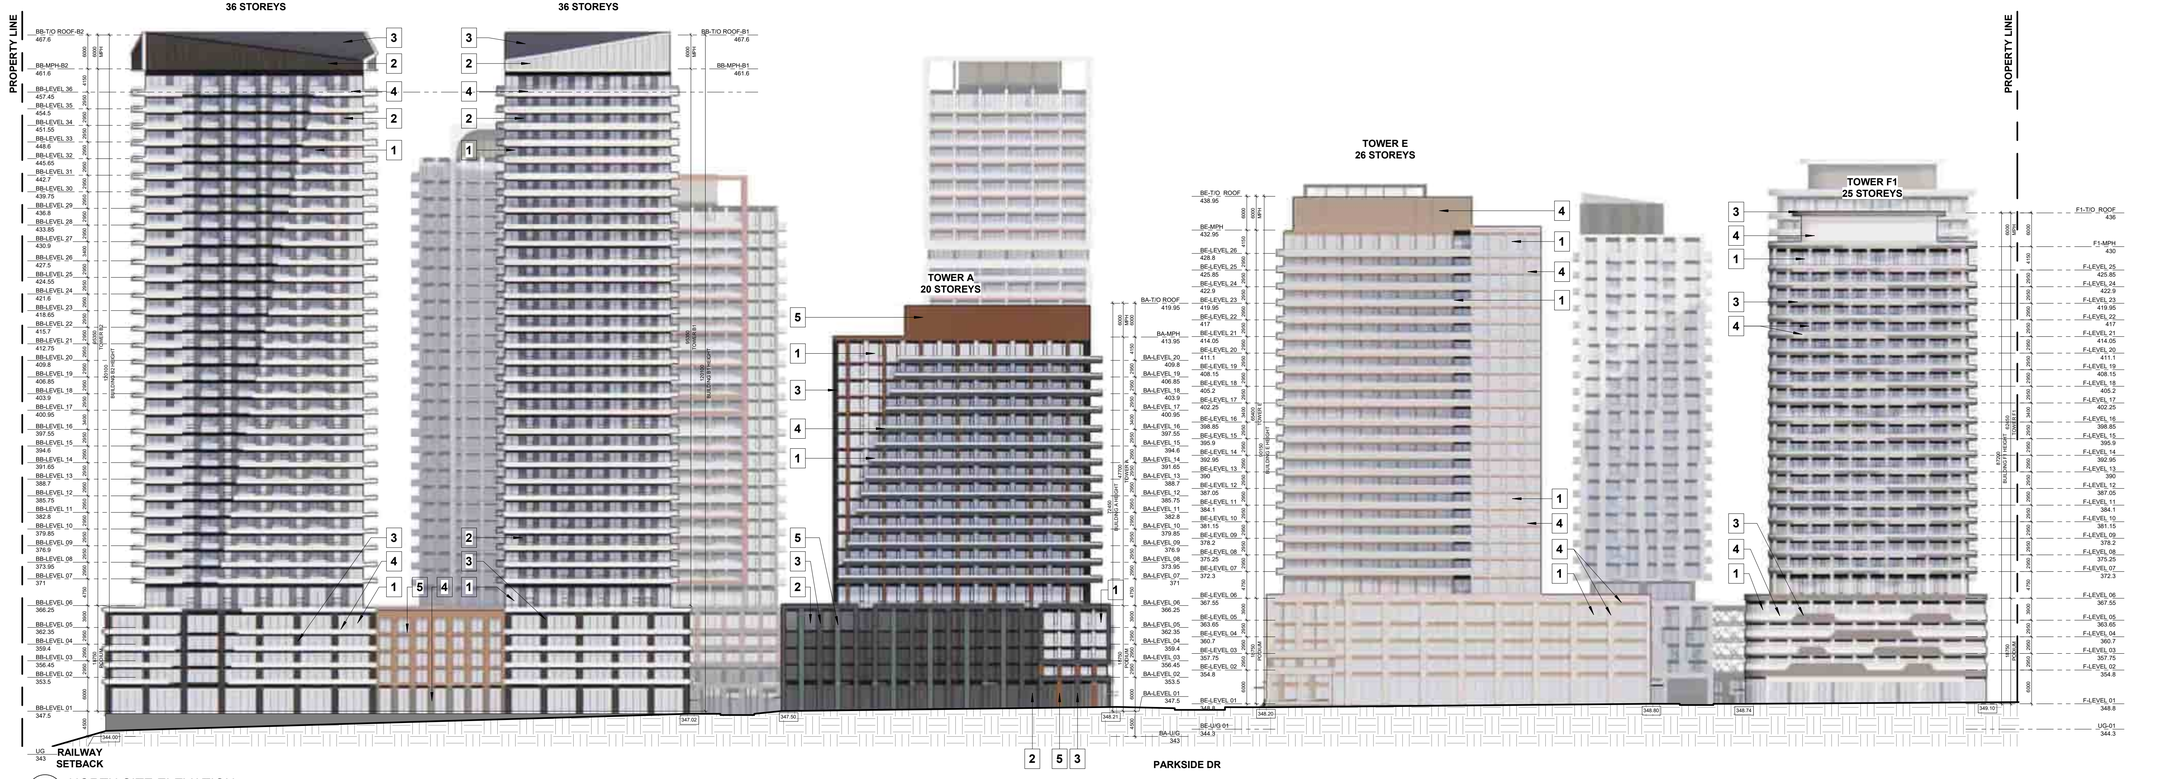

2 NORTH SITE ELEVATION
RZ301 1 : 500

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical or electrical drawings. The contractor must review all shop drawings with appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

EXTERIOR FINISHES LEGEND

1	CLEAR GLAZING
2	SPANDREL PANEL
3	METAL/PRECAST/BRICK - DARK
4	METAL/PRECAST/BRICK - LIGHT
5	METAL/PRECAST/BRICK - COLOURED

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING


ELEVATIONS

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	As indicated

ONTARIO ASSOCIATION OF ARCHITECTS — M. REZA MEHDI — LICENCE — 9852

DRAWING NO. RZ301 | REV. 2

2025-03-04 4:40:56 PM

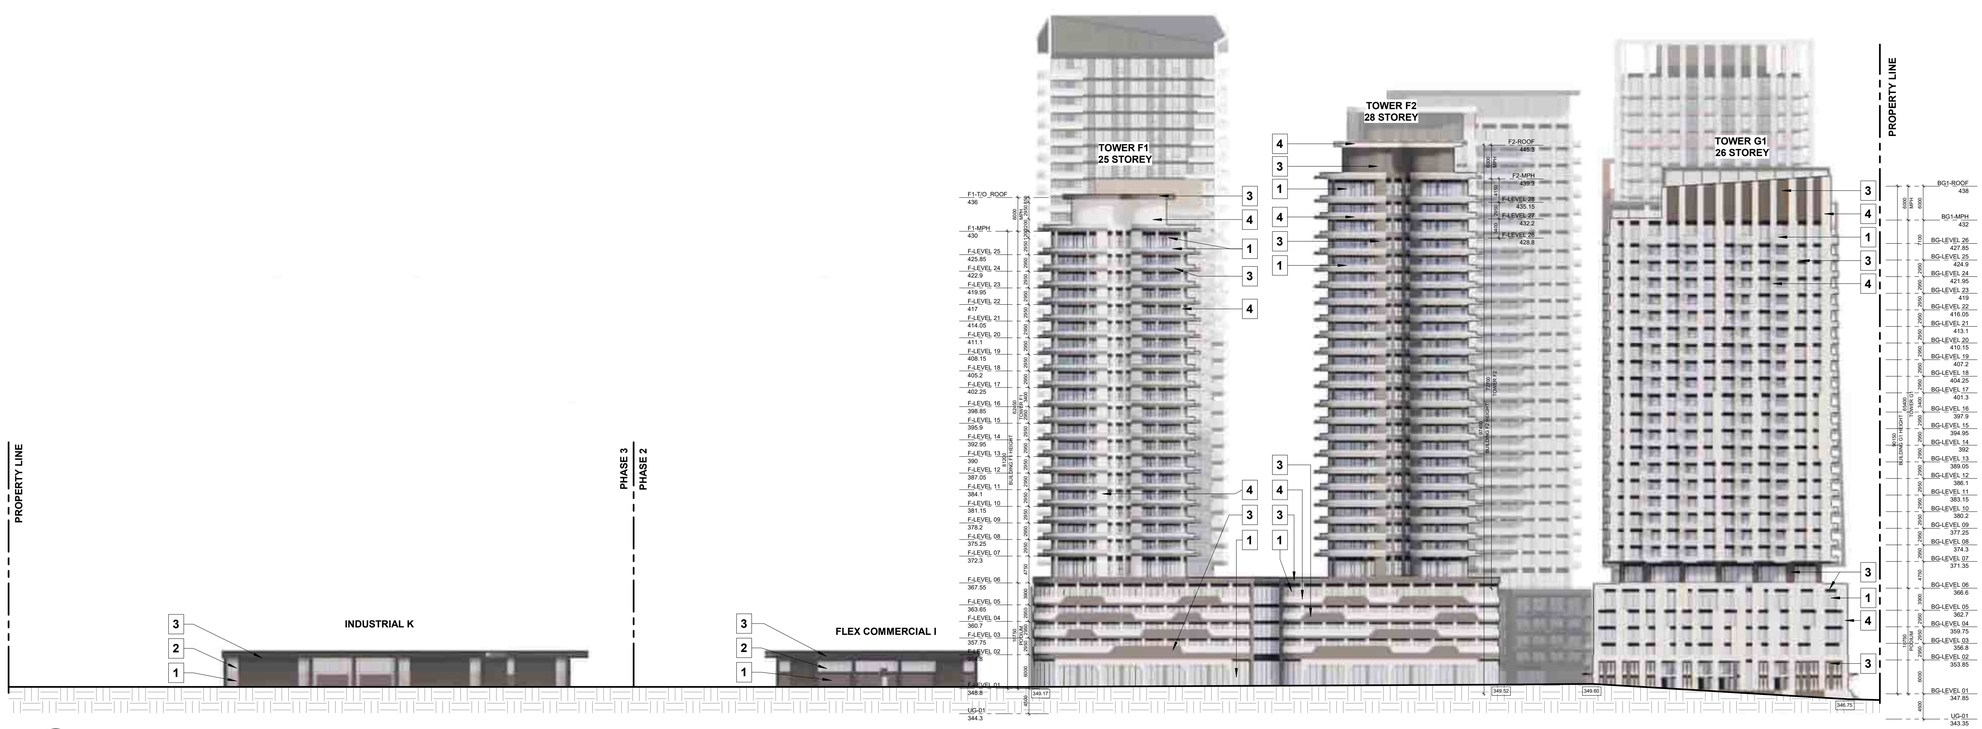

1 RZ302 WEST SITE ELEVATION
1 : 500



2 RZ302 EAST SITE ELEVATION
1 : 500

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digitally transmitted drawings and reserves the right to remove all or portions of them. Refer to appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

EXTERIOR FINISHES LEGEND

1	CLEAR GLAZING
2	SPANDREL PANEL
3	METAL/PRECAST/BRICK - DARK
4	METAL/PRECAST/BRICK - LIGHT
5	METAL/PRECAST/BRICK - COLOURED

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

ELEVATIONS

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	As indicated


ONTARIO ASSOCIATION OF ARCHITECTS — M. REZA MEHER — LICENCE 9452

DRAWING NO. RZ302 | REV. 2

2025-03-04 4:41:01 PM



1 WEST INTERIOR SITE ELEVATION
RZ303 1 : 500

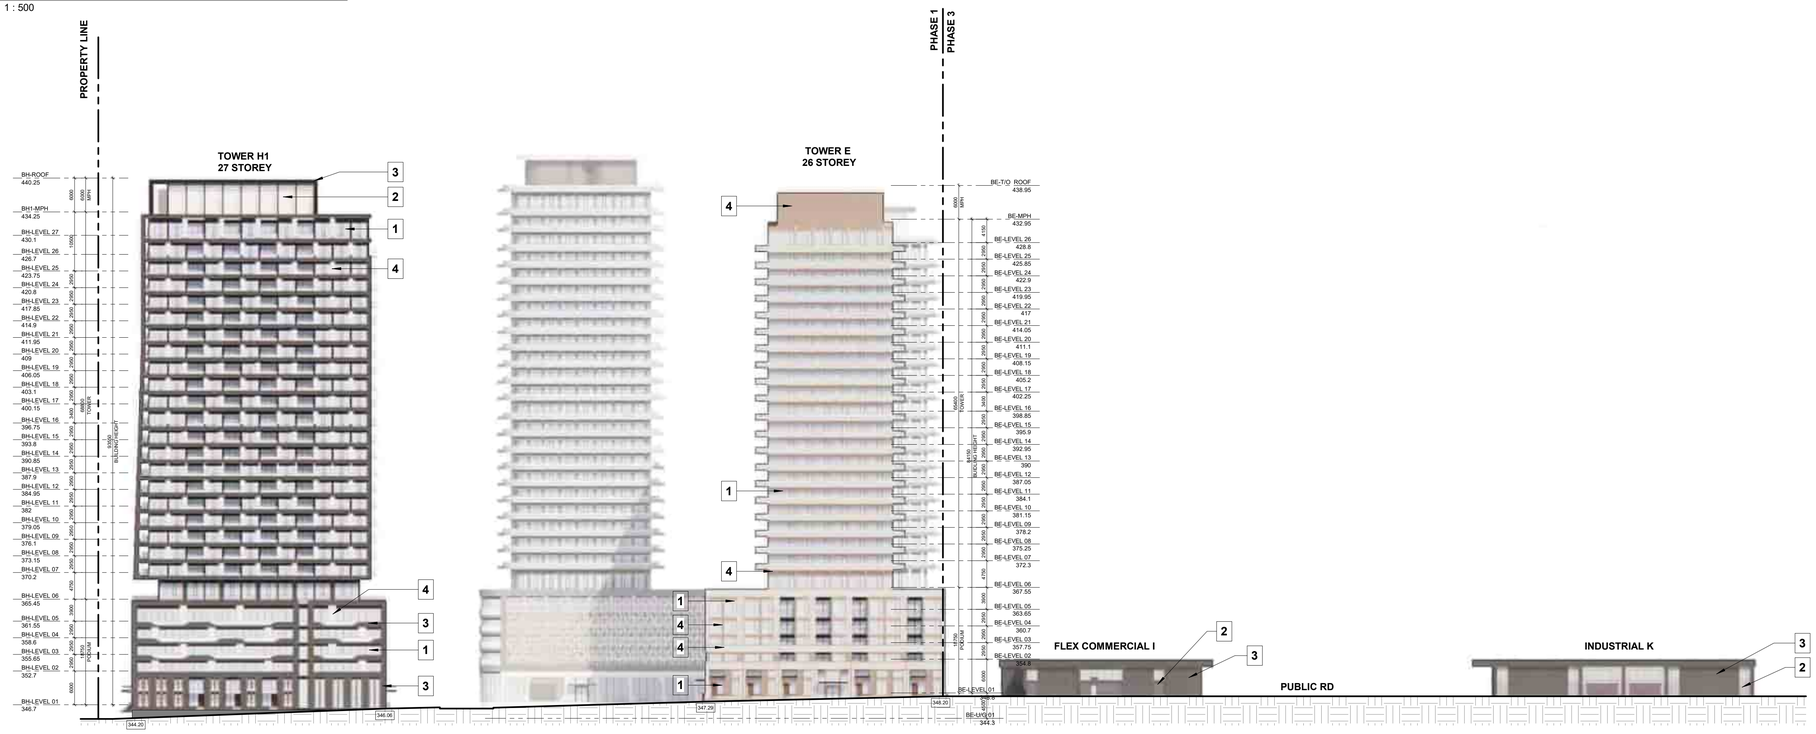

2 EAST INTERIOR SITE ELEVATION
RZ303 1 : 500

2025-03-04 4:41:03 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digitally transmitted drawings. Discrepancies must be reported immediately. Refer to the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

EXTERIOR FINISHES LEGEND

1	CLEAR GLAZING
2	SPANDREL PANEL
3	METAL/PRECAST/BRICK - DARK
4	METAL/PRECAST/BRICK - LIGHT
5	METAL/PRECAST/BRICK - COLOURED

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario


DRAWING

ELEVATIONS


PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	As indicated

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE

DRAWING NO. RZ303 | REV. 2

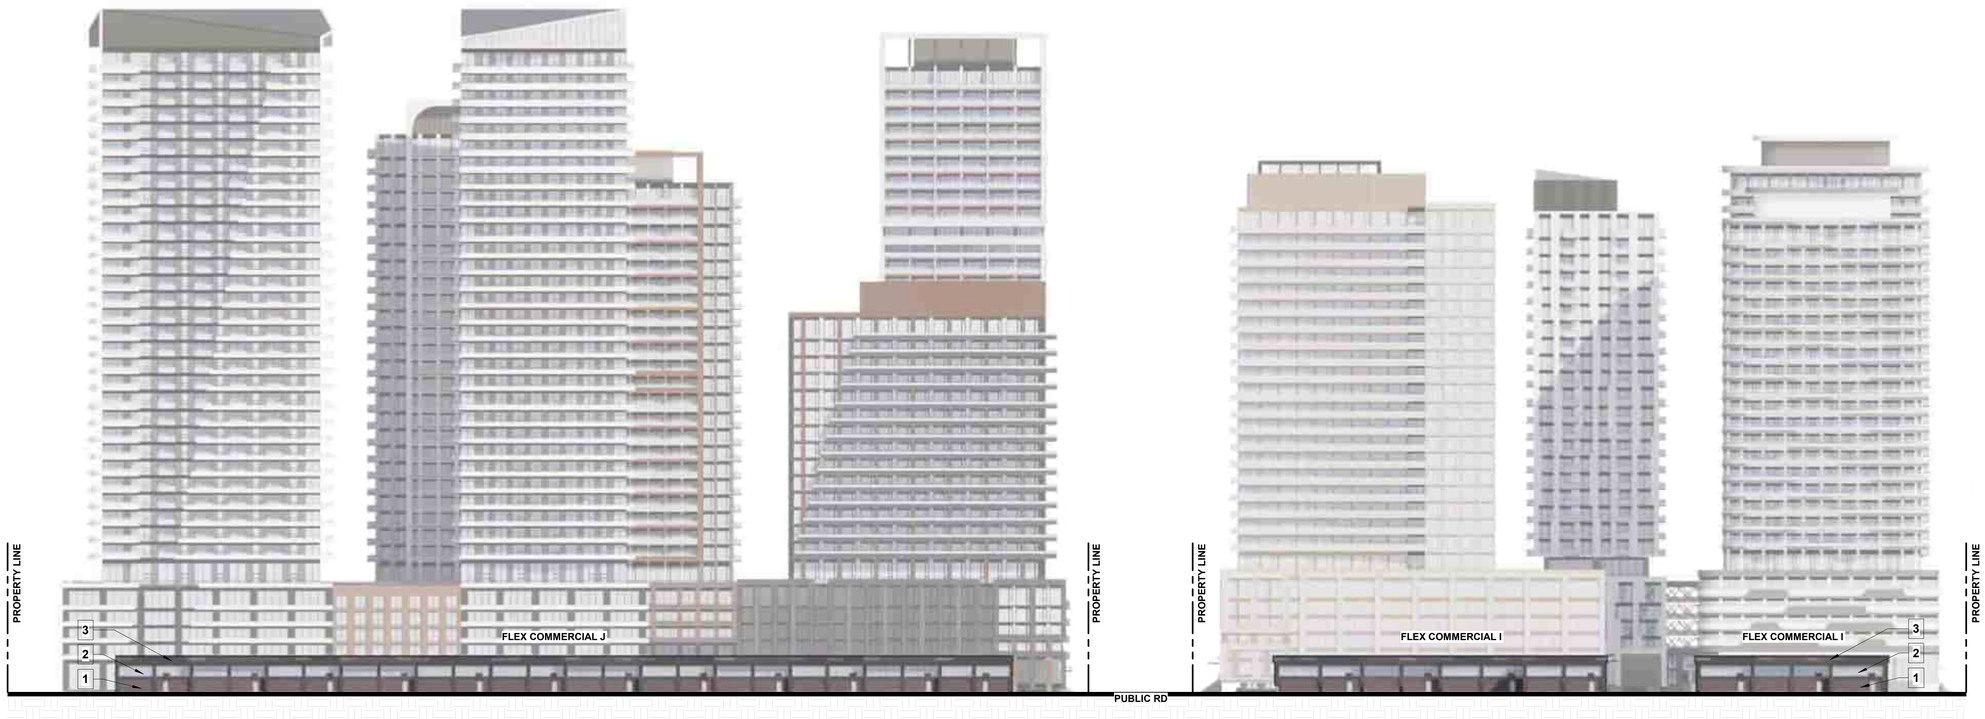

1 NORTH INTERNAL COMERCIAL SITE ELEVATION
RZ304 1 : 500

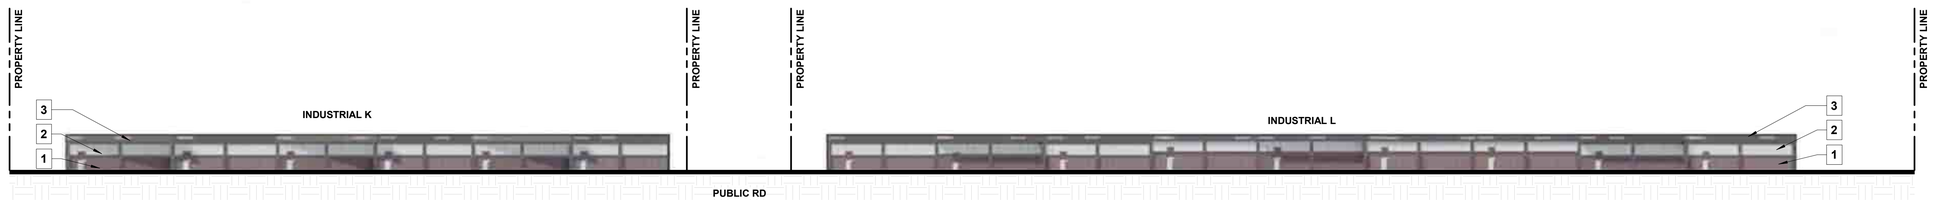

2 SOUTH INTERNAL COMERCIAL SITE ELEVATION
RZ304 1 : 500

2025-03-04 4:41:05 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of any information provided by consultants, clients or contractors. Refer to the drawings of the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

EXTERIOR FINISHES LEGEND

1. CLEAR GLAZING
2. SPANDREL PANEL
3. METAL/PRECAST/BRICK - DARK
4. METAL/PRECAST/BRICK - LIGHT
5. METAL/PRECAST/BRICK - COLOURED

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario


DRAWING

ELEVATIONS


PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	As indicated

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
9452

DRAWING NO. RZ304 | REV. 2

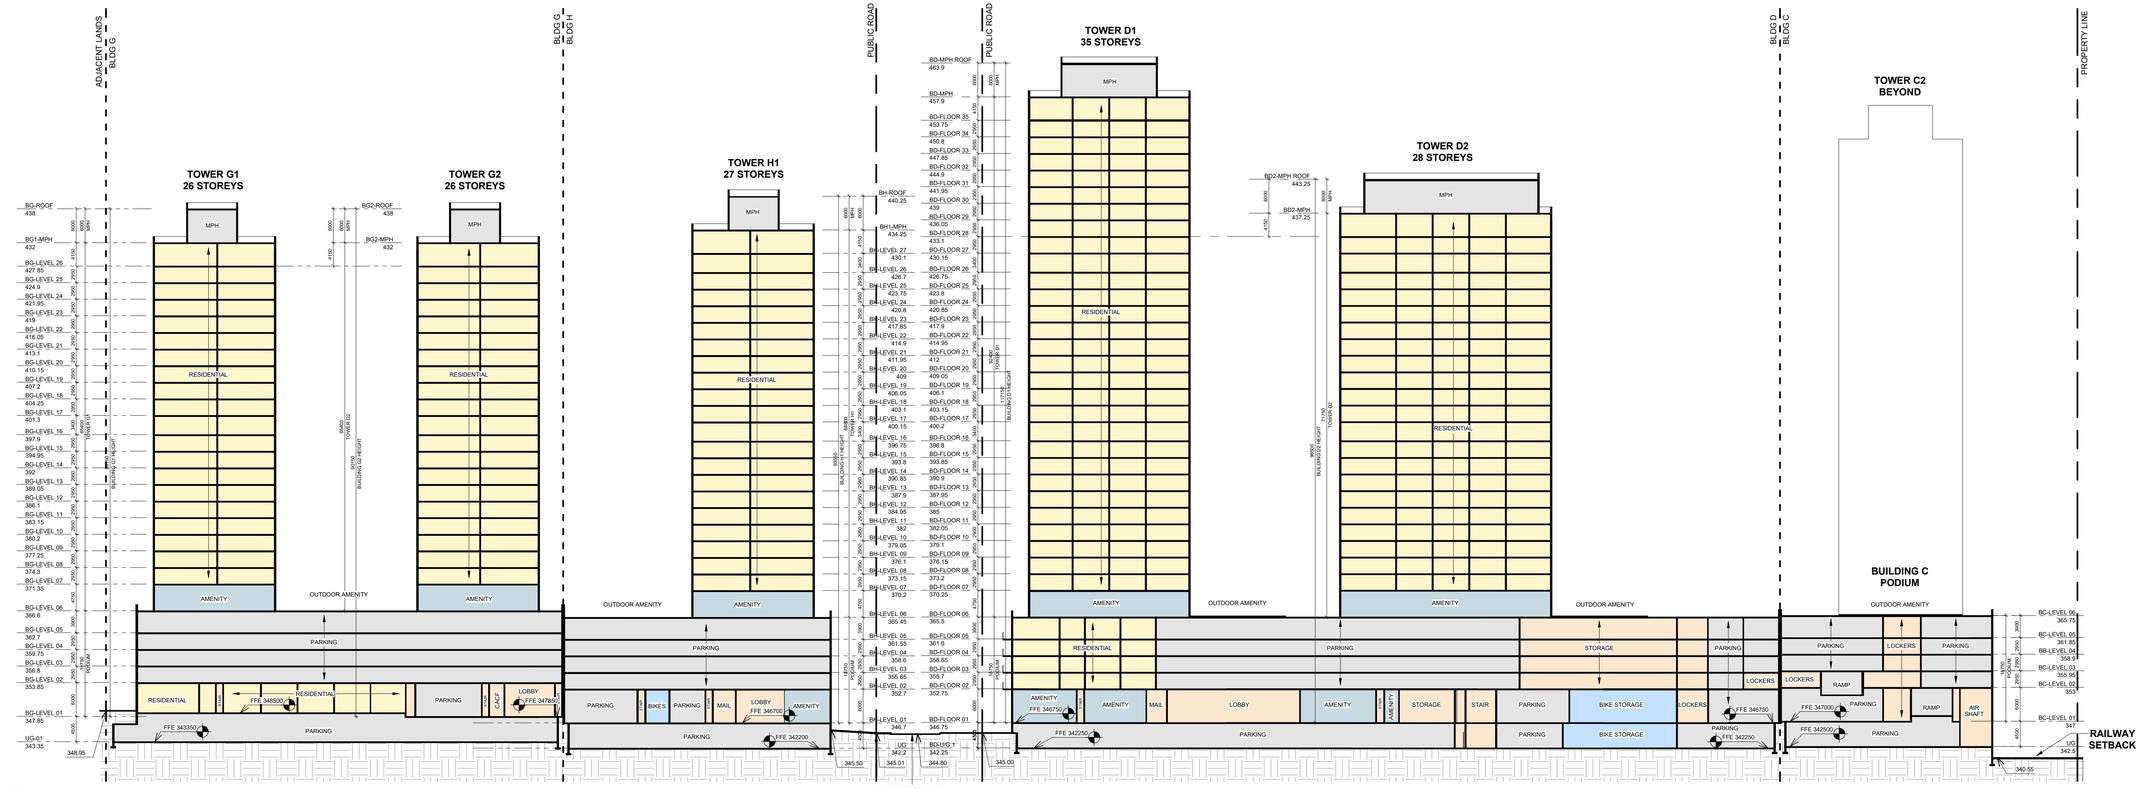

1 / RZ401 SITE SECTION EW1
1 : 500

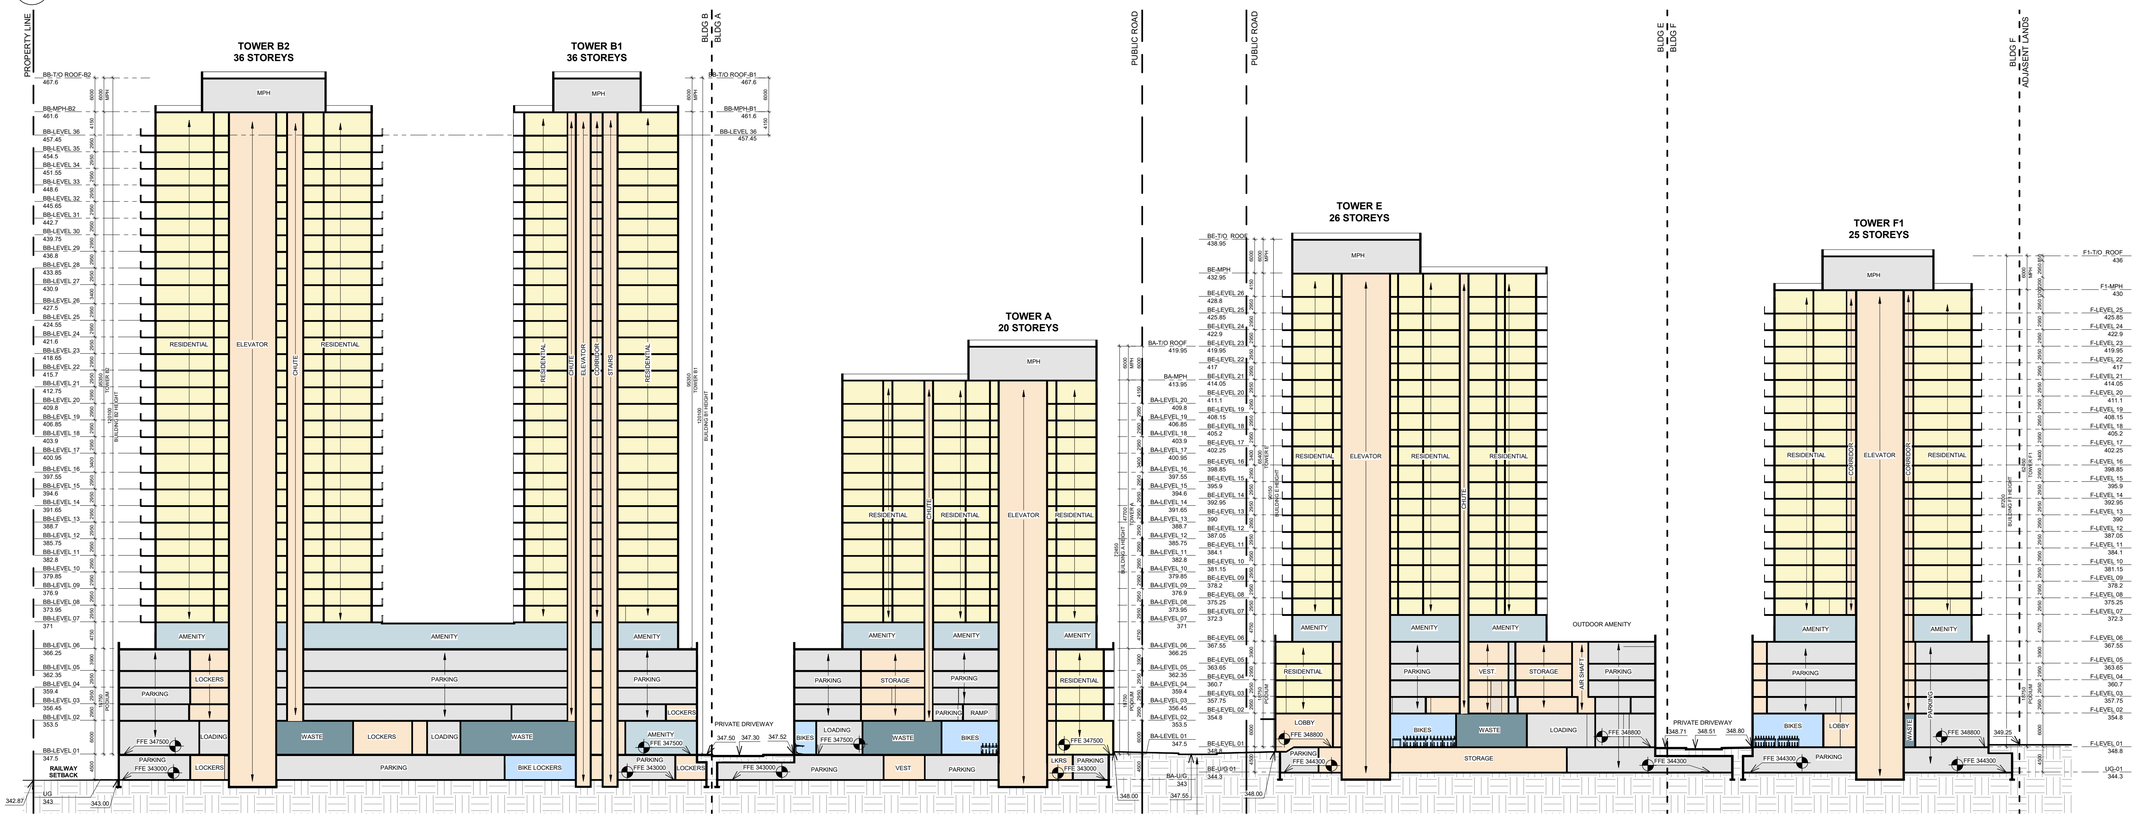

2 / RZ401 SITE SECTION EW2
1 : 500

2025-03-04 4:41:09 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of structural, mechanical or electrical drawings. Refer to consultant's drawings for these items. Use appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario


DRAWING

BUILDING SECTIONS


PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
9452

DRAWING NO. RZ401 REV. 2

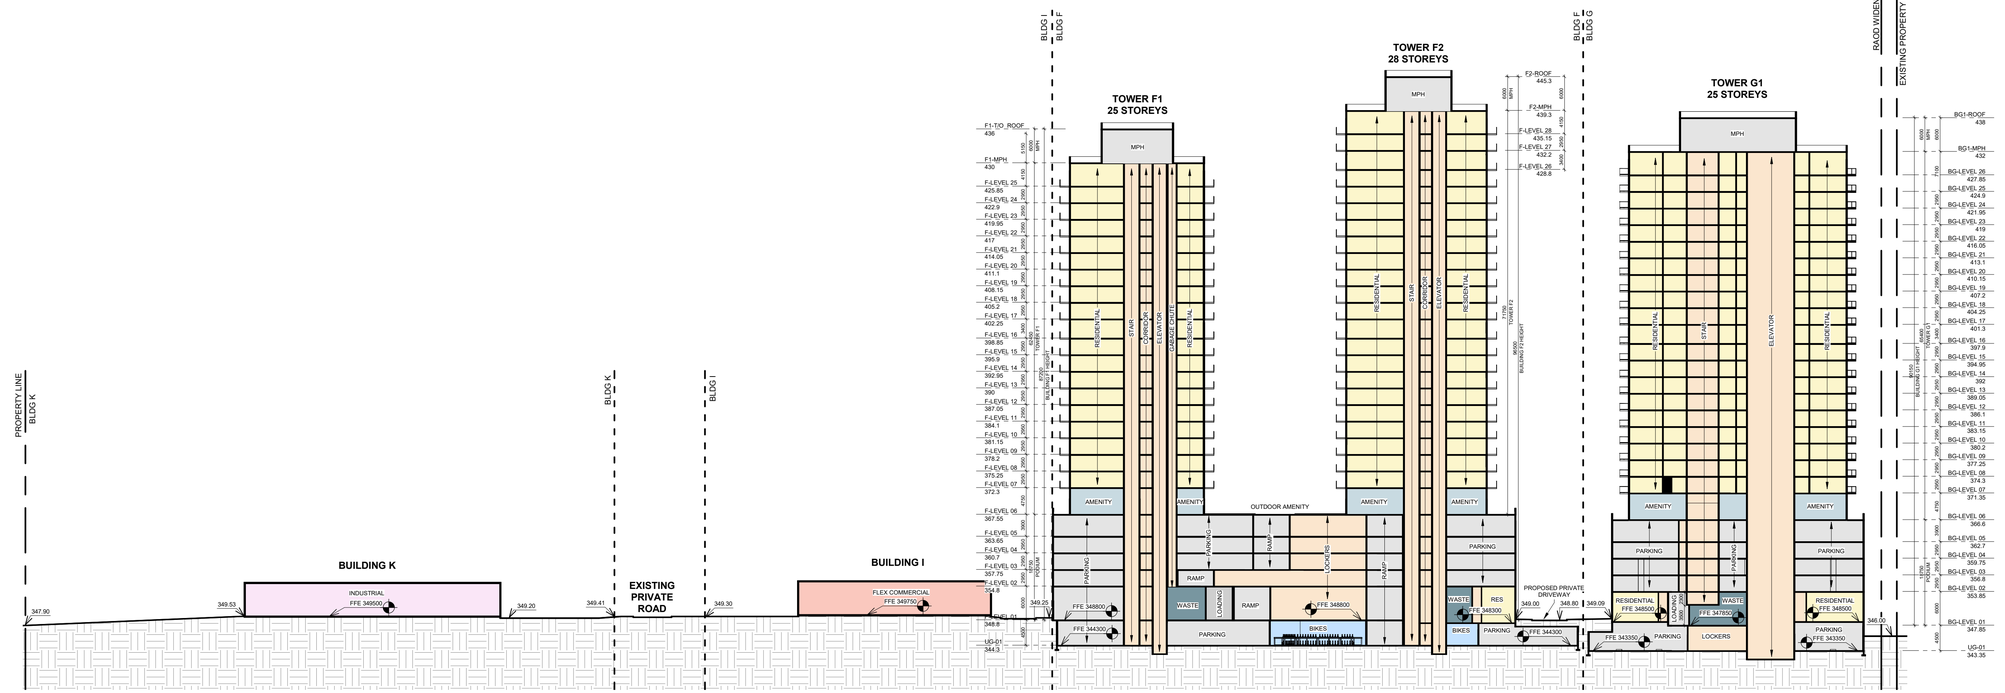

1 SITE SECTION NS4
RZ402 1 : 500

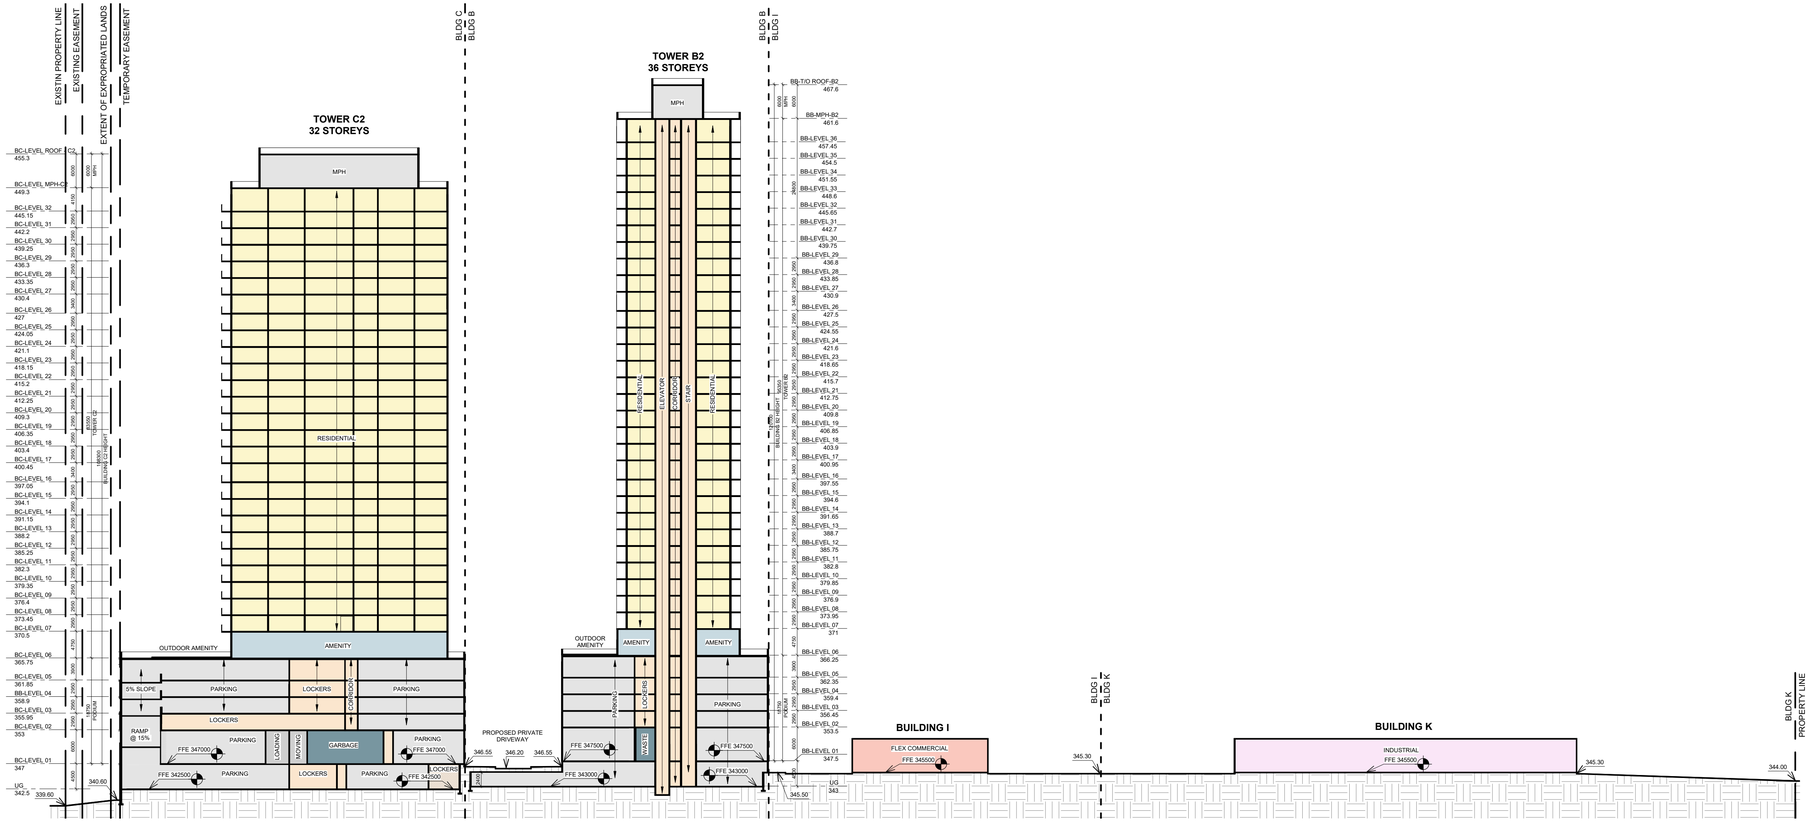

2 SITE SECTION NS5
RZ402 1 : 500

2025-03-04 4:41:12 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digital files or reproductions of this drawing. Contractor must review all drawings prior to the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario


DRAWING

BUILDING SECTIONS


PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE
5852

DRAWING NO. RZ402 | REV. 2

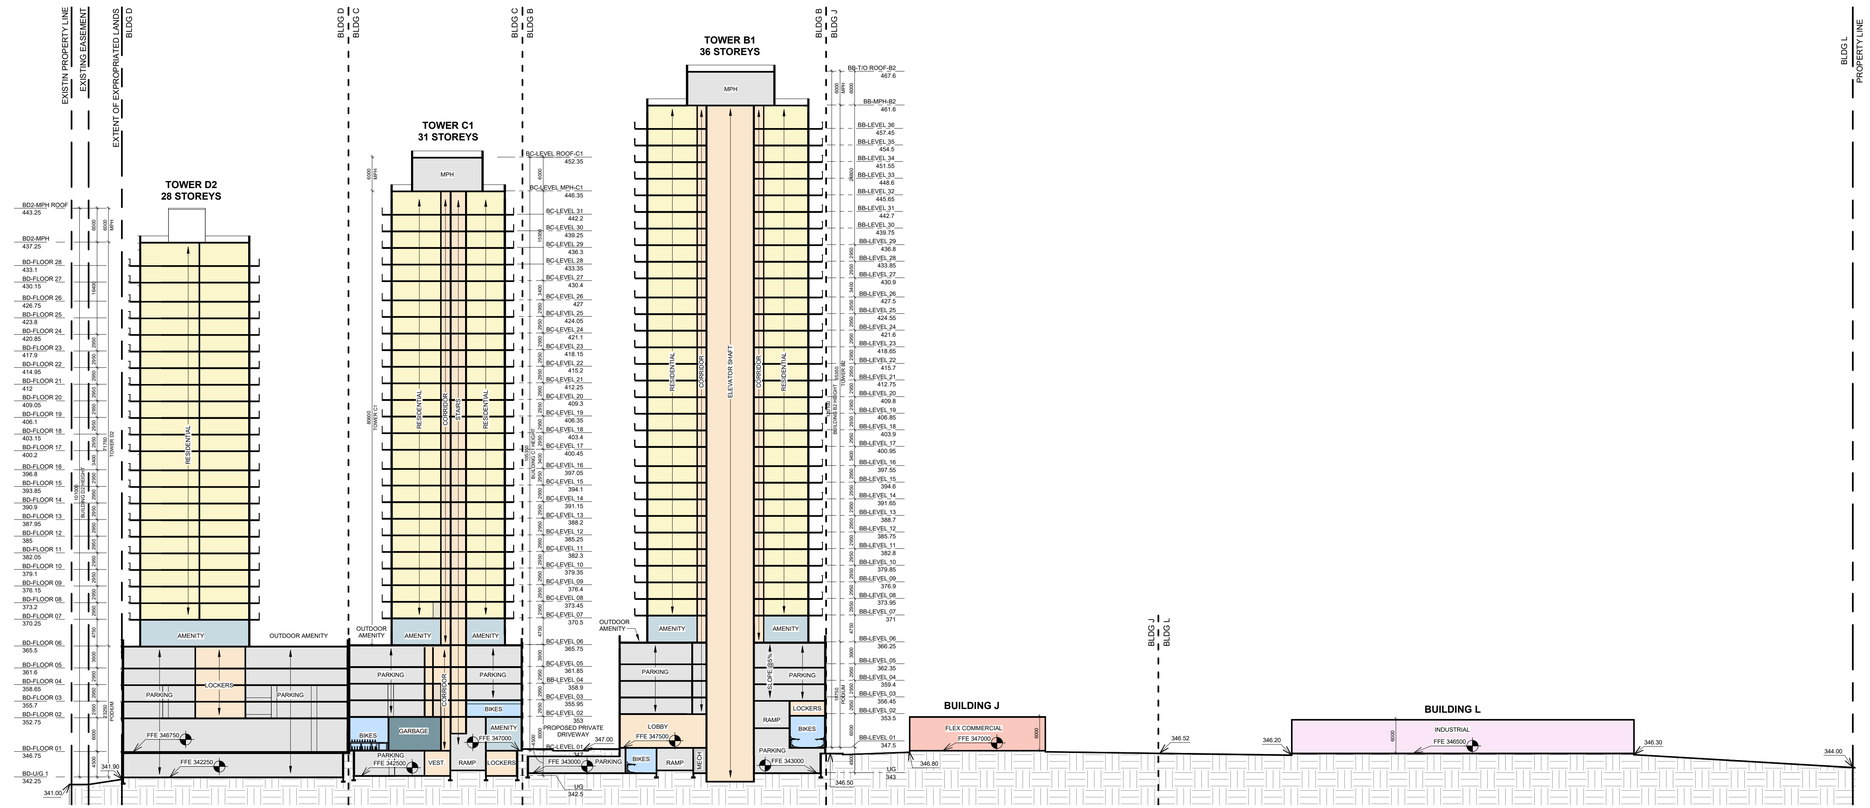

1 RZ403 SITE SECTION NS1
1 : 500

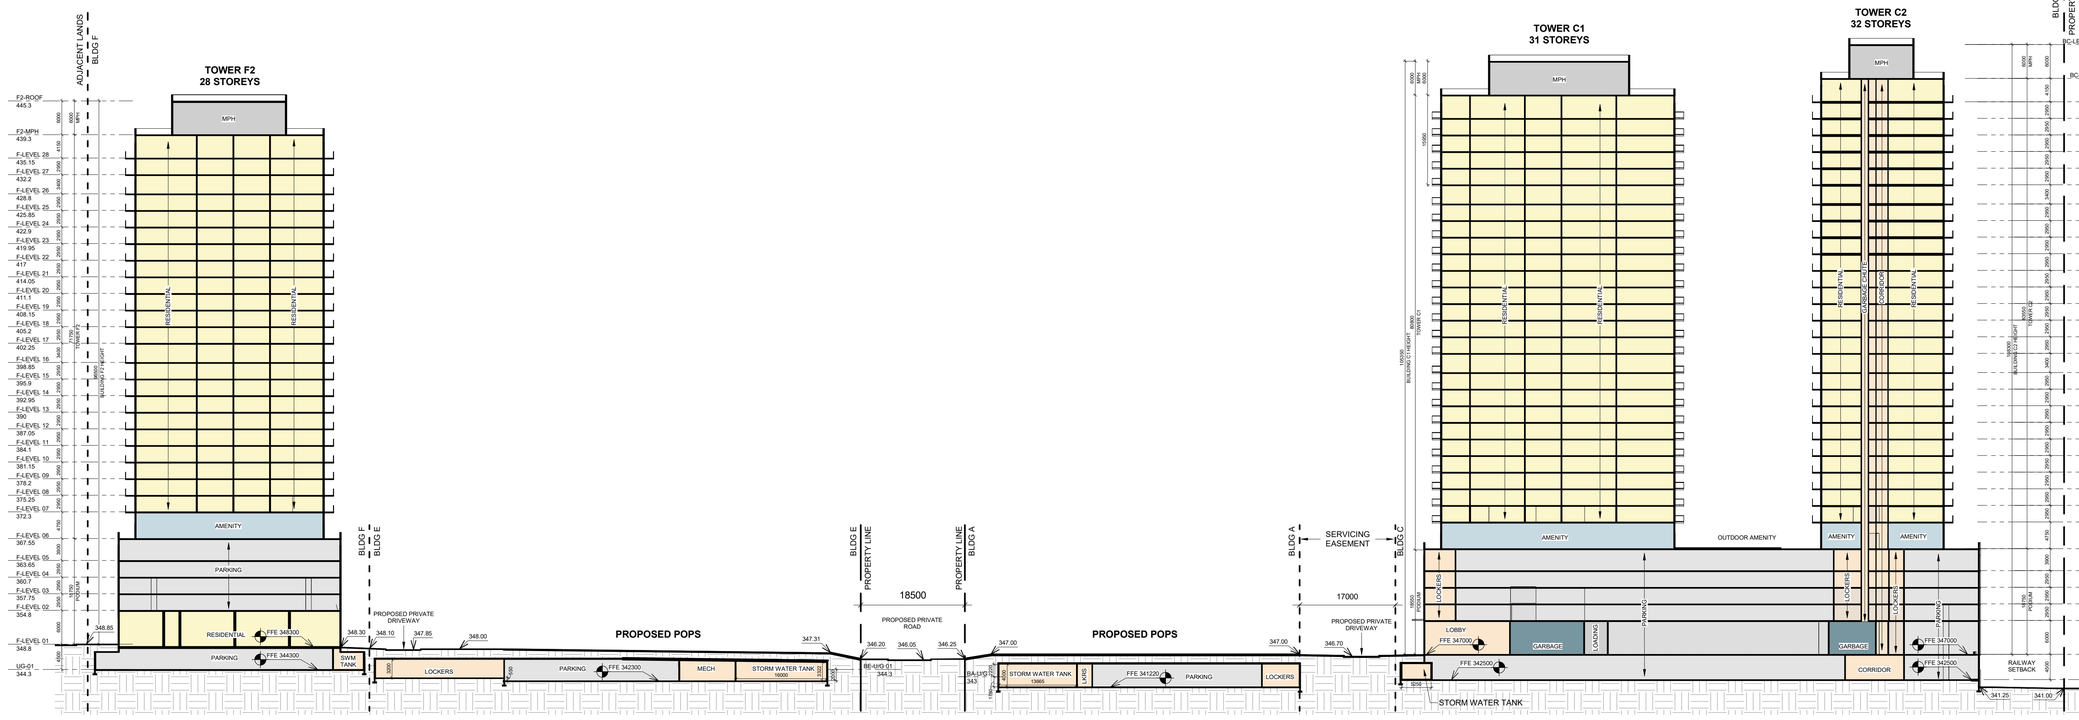

2 RZ403 SITE SECTION EW3 - PARK
1 : 500

2025-03-04 4:41:13 PM

TURNER FLEISCHER

Turner Fleischer Architects Inc.

67 Lesmill Road
Toronto, ON, M3B 2T8
T 416 425 2222
turnerfleischer.com

This drawing, as an instrument of service, is provided by and is the property of Turner Fleischer Architects Inc. The contractor must verify and accept responsibility for all dimensions and conditions on site and must notify Turner Fleischer Architects Inc. of any variations from the supplied information. This drawing is not to be scaled. The architect is not responsible for the accuracy of digitally transmitted information. The contractor must use only the latest drawings from the appropriate consultant's drawings before proceeding with the work. Construction must conform to all applicable codes and requirements of authorities having jurisdiction. The contractor working from drawings not specifically marked 'For Construction' must assume full responsibility and bear costs for any corrections or damages resulting from his work.

#	DATE	DESCRIPTION	BY
2	2025-03-04	ISSUED FOR REZONING #2	DRO
1	2024-02-28	ISSUED FOR REZONING	DVI

PROJECT

PROPOSED MIXED-USE DEVELOPMENT

170 Northfield Drive West, Waterloo, Ontario

DRAWING

BUILDING SECTIONS

PROJECT NO.	22.237P01
PROJECT DATE	2025-02-25
DRAWN BY	DVI
CHECKED BY	RMM
SCALE	1 : 500

ONTARIO ASSOCIATION OF ARCHITECTS
M. REZA MEHDI
LICENCE

DRAWING NO. RZ403 | REV. 2

Appendix C Traffic Data and Calculations

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

Region of Waterloo AADT Forecast for Noise Studies

1. Development/Location

170 Northfield Dr W, Waterloo

2. Current AADT (2024)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,400	2,200	28,100	13,300

3. Forecast AADT (2034)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,600	2,500	32,700	15,500

4. Commercial Vehicle Rates

	Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
% Medium Trucks	3%	2%	1%	2%
% Heavy Trucks	6%	6%	2%	3%

5. Posted Speed Limit

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
50 km/h	20 km/h	60 km/h	60 km/h

6. Day/Night Splits

Regional Standard 90/10 Day/Night Split

7. Expiry

Dec 31 2024

8. Notes

This forecast is intended for the purpose of carrying out a noise study for the above mentioned location only.

As Kumpf Dr and Parkside Dr are not under the jurisdiction of Region of Waterloo, City of Waterloo should verify these forecasts.

Please note this location is within distance of interest of the ION LRT.

This forecast remains valid up to the date indicated above. The Region of Waterloo should be contacted for an updated forecast if there are plans to use this forecast beyond the above validity period.

Keni Mallinen

From: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Sent: February 07, 2025 4:22 PM
To: Dylan Diebolt
Cc: Keni Mallinen
Subject: RE: 170 Northfield Drive West Traffic Data Validation

Some people who received this message don't often get email from nwennyk@regionofwaterloo.ca. Learn why this is important

Hi Dylan,

I'm sorry for the late reply.

I have checked and can confirm that yet: this forecast remains accurate – all updated counts reflect the same data.
Please use it with expiry December 31, 2025.

Thank you,

Natalie Wennyk
Engineering Intern | Transportation Planning
Transportation Division | Region of Waterloo
150 Frederick Street, Kitchener, ON
519-501-0691

From: Dylan Diebolt <ddiebolt@slrconsulting.com>
Sent: January 14, 2025 3:54 PM
To: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Cc: Keni Mallinen <kmallinen@slrconsulting.com>
Subject: 170 Northfield Drive West Traffic Data Validation

CAUTION! EXTERNAL SENDER
Were you expecting this email? TAKE A CLOSER LOOK. Is the sender legitimate?
DO NOT click links or open attachments unless you are 100% sure that the email is safe.

Hi Natalie,

We previously received the attached traffic data dated January 18th, 2024, for 170 Northfield Dr W in Waterloo. It states the traffic data expired on December 31, 2024. As the traffic data is less than a year old can you confirm that it is still valid?

Thank you in advance for your assistance,

Dylan

Dylan Diebolt

Acoustics Consultant

O +1 226 706 8080
M +1 226 203 8694
E ddiebolt@slrconsulting.com

SLR Consulting (Canada) Ltd
100 Stone Road West, Suite 201, Guelph, ON, Canada N1G 5L3



Confidentiality Notice and Disclaimer
This communication and any attachment(s) contain information which is confidential and may also be legally privileged. It is intended for the exclusive use of the recipient(s) to whom it is addressed. If you have received this communication in error, please e-mail us by return e-mail and then delete the e-mail from your systen together with any copies of it. Any views or opinions are solely those of the author and do not represent those of SLR International Corporation, or any of its subsidi unless specifically stated.

SLR is committed to the responsible and ethical use of relevant technologies including artificial intelligence (AI). If you have any questions or concerns, please con directly.

Keni Mallinen

From: Haydn Kocznur <Haydn.Kocznur@waterloo.ca>
Sent: February 15, 2024 2:15 PM
To: Keni Mallinen
Subject: RE: Request Confirmation of RMOW Traffic Data Forecasts
Attachments: Cedarbrae Ave @ Parkside Dr 2018.JPG; Kumpf Dr btwn Northfield Dr W & Randall Dr 2023.xlsx; Kumph Dr @ Randall Dr 2020.JPG; Bearinger Rd @ Parkside Dr 2023.JPG

You don't often get email from haydn.kocznur@waterloo.ca. Learn why this is important

Good afternoon Keni,

Christine has retired and Bob Henderson is our new director. Unfortunately, I unable to verify the forecasted AADTs however I can provide data from our actual counts. Please see below and the attached files. Please note that Parkside Drive is 50 km/h.

- Kumpf Dr btwn end of street & Randall Dr, 2018, No class data, AADT: 726
- Kumpf Dr at Randall Dr, 2020, Major AADT: 1309, Minor AADT: 744
- Cedarbrae Ave at Parkside Dr, 2018, Major AADT: 8537, Minor AADT: 1890
- Bearinger Rd @ Parkside Dr, 2023, Major AADT: 9009, Minor AADT: 6248
- Parkside Dr btwn Bearinger Rd & Cedarbrae Ave, 2021, No class data, AADT: 3124

Regards,

Haydn Kocznur, C. Tech
Traffic Operations Technician
Transportation Engineering Section
Integrated Planning & Public Works, City of Waterloo
265 Lexington Court
PO Box 337 Station Waterloo
Waterloo, ON N2J 4A8
P: 1.519.886.2310 ext. 30293
E: haydn.kocznur@waterloo.ca

From: Keni Mallinen <kmallinen@slrconsulting.com>
Sent: Thursday, February 15, 2024 1:23 PM
To: christine.koehler@waterloo.ca; Haydn Kocznur <Haydn.Kocznur@waterloo.ca>
Subject: [EXTERNAL] Request Confirmation of RMOW Traffic Data Forecasts

Hi Christine and Haydn,

SLR Consulting is working on an environmental noise assessment for a proposed development in the City of Waterloo.

We received the following traffic forecasts from the Region for the transportation noise study:

2. Current AADT (2024)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,400	2,200	28,100	

3. Forecast AADT (2034)

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
2,600	2,500	32,700	

4. Commercial Vehicle Rates

	Kumpf Drive	Parkside Dr	Northfield Dr W
% Medium Trucks	3%	2%	1%
% Heavy Trucks	6%	6%	2%

5. Posted Speed Limit

Kumpf Drive	Parkside Dr	Northfield Dr W	Weber St N
50 km/h	20 km/h	60 km/h	60 km/h

6. Day/Night Splits

Regional Standard 90/10 Day/Night Split

7. Expiry

Dec 31 2024

8. Notes

This forecast is intended for the purpose of carrying out a noise study for the above mentioned location only.

As Kumpf Dr and Parkside Dr are not under the jurisdiction of Region of Waterloo, City o Waterloo should verify these forecasts.

The dataset indicated forecasts for Kumpf Drive and Parkside Drive should be verified by the City of Waterloo as they're not under the Region's jurisdiction. Are you able to provide comment on or confirmation of these volumes. Alternatively, do you have contact information for someone who may be able to do so?

Please let me know if you have any questions regarding this request.

Thank you,
Keni

Keni Mallinen M.A.Sc., P.Eng.
Senior Acoustics Engineer


O +1 226 706 8080
M +1 226 203 7385
E kmallinen@slrconsulting.com

SLR Consulting (Canada) Ltd.
100 Stone Road West, Suite 201, Guelph ON Canada N1G 5L3

Confidentiality Notice and Disclaimer
This communication and any attachment(s) contain information which is confidential and may also be legally privileged. It is intended for the exclusive use of the recipient(s) to whom it is addressed. If you have received this communication in error, please e-mail us by return e-mail and then delete the e-mail from your systen together with any copies of it. Any views or opinions are solely those of the author and do not represent those of SLR International Corporation, or any of its subsidi unless specifically stated.

Road Traffic Data – Highway 85


North of Northfield Drive West

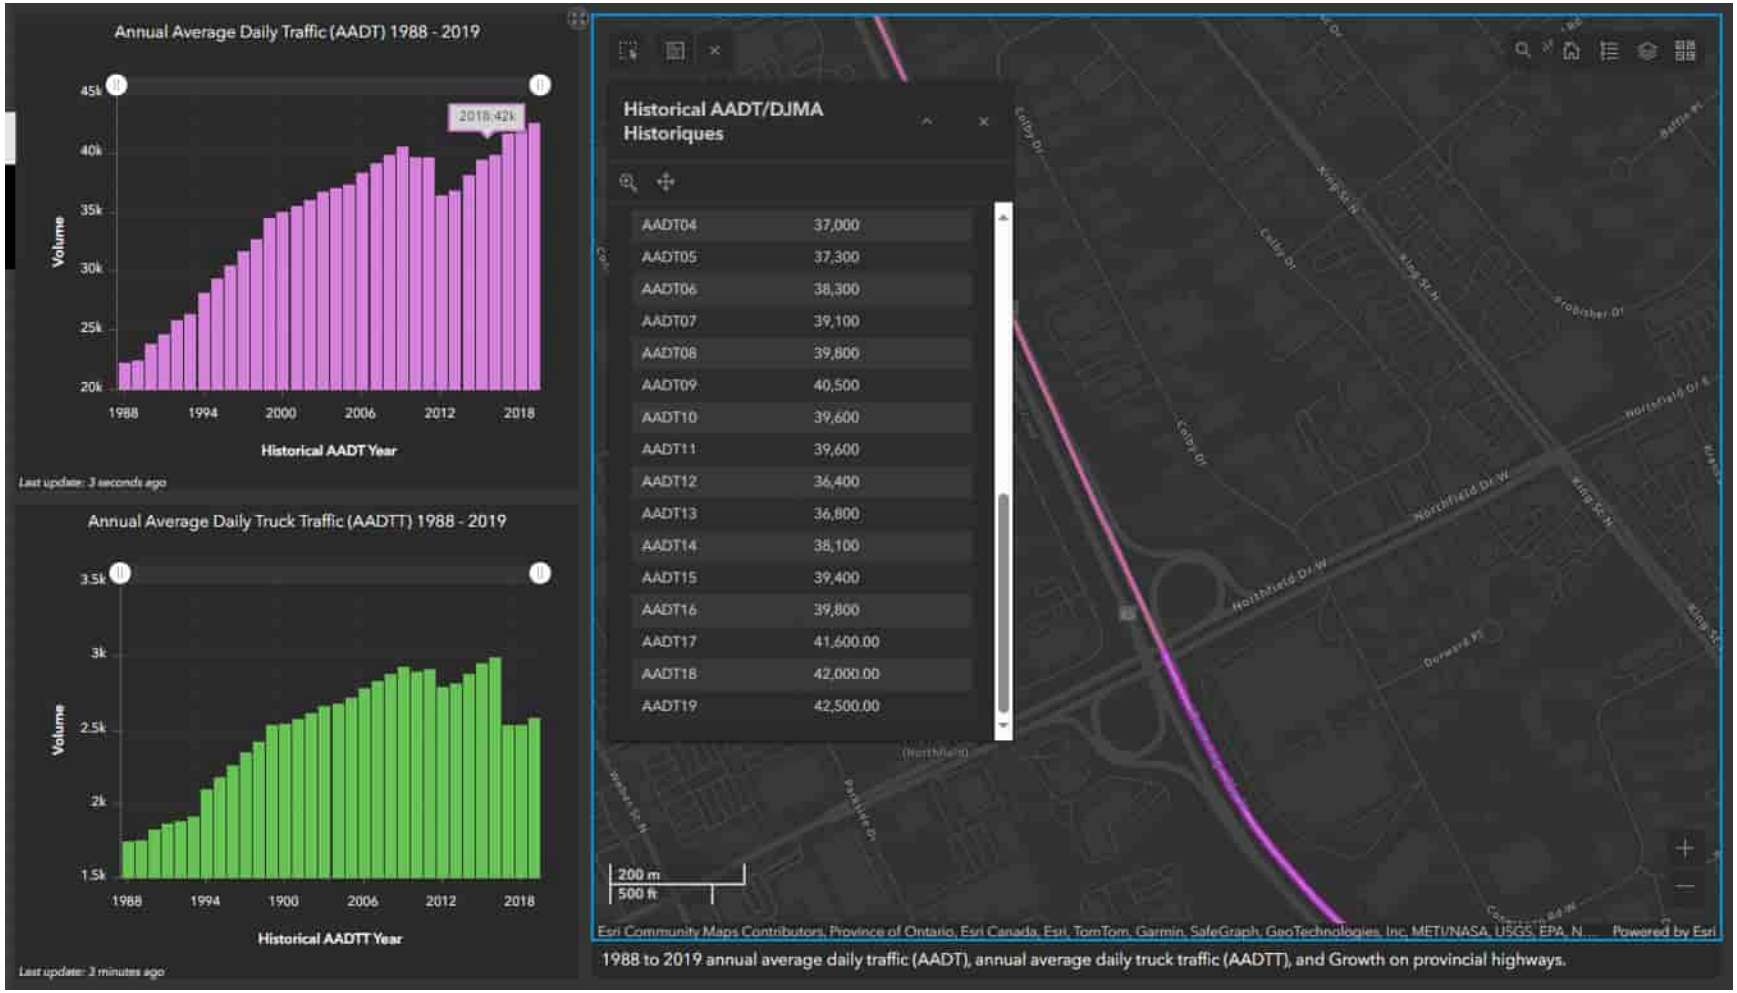

Source: https://icorridor-mto-on-ca.hub.arcgis.com/apps/4f4b6a27ee0a4a4e86ab9a94597475f3/explore

Road Traffic Data – Highway 85

North of Northfield Drive West

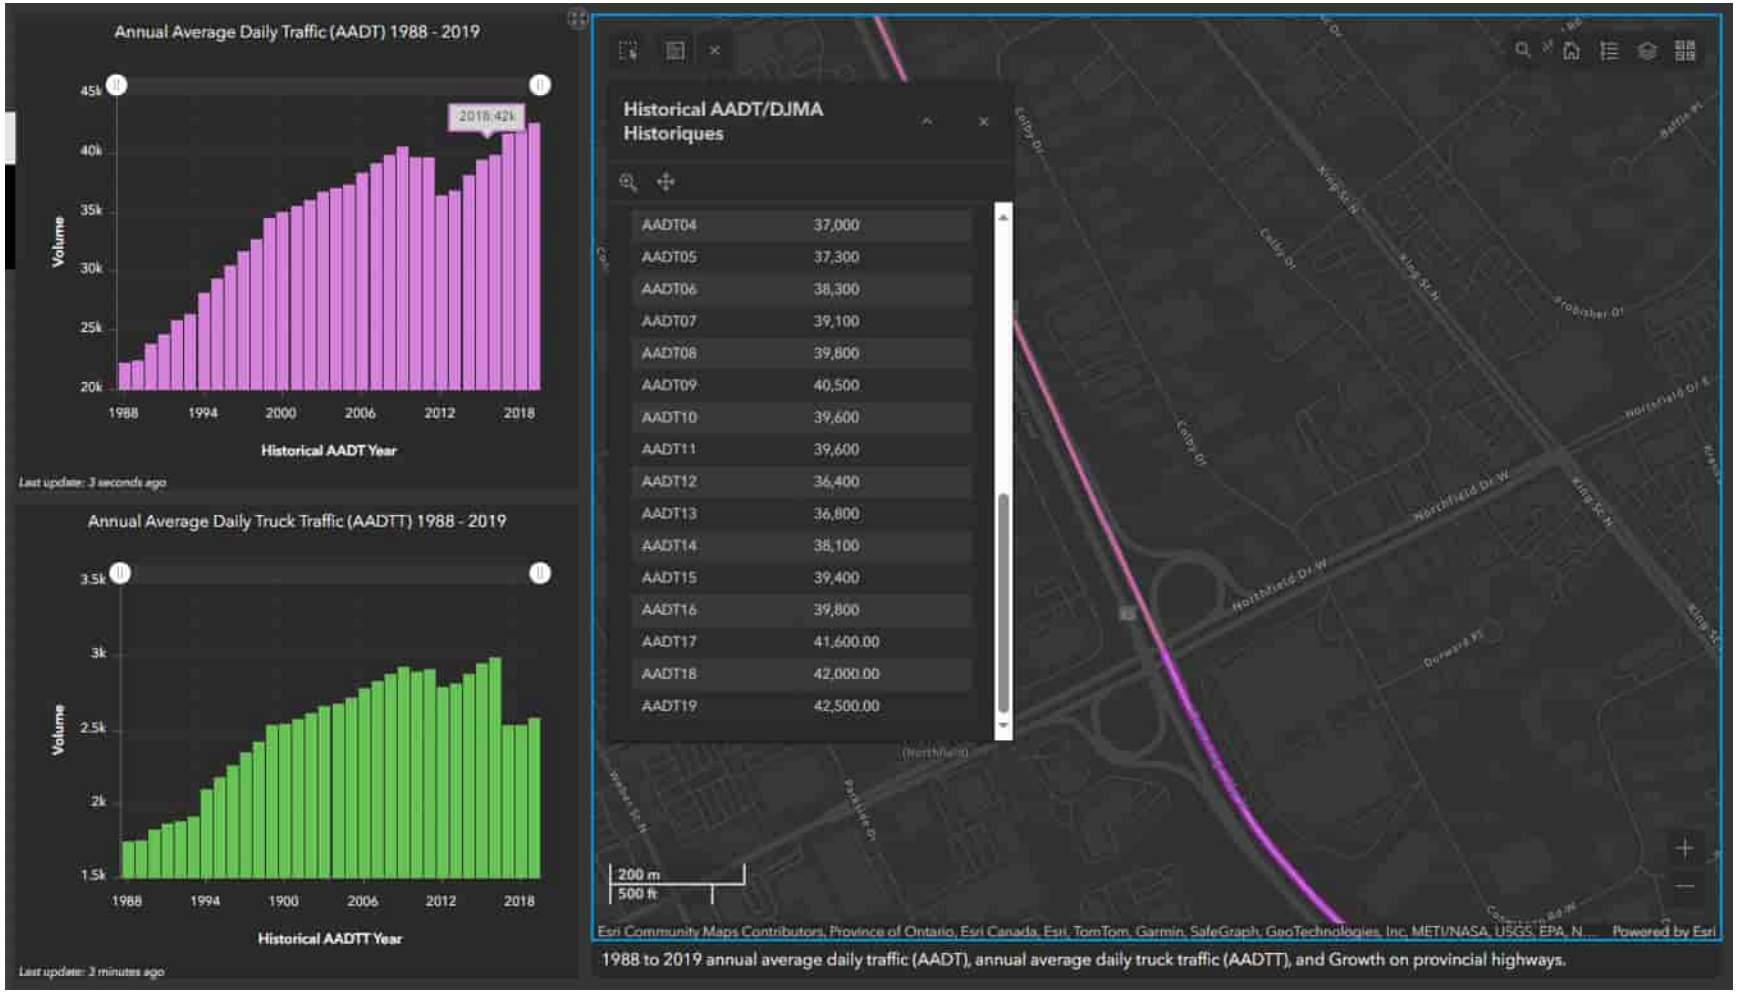

Source: https://icorridor-mto-on-ca.hub.arcgis.com/apps/4f4b6a27ee0a4a4e86ab9a94597475f3/explore

O R N A M E N T - Sound Power Emissions & Source Heights

Ontario Road Noise Analysis Method for Environment and Transportation

Future Forecast

Road Segment ID	AADT	Percent Traffic In Period	Period (h)	Total Traffic Volumes (Period)	Speed (kph)	Auto %	Med %	Hvy %	Auto	Med	Heavy	Road Gradient (%)	PWL (dBA)	Source Height, s (m)	Reference Leq (dBA)
Daytime															
Kumpf Drive	2600	90%	16	2340	50	91.0%	3.0%	6.0%	2129	70	140	0.0	**75.9**	**1.6**	**60.8**
Parkside Drive	10142	90%	16	9128	50	92.0%	2.0%	6.0%	8398	183	548	0.0	**81.7**	**1.6**	**66.6**
Weber Street North	15500	90%	16	13950	60	95.0%	2.0%	3.0%	13253	279	419	0.0	**83.1**	**1.3**	**68.0**
Northfield Drive - Westbound	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Westbound - Downhill	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Eastbound	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	0.0	**82.2**	**1.2**	**67.2**
Northfield Drive - Eastbound - Uphill	16350	90%	16	14715	60	97.0%	1.0%	2.0%	14274	147	294	2.1	**83.1**	**1.2**	**68.1**
Highway 85 - Northbound - N of Northfield Dr. W.	14167	85%	16	12042	90	87.1%	3.2%	9.7%	10483	390	1169	0.0	**89.1**	**1.8**	**74.0**
Highway 85 - Southbound - N of Northfield Dr. W.	14167	85%	16	12042	90	87.1%	3.2%	9.7%	10483	390	1169	0.0	**89.1**	**1.8**	**74.0**
Highway 85 - Northbound - S of Northfield Dr. W.	26178	85%	16	22251	90	93.0%	1.8%	5.3%	20685	392	1175	0.0	**90.0**	**1.5**	**74.9**
Highway 85 - Southbound - S of Northfield Dr. W.	26178	85%	16	22251	90	93.0%	1.8%	5.3%	20685	392	1175	0.0	**90.0**	**1.5**	**74.9**
Night-time															
Kumpf Drive	2600	10%	8	260	50	91.0%	3.0%	6.0%	237	8	16	0.0	**69.4**	**1.6**	**54.3**
Parkside Drive	10142	10%	8	1014	50	92.0%	2.0%	6.0%	933	20	61	0.0	**75.2**	**1.6**	**60.1**
Weber Street North	15500	10%	8	1550	60	95.0%	2.0%	3.0%	1473	31	47	0.0	**76.6**	**1.3**	**61.5**
Northfield Drive - Westbound	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Westbound - Downhill	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Eastbound	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	0.0	**75.7**	**1.2**	**60.6**
Northfield Drive - Eastbound - Uphill	16350	10%	8	1635	60	97.0%	1.0%	2.0%	1586	16	33	2.1	**76.6**	**1.2**	**61.5**
Highway 85 - Northbound - N of Northfield Dr. W.	14167	15%	8	2125	90	87.1%	3.2%	9.7%	1850	69	206	0.0	**84.6**	**1.8**	**69.5**
Highway 85 - Southbound - N of Northfield Dr. W.	14167	15%	8	2125	90	87.1%	3.2%	9.7%	1850	69	206	0.0	**84.6**	**1.8**	**69.5**
Highway 85 - Northbound - S of Northfield Dr. W.	26178	15%	8	3927	90	93.0%	1.8%	5.3%	3650	69	207	0.0	**85.4**	**1.5**	**70.4**
Highway 85 - Southbound - S of Northfield Dr. W.	26178	15%	8	3927	90	93.0%	1.8%	5.3%	3650	69	207	0.0	**85.4**	**1.5**	**70.4**

Keni Mallinen

From: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Sent: January 23, 2024 11:40 AM
To: Jason Dorssers
Cc: jenny.setterfield@waterloo.ca; Keni Mallinen
Subject: RE: Noise Assessment Requests Id: NA240116-xblg5x

Some people who received this message don't often get email from nwennyk@regionofwaterloo.ca. Learn why this is important

Hi Jason,

Not sure if you have had contact with anyone - Sorry for the delay.

Please see the below table for the ultimate ION LRT headway for each time period, based on the Baseline Service Plan 2 (2021-24) contained within Rapid Transit's Project Agreement (exact timetable is subject to change).

Time period (weekdays)	Headway
Early morning (05:00 – 07:30)	15 minutes
AM Peak (07:30 – 09:30)	8 minutes
Midday (09:30 – 14:30)	10 minutes
PM Peak (14:30 – 18:30)	7.5 minutes
Evening (18:30 – 01:00 next day)	15 minutes

Thank you,

Natalie Wennyk
Engineering Intern | Transportation Planning
Transportation Division | Region of Waterloo
150 Frederick Street, Kitchener, ON
519-501-0691

From: Jason Dorssers <jdorssers@slrconsulting.com>
Sent: January 18, 2024 10:45 AM
To: Natalie Wennyk <NWennyk@regionofwaterloo.ca>
Cc: jenny.setterfield@waterloo.ca; Keni Mallinen <kmallinen@slrconsulting.com>
Subject: RE: Noise Assessment Requests Id: NA240116-xblg5x

****EXTERNAL ALERT** This email originated from outside the Region of Waterloo.**

Natalie,

Thank you kindly for getting to this request so quickly. It is really appreciated.

Any idea who to speak to on the ION LRT?

Best,
Jason

Jason Dorssers B.Eng., EIT

Acoustics Consultant

O +1 226 706 8080
M 519-362-0958
E jdorssers@slrconsulting.com

SLR Consulting (Canada) Ltd
100 Stone Road West, Suite 201, Guelph ON Canada N1G 5L3



Confidentiality Notice and Disclaimer
This communication and any attachment(s) contain information which is confidential and may also be legally privileged. It is intended for the exclusive use of the recipient(s) to whom it is addressed. If you have received this communication in error, please e-mail us by return e-mail and then delete the e-mail from your systen together with any copies of it. Any views or opinions are solely those of the author and do not represent those of SLR Management Ltd, or any of its subsidiaries, u specifically stated.

From: Region of Waterloo Road Permits <no-reply-permits@regionofwaterloo.ca>
Sent: January 18, 2024 10:37 AM
To: Jason Dorssers <jdorssers@slrconsulting.com>
Cc: nwennyk@regionofwaterloo.ca
Subject: Noise Assessment Requests Id: NA240116-xblg5x

> You don't often get email from no-reply-permits@regionofwaterloo.ca. Learn why this is important

Hi Jason,

Please follow this link to your traffic forecast for 170 Northfield Dr W, Waterloo:
https://rmow.permitcentral.ca/Permit/PermitApplicationView/NA240116-xblg5x

Please note Kumpf Dr and Parkside Dr are not under Region of Waterloo jurisdiction. As such, I recommend connecting with Jenny at City of Waterloo to verify these forecasts at Jenny.Setterfield@waterloo.ca.

Best,
Natalie Wennyk
nwennyk@regionofwaterloo.ca

Railway Company	Region	Province	Access	Jurisdiction	Mile	Subdivision	Spur Mile Point	Spur Name	Location	Latitude	Longitude	Road Authority	Protection	Accident	Fatality	Injury	Total Trains Daily	Vehicles Daily	Train Max Speed (mph)	Road Speed (km/h)	Lanes	Tracks	IsUrban
MUNI	ONT	ON	Public	P	62.5	Guelph - GO	4.73	Waterloo	Northfld Dr (Reg 50)	43.498	-80.5436	Waterloo (ON)	Active - FLB	0	0	0	2	20040	15	60	6	1	N

Source: https://tc.canada.ca/en/rail-transportation/grade-crossings/grade-crossings-inventory

Name	M.	ID	Lw' Day (dBA)	Lw' Night (dBA)	Train Class	Correct. Track (dB)	Vmax (km/h)	Height A (m)	E (m)	A_att	E_Att	Length (m)	Train Type 1 Type	No. Day	No. Night	Speed (km/h)	Throttle (1 to 8)
CN Freight - Locomotive		CNfreight_loco	-81	42.9	(local)	0		0.6		r		1821	FRA_CONV_FRE_CAR	0	12	24	8
ION LRT - NB/EB		ION_wheel	53.5	48.7	(local)	5		0.6		r		1299	FTA_COMM_CAR	67	11	50	0
ION LRT - SB/WB		ION_wheel	53.5	48.7	(local)	5		0.6		r		1312	FTA_COMM_CAR	67	11	50	0
CN Freight - Locomotive		CNfreight_wheel	-81	45.6	(local)	0		0.6		r		1821	FTA_COMM_CAR	0	75	24	0

Appendix D STAMSON Output File

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

STAMSON 5.0 NORMAL REPORT Date: 30-01-2025 20:17:02
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: st5.te Time Period: 16 hours
Description: STAMSON Validation - Sample Calculation

Road data, segment # 1: NorthfieldWB

Car traffic volume : 14274 veh/TimePeriod
Medium truck volume : 147 veh/TimePeriod
Heavy truck volume : 294 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 1: NorthfieldWB

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 16.80 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Road data, segment # 2: NorthfieldEB

Car traffic volume : 14274 veh/TimePeriod
Medium truck volume : 147 veh/TimePeriod
Heavy truck volume : 294 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 2: NorthfieldEB

Angle1 Angle2 : -90.00 deg 90.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 23.70 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Road data, segment # 3: WeberStreetN

Car traffic volume : 13253 veh/TimePeriod
Medium truck volume : 279 veh/TimePeriod
Heavy truck volume : 419 veh/TimePeriod
Posted speed limit : 60 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 3: WeberStreetN

Angle1 Angle2 : -22.00 deg 0.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 167.00 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Road data, segment # 4: ParksideDr

Car traffic volume : 8398 veh/TimePeriod
Medium truck volume : 183 veh/TimePeriod
Heavy truck volume : 548 veh/TimePeriod
Posted speed limit : 50 km/h
Road gradient : 0 %
Road pavement : 1 (Typical asphalt or concrete)

Data for Segment # 4: ParksideDr

Angle1 Angle2 : -3.00 deg 24.00 deg
Wood depth : 0 (No woods.)
No of house rows : 0
Surface : 2 (Reflective ground surface)
Receiver source distance : 130.50 m
Receiver height : 2.00 m
Topography : 1 (Flat/gentle slope; no barrier)
Reference angle : 0.00

Results segment # 1: NorthfieldWB

Source height = 1.19 m

ROAD (0.00 + 66.66 + 0.00) = 66.66 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	67.15	0.00	-0.49	0.00	0.00	0.00	0.00	66.66

Segment Leq : 66.66 dBA

Results segment # 2: NorthfieldEB

Source height = 1.19 m

ROAD (0.00 + 65.16 + 0.00) = 65.16 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	67.15	0.00	-1.99	0.00	0.00	0.00	0.00	65.16

Segment Leq : 65.16 dBA

Results segment # 3: WeberStreetN

Source height = 1.32 m

ROAD (0.00 + 48.44 + 0.00) = 48.44 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-22	0	0.00	68.03	0.00	-10.47	-9.13	0.00	0.00	0.00	48.44

Segment Leq : 48.44 dBA

Results segment # 4: ParksideDr

Source height = 1.57 m

ROAD (0.00 + 48.99 + 0.00) = 48.99 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-3	24	0.00	66.63	0.00	-9.40	-8.24	0.00	0.00	0.00	48.99

Segment Leq : 48.99 dBA

Total Leq All Segments: 69.07 dBA

TOTAL Leq FROM ALL SOURCES: 69.07



FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,250	METRES	SLR
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **D1**	
COMPARISON OF CADNA/A AND STAMSON – ROAD TRAFFIC NOISE		Project No. 241.030968.00001		

Appendix E Ventilation, Warning Clause and Mitigation Summary

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

Appendix E Ventilation, Warning Clause and Mitigation Summary

The following warning clauses are recommended for inclusion in agreements registered on Title for the residential units and included in all agreements of purchase and sale or lease, and all rental agreements.

A summary of the warning clause, ventilation and mitigation requirements is included in **Table E.1**.

MECP Type A: “Purchasers/tenants are advised that sound levels due to increasing road and rail traffic may occasionally interfere with some activities of the dwelling occupants as the sound levels exceed the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type C: “This dwelling unit has been designed with the provision for adding central air conditioning at the occupant’s discretion. Installation of central air conditioning by the occupant will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type D: “This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment.”

MECP Type E: “Purchasers/tenants are advised that due to the proximity of near employment lands (industries, commercial and retail uses), noise from industries, commercial and retail uses may at times be audible.”

MECP Type F: “Purchasers/tenants are advised that sound levels due to the adjacent industry (facility) (utility) are required to comply with sound level limits that are protective of indoor areas and are based on the assumption that windows and exterior doors are closed. This dwelling unit has been supplied with a ventilation/air conditioning system which will allow windows and exterior doors to remain closed.”

Table E.1: Summary of Ventilation, Warning Clause and Mitigation Requirements

Proposed Development Location/Building	Barrier Required?	Ventilation Requirement [1]	Warning Clause Requirement(s)
Building A Podium	-	Central AC	Type A, Type D, Type E
Building A Tower	-	Provision for AC	Type A, Type C, Type E
Building B1 Tower	-	Provision for AC	Type A, Type C, Type E
Building B2 Tower	-	Provision for AC	Type A, Type C, Type E
Building C1 Tower	-	Provision for AC	Type A, Type C, Type E
Building C2 Tower	-	Provision for AC	Type A, Type C, Type E
Building D Podium	-	Central AC	Type A, Type D, Type E
Building D1 Tower	-	Central AC	Type A, Type D, Type E
Building D2 Tower	-	Central AC	Type A, Type D, Type E
Building E Podium	-	Central AC	Type D, Type E
Building E Tower	-	Provision for AC	Type C, Type E
Building F Podium	-	Provision for AC	Type C, Type E
Building F1 Tower	-	Provision for AC	Type C, Type E
Building F2 Tower	-	Provision for AC	Type C, Type E
Building G Podium	-	Central AC	Type D, Type E
Building G1 Tower	-	Central AC	Type D, Type E
Building G2 Tower	-	Central AC	Type D, Type E
Building H1 Podium	-	Central AC	Type D, Type E
Building H1 Tower	-	Central AC	Type D, Type E
Notes: [1] AC = air conditioning			

If Class 4 designation is provided for the Project site, all residential units will require:

- Central AC; and
- Type F warning clause

Appendix F Ambient Road Traffic Sound Levels

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001


April 2, 2025

O R N A M E N T - Sound Power Emissions & Source Heights


Ontario Road Noise Analysis Method for Environment and Transportation

Ambient Road Traffic

Road Segment ID	AADT	Percent Traffic In Period	Period (h)	Total Traffic Volumes (Period)	Speed (kph)	Auto %	Med %	Hvy %	Auto	Med	Heavy	Road Gradient (%)	PWL (dBA)	Source Height, s (m)	Reference Leq (dBA)
Daytime Ambient															
Kumpf Drive	2400	4.3%	1	103	50	91.0%	3.0%	6.0%	94	3	6	0.0	**74.4**	**1.6**	**59.3**
Parkside Drive	9009	4.3%	1	387	50	92.0%	2.0%	6.0%	356	8	23	0.0	**80.0**	**1.6**	**64.9**
Weber Street North	13300	4.3%	1	572	60	95.0%	2.0%	3.0%	543	11	17	0.0	**81.3**	**1.3**	**66.2**
Northfield Drive - Westbound	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Westbound - Downhill	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Eastbound	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	0.0	**80.4**	**1.2**	**65.3**
Northfield Drive - Eastbound - Uphill	14050	4.3%	1	604	60	97.0%	1.0%	2.0%	586	6	12	2.1	**81.3**	**1.2**	**66.2**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	4.3%	1	495	90	87.1%	3.2%	9.7%	431	16	48	0.0	**87.3**	**1.8**	**72.2**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	4.3%	1	495	90	87.1%	3.2%	9.7%	431	16	48	0.0	**87.3**	**1.8**	**72.2**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	4.3%	1	914	90	93.0%	1.8%	5.3%	849	16	48	0.0	**88.1**	**1.5**	**73.1**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	4.3%	1	914	90	93.0%	1.8%	5.3%	849	16	48	0.0	**88.1**	**1.5**	**73.1**
Evening Ambient															
Kumpf Drive	2400	3.1%	1	74	50	91.0%	3.0%	6.0%	68	2	4	0.0	**73.0**	**1.6**	**57.9**
Parkside Drive	9009	3.1%	1	279	50	92.0%	2.0%	6.0%	257	6	17	0.0	**78.6**	**1.6**	**63.5**
Weber Street North	13300	3.1%	1	412	60	95.0%	2.0%	3.0%	392	8	12	0.0	**79.8**	**1.3**	**64.8**
Northfield Drive - Westbound	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Westbound - Downhill	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Eastbound	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	0.0	**79.0**	**1.2**	**63.9**
Northfield Drive - Eastbound - Uphill	14050	3.1%	1	436	60	97.0%	1.0%	2.0%	422	4	9	2.1	**79.9**	**1.2**	**64.8**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	3.1%	1	357	90	87.1%	3.2%	9.7%	310	12	35	0.0	**85.9**	**1.8**	**70.8**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	3.1%	1	357	90	87.1%	3.2%	9.7%	310	12	35	0.0	**85.9**	**1.8**	**70.8**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	3.1%	1	659	90	93.0%	1.8%	5.3%	612	12	35	0.0	**86.7**	**1.5**	**71.7**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	3.1%	1	659	90	93.0%	1.8%	5.3%	612	12	35	0.0	**86.7**	**1.5**	**71.7**
Night-time Ambient															
Kumpf Drive	2400	0.4%	1	10	50	91.0%	3.0%	6.0%	9	0	1	0.0	**64.1**	**1.6**	**49.0**
Parkside Drive	9009	0.4%	1	36	50	92.0%	2.0%	6.0%	33	1	2	0.0	**69.7**	**1.6**	**54.6**
Weber Street North	13300	0.4%	1	53	60	95.0%	2.0%	3.0%	51	1	2	0.0	**71.0**	**1.3**	**55.9**
Northfield Drive - Westbound	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Westbound - Downhill	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Eastbound	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	0.0	**70.1**	**1.2**	**55.0**
Northfield Drive - Eastbound - Uphill	14050	0.4%	1	56	60	97.0%	1.0%	2.0%	55	1	1	2.1	**71.0**	**1.2**	**55.9**
Highway 85 - Northbound - N of Northfield Dr. W.	11500	0.4%	1	46	90	87.1%	3.2%	9.7%	40	1	4	0.0	**77.0**	**1.8**	**61.9**
Highway 85 - Southbound - N of Northfield Dr. W.	11500	0.4%	1	46	90	87.1%	3.2%	9.7%	40	1	4	0.0	**77.0**	**1.8**	**61.9**
Highway 85 - Northbound - S of Northfield Dr. W.	21250	0.4%	1	85	90	93.0%	1.8%	5.3%	79	1	4	0.0	**77.8**	**1.5**	**62.8**
Highway 85 - Southbound - S of Northfield Dr. W.	21250	0.4%	1	85	90	93.0%	1.8%	5.3%	79	1	4	0.0	**77.8**	**1.5**	**62.8**

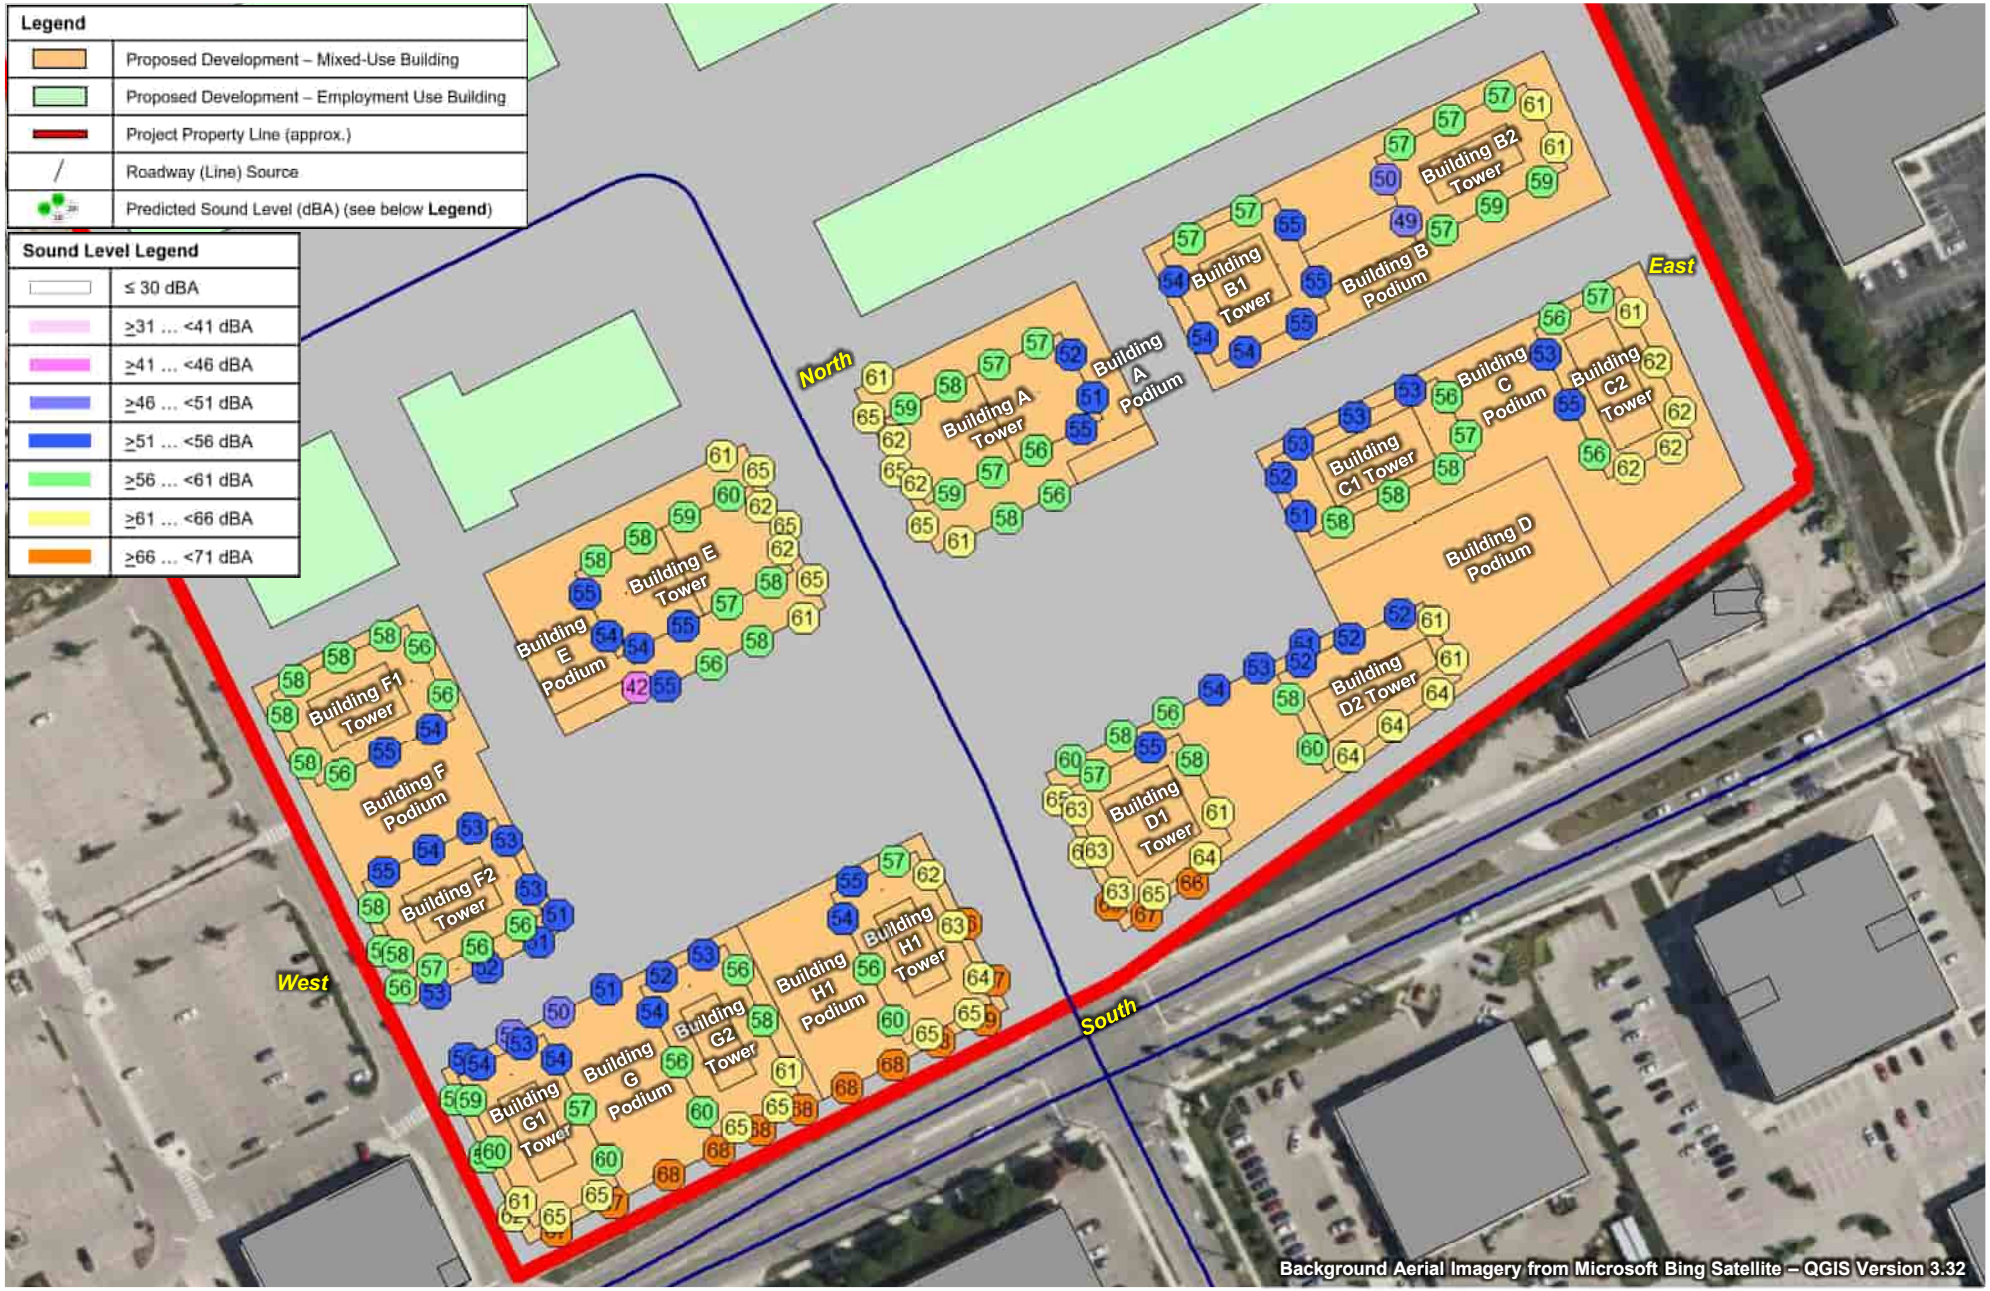


FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **F1**
PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM DAYTIME HOUR		Project No. 241.030968.00001	SLR

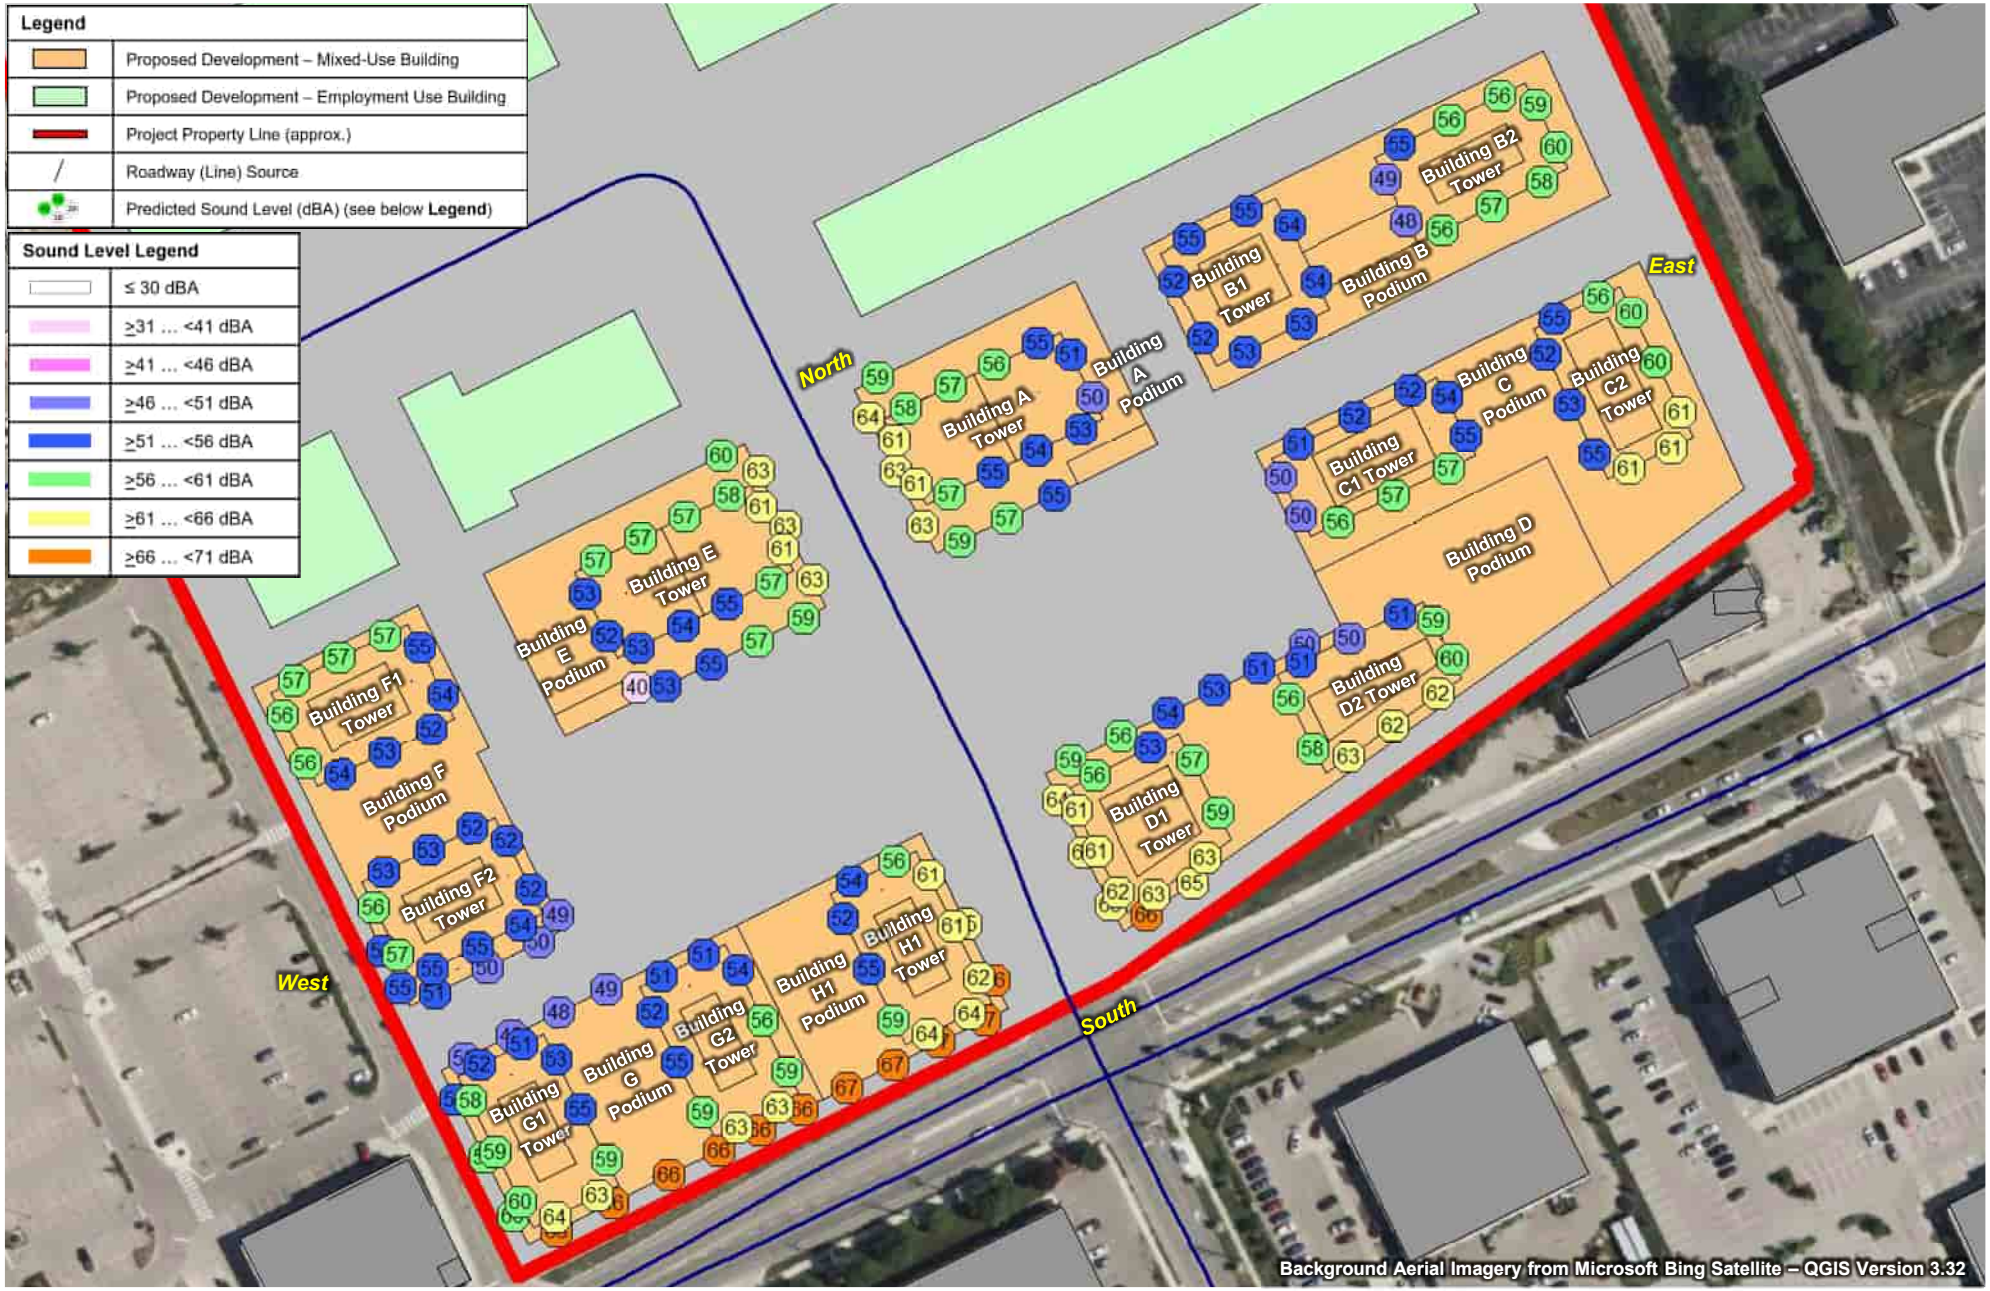

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **F2**
PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM EVENING HOUR		Project No. 241.030968.00001	

SLR

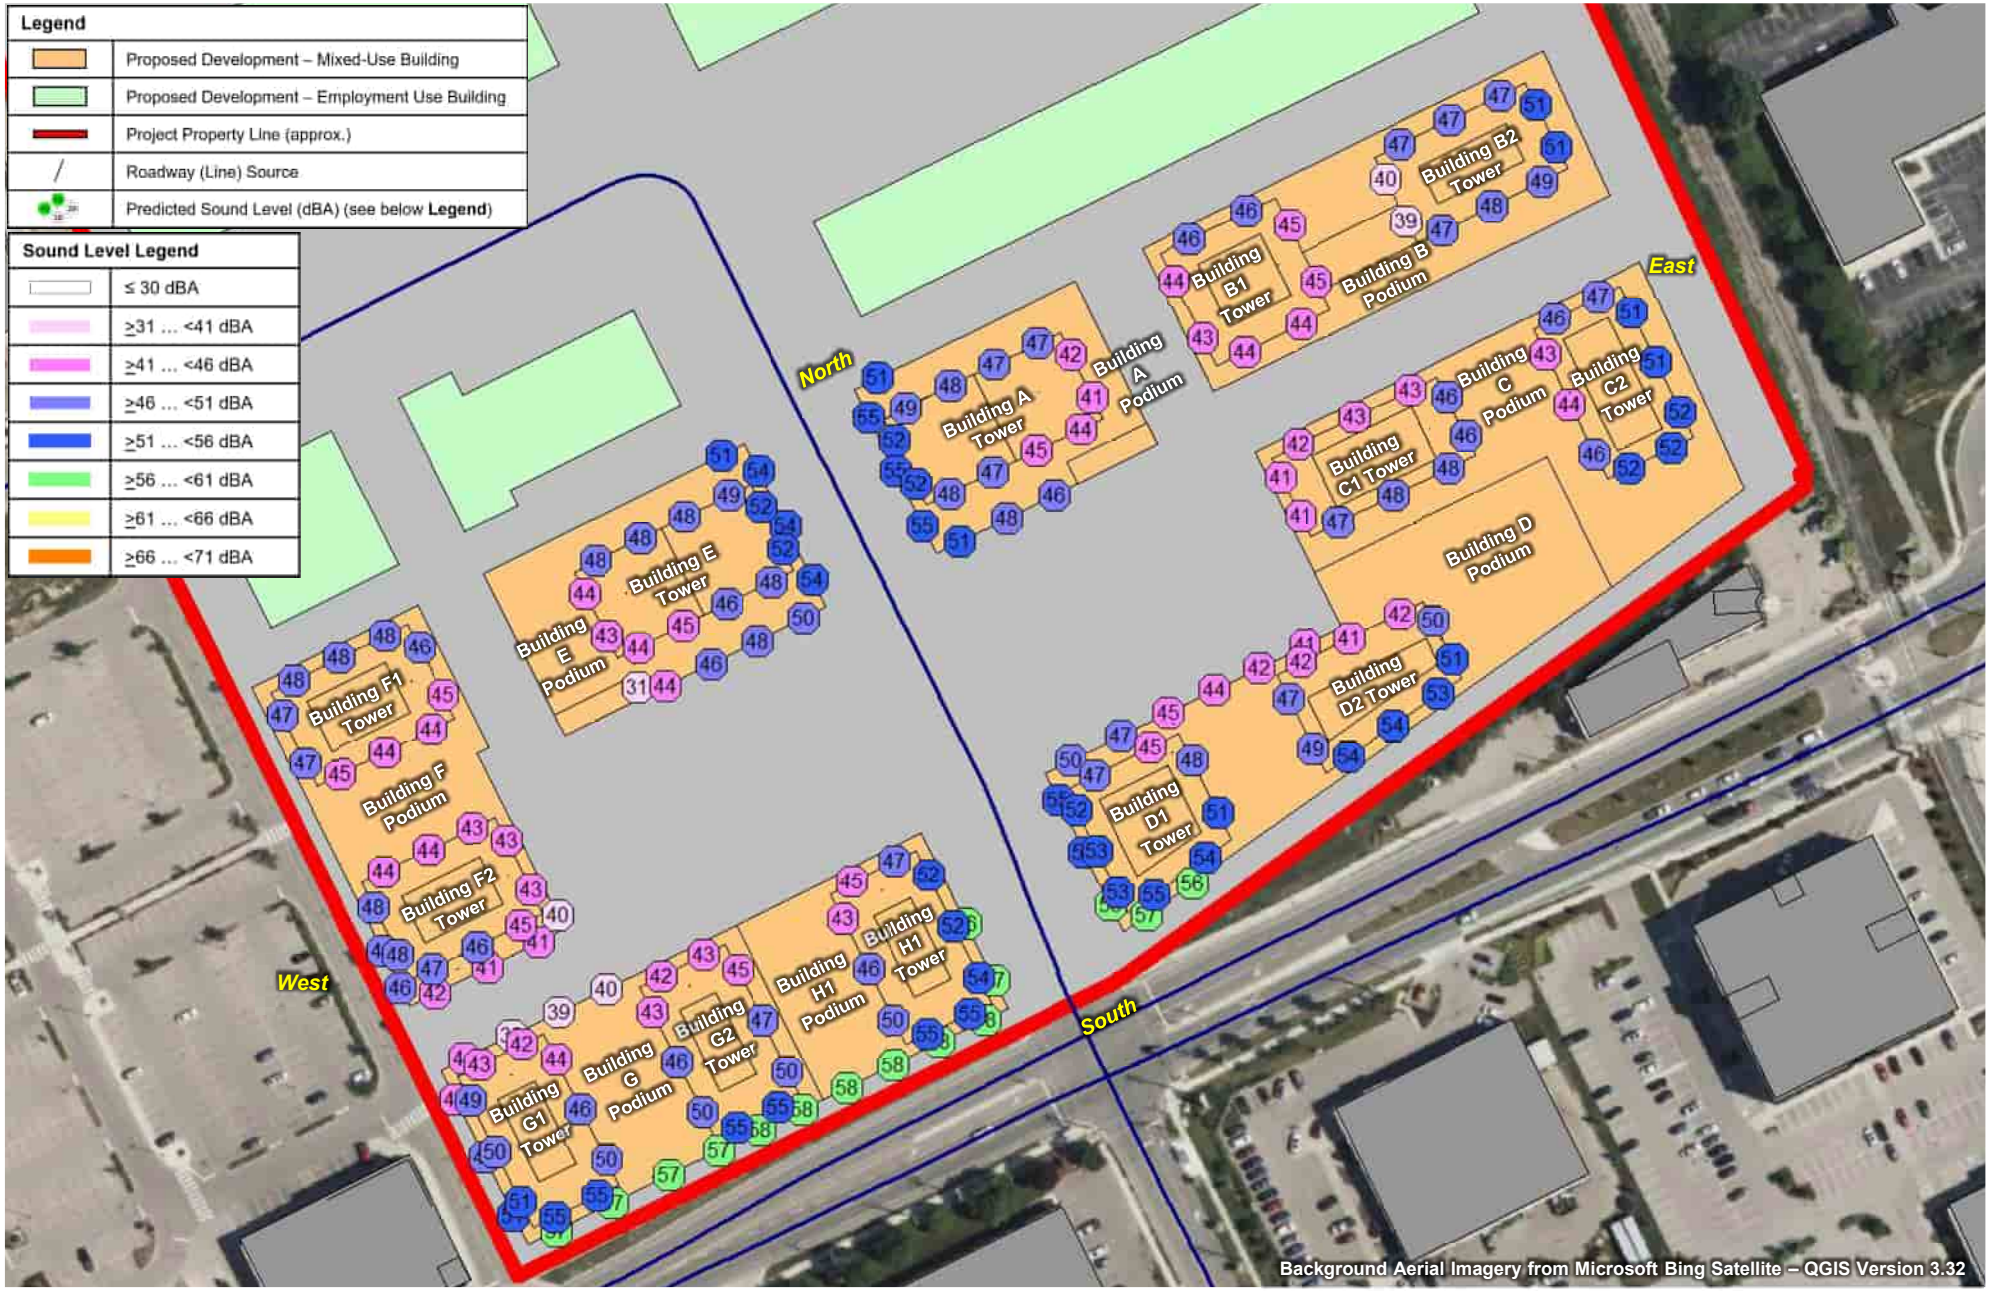

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:1,750	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **F3**
PREDICTED AMBIENT SOUND LEVEL – ROAD TRAFFIC – MINIMUM NIGHT-TIME HOUR		Project No. 241.030968.00001	

Appendix G Surrounding Stationary Sources – Facility Review

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

Appendix G Inventory of Surrounding Stationary Sources/Facilities

The following facilities within 300 m of the noise sensitive portions of the proposed development were reviewed. No Class III industries with respect to noise were identified or audible at the Project site.


Table G1: Review of Surrounding Stationary Sources/Facilities

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
Office Building – 565 Kumpf Drive		Multi-tenant office building	9:00 AM to 5:00 PM	---	Modelled in detail. See Report Section 4.5.1.
Teledyne DALSA – 575 Kumpf Drive		Manufacturer of technology products (drones)	9:00 AM to 5:00 PM	---	Modelled in detail. See Report Section 4.5.2.
Office/Commercial Building – 101-139 Northfield Drive West		Multi-tenant office/commercial building	Varies, 8:30 AM to 5:00 AM	---	Modelled in detail. See Report Section 4.5.3.
Waterloo Nissan – 141 Northfield Drive West		Vehicle dealership and service centre	9:00 AM to 8:00 PM	---	Modelled in detail. See Report Section 4.5.4.
Heffner Cabinetry & Woodworking – 145 Northfield Drive West		Manufacturer of cabinetry and wood products	8:00 AM to 4:30 PM	5843-77LM2Z, 10/18/2007 [1]	Modelled in detail. See Report Section 4.5.5.
Greystone Club – 155 Northfield Drive West		Health and wellness club (gym facilities)	5:30 AM to 10:00 PM	---	Modelled in detail. See Report Section 4.5.6.
Shoppers Drug Mart – 190 Northfield Drive West		Pharmacy (retail)	8:00 AM to 10:00 PM	---	Modelled in detail. See Report Section 4.5.7.
Sobeys – 640 Parkside Drive		Grocery store	7:00 AM to 11:00 PM	---	Modelled in detail. See Report Section 4.5.8.
Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive		Manufacturer of barbecues	8:30 AM to 4:30 PM	---	Modelled in detail. See Report Section 4.5.9.
Waterloo Fire Station 3 – 150 Northfield Drive West		Fire station with emergency generator	24 hours per day	8495-7HMQZ5, 08/19/2008 (standby generator)	Modelled in detail. See Report Section 4.5.10a and 4.5.10b.

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
1	Northfield Centre Plaza – 585 Weber Street North	Multi-tenant commercial/retail/gym	24 hours per day	---	Class I Light Industry, > 70 m from proposed development.
2	Starbucks – 590 Weber Street North	Coffee Shop	6:00 AM to 9:30 PM	---	Class I Light Industry, > 70 m from proposed development.
3	Waterloo Corporate Campus – Building – 655 Parkside Drive	Multi-tenant commercial/retail building	Varies, 9:00 AM to 10:00 PM	---	Class I Light Industry, > 70 m from proposed development.
4	Waterloo Corporate Campus – Building – 584 Weber street North	Multi-tenant commercial/retail building	Varies, 7:00 AM to 9:00 PM	---	Class I Light Industry, > 70 m from proposed development.
5	Pet Valu – 585 Weber Street North	Pet Store	9:00 AM to 9:00 PM	---	Class I Light Industry, > 70 m from proposed development.
6	State & Main – 578 Weber Street North	Restaurant	11:00 AM to 12:00 AM	---	Class I Light Industry, > 70 m from proposed development.
7	TD Canada Trust – 576 Weber Street North	Bank and ATM	9:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
8	Marsland Mall Business Centre – 572 Weber Street North	Multi-tenant office/commercial building	Varies, 8:00 AM to 7:00 PM	---	Class I Light Industry, > 70 m from proposed development.
9	Marsland Mall Business Centre – 564 Weber Street North	Multi-tenant office/commercial building	Varies, 7:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
10	Imagine Fibreglass Pools – 560 Weber Street North	Swimming pool contractor	9:30 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
10	Johnsonite (Canada) Inc. |Tarkett – 560 Weber Street North	Vinyl flooring manufacturer	Unavailable	3482-8ESR5L, 03/30/2011	Class II Medium Industry, source located closer to/more exposed to existing points of reception on west side of Weber Street North
10	L'air Camper Co – 560 Weber Street North	Camping store	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.


Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
11	555 Parkside Drive	Formerly Terra Bioplastics Inc. (plastics manufacturer) – current tenant unknown	Unavailable	---	Class I Light Industry, > 70 m from proposed development.
12	Bo-De Factory Outlet – 551 Parkside Drive	Wholesale grocer	9:00 AM to 7:00 PM	---	Class I Light Industry, > 70 m from proposed development.
13	Cineplex Digital Media – 137 Northfield Drive West	Corporate office	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
14	Planitar Inc. – 560 Parkside Drive	Mapping services office	Unavailable	---	Class I Light Industry, > 70 m from proposed development.
14	KA Imaging Inc. – 560 Parkside Drive	Manufacturer, imaging technologies	9:00 AM to 5:30 PM	---	Class I Light Industry, > 70 m from proposed development.
14	Crunch Fitness – Waterloo, Physiomed Waterloo – 560 Parkside Drive	Fitness center, physiotherapist	Open 24 hours	---	Class I Light Industry, > 70 m from proposed development.
15	Emerge2 Digital – 554 Parkside Drive	E-commerce services	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from proposed development.
15	Atletica Sport Systems Inc. – 554 Parkside Drive	Manufacturer, sports equipment	8:00 AM to 4:30 PM	---	Class I Light Industry, > 70 m from proposed development.
16	Forbes Waterloo Mazda – 115 Northfield Drive West	Vehicle dealership and service centre	9:00 AM to 8:00 PM	---	Class I Light Industry, > 70 m from proposed development.
17	Ontario Teachers Insurance Plan (OTIP) – 125 Northfield Drive West	Corporate office	8:00 AM to 5:00 PM	4579-AANLM9, 06/10/2016 (standby generator) 4579-AANLM9, 06/10/2016	Class I Light Industry, > 70 m from the proposed development. Proposed development will not affect compliance status with existing approvals.
18	Clearpath Robotics Waterloo Office – 97 Randall Drive	Corporate office	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.

Reference from Figure 5	Name of Facility, Address	Facility Description	Hours of Operation	ECA/CofA #, Date	Assessment Notes/Considerations
19	Office Building	Offices	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.
20	NDI – Northern Digital Inc.	Medical equipment supplier	8:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	DarwinAI – 600 Weber Street North	Software company office	8:30 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	Aquanty – 600 Weber Street North	Corporate office	9:00 AM to 5:00 PM	---	Class I Light Industry, > 70 m from the proposed development.
21	Sun Life – 600 Weber Street North	Corporate office	Unavailable	---	Class I Light Industry, > 70 m from the proposed development.
22	ION LRT Operation Maintenance/Storage Facility – 518 Dutton Drive	Maintenance/storage facility for Grand River Transit LRT	Unavailable	3478-9YWNHR, 05/07/2016	Class II Medium Industry, ~300 m from the proposed development. Proposed development not expected affect compliance status with existing environmental approvals. South facades of proposed development most exposed to facility experience high ambient sound levels due to road traffic from Northfield Drive West, Highway 85. See Report **Section 4.2.3.**
Notes: [1] ECA/CofA shown as 'Approved' on MECP Access Environment. Issued for different business name/entity, not reflective of current operations at facility.					

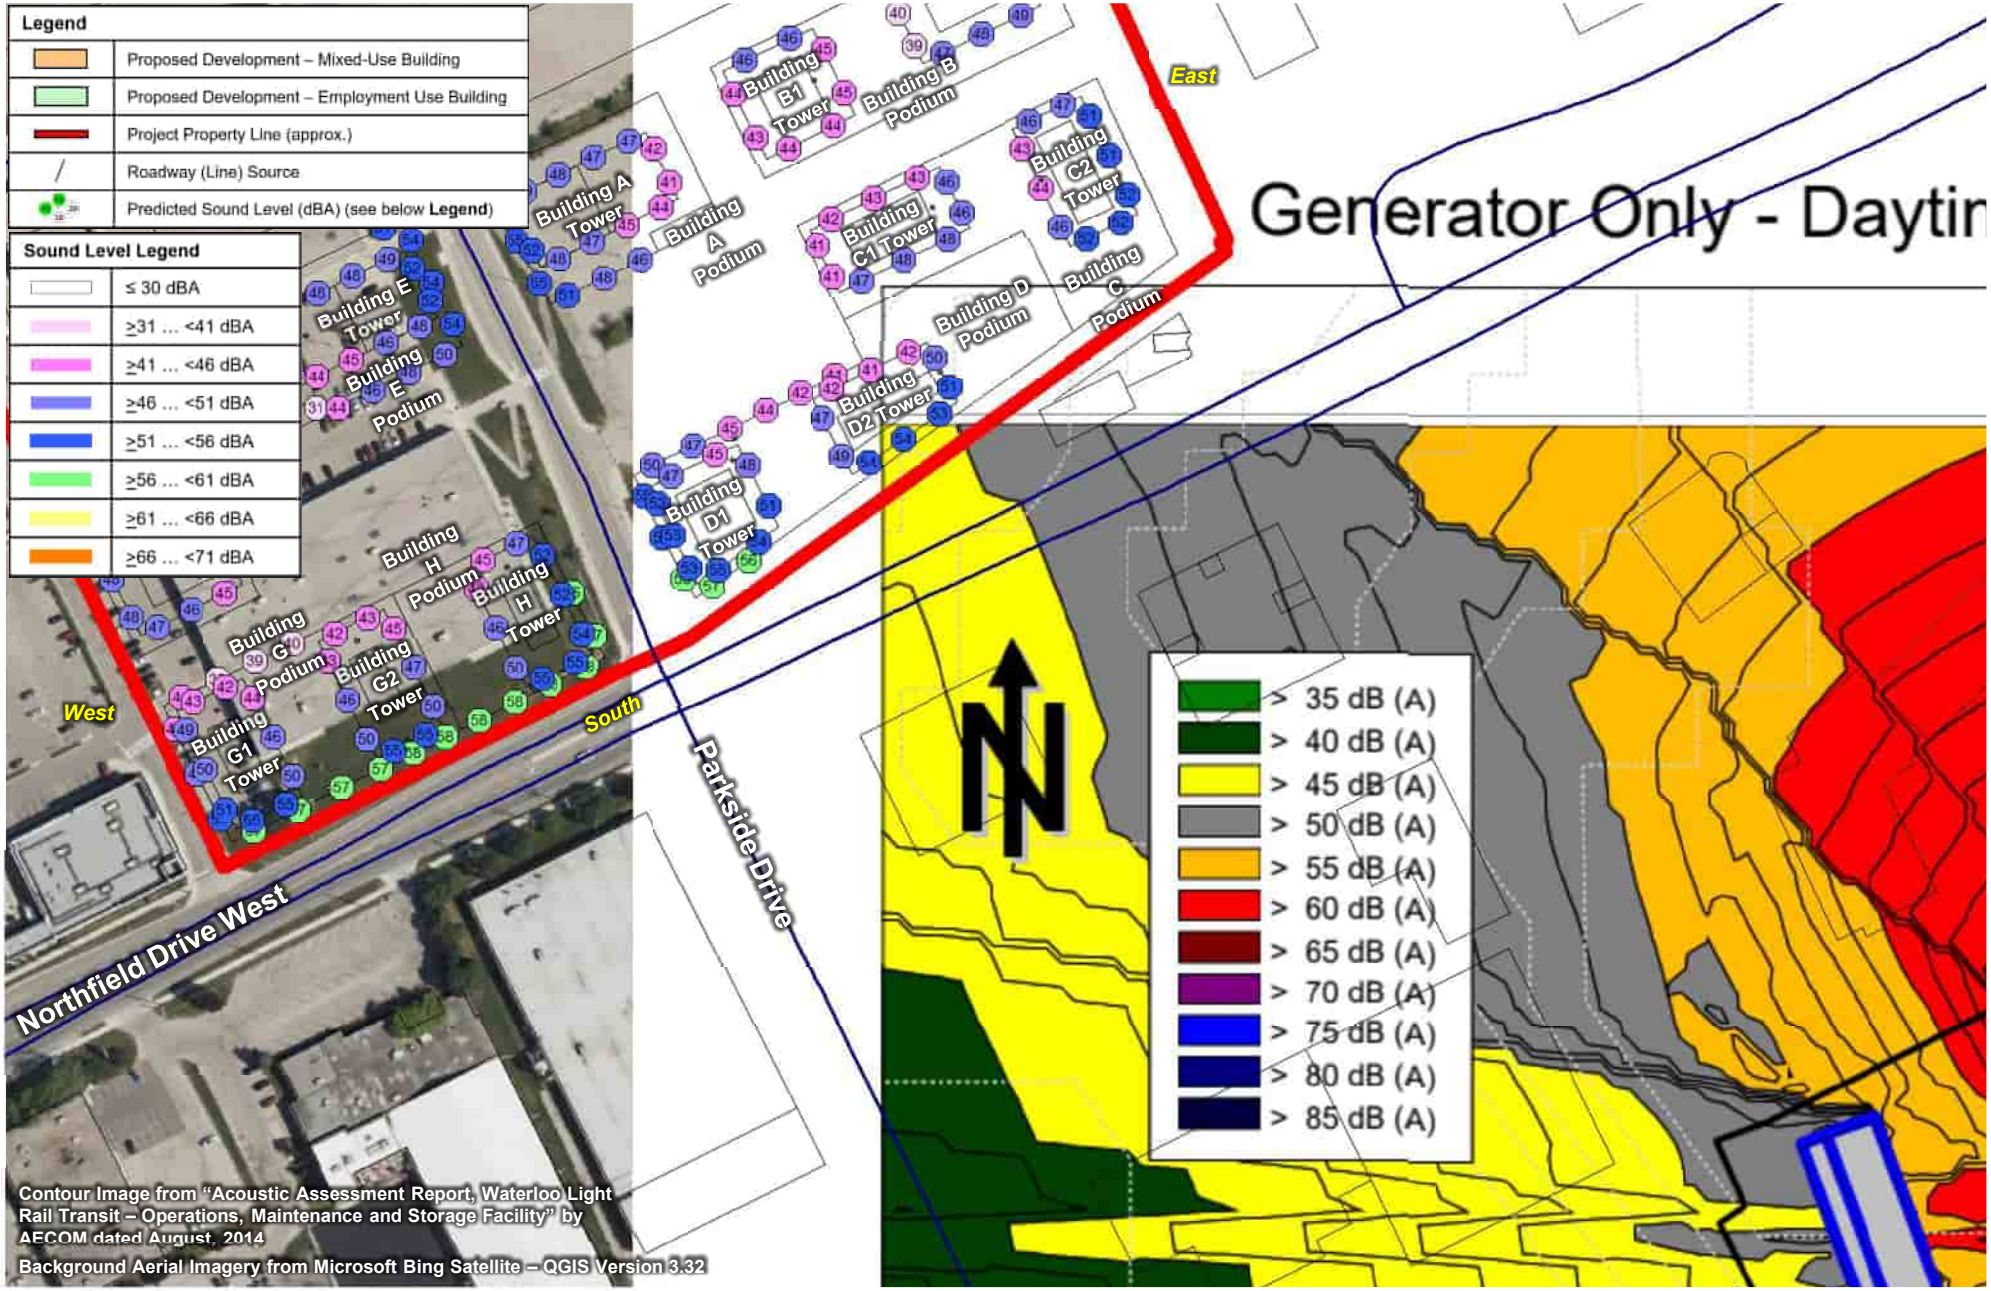

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,250	METRES
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **G1**
PREDICTED ION LRT MAINTENANCE/STORAGE FACILITY SOUND LEVEL CONTOURS FOR GENERATOR TESTING, AND PREDICTED AMBIENT SOUND LEVELS – NIGHT-TIME		Project No. 241.030968.00001	


SLR

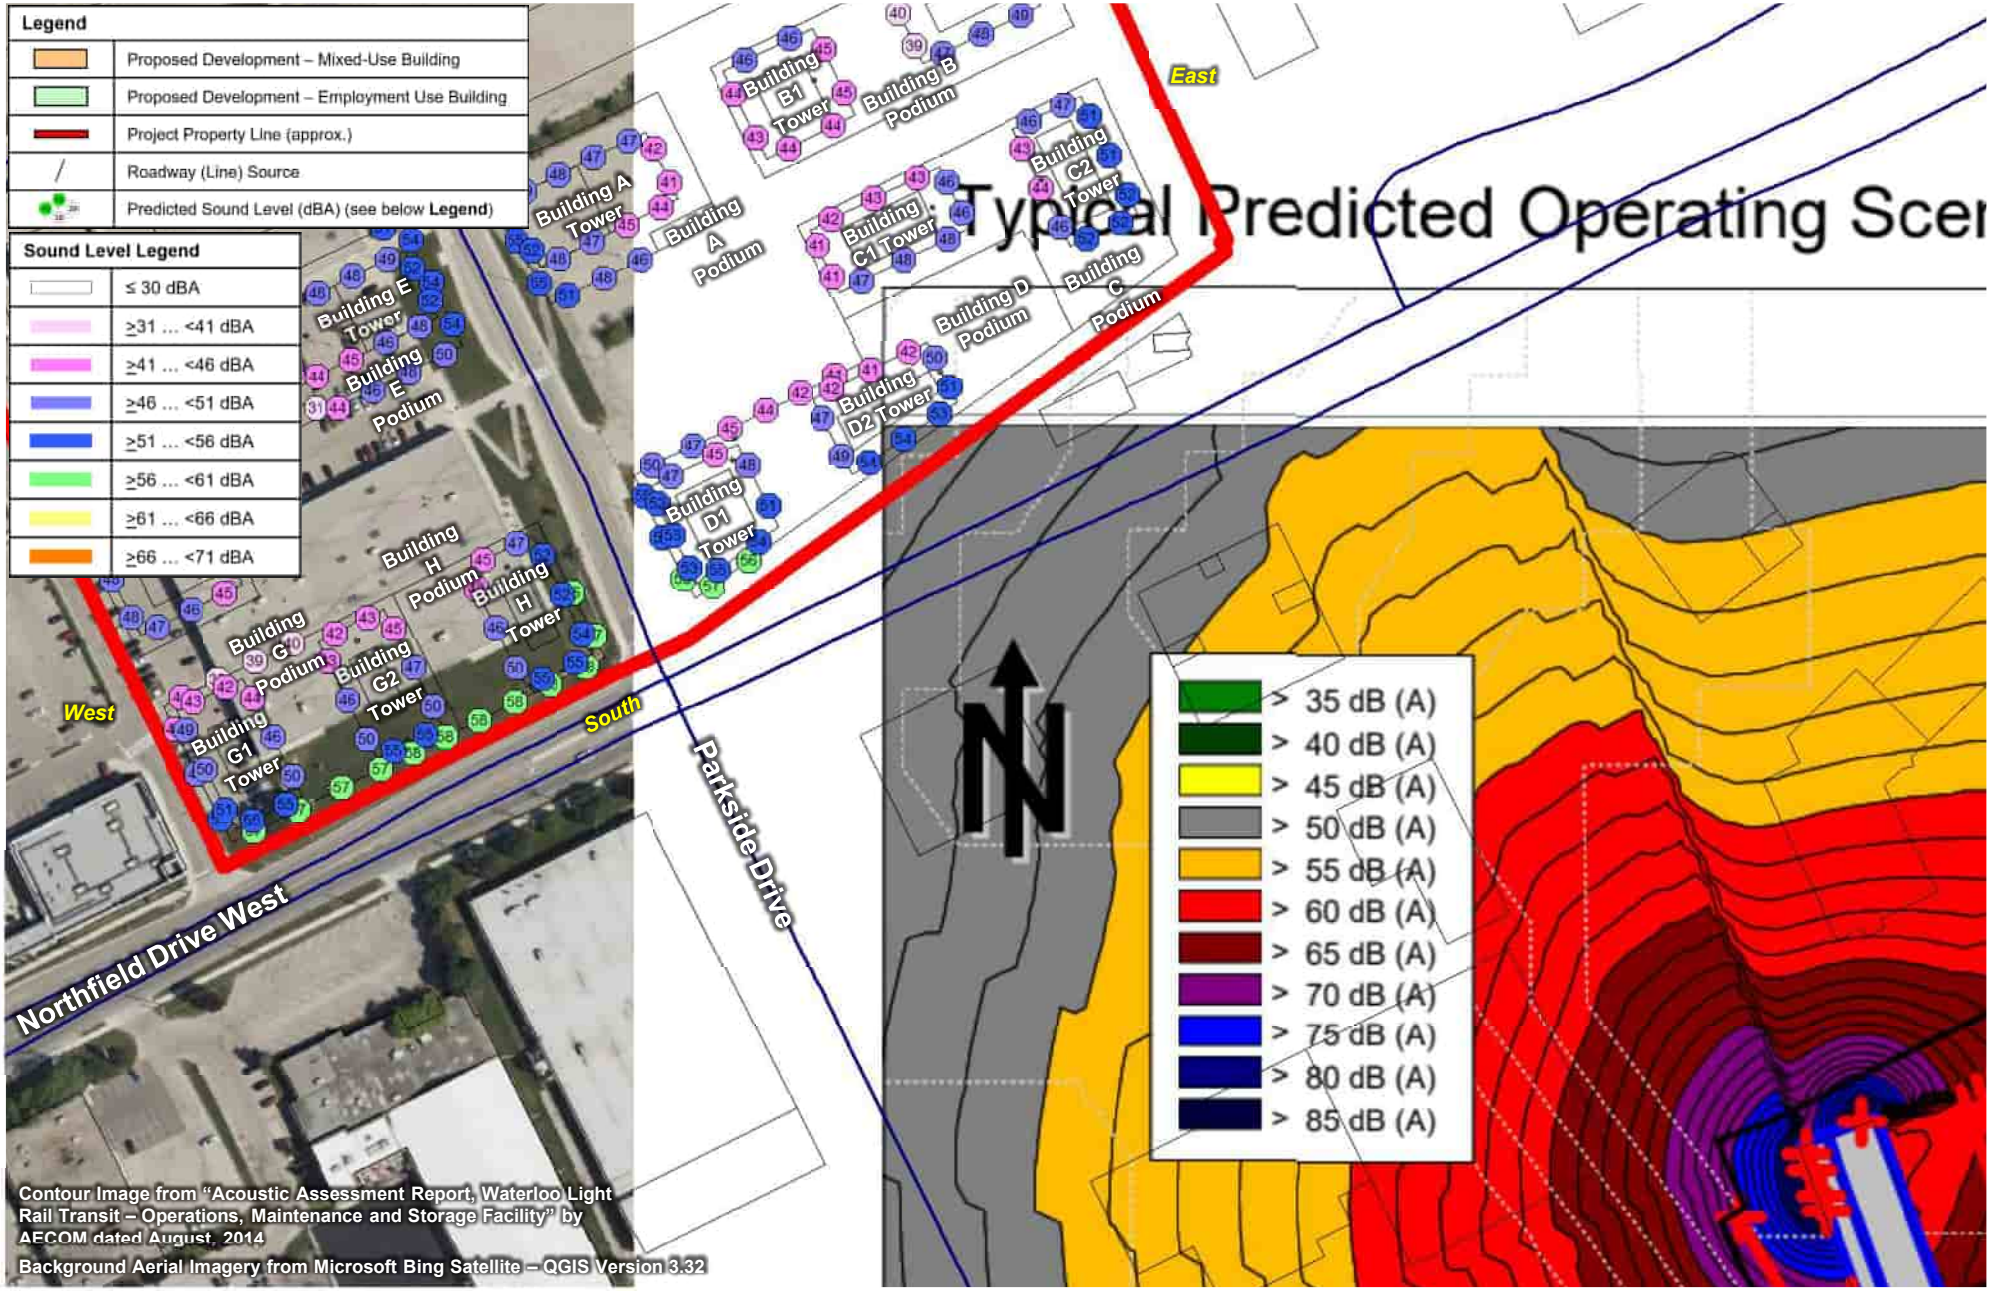

Contour Image from "Acoustic Assessment Report, Waterloo Light Rail Transit – Operations, Maintenance and Storage Facility" by AECOM dated August, 2014

Background Aerial Imagery from Microsoft Bing Satellite – QGIS Version 3.32

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,250	METRES	SLR
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **G2**	
PREDICTED ION LRT MAINTENANCE/STORAGE FACILITY SOUND LEVEL CONTOURS FOR TYPICAL OPERATIONS, AND PREDICTED AMBIENT SOUND LEVELS – NIGHT-TIME		Project No. 241.030968.00001		

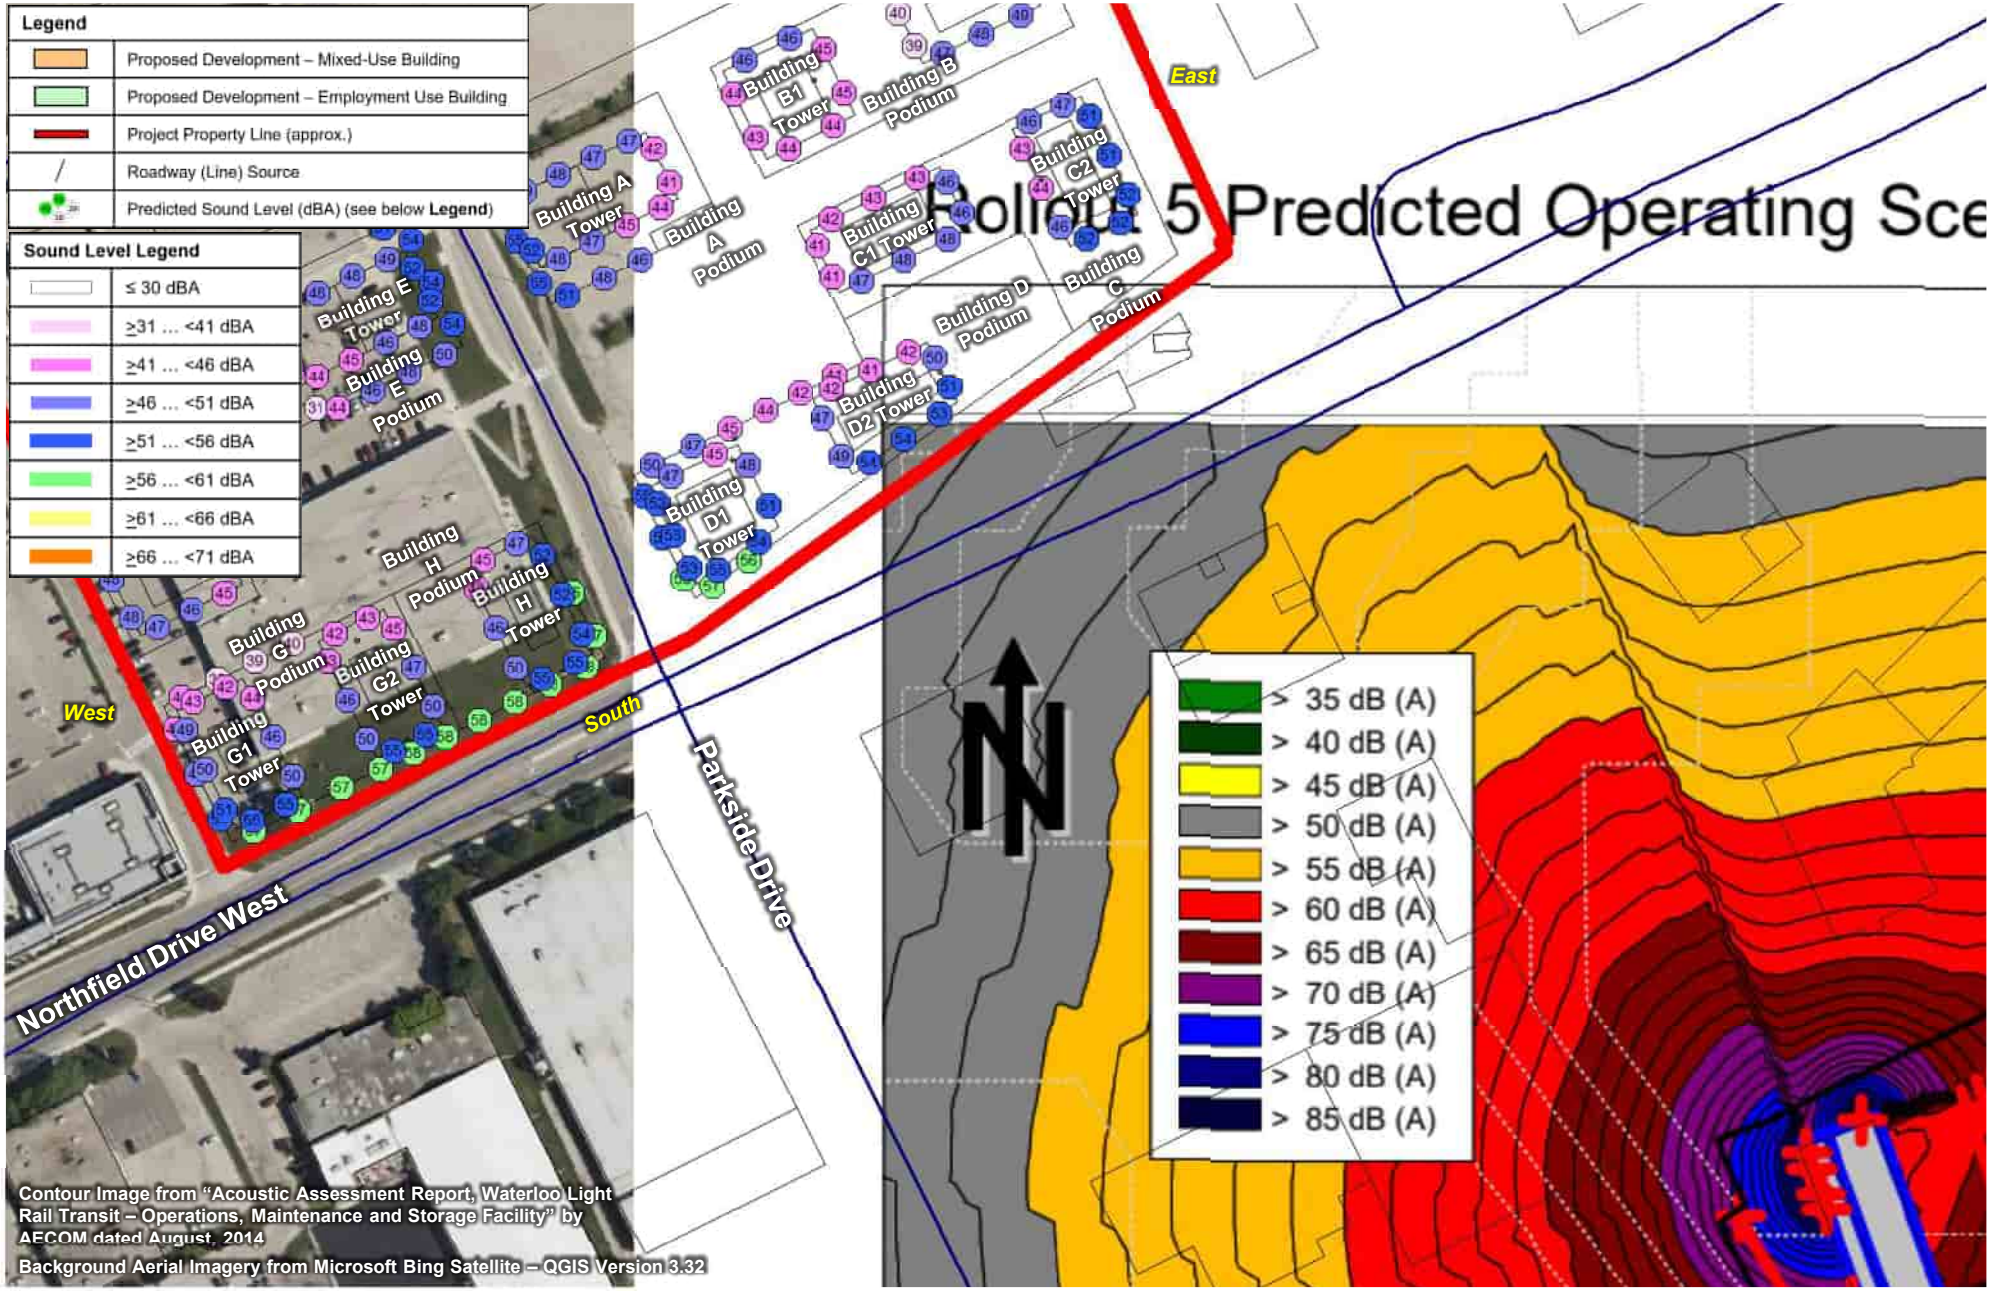


FORGESTONE CAPITAL MANAGEMENT L.P.

170 NORTHFIELD DRIVE WEST, WATERLOO

PREDICTED ION LRT MAINTENANCE/STORAGE FACILITY SOUND LEVEL CONTOURS FOR ROLLOUT 5 OPERATIONS, AND PREDICTED AMBIENT SOUND LEVELS – NIGHT-TIME

True North	Scale: 1:2,250		METRES
	Date: Apr. 2, 2025	Rev. 1	Figure No. G3
	Project No. 241.030968.00001		

SLR

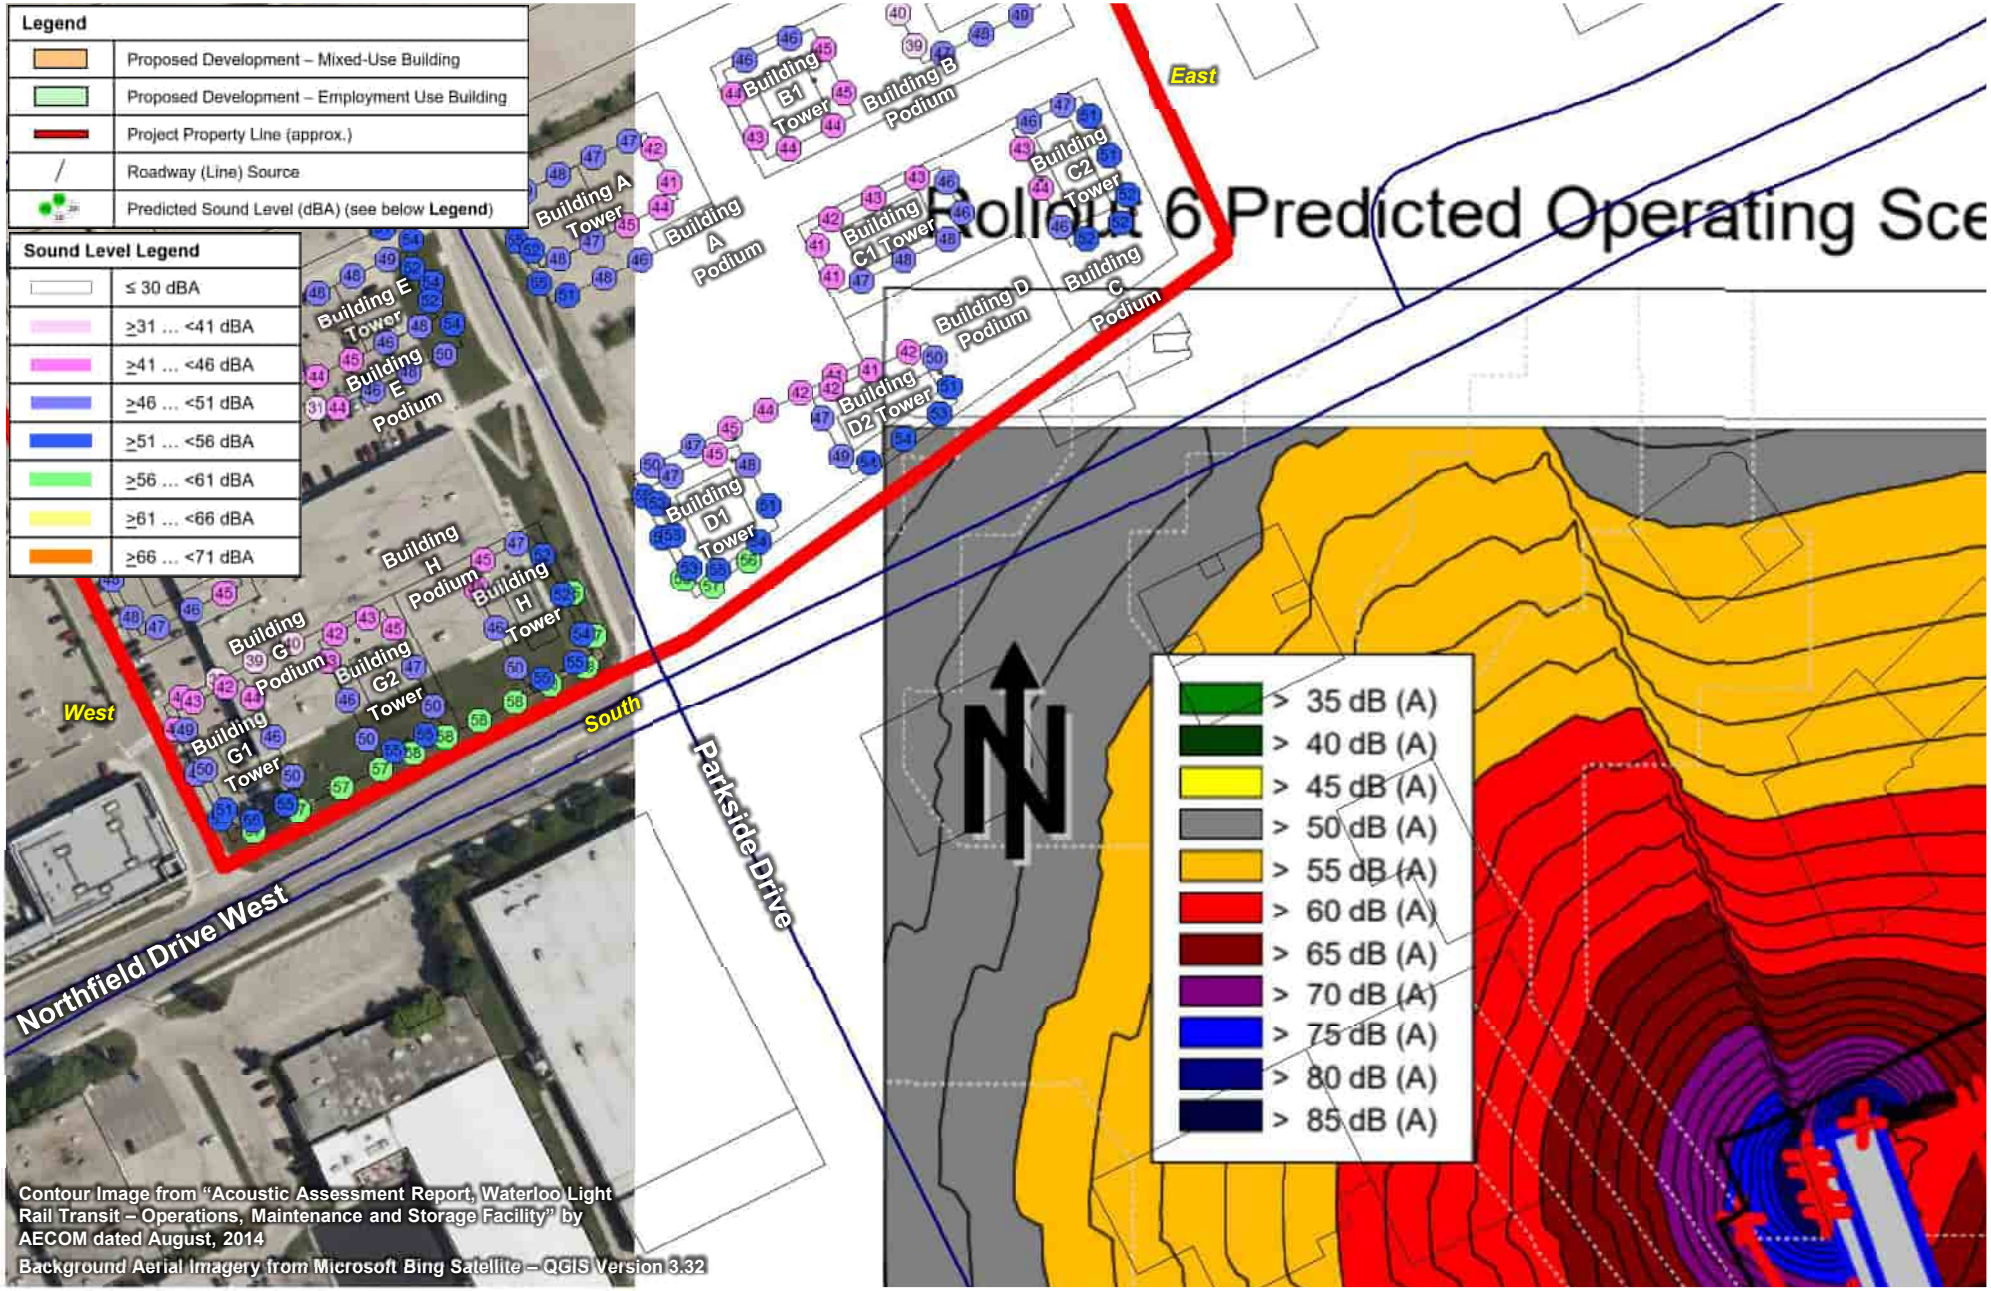

FORGESTONE CAPITAL MANAGEMENT L.P.	True North	Scale: 1:2,250	METRES	SLR
170 NORTHFIELD DRIVE WEST, WATERLOO		Date: Apr. 2, 2025 Rev. 1	Figure No. **G4**	
PREDICTED ION LRT MAINTENANCE/STORAGE FACILITY SOUND LEVEL CONTOURS FOR ROLLOUT 6 OPERATIONS, AND PREDICTED AMBIENT SOUND LEVELS – NIGHT-TIME		Project No. 241.030968.00001		

Appendix H Stationary Source Modelling Information

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
Office Building - 545 Kumpf Drive											
8x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
7x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
3x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
2x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
Teledyne DALSA - 565 Kumpf Drive											
6x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
4x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling during posted facility hours)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Office/Commercial Buildings - 101-139 Northfield Drive West											
5x Rooftop Exhaust Fans	-	-	88	83	81	74	68	64	60	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
2x Rooftop Make Up Air Units	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Fluid Cooler		100	97	96	91	87	85	84	83	94	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
Waterloo Nissan - 141 Northfield Drive West											
3x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
2x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours when facility is open
2x Rooftop Exhaust Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours when facility is open
Open Bay Door x 2 - Impact Wrench	83	78	82	76	79	78	86	85	85	91	Based on historical SLR data - Operates 1 minute per hour during daytime - +10 dB penalty for quasi-steady-state impulsive sound quality (total PWL = 101 dBA)
Open Bay Door x 2 - Compressed Air	101	101	96	89	86	86	84	85	81	92	Based on historical SLR data - Operates 10 minutes per hour during daytime - +5 dB penalty for tonal sound quality (total PWL = 97 dBA)
Heffner Cabinetry & Woodworking - 145 Northfield Drive West											
6x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
3x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
3x Rooftop 15-ton HVAC Units	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
4x Rooftop Make Up Air Units	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Dust Collector	110	115	107	98	96	94	93	95	83	102	Based on SLR measurement from February 1, 2024 - Operates 60 minutes per hour during daytime hours (facility operating period)
7x Rooftop Paint Booth Exhaust Stacks	95	91	95	95	88	83	72	64	63	90	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Building-Side Exhaust Louvre	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling facility operating period)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (facility operating period), 10 km/hr travel speed
Greystone Club - 155 Northfield Drive West											
7x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 10-ton HVAC Unit	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop 15-ton HVAC Unit	87	90	91	91	90	88	84	80	74	93	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied)
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
Shoppers Drug Mart - 190 Northfield Drive West											
2x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours)
4x Rooftop 10-ton HVAC Units	80	83	84	84	83	81	77	73	67	86	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours)
1x Rooftop Refrigeration Unit	71	77	89	79	79	76	71	66	68	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Exhaust Fan	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Refrigeration Truck (Medium-Sized Truck)	104	107	98	100	97	91	87	84	78	98	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (restricted by City of Waterloo Noise By-Law 2010-073)
Truck Movement to Shipping Door	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 1 truck movement per daytime hour (facility operating period), 10 km/hr travel speed (restricted by City of Waterloo Noise By-Law 2010-073)
Sobeys - 640 Parkside Drive											
2x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Packaged Chiller/Cooler Unit (4-fan)	-	101	101	97	98	96	91	85	82	100	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
1x Rooftop Air Cooled Chiller (8-fan)	103	105	99	95	93	94	83	77	73	97	Based on measurements taken by SLR Staff while on site - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours
3x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 60 minutes per daytime hour (restricted by City of Waterloo Noise By-Law 2010-073)

STATIONARY SOURCE MODELLING DATA

Source Description	Maximum Sound Power Level (1/1 Octave Bands)									Modelled Sound Power Level (dBA)	Source Notes
	31.5	63	125	250	500	1000	2000	4000	8000		
1x Idling Refrigeration Truck (Large-Sized Truck)	97	112	102	104	100	95	94	89	80	102	Based on historical SLR data - Operates 40 minutes per hour during daytime hours (restricted to daytime by City of Waterloo Noise By-Law 2010-073) - Worst-case operational times based on conversations with Sobeys staff/management while on site.
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 2 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Garbage Compactor	95	92	87	89	89	78	74	71	70	88	Based on measurements taken by SLR Staff while on site - Operates approximately 10 minutes/hour during daytime only. - Operational times based on concersations with Sobeys staff/management while on site.
Onward Manufacturing Company Limited/Broil King - 585 Kumpf Drive											
5x Rooftop 5-ton HVAC Units	77	80	81	81	80	78	74	70	64	83	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied offices)
1x Rooftop 20-ton HVAC Units	89	92	93	93	92	90	86	82	76	95	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 15 minutes per hour during night-time (outside facility operating hours, unoccupied offices)
12x Rooftop Exhaust Fans	-	-	88	83	81	74	68	64	60	81	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
5x Rooftop Exhaust Fans	-	-	80	76	79	71	67	64	59	79	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
1x Rooftop Make Up Air Unit	-	84	83	81	80	78	73	70	65	82	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening/night-time hours
5x Rooftop Process Exhaust Stacks/Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
5x Rooftop Process Exhaust Stacks/Fans	-	99	99	92	88	82	78	72	66	90	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
2x Idling Heavy Truck	-	93	88	83	90	87	88	82	71	93	Based on historical SLR data - Operates 5 minutes per daytime hour (incidental idling facility operating period)
Heavy Truck Movement to Shipping Doors	98	101	101	97	96	96	92	84	78	100	Based on historical SLR data - 2 truck movement per daytime hour (posted facility hours), 10 km/hr travel speed
Forkift Movements at South Doors	91	98	93	90	90	85	83	77	69	91	Based on historical SLR data - 5 forklift movement per daytime hour (posted facility hours), 10 km/hr travel speed
Waterloo Fire Station 3 - 150 Northfield Drive West											
1x Emergency Generator - 35 kW Natural Gas Unit		91	91	101	96	100	103	102	92	108	Based on historical SLR data - Operates 60 minutes per hour during daytime hour (typical testing schedule)
2x Rooftop Process Exhaust Fans	-	83	93	88	82	77	75	69	66	85	Based on historical SLR data - Operates 60 minutes per hour during daytime hours (facility operating period)
1x Rooftop Split-System Condenser Unit	-	68	66	58	57	54	54	44	39	60	Based on historical SLR data - Operates 60 minutes per hour during daytime/evening hours - Operates 30 minutes per hour during night-time hours

Appendix I Stationary Source Assessment Tables

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

Table I1: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Office Buildings – 565 Kumpf Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	30	30	24	≤ 61	≤ 59	≤ 51
	South	45	45	39	≤ 61	≤ 60	≤ 51
	West	26	26	20	≤ 65	≤ 64	≤ 55
Building A Tower	North	21	21	15	≤ 59	≤ 58	≤ 49
	East	38	38	32	≤ 52	≤ 51	45 [2]
	South	44	44	38	≤ 59	≤ 57	≤ 48
	West	36	36	30	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	23	23	18	≤ 57	≤ 55	≤ 46
	East	47	47	41	≤ 55	≤ 54	45 [2]
	South	47	47	41	≤ 55	≤ 53	45 [2]
	West	35	35	29	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	37	37	31	≤ 57	≤ 56	≤ 47
	East	53	53	47	≤ 61	≤ 60	≤ 51
	South	53	53	47	≤ 59	≤ 58	≤ 49
	West	44	44	39	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	48	48	42	≤ 53	≤ 52	45 [2]
	East	42	42	36	≤ 57	≤ 55	≤ 46
	South	22	22	16	≤ 58	≤ 57	≤ 48
	West	25	25	19	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	53	53	47	≤ 57	≤ 56	≤ 47
	East	53	53	48	≤ 62	≤ 61	≤ 52
	South	37	37	31	≤ 62	≤ 61	≤ 52
	West	40	40	34	≤ 56	≤ 55	≤ 46
Building D Podium	North	21	21	15	≤ 60	≤ 59	≤ 50
	South	19	19	13	≤ 67	≤ 66	≤ 57
	West	18	18	12	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	23	23	17	≤ 57	≤ 56	≤ 47
	East	22	22	16	≤ 61	≤ 59	≤ 51
	South	21	21	16	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	18	18	12	≤ 63	≤ 62	≤ 53
Building D2 Tower	North	25	25	20	≤ 52	≤ 51	45 [2]
	East	31	31	26	≤ 61	≤ 60	≤ 51
	South	28	28	23	≤ 64	≤ 63	≤ 54
	West	21	21	15	≤ 60	≤ 58	≤ 49
Building E Podium	North	17	17	11	≤ 61	≤ 60	≤ 51
	East	29	29	24	≤ 65	≤ 64	≤ 55
	South	42	42	37	≤ 61	≤ 60	≤ 51
Building E Tower	North	16	16	10	≤ 60	≤ 58	≤ 49
	East	36	36	30	≤ 62	≤ 61	≤ 52
	South	42	42	36	≤ 58	≤ 57	≤ 48
	West	19	19	13	≤ 55	≤ 53	45 [2]
Building F Podium	East	36	36	30	≤ 51	50 [2]	45 [2]
	South	13	13	7	≤ 53	≤ 51	45 [2]
	West	11	11	5	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	14	14	8	≤ 58	≤ 57	≤ 48
	East	24	24	18	≤ 56	≤ 55	≤ 46
	South	36	36	30	≤ 56	≤ 54	45 [2]
	West	15	15	9	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	38	38	33	≤ 55	≤ 53	45 [2]
	East	39	39	33	≤ 53	≤ 52	45 [2]
	South	25	25	19	≤ 57	≤ 55	≤ 47
	West	16	16	10	≤ 58	≤ 57	≤ 48
Building G Podium	North	33	33	27	≤ 51	50 [2]	≤ 41
	South	15	15	9	≤ 68	≤ 67	≤ 58
	West	14	14	8	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	32	32	26	≤ 54	≤ 52	≤ 43
	East	27	27	21	≤ 60	≤ 59	≤ 50
	South	13	13	7	≤ 65	≤ 63	≤ 55
	West	14	14	8	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	28	28	22	≤ 53	≤ 51	45 [2]
	East	28	28	22	≤ 61	≤ 59	≤ 50

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	South	15	15	10	≤ 65	≤ 63	≤ 55
	West	16	16	10	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	19	19	13	≤ 67	≤ 66	≤ 57
	South	17	17	11	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	28	28	22	≤ 57	≤ 56	≤ 47
	East	23	23	17	≤ 64	≤ 62	≤ 54
	South	17	17	11	≤ 65	≤ 64	≤ 55
	West	17	17	11	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I2: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Teledyne DALSA – 575 Kumpf Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	29	29	23	≤ 61	≤ 59	≤ 51
	South	29	28	23	≤ 61	≤ 60	≤ 51
	West	14	14	9	≤ 65	≤ 64	≤ 55
Building A Tower	North	14	14	8	≤ 59	≤ 58	≤ 49
	East	31	31	25	≤ 52	≤ 51	≤ 42
	South	36	36	30	≤ 59	≤ 57	≤ 48
	West	32	32	26	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	16	16	10	≤ 57	≤ 55	≤ 46
	East	39	39	33	≤ 55	≤ 54	45 [2]
	South	39	39	33	≤ 55	≤ 53	45 [2]
	West	34	34	28	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	29	28	22	≤ 57	≤ 56	≤ 47
	East	42	41	36	≤ 61	≤ 60	≤ 51
	South	41	41	35	≤ 59	≤ 58	≤ 49
	West	37	37	31	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	36	36	30	≤ 53	≤ 52	45 [2]
	East	22	20	15	≤ 57	≤ 55	≤ 46
	South	17	17	11	≤ 58	≤ 57	≤ 48
	West	15	14	8	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	36	35	29	≤ 57	≤ 56	≤ 47
	East	42	42	36	≤ 62	≤ 61	≤ 52
	South	37	37	31	≤ 62	≤ 61	≤ 52
	West	19	18	12	≤ 56	≤ 55	≤ 46
Building D Podium	North	11	11	5	≤ 60	≤ 59	≤ 50
	South	35	35	29	≤ 67	≤ 66	≤ 57
	West	14	14	8	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	34	34	28	≤ 57	≤ 56	≤ 47
	East	36	36	30	≤ 61	≤ 59	≤ 51
	South	35	35	29	≤ 65	≤ 63	≤ 55
	West	15	15	9	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	37	37	31	≤ 52	≤ 51	45 [2]
	East	39	39	33	≤ 61	≤ 60	≤ 51
	South	37	37	31	≤ 64	≤ 63	≤ 54
	West	16	16	10	≤ 60	≤ 58	≤ 49
Building E Podium	North	28	27	21	≤ 61	≤ 60	≤ 51
	East	28	27	21	≤ 65	≤ 64	≤ 55
	South	24	24	18	≤ 61	≤ 60	≤ 51
Building E Tower	North	10	9	4	≤ 60	≤ 58	≤ 49
	East	34	33	28	≤ 62	≤ 61	≤ 52
	South	32	31	26	≤ 58	≤ 57	≤ 48
	West	15	15	10	≤ 55	≤ 53	45 [2]
Building F Podium	North	11	10	4	≤ 51	50 [2]	45 [2]
	South	5	5	-1	≤ 53	≤ 51	45 [2]
	West	5	5	-1	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	8	8	2	≤ 58	≤ 57	≤ 48
	East	14	14	9	≤ 56	≤ 55	≤ 46
	South	27	27	22	≤ 56	≤ 54	45 [2]
	West	8	8	2	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	22	17	12	≤ 55	≤ 53	45 [2]
	East	22	16	11	≤ 53	≤ 52	45 [2]
	South	16	16	10	≤ 57	≤ 55	≤ 47
	West	8	8	2	≤ 58	≤ 57	≤ 48
Building G Podium	North	9	9	3	≤ 51	50 [2]	45 [2]
	South	17	17	12	≤ 68	≤ 67	≤ 58
	West	7	7	1	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	26	26	20	≤ 54	≤ 52	≤ 43
	East	11	11	5	≤ 60	≤ 59	≤ 50
	South	14	14	8	≤ 65	≤ 63	≤ 55
	West	7	7	1	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	28	28	22	≤ 53	≤ 51	≤ 43
	East	14	13	7	≤ 61	≤ 59	≤ 50
	South	16	16	11	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	10	10	4	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	19	19	14	≤ 67	≤ 66	≤ 57
	South	25	25	19	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	29	29	23	≤ 57	≤ 56	≤ 47
	East	25	25	18	≤ 64	≤ 62	≤ 54
	South	25	25	19	≤ 65	≤ 64	≤ 55
	West	11	11	5	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I3: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Office/Commercial Building – 101-139 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	11	11	9	≤ 61	≤ 59	≤ 51
	South	16	16	14	≤ 61	≤ 60	≤ 51
	West	13	13	12	≤ 65	≤ 64	≤ 55
Building A Tower	North	14	14	12	≤ 59	≤ 58	≤ 49
	East	18	18	16	≤ 52	≤ 51	≤ 42
	South	24	24	22	≤ 59	≤ 57	≤ 48
	West	18	18	16	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	15	15	13	≤ 57	≤ 55	≤ 46
	East	26	26	25	≤ 55	≤ 54	45 [2]
	South	36	36	34	≤ 55	≤ 53	45 [2]
	West	14	14	12	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	16	16	14	≤ 57	≤ 56	≤ 47
	East	23	23	21	≤ 61	≤ 60	≤ 51
	South	40	40	38	≤ 59	≤ 58	≤ 49
	West	35	35	33	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	21	21	20	≤ 53	≤ 52	45 [2]
	East	42	42	41	≤ 57	≤ 55	≤ 46
	South	43	43	42	≤ 58	≤ 57	≤ 48
	West	38	38	37	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	25	25	24	≤ 57	≤ 56	≤ 47
	East	35	35	33	≤ 62	≤ 61	≤ 52
	South	44	44	42	≤ 62	≤ 61	≤ 52
	West	44	44	42	≤ 56	≤ 55	≤ 46
Building D Podium	North	19	19	17	≤ 60	≤ 59	≤ 50
	South	43	43	41	≤ 67	≤ 66	≤ 57
	West	38	38	36	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	25	25	23	≤ 57	≤ 56	≤ 47
	East	43	43	41	≤ 61	≤ 59	≤ 51
	South	43	43	41	≤ 65	≤ 63	≤ 55
	West	38	38	36	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	40	40	38	≤ 52	≤ 51	45 [2]
	East	46	46	44	≤ 61	≤ 60	≤ 51
	South	45	45	44	≤ 64	≤ 63	≤ 54
	West	35	35	34	≤ 60	≤ 58	≤ 49
Building E Podium	North	10	10	8	≤ 61	≤ 60	≤ 51
	East	22	22	20	≤ 65	≤ 64	≤ 55
	South	18	18	16	≤ 61	≤ 60	≤ 51
Building E Tower	North	12	12	11	≤ 60	≤ 58	≤ 49
	East	37	37	35	≤ 62	≤ 61	≤ 52
	South	31	31	29	≤ 58	≤ 57	≤ 48
	West	15	15	13	≤ 55	≤ 53	45 [2]
Building F Podium	East	11	11	9	≤ 51	50 [2]	45 [2]
	South	12	12	10	≤ 53	≤ 51	45 [2]
	West	11	11	9	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	8	8	6	≤ 58	≤ 57	≤ 48
	East	22	22	20	≤ 56	≤ 55	≤ 46
	South	16	16	14	≤ 56	≤ 54	45 [2]
	West	8	8	6	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	11	11	9	≤ 55	≤ 53	45 [2]
	East	19	19	16	≤ 53	≤ 52	45 [2]
	South	17	17	15	≤ 57	≤ 55	≤ 47
	West	9	9	7	≤ 58	≤ 57	≤ 48
Building G Podium	North	13	13	11	≤ 51	50 [2]	45 [2]
	South	38	38	36	≤ 68	≤ 67	≤ 58
	West	33	33	30	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	11	11	9	≤ 54	≤ 52	≤ 43
	East	37	37	35	≤ 60	≤ 59	≤ 50
	South	37	37	35	≤ 65	≤ 63	≤ 55
	West	17	17	15	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	24	24	23	≤ 53	≤ 51	≤ 43
	East	38	38	36	≤ 61	≤ 59	≤ 50
	South	38	38	36	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	24	24	23	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	40	40	39	≤ 67	≤ 66	≤ 57
	South	40	40	39	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	16	16	15	≤ 57	≤ 56	≤ 47
	East	40	40	38	≤ 64	≤ 62	≤ 54
	South	40	40	39	≤ 65	≤ 64	≤ 55
	West	36	36	33	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I4: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Nissan – 141 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	15	15	5	≤ 61	≤ 59	≤ 51
	South	37	37	30	≤ 61	≤ 60	≤ 51
	West	18	18	7	≤ 65	≤ 64	≤ 55
Building A Tower	North	19	19	9	≤ 59	≤ 58	≤ 49
	East	38	38	30	≤ 52	≤ 51	≤ 42
	South	41	41	34	≤ 59	≤ 57	≤ 48
	West	18	18	8	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	18	18	8	≤ 57	≤ 55	≤ 46
	East	36	36	29	≤ 55	≤ 54	45 [2]
	South	24	24	16	≤ 55	≤ 53	45 [2]
	West	30	30	22	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	14	14	3	≤ 57	≤ 56	≤ 47
	East	15	15	4	≤ 61	≤ 60	≤ 51
	South	38	38	31	≤ 59	≤ 58	≤ 49
	West	23	23	12	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	20	20	10	≤ 53	≤ 52	45 [2]
	East	36	36	31	≤ 57	≤ 55	≤ 46
	South	38	38	26	≤ 58	≤ 57	≤ 48
	West	24	24	15	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	34	34	22	≤ 57	≤ 56	≤ 47
	East	25	25	15	≤ 62	≤ 61	≤ 52
	South	41	41	34	≤ 62	≤ 61	≤ 52
	West	41	41	34	≤ 56	≤ 55	≤ 46
Building D Podium	North	23	23	13	≤ 60	≤ 59	≤ 50
	South	47	47	40	≤ 67	≤ 66	≤ 57
	West	40	40	33	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	36	36	28	≤ 57	≤ 56	≤ 47
	East	46	46	39	≤ 61	≤ 59	≤ 51
	South	46	46	40	≤ 65	≤ 63	≤ 55
	West	38	38	32	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	24	24	15	≤ 52	≤ 51	45 [2]
	East	33	33	24	≤ 61	≤ 60	≤ 51
	South	46	46	39	≤ 64	≤ 63	≤ 54
	West	46	46	39	≤ 60	≤ 58	≤ 49
Building E Podium	North	13	13	4	≤ 61	≤ 60	≤ 51
	East	24	24	14	≤ 65	≤ 64	≤ 55
	South	37	37	29	≤ 61	≤ 60	≤ 51
Building E Tower	North	16	16	6	≤ 60	≤ 58	≤ 49
	East	26	26	17	≤ 62	≤ 61	≤ 52
	South	38	38	30	≤ 58	≤ 57	≤ 48
	West	25	25	16	≤ 55	≤ 53	45 [2]
Building F Podium	East	17	17	8	≤ 51	50 [2]	45 [2]
	South	18	18	7	≤ 53	≤ 51	45 [2]
	West	13	13	3	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	16	16	7	≤ 58	≤ 57	≤ 48
	East	27	27	19	≤ 56	≤ 55	≤ 46
	South	22	22	13	≤ 56	≤ 54	45 [2]
	West	12	12	2	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	15	15	5	≤ 55	≤ 53	45 [2]
	East	20	20	10	≤ 53	≤ 52	45 [2]
	South	21	21	10	≤ 57	≤ 55	≤ 47
	West	14	14	3	≤ 58	≤ 57	≤ 48
Building G Podium	North	27	27	21	≤ 51	50 [2]	45 [2]
	South	42	42	35	≤ 68	≤ 67	≤ 58
	West	36	36	29	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	16	16	6	≤ 54	≤ 52	≤ 43
	East	39	39	32	≤ 60	≤ 59	≤ 50
	South	39	39	32	≤ 65	≤ 63	≤ 55
	West	21	21	11	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	33	33	25	≤ 53	≤ 51	≤ 43
	East	41	41	34	≤ 61	≤ 59	≤ 50
	South	41	41	34	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	37	37	30	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	45	45	37	≤ 67	≤ 66	≤ 57
	South	45	45	37	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	25	25	17	≤ 57	≤ 56	≤ 47
	East	44	44	37	≤ 64	≤ 62	≤ 54
	South	44	44	37	≤ 65	≤ 64	≤ 55
	West	39	39	31	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I5: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Heffner Woodworking & Cabinetry – 145 Northfield Drive West – Unmitigated

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	21	15	10	≤ 61	≤ 59	≤ 51
	South	42	40	34	≤ 61	≤ 60	≤ 51
	West	39	37	31	≤ 65	≤ 64	≤ 55
Building A Tower	North	24	18	13	≤ 59	≤ 58	≤ 49
	East	31	29	23	≤ 52	≤ 51	≤ 42
	South	42	41	35	≤ 59	≤ 57	≤ 48
	West	41	39	33	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	24	19	13	≤ 57	≤ 55	≤ 46
	East	27	26	20	≤ 55	≤ 54	45 [2]
	South	35	30	25	≤ 55	≤ 53	45 [2]
	West	41	36	32	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	19	13	8	≤ 57	≤ 56	≤ 47
	East	20	15	10	≤ 61	≤ 60	≤ 51
	South	26	21	16	≤ 59	≤ 58	≤ 49
	West	26	19	15	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	27	23	18	≤ 53	≤ 52	45 [2]
	East	38	37	31	≤ 57	≤ 55	≤ 46
	South	30	28	22	≤ 58	≤ 57	≤ 48
	West	37	33	28	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	20	15	10	≤ 57	≤ 56	≤ 47
	East	26	21	16	≤ 62	≤ 61	≤ 52
	South	45	41	36	≤ 62	≤ 61	≤ 52
	West	42	39	33	≤ 56	≤ 55	≤ 46
Building D Podium	North	37	36	30	≤ 60	≤ 59	≤ 50
	South	53	49	44	≤ 67	≤ 66	≤ 57
	West	53	49	44	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	37	36	30	≤ 57	≤ 56	≤ 47
	East	44	39	35	≤ 61	≤ 59	≤ 51
	South	52	48	43	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	53	48	43	≤ 63	≤ 62	≤ 53
Building D2 Tower	North	36	36	30	≤ 52	≤ 51	45 [2]
	East	30	26	20	≤ 61	≤ 60	≤ 51
	South	49	45	40	≤ 64	≤ 63	≤ 54
	West	50	46	41	≤ 60	≤ 58	≤ 49
Building E Podium	North	23	17	12	≤ 61	≤ 60	≤ 51
	East	37	35	29	≤ 65	≤ 64	≤ 55
	South	42	41	35	≤ 61	≤ 60	≤ 51
Building E Tower	North	26	21	16	≤ 60	≤ 58	≤ 49
	East	36	33	27	≤ 62	≤ 61	≤ 52
	South	50	46	41	≤ 58	≤ 57	≤ 48
	West	47	43	38	≤ 55	≤ 53	45 [2]
Building F Podium	East	28	22	17	≤ 51	50 [2]	45 [2]
	South	36	28	23	≤ 53	≤ 51	45 [2]
	West	25	20	15	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	27	18	14	≤ 58	≤ 57	≤ 48
	East	46	35	32	≤ 56	≤ 55	≤ 46
	South	43	24	19	≤ 56	≤ 54	45 [2]
	West	25	17	12	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	39	21	16	≤ 55	≤ 53	45 [2]
	East	48	40	35	≤ 53	≤ 52	45 [2]
	South	50	44	40	≤ 57	≤ 55	≤ 47
	West	28	20	15	≤ 58	≤ 57	≤ 48
Building G Podium	North	31	24	20	≤ 51	50 [2]	45 [2]
	South	58	52	47	≤ 68	≤ 67	≤ 58
	West	47	44	40	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	47	41	37	≤ 54	≤ 52	≤ 43
	East	55	49	45	≤ 60	≤ 59	≤ 50
	South	56	49	45	≤ 65	≤ 63	≤ 55
	West	40	31	27	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	32	26	21	≤ 53	≤ 51	≤ 43
	East	53	48	44	≤ 61	≤ 59	≤ 50

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	South	57	51	47	≤ 65	≤ 63	≤ 55
	West	49	42	37	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	41	37	32	≤ 67	≤ 66	≤ 57
	South	57	52	47	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	43	37	32	≤ 57	≤ 56	≤ 47
	East	47	40	36	≤ 64	≤ 62	≤ 54
	South	56	51	46	≤ 65	≤ 64	≤ 55
	West	56	50	46	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

[3] Excesses of up to 5 dBA are predicted along the west façade of Building H1 Tower during daytime hours. Excesses of up to 2 dBA are predicted along the east façade of Building G1 Tower due to daytime hours.

Table I6: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Greystone Club – 155 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	10	10	4	≤ 61	≤ 59	≤ 51
	South	19	19	12	≤ 61	≤ 60	≤ 51
	West	17	17	11	≤ 65	≤ 64	≤ 55
Building A Tower	North	14	14	8	≤ 59	≤ 58	≤ 49
	East	14	14	7	≤ 52	≤ 51	≤ 42
	South	22	22	16	≤ 59	≤ 57	≤ 48
	West	32	32	26	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	10	10	4	≤ 57	≤ 55	≤ 46
	East	9	9	3	≤ 55	≤ 54	45 [2]
	South	17	17	11	≤ 55	≤ 53	45 [2]
	West	23	23	17	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	8	8	1	≤ 57	≤ 56	≤ 47
	East	8	8	2	≤ 61	≤ 60	≤ 51
	South	12	12	6	≤ 59	≤ 58	≤ 49
	West	10	10	4	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	14	14	8	≤ 53	≤ 52	45 [2]
	East	13	13	7	≤ 57	≤ 55	≤ 46
	South	17	17	11	≤ 58	≤ 57	≤ 48
	West	17	17	11	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	8	8	2	≤ 57	≤ 56	≤ 47
	East	15	15	9	≤ 62	≤ 61	≤ 52
	South	35	35	29	≤ 62	≤ 61	≤ 52
	West	29	29	23	≤ 56	≤ 55	≤ 46
Building D Podium	North	15	15	9	≤ 60	≤ 59	≤ 50
	South	41	41	35	≤ 67	≤ 66	≤ 57
	West	42	42	35	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	14	14	8	≤ 57	≤ 56	≤ 47
	East	37	37	31	≤ 61	≤ 59	≤ 51
	South	41	41	35	≤ 65	≤ 63	≤ 55
	West	41	41	35	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	13	13	7	≤ 52	≤ 51	45 [2]
	East	18	18	12	≤ 61	≤ 60	≤ 51
	South	39	39	32	≤ 64	≤ 63	≤ 54
	West	39	39	33	≤ 60	≤ 58	≤ 49
Building E Podium	North	11	11	5	≤ 61	≤ 60	≤ 51
	East	13	13	6	≤ 65	≤ 64	≤ 55
	South	16	16	10	≤ 61	≤ 60	≤ 51
Building E Tower	North	16	16	10	≤ 60	≤ 58	≤ 49
	East	20	20	13	≤ 62	≤ 61	≤ 52
	South	30	30	24	≤ 58	≤ 57	≤ 48
	West	34	34	28	≤ 55	≤ 53	45 [2]
	East	19	19	13	≤ 51	50 [2]	45 [2]
	South	37	37	31	≤ 53	≤ 51	45 [2]
	West	40	40	34	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	16	16	10	≤ 58	≤ 57	≤ 48
	East	29	29	23	≤ 56	≤ 55	≤ 46
	South	38	38	32	≤ 56	≤ 54	45 [2]
	West	34	34	28	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	20	20	14	≤ 55	≤ 53	45 [2]
	East	42	42	36	≤ 53	≤ 52	45 [2]
	South	44	44	38	≤ 57	≤ 55	≤ 47
	West	37	37	31	≤ 58	≤ 57	≤ 48
Building G Podium	North	21	21	15	≤ 51	50 [2]	45 [2]
	South	49	49	43	≤ 68	≤ 67	≤ 58
	West	43	43	37	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	28	28	22	≤ 54	≤ 52	≤ 43
	East	45	45	39	≤ 60	≤ 59	≤ 50
	South	48	48	42	≤ 65	≤ 63	≤ 55
	West	43	43	37	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	24	24	18	≤ 53	≤ 51	≤ 43
	East	41	41	35	≤ 61	≤ 59	≤ 50
	South	47	47	41	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	47	47	41	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	29	29	23	≤ 67	≤ 66	≤ 57
	South	46	46	40	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	27	27	21	≤ 57	≤ 56	≤ 47
	East	38	38	32	≤ 64	≤ 62	≤ 54
	South	44	44	38	≤ 65	≤ 64	≤ 55
	West	44	44	38	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I7: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Shoppers Drug Mart – 190 Northfield Drive West

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	14	10	6	≤ 61	≤ 59	≤ 51
	South	24	20	14	≤ 61	≤ 60	≤ 51
	West	23	22	16	≤ 65	≤ 64	≤ 55
Building A Tower	North	15	10	6	≤ 59	≤ 58	≤ 49
	East	17	10	5	≤ 52	≤ 51	≤ 42
	South	25	22	18	≤ 59	≤ 57	≤ 48
	West	32	30	26	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	14	12	7	≤ 57	≤ 55	≤ 46
	East	13	8	4	≤ 55	≤ 54	45 [2]
	South	24	17	13	≤ 55	≤ 53	45 [2]
	West	24	22	17	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	10	5	0	≤ 57	≤ 56	≤ 47
	East	9	5	0	≤ 61	≤ 60	≤ 51
	South	21	13	10	≤ 59	≤ 58	≤ 49
	West	12	7	3	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	19	13	8	≤ 53	≤ 52	45 [2]
	East	14	10	5	≤ 57	≤ 55	≤ 46
	South	24	14	9	≤ 58	≤ 57	≤ 48
	West	24	16	11	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	17	9	4	≤ 57	≤ 56	≤ 47
	East	10	6	2	≤ 62	≤ 61	≤ 52
	South	18	11	7	≤ 62	≤ 61	≤ 52
	West	21	12	8	≤ 56	≤ 55	≤ 46
Building D Podium	North	23	13	8	≤ 60	≤ 59	≤ 50
	South	18	17	12	≤ 67	≤ 66	≤ 57
	West	19	16	11	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	21	13	8	≤ 57	≤ 56	≤ 47
	East	17	13	8	≤ 61	≤ 59	≤ 51
	South	19	18	14	≤ 65	≤ 63	≤ 55
	West	22	18	14	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	19	11	6	≤ 52	≤ 51	45 [2]
	East	13	10	5	≤ 61	≤ 60	≤ 51
	South	15	13	9	≤ 64	≤ 63	≤ 54
	West	17	13	9	≤ 60	≤ 58	≤ 49
Building E Podium	North	17	13	9	≤ 61	≤ 60	≤ 51
	East	19	14	9	≤ 65	≤ 64	≤ 55
	South	21	15	11	≤ 61	≤ 60	≤ 51
Building E Tower	North	20	15	10	≤ 60	≤ 58	≤ 49
	East	22	21	15	≤ 62	≤ 61	≤ 52
	South	35	34	30	≤ 58	≤ 57	≤ 48
	West	24	22	18	≤ 55	≤ 53	45 [2]
Building F Podium	East	24	19	14	≤ 51	50 [2]	45 [2]
	South	46	43	38	≤ 53	≤ 51	45 [2]
	West	45	42	37	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	26	21	17	≤ 58	≤ 57	≤ 48
	East	19	15	10	≤ 56	≤ 55	≤ 46
	South	46	43	38	≤ 56	≤ 54	45 [2]
	West	48	43	38	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	43	40	35	≤ 55	≤ 53	45 [2]
	East	28	24	20	≤ 53	≤ 52	45 [2]
	South	49	48	43	≤ 57	≤ 55	≤ 47
	West	50	47	43	≤ 58	≤ 57	≤ 48
Building G Podium	North	40	38	32	≤ 51	50 [2]	45 [2]
	South	38	27	23	≤ 68	≤ 67	≤ 58
	West	51	45	39	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	44	44	39	≤ 54	≤ 52	≤ 43
	East	27	24	20	≤ 60	≤ 59	≤ 50
	South	45	43	38	≤ 65	≤ 63	≤ 55
	West	53	52	47	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	41	40	36	≤ 53	≤ 51	≤ 43
	East	24	21	16	≤ 61	≤ 59	≤ 50
	South	35	34	31	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	42	41	36	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	20	15	11	≤ 67	≤ 66	≤ 57
	South	26	21	18	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	30	19	15	≤ 57	≤ 56	≤ 47
	East	20	16	11	≤ 64	≤ 62	≤ 54
	South	30	30	26	≤ 65	≤ 64	≤ 55
	West	28	22	18	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I8: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Sobeys – 640 Parkside Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	48	45	42	≤ 61	≤ 59	≤ 51
	South	26	22	20	≤ 61	≤ 60	≤ 51
	West	48	45	42	≤ 65	≤ 64	≤ 55
Building A Tower	North	48	44	42	≤ 59	≤ 58	≤ 49
	East	41	40	37	≤ 52	≤ 51	≤ 42
	South	31	29	26	≤ 59	≤ 57	≤ 48
	West	49	45	42	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	46	42	39	≤ 57	≤ 55	≤ 46
	East	40	39	36	≤ 55	≤ 54	45 [2]
	South	29	26	24	≤ 55	≤ 53	45 [2]
	West	46	42	39	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	44	41	38	≤ 57	≤ 56	≤ 47
	East	24	21	18	≤ 61	≤ 60	≤ 51
	South	34	33	30	≤ 59	≤ 58	≤ 49
	West	44	41	38	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	42	41	38	≤ 53	≤ 52	45 [2]
	East	21	17	14	≤ 57	≤ 55	≤ 46
	South	40	39	36	≤ 58	≤ 57	≤ 48
	West	34	33	30	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	27	25	22	≤ 57	≤ 56	≤ 47
	East	17	13	10	≤ 62	≤ 61	≤ 52
	South	20	15	12	≤ 62	≤ 61	≤ 52
	West	40	35	32	≤ 56	≤ 55	≤ 46
Building D Podium	North	25	23	20	≤ 60	≤ 59	≤ 50
	South	18	13	10	≤ 67	≤ 66	≤ 57
	West	24	22	20	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	32	30	27	≤ 57	≤ 56	≤ 47
	East	30	29	26	≤ 61	≤ 59	≤ 51
	South	21	17	15	≤ 65	≤ 63	≤ 55
	West	33	29	28	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	43	41	38	≤ 52	≤ 51	45 [2]
	East	20	16	14	≤ 61	≤ 60	≤ 51
	South	20	15	13	≤ 64	≤ 63	≤ 54
	West	36	35	32	≤ 60	≤ 58	≤ 49
Building E Podium	North	50	46	43	≤ 61	≤ 60	≤ 51
	East	43	42	39	≤ 65	≤ 64	≤ 55
	South	40	40	37	≤ 61	≤ 60	≤ 51
Building E Tower	North	52	47	44	≤ 60	≤ 58	≤ 49
	East	33	29	26	≤ 62	≤ 61	≤ 52
	South	40	32	29	≤ 58	≤ 57	≤ 48
	West	52	47	44	≤ 55	≤ 53	45 [2]
Building F Podium	East	37	35	32	≤ 51	50 [2]	45 [2]
	South	31	28	27	≤ 53	≤ 51	45 [2]
	West	46	38	35	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	54	49	46	≤ 58	≤ 57	≤ 48
	East	41	36	33	≤ 56	≤ 55	≤ 46
	South	34	32	29	≤ 56	≤ 54	45 [2]
	West	54	49	46	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	41	38	36	≤ 55	≤ 53	45 [2]
	East	45	31	29	≤ 53	≤ 52	45 [2]
	South	29	24	22	≤ 57	≤ 55	≤ 47
	West	51	46	43	≤ 58	≤ 57	≤ 48
Building G Podium	North	33	23	23	≤ 51	50 [2]	45 [2]
	South	21	16	14	≤ 68	≤ 67	≤ 58
	West	44	37	34	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	38	35	33	≤ 54	≤ 52	≤ 43
	East	45	41	38	≤ 60	≤ 59	≤ 50
	South	26	22	19	≤ 65	≤ 63	≤ 55
	West	49	44	41	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	39	33	30	≤ 53	≤ 51	≤ 43
	East	34	27	24	≤ 61	≤ 59	≤ 50
	South	21	17	14	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	31	26	23	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	20	15	12	≤ 67	≤ 66	≤ 57
	South	22	18	15	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	48	43	40	≤ 57	≤ 56	≤ 47
	East	23	18	16	≤ 64	≤ 62	≤ 54
	South	27	23	20	≤ 65	≤ 64	≤ 55
	West	48	43	40	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I9: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Onward Manufacturing Company Limited/Broil King – 585 Kumpf Drive

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	41	36	34	≤ 61	≤ 59	≤ 51
	South	22	17	15	≤ 61	≤ 60	≤ 51
	West	37	33	30	≤ 65	≤ 64	≤ 55
Building A Tower	North	42	37	35	≤ 59	≤ 58	≤ 49
	East	42	37	35	≤ 52	≤ 51	≤ 42
	South	30	30	24	≤ 59	≤ 57	≤ 48
	West	41	36	33	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	44	39	37	≤ 57	≤ 55	≤ 46
	East	45	40	38	≤ 55	≤ 54	45 [2]
	South	22	15	13	≤ 55	≤ 53	45 [2]
	West	38	34	31	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	46	41	39	≤ 57	≤ 56	≤ 47
	East	46	41	39	≤ 61	≤ 60	≤ 51
	South	41	37	35	≤ 59	≤ 58	≤ 49
	West	40	36	33	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	37	32	30	≤ 53	≤ 52	45 [2]
	East	38	36	32	≤ 57	≤ 55	≤ 46
	South	23	19	17	≤ 58	≤ 57	≤ 48
	West	29	26	26	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	45	41	39	≤ 57	≤ 56	≤ 47
	East	44	39	37	≤ 62	≤ 61	≤ 52
	South	27	21	19	≤ 62	≤ 61	≤ 52
	West	33	29	29	≤ 56	≤ 55	≤ 46
Building D Podium	North	17	13	11	≤ 60	≤ 59	≤ 50
	South	14	9	7	≤ 67	≤ 66	≤ 57
	West	15	10	8	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	24	19	17	≤ 57	≤ 56	≤ 47
	East	24	21	20	≤ 61	≤ 59	≤ 51
	South	17	12	10	≤ 65	≤ 63	≤ 55
	West	16	11	9	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	29	27	23	≤ 52	≤ 51	45 [2]
	East	36	31	30	≤ 61	≤ 60	≤ 51
	South	18	12	11	≤ 64	≤ 63	≤ 54
	West	15	10	8	≤ 60	≤ 58	≤ 49
Building E Podium	North	39	35	32	≤ 61	≤ 60	≤ 51
	East	39	35	33	≤ 65	≤ 64	≤ 55
	South	17	13	11	≤ 61	≤ 60	≤ 51
Building E Tower	North	40	35	33	≤ 60	≤ 58	≤ 49
	East	40	36	33	≤ 62	≤ 61	≤ 52
	South	28	22	20	≤ 58	≤ 57	≤ 48
	West	36	32	30	≤ 55	≤ 53	45 [2]
Building F Podium	East	15	10	8	≤ 51	50 [2]	45 [2]
	South	14	10	8	≤ 53	≤ 51	45 [2]
	West	11	6	4	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	38	34	32	≤ 58	≤ 57	≤ 48
	East	38	34	32	≤ 56	≤ 55	≤ 46
	South	18	15	15	≤ 56	≤ 54	45 [2]
	West	20	15	13	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	26	21	20	≤ 55	≤ 53	45 [2]
	East	24	20	18	≤ 53	≤ 52	45 [2]
	South	20	15	15	≤ 57	≤ 55	≤ 47
	West	15	10	8	≤ 58	≤ 57	≤ 48
Building G Podium	North	12	8	6	≤ 51	50 [2]	45 [2]
	South	13	9	7	≤ 68	≤ 67	≤ 58
	West	10	5	3	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	28	24	22	≤ 54	≤ 52	≤ 43
	East	27	23	21	≤ 60	≤ 59	≤ 50
	South	10	6	4	≤ 65	≤ 63	≤ 55
	West	12	7	5	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	25	19	18	≤ 53	≤ 51	≤ 43
	East	22	18	17	≤ 61	≤ 59	≤ 50
	South	14	9	7	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	22	19	16	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	15	11	9	≤ 67	≤ 66	≤ 57
	South	15	10	8	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	22	18	16	≤ 57	≤ 56	≤ 47
	East	22	16	15	≤ 64	≤ 62	≤ 54
	South	14	9	7	≤ 65	≤ 64	≤ 55
	West	21	15	14	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I10a: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Fire Station 3 – 150 Northfield Drive West – Emergency Generator

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	27	n/a	n/a	≤ 66	n/a	n/a
	South	29	n/a	n/a	≤ 66	n/a	n/a
	West	29	n/a	n/a	≤ 70	n/a	n/a
Building A Tower	North	28	n/a	n/a	≤ 64	n/a	n/a
	East	27	n/a	n/a	≤ 57	n/a	n/a
	South	31	n/a	n/a	≤ 64	n/a	n/a
	West	25	n/a	n/a	≤ 67	n/a	n/a
Building B1 Tower	North	27	n/a	n/a	≤ 62	n/a	n/a
	East	33	n/a	n/a	≤ 60	n/a	n/a
	South	31	n/a	n/a	≤ 60	n/a	n/a
	West	28	n/a	n/a	≤ 59	n/a	n/a
Building B2 Tower	North	31	n/a	n/a	≤ 62	n/a	n/a
	East	30	n/a	n/a	≤ 66	n/a	n/a
	South	37	n/a	n/a	≤ 64	n/a	n/a
	West	29	n/a	n/a	≤ 55	n/a	n/a
Building C1 Tower	North	35	n/a	n/a	≤ 58	n/a	n/a
	East	42	n/a	n/a	≤ 62	n/a	n/a
	South	44	n/a	n/a	≤ 63	n/a	n/a
	West	33	n/a	n/a	≤ 57	n/a	n/a
Building C2 Tower	North	35	n/a	n/a	≤ 62	n/a	n/a
	East	44	n/a	n/a	≤ 67	n/a	n/a
	South	62	n/a	n/a	≤ 67	n/a	n/a
	West	60	n/a	n/a	≤ 61	n/a	n/a
Building D Podium	North	36	n/a	n/a	≤ 65	n/a	n/a
	South	58	n/a	n/a	≤ 72	n/a	n/a
	West	32	n/a	n/a	≤ 71	n/a	n/a
Building D1 Tower	North	28	n/a	n/a	≤ 62	n/a	n/a
	East	48	n/a	n/a	≤ 66	n/a	n/a
	South	56	n/a	n/a	≤ 70	n/a	n/a
	West	31	n/a	n/a	≤ 68	n/a	n/a

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	43	n/a	n/a	≤ 57	n/a	n/a
	East	62	n/a	n/a	≤ 66	n/a	n/a
	South	63	n/a	n/a	≤ 69	n/a	n/a
	West	37	n/a	n/a	≤ 65	n/a	n/a
Building E Podium	North	22	n/a	n/a	≤ 66	n/a	n/a
	East	27	n/a	n/a	≤ 70	n/a	n/a
	South	26	n/a	n/a	≤ 66	n/a	n/a
Building E Tower	North	22	n/a	n/a	≤ 65	n/a	n/a
	East	28	n/a	n/a	≤ 67	n/a	n/a
	South	28	n/a	n/a	≤ 63	n/a	n/a
	West	21	n/a	n/a	≤ 60	n/a	n/a
Building F Podium	East	20	n/a	n/a	≤ 56	n/a	n/a
	South	21	n/a	n/a	≤ 58	n/a	n/a
	West	21	n/a	n/a	≤ 61	n/a	n/a
Building F1 Tower	North	19	n/a	n/a	≤ 63	n/a	n/a
	East	24	n/a	n/a	≤ 61	n/a	n/a
	South	24	n/a	n/a	≤ 61	n/a	n/a
	West	18	n/a	n/a	≤ 63	n/a	n/a
Building F2 Tower	North	20	n/a	n/a	≤ 60	n/a	n/a
	East	27	n/a	n/a	≤ 58	n/a	n/a
	South	22	n/a	n/a	≤ 62	n/a	n/a
	West	19	n/a	n/a	≤ 63	n/a	n/a
Building G Podium	North	21	n/a	n/a	≤ 56	n/a	n/a
	South	40	n/a	n/a	≤ 73	n/a	n/a
	West	21	n/a	n/a	≤ 67	n/a	n/a
Building G1 Tower	North	20	n/a	n/a	≤ 59	n/a	n/a
	East	25	n/a	n/a	≤ 65	n/a	n/a
	South	32	n/a	n/a	≤ 70	n/a	n/a
	West	20	n/a	n/a	≤ 66	n/a	n/a
Building G2 Tower	North	22	n/a	n/a	≤ 58	n/a	n/a
	East	27	n/a	n/a	≤ 66	n/a	n/a
	South	35	n/a	n/a	≤ 70	n/a	n/a

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels + 5 dN L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	24	n/a	n/a	≤ 65	n/a	n/a
Building H1 Podium	East	39	n/a	n/a	≤ 72	n/a	n/a
	South	46	n/a	n/a	≤ 74	n/a	n/a
Building H1 Tower	North	25	n/a	n/a	≤ 62	n/a	n/a
	East	41	n/a	n/a	≤ 69	n/a	n/a
	South	46	n/a	n/a	≤ 70	n/a	n/a
	West	26	n/a	n/a	≤ 65	n/a	n/a

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I10b: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – Waterloo Fire Station 3 – 150 Northfield Drive West – Continuous

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	9	9	9	≤ 61	≤ 59	≤ 51
	South	13	13	13	≤ 61	≤ 60	≤ 51
	West	11	11	11	≤ 65	≤ 64	≤ 55
Building A Tower	North	10	10	10	≤ 59	≤ 58	≤ 49
	East	11	11	11	≤ 52	≤ 51	≤ 42
	South	17	17	17	≤ 59	≤ 57	≤ 48
	West	9	9	9	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	9	9	9	≤ 57	≤ 55	≤ 46
	East	13	13	13	≤ 55	≤ 54	≤ 45
	South	15	15	15	≤ 55	≤ 53	45 [2]
	West	11	11	11	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	10	10	10	≤ 57	≤ 56	≤ 47
	East	14	14	14	≤ 61	≤ 60	≤ 51
	South	27	27	27	≤ 59	≤ 58	≤ 49
	West	24	24	24	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	17	17	17	≤ 53	≤ 52	45 [2]
	East	37	37	37	≤ 57	≤ 55	≤ 46
	South	39	39	39	≤ 58	≤ 57	≤ 48
	West	24	24	24	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	23	23	23	≤ 57	≤ 56	≤ 47
	East	27	27	27	≤ 62	≤ 61	≤ 52
	South	43	43	43	≤ 62	≤ 61	≤ 52
	West	42	42	42	≤ 56	≤ 55	≤ 46
Building D Podium	North	18	18	18	≤ 60	≤ 59	≤ 50
	South	39	39	39	≤ 67	≤ 66	≤ 57
	West	18	18	18	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	12	12	12	≤ 57	≤ 56	≤ 47
	East	38	38	38	≤ 61	≤ 59	≤ 51
	South	39	39	39	≤ 65	≤ 63	≤ 55
	West	18	18	18	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	29	29	29	≤ 52	≤ 51	45 [2]
	East	46	46	46	≤ 61	≤ 60	≤ 51
	South	46	46	46	≤ 64	≤ 63	≤ 54
	West	34	34	34	≤ 60	≤ 58	≤ 49
Building E Podium	North	5	5	5	≤ 61	≤ 60	≤ 51
	East	11	11	11	≤ 65	≤ 64	≤ 55
	South	10	10	10	≤ 61	≤ 60	≤ 51
Building E Tower	North	6	6	6	≤ 60	≤ 58	≤ 49
	East	12	12	12	≤ 62	≤ 61	≤ 52
	South	12	12	12	≤ 58	≤ 57	≤ 48
	West	5	5	5	≤ 55	≤ 53	45 [2]
Building F Podium	East	5	5	5	≤ 51	≤ 49	46 [2]
	South	5	5	5	≤ 53	≤ 51	47 [2]
	West	3	3	3	≤ 56	≤ 55	48 [2]
Building F1 Tower	North	3	3	3	≤ 58	≤ 57	≤ 48
	East	7	7	7	≤ 56	≤ 55	≤ 46
	South	5	5	5	≤ 56	≤ 54	45 [2]
	West	2	2	2	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	3	3	3	≤ 55	≤ 53	45 [2]
	East	7	7	7	≤ 53	≤ 52	45 [2]
	South	5	5	5	≤ 57	≤ 55	≤ 47
	West	3	3	3	≤ 58	≤ 57	≤ 48
Building G Podium	North	4	4	4	≤ 51	50 [2]	45 [2]
	South	25	25	25	≤ 68	≤ 67	≤ 58
	West	5	5	5	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	4	4	4	≤ 54	≤ 52	45 [2]
	East	15	15	15	≤ 60	≤ 59	≤ 50
	South	25	25	25	≤ 65	≤ 63	≤ 55
	West	7	7	7	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	5	5	5	≤ 53	≤ 51	45 [2]
	East	19	19	19	≤ 61	≤ 59	≤ 50
	South	26	26	26	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	9	9	9	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	27	27	27	≤ 67	≤ 66	≤ 57
	South	27	27	27	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	10	10	10	≤ 57	≤ 56	≤ 47
	East	29	29	29	≤ 64	≤ 62	≤ 54
	South	33	33	33	≤ 65	≤ 64	≤ 55
	West	13	13	13	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Table I11: Summary of Predicted Stationary Source and Ambient Façade Sound Levels – All Sources – Unmitigated

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building A Podium	North	48	45	43	≤ 61	≤ 59	≤ 51
	South	46	46	40	≤ 61	≤ 60	≤ 51
	West	48	45	42	≤ 65	≤ 64	≤ 55
Building A Tower	North	49	45	42	≤ 59	≤ 58	≤ 49
	East	45	44	40	≤ 52	≤ 51	≤ 42
	South	47	47	41	≤ 59	≤ 57	≤ 48
	West	50	46	43	≤ 62	≤ 61	≤ 52
Building B1 Tower	North	48	44	41	≤ 57	≤ 55	≤ 46
	East	49	49	44	≤ 55	≤ 54	45 [2]
	South	48	48	43	≤ 55	≤ 53	45 [2]
	West	47	44	40	≤ 54	≤ 52	45 [2]
Building B2 Tower	North	48	44	41	≤ 57	≤ 56	≤ 47
	East	54	54	48	≤ 61	≤ 60	≤ 51
	South	53	53	47	≤ 59	≤ 58	≤ 49
	West	47	46	41	50 [2]	50 [2]	45 [2]
Building C1 Tower	North	49	48	43	≤ 53	≤ 52	45 [2]
	East	46	46	43	≤ 57	≤ 55	≤ 46
	South	45	45	43	≤ 58	≤ 57	≤ 48
	West	41	40	38	≤ 52	50 [2]	45 [2]
Building C2 Tower	North	53	53	47	≤ 57	≤ 56	≤ 47
	East	54	54	48	≤ 62	≤ 61	≤ 52
	South	50	49	46	≤ 62	≤ 61	≤ 52
	West	48	48	46	≤ 56	≤ 55	≤ 46
Building D Podium	North	38	36	30	≤ 60	≤ 59	≤ 50
	South	54	52	47	≤ 67	≤ 66	≤ 57
	West	53	50	44	≤ 66	≤ 65	≤ 56
Building D1 Tower	North	40	38	33	≤ 57	≤ 56	≤ 47
	East	49	48	44	≤ 61	≤ 59	≤ 51
	South	54	52	47	≤ 65	≤ 63	≤ 55
	West	53	49	44	≤ 63	≤ 62	≤ 53

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
Building D2 Tower	North	44	43	40	≤ 52	≤ 51	45 [2]
	East	49	49	48	≤ 61	≤ 60	≤ 51
	South	53	51	49	≤ 64	≤ 63	≤ 54
	West	51	49	44	≤ 60	≤ 58	≤ 49
Building E Podium	North	50	46	44	≤ 61	≤ 60	≤ 51
	East	44	43	40	≤ 65	≤ 64	≤ 55
	South	46	45	41	≤ 61	≤ 60	≤ 51
Building E Tower	North	52	47	44	≤ 60	≤ 58	≤ 49
	East	44	42	38	≤ 62	≤ 61	≤ 52
	South	51	47	42	≤ 58	≤ 57	≤ 48
	West	53	48	45	≤ 55	≤ 53	45 [2]
Building F Podium	East	40	39	34	≤ 51	50 [2]	45 [2]
	South	47	45	39	≤ 53	≤ 51	45 [2]
	West	49	45	40	≤ 56	≤ 55	≤ 46
Building F1 Tower	North	54	49	46	≤ 58	≤ 57	≤ 48
	East	48	40	37	≤ 56	≤ 55	≤ 46
	South	47	44	39	≤ 56	≤ 54	45 [2]
	West	54	50	46	≤ 58	≤ 56	≤ 47
Building F2 Tower	North	45	42	38	≤ 55	≤ 53	45 [2]
	East	50	45	39	≤ 53	≤ 52	45 [2]
	South	52	48	44	≤ 57	≤ 55	≤ 47
	West	53	50	46	≤ 58	≤ 57	≤ 48
Building G Podium	North	41	38	33	≤ 51	50 [2]	45 [2]
	South	58	54	49	≤ 68	≤ 67	≤ 58
	West	53	48	44	≤ 62	≤ 60	≤ 51
Building G1 Tower	North	48	44	39	≤ 54	≤ 52	≤ 43
	East	56	51	46	≤ 60	≤ 59	≤ 50
	South	57	52	47	≤ 65	≤ 63	≤ 55
	West	54	53	48	≤ 61	≤ 60	≤ 51
Building G2 Tower	North	44	41	37	≤ 53	≤ 51	≤ 43
	East	53	50	45	≤ 61	≤ 59	≤ 50
	South	58	53	48	≤ 65	≤ 63	≤ 55

Building	Façade	Predicted Stationary Source Sound Levels – L_{eq}(1-hr) (dBA) [1]			Ambient Sound Levels L_{eq}(1-hr) (dBA)		
		Day	Evening	Night	Day	Evening	Night
	West	51	48	42	≤ 60	≤ 59	≤ 50
Building H1 Podium	East	47	47	42	≤ 67	≤ 66	≤ 57
	South	58	54	49	≤ 69	≤ 67	≤ 58
Building H1 Tower	North	49	44	41	≤ 57	≤ 56	≤ 47
	East	49	46	42	≤ 64	≤ 62	≤ 54
	South	57	53	48	≤ 65	≤ 64	≤ 55
	West	56	52	47	≤ 60	≤ 59	≤ 50

Notes: [1] Sound levels shown represent the calculated worst-case impact along the identified facade.

[2] The minimum exclusionary limit is higher than or equal to the predicted ambient sound level and was therefore use as the assessment criterion for that façade.

Appendix J Stationary Source Sample Calculations

Updated Environmental Noise & Vibration Assessment

170 Northfield Drive West, Waterloo

Forgestone Capital Management L.P.

SLR Project No.: 241.030968.00001

April 2, 2025

Receiver
Name: Building G2 Tower - South Facade
ID: POR
X: 536627.14 m
Y: 4816108.61 m
Z: 379.56 m

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1	536661.02	4816040.71	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	45.4
1	536661.02	4816040.71	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	39.4
1	536661.02	4816040.71	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	49.3	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	45.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3	536661.19	4816008.16	345.74	0	D	A	101.5	0.0	0.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	51.1
3	536661.19	4816008.16	345.74	0	N	A	101.5	0.0	-188.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	-136.9
3	536661.19	4816008.16	345.74	0	E	A	101.5	0.0	-188.0	0.0	0.0	51.9	1.2	-2.7	0.0	0.0	0.0	0.0	0.0	-136.9

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
5	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	44.2
5	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	38.2
5	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.8	0.0	0.0	0.0	0.0	0.0	44.2
6	536625.51	4816018.66	348.75	1	D	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	14.0
6	536625.51	4816018.66	348.75	1	N	A	92.5	0.0	-6.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	8.0
6	536625.51	4816018.66	348.75	1	E	A	92.5	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	14.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
8	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	44.1
8	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	38.0
8	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	50.6	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	44.1

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
11	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	16.9
11	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	13.9
11	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	16.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
13	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	51.8	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	42.8
13	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	51.8	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	36.8
13	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	51.8	0.6	-2.7	0.0	0.0	0.0	0.0	0.0	42.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
15	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8
15	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8
15	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
16	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
16	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8
16	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	47.4	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
17	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	47.7	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	39.9
17	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	47.7	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	33.9
17	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	47.7	0.4	-2.5	0.0	0.0	0.0	0.0	0.0	39.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
18	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	48.1	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.1
18	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	48.1	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.1
18	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	48.1	0.4	-2.6	0.0	0.0	0.0	0.0	0.0	36.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
19	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
19	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	33.8
19	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	59.0	1.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
21	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	49.2	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	38.4
21	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	49.2	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	32.4
21	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	49.2	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	38.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
22	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.7
22	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.3
22	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
23	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.7
23	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.3
23	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	46.8	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
24	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	45.6
24	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.4
24	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	46.9	0.1	-2.4	0.0	0.0	0.0	0.0	0.0	-142.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
25	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	49.5	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.7
25	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	49.5	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.7
25	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	49.5	0.5	-2.6	0.0	0.0	0.0	0.0	0.0	34.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
27	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	47.5	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	45.0
27	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	47.5	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
27	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	47.5	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.0

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
29	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	55.2	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	21.9
29	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	55.2	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	-158.3
29	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	55.2	1.7	-3.0	0.0	0.0	16.5	0.0	0.0	21.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
30	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	47.9	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	44.6
30	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	47.9	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.4
30	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	47.9	0.1	-2.5	0.0	0.0	0.0	0.0	0.0	-143.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
31	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	50.9	0.6	-3.0	0.0	0.0	19.7	0.0	0.0	17.3
31	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	50.9	0.6	-3.0	0.0	0.0	19.7	0.0	0.0	11.3
31	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	50.9	0.6	-3.0	0.0	0.0	19.7	0.0	0.0	17.3
33	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
33	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
33	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
34	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
34	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
34	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
35	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5
35	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
35	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
36	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
36	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	30.9
36	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	51.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
37	536617.27	4816013.87	348.50	1	D	A	85.5	0.0	0.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	6.6
37	536617.27	4816013.87	348.50	1	N	A	85.5	0.0	-6.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.6
37	536617.27	4816013.87	348.50	1	E	A	85.5	0.0	0.0	0.0	0.0	52.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	6.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
40	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	12.7
40	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	6.7
40	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	12.7
41	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	4.3
41	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-1.7
41	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	4.3
42	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
42	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
42	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.7
44	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5
44	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.5
44	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.5
46	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8
46	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.8
46	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-1.8

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
48	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.5	0.0	0.0	19.9
48	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.5	0.0	0.0	-160.3
48	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	56.1	1.8	-3.0	0.0	0.0	17.5	0.0	0.0	19.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
50	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	17.5
50	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-167.5
50	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	53.5	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-167.5
52	536507.11	4816057.67	350.67	1	D	A	98.0	0.0	-3.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	11.5
52	536507.11	4816057.67	350.67	1	N	A	98.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-173.5
52	536507.11	4816057.67	350.67	1	E	A	98.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-173.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
53	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	48.8	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	43.8
53	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	48.8	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.2
53	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	48.8	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
54	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	49.2	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	43.4
54	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	49.2	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.6
54	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	49.2	0.2	-2.6	0.0	0.0	0.0	0.0	0.0	-144.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
55	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.5	0.0	0.0	9.2
55	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.5	0.0	0.0	9.2
55	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	51.1	0.6	-3.0	0.0	0.0	23.5	0.0	0.0	9.2
57	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.5
57	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.5
57	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	0.5
58	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
58	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
58	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
60	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7
60	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7
60	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	59.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-5.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
63	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	17.7	0.0	0.0	17.8
63	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	17.7	0.0	0.0	11.8
63	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	17.7	0.0	0.0	17.8
65	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
65	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
65	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	55.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	3.1
67	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.6
67	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.4
67	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
68	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	12.8
68	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	6.8
68	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	12.8
69	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.5

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
69	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
69	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	56.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
70	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4
70	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.4
70	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	60.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-2.4

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
72	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	-1.8	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	18.5
72	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-167.7
72	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	23.8	0.0	0.0	-167.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
73	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0
73	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	-151.0
73	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	55.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
75	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.3	0.0	0.0	16.3
75	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.3	0.0	0.0	10.3
75	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	50.4	0.6	-3.0	0.0	0.0	18.3	0.0	0.0	16.3
76	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.8
76	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.2
76	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.8
77	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	28.0	0.0	31.1	-24.6
77	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	28.0	0.0	31.1	-30.7
77	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	28.0	0.0	31.1	-24.6
78	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
78	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
78	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
79	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
79	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
79	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	0.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
81	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	33.4
81	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	27.4
81	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	54.1	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	33.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
82	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	6.3
82	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	0.3
82	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	6.3
84	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.1
84	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.0
84	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	1.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
88	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	6.1
88	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	0.1
88	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	6.1
90	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.9
90	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
90	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.9

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
92	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.0
92	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
92	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	33.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
95	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.1	0.0	0.0	17.0
95	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.1	0.0	0.0	11.0
95	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	16.1	0.0	0.0	17.0
97	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
97	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
97	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	0.2
99	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
99	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4
99	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
101	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0
101	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.1
101	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.0

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
103	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.7
103	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
103	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
106	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.9
106	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.8
106	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.9
109	536593.76	4816005.73	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.7
109	536593.76	4816005.73	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-3.3
109	536593.76	4816005.73	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
112	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
112	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.8
112	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.8
114	536617.01	4816000.75	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.7
114	536617.01	4816000.75	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-3.4
114	536617.01	4816000.75	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
119	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7
119	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7
119	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	57.8	0.7	-3.0	0.0	0.0	4.8	0.0	0.0	24.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
122	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8
122	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
122	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	57.9	0.7	-3.0	0.0	0.0	7.5	0.0	0.0	21.8
123	536820.59	4816211.30	344.53	1	D	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6
123	536820.59	4816211.30	344.53	1	N	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6
123	536820.59	4816211.30	344.53	1	E	A	85.0	0.0	0.0	0.0	0.0	60.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
125	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
125	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.6
125	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.6
127	536605.83	4815999.22	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
127	536605.83	4815999.22	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
127	536605.83	4815999.22	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	2.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
128	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
128	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
128	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
129	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
129	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
129	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	52.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
134	536596.30	4815999.27	348.25	1	D	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.3
134	536596.30	4815999.27	348.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-3.7
134	536596.30	4815999.27	348.25	1	E	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	2.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
136	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	32.0
136	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	26.0
136	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	52.6	0.7	-2.8	0.0	0.0	0.0	0.0	0.0	32.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
140	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	6.1
140	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	0.1
140	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.0	0.0	0.0	6.1
143	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
143	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
143	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
145	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
145	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
145	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
147	536613.71	4815987.38	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.8
147	536613.71	4815987.38	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.2
147	536613.71	4815987.38	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
148	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	10.0	0.0	0.0	28.9
148	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	10.0	0.0	0.0	-159.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
148	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	51.3	0.4	-2.6	0.0	0.0	10.0	0.0	0.0	-159.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
149	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
149	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.4
149	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
150	536602.80	4815982.70	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4
150	536602.80	4815982.70	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6
150	536602.80	4815982.70	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
151	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	55.2	3.4	-3.0	0.0	0.0	20.1	0.0	0.0	10.4
151	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	55.2	3.4	-3.0	0.0	0.0	20.1	0.0	0.0	-159.8
151	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	55.2	3.4	-3.0	0.0	0.0	20.1	0.0	0.0	10.4

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
154	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	31.2
154	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
154	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	53.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	31.2
157	536599.19	4815980.04	349.25	1	D	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.2
157	536599.19	4815980.04	349.25	1	N	A	82.5	0.0	-6.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
157	536599.19	4815980.04	349.25	1	E	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
159	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	53.8	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	30.7
159	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	53.8	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	24.7
159	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	53.8	0.8	-2.8	0.0	0.0	0.0	0.0	0.0	30.7

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
163	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	2.4
163	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	-3.6
163	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	2.4
165	536912.04	4816588.26	347.50	1	D	A	94.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
165	536912.04	4816588.26	347.50	1	N	A	94.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
165	536912.04	4816588.26	347.50	1	E	A	94.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
166	536415.97	4816336.50	359.79	0	D	A	88.0	0.0	0.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	24.2	0.0	0.0	5.2
166	536415.97	4816336.50	359.79	0	N	A	88.0	0.0	-3.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	24.2	0.0	0.0	2.2
166	536415.97	4816336.50	359.79	0	E	A	88.0	0.0	0.0	0.0	0.0	60.9	0.8	-3.0	0.0	0.0	24.2	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
170	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	12.7
170	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	6.7
170	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	16.4	0.0	0.0	12.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
175	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.7	0.0	0.0	8.6

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
175	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.7	0.0	0.0	-161.6
175	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	56.1	3.7	-3.0	0.0	0.0	20.7	0.0	0.0	8.6

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
180	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	30.2
180	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
180	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	54.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	30.2

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
183	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	5.4	0.0	0.0	21.6
183	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	5.4	0.0	0.0	21.6
183	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	5.4	0.0	0.0	21.6
185	536503.25	4816045.85	353.78	1	D	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	11.3	0.0	1.0	11.4
185	536503.25	4816045.85	353.78	1	N	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	11.3	0.0	1.0	11.4
185	536503.25	4816045.85	353.78	1	E	A	78.6	0.0	0.0	0.0	0.0	57.2	0.8	-3.0	0.0	0.0	11.3	0.0	1.0	11.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
187	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.6
187	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.9	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.5
187	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	54.9	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.6

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
190	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.5
190	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	23.5
190	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
192	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
192	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.2	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.2
192	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.2	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
194	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
194	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.2
194	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
197	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2
197	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	23.2
197	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-2.8	0.0	0.0	0.0	0.0	0.0	29.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
200	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
200	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
200	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
203	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	22.3
203	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	22.3
203	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	3.0	0.0	0.0	22.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
206	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
206	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
206	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	25.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
209	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.1
209	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.1
209	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	4.0	0.0	0.0	21.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
211	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
211	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
211	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
213	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
213	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
213	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.1
215	536863.54	4816147.88	347.82	1	D	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5
215	536863.54	4816147.88	347.82	1	N	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5
215	536863.54	4816147.88	347.82	1	E	A	81.4	0.0	0.0	0.0	0.0	58.8	0.7	-3.0	0.0	0.0	0.0	0.0	7.4	17.5

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
219	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	25.5	0.0	0.0	9.0
219	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	25.5	0.0	0.0	-179.0
219	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	59.7	1.9	-3.0	0.0	0.0	25.5	0.0	0.0	-179.0
223	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	59.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	5.5
223	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	59.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-182.5
223	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	59.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-182.5

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
225	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	50.8	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	30.3
225	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	50.8	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	-157.7
225	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	50.8	0.4	-2.9	0.0	0.0	0.0	0.0	0.0	30.3
227	536621.34	4816015.88	347.75	1	D	A	78.6	0.0	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	0.0
227	536621.34	4816015.88	347.75	1	N	A	78.6	0.0	-188.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-188.0
227	536621.34	4816015.88	347.75	1	E	A	78.6	0.0	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	0.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
229	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
229	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.9
229	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.9

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
233	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
233	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
233	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
238	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	0.0
238	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-6.0
238	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	0.0
240	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
240	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
240	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.5	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-5.9
242	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-4.9
242	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-10.9
242	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-4.9
244	536876.37	4816316.45	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-4.1
244	536876.37	4816316.45	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-10.2
244	536876.37	4816316.45	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-4.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
249	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-1.0
249	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-7.0
249	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-1.0
251	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
251	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
251	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
256	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-0.8
256	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-6.8
256	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-0.8
258	536887.93	4816338.30	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4
258	536887.93	4816338.30	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
258	536887.93	4816338.30	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
261	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
261	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
261	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	58.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
265	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.3	0.0	0.0	-1.4
265	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.3	0.0	0.0	-7.4
265	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.7	-3.0	0.0	0.0	26.3	0.0	0.0	-1.4
267	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
267	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
267	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
270	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3
270	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-5.3
270	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	25.7	0.0	0.0	-2.3

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
274	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-2.4
274	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-5.4
274	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	25.6	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
276	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-0.8
276	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-6.8
276	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.0	0.0	0.0	-0.8
279	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
279	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
279	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
284	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-1.3
284	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-7.4
284	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-1.3
285	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
285	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
285	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
289	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-1.7
289	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-7.7
289	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.6	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-1.7
291	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
291	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
291	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
296	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	7.8
296	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	1.8
296	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	15.7	0.0	0.0	7.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
299	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	5.2
299	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	-0.8
299	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	18.1	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
304	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	3.0
304	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	-3.0
304	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	20.3	0.0	0.0	3.0

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
310	536439.12	4816311.15	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	59.9	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.8
310	536439.12	4816311.15	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	59.9	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.8
310	536439.12	4816311.15	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	59.9	1.0	-3.0	0.0	0.0	24.5	0.0	0.0	-3.8

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
315	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.0
315	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.0
315	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	60.1	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
318	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.3	0.0	0.0	14.5
318	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.3	0.0	0.0	-165.7
318	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	56.1	1.3	-2.9	0.0	0.0	16.3	0.0	0.0	-165.7
320	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	25.4
320	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	-154.9
320	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-2.9	0.0	0.0	0.0	0.0	2.1	-154.9

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
323	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3
323	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3
323	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	25.5	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
325	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.0	0.0	0.0	-3.1
325	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.0	0.0	0.0	-9.2
325	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.2	1.5	-3.0	0.0	0.0	26.0	0.0	0.0	-3.1
326	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
326	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
326	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.8
328	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-7.8
328	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-13.8
328	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-7.8
330	536870.97	4816316.62	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-7.0
330	536870.97	4816316.62	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-13.0
330	536870.97	4816316.62	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-7.0

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
331	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.8
331	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.8
331	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.0	0.0	0.0	-7.8
332	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
332	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
332	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	65.5	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
334	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
334	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
334	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
337	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-3.9
337	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-9.9
337	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-3.9
339	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9
339	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
339	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-8.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
342	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
342	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-162.6
342	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	55.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
345	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
345	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-10.2
345	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.5	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
348	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
348	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
348	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
353	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-4.1
353	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-10.1
353	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-4.1
355	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1
355	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
355	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.7	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
359	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.0	0.0	0.0	4.9
359	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.0	0.0	0.0	-1.1
359	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.0	0.0	0.0	4.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
364	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-4.1
364	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-10.1
364	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.6	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-4.1
367	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
367	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
367	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
370	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-4.1
370	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-10.2
370	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-4.1
374	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5
374	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.5
374	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.5

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
375	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8
375	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-163.2
375	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	56.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
379	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-4.3
379	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-10.3
379	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-4.3
381	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
381	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
381	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
385	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7
385	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7
385	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-7.7
387	536904.16	4816494.80	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
387	536904.16	4816494.80	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
387	536904.16	4816494.80	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
390	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
390	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
390	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.0
391	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
391	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
391	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
394	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
394	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
394	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	65.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
398	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-3.9
398	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-10.0
398	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	25.1	0.0	0.0	-3.9
400	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
400	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
400	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
406	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
406	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
406	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.7	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.0
408	536895.35	4816513.18	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
408	536895.35	4816513.18	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
408	536895.35	4816513.18	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
410	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
410	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
410	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.3
413	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
413	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
413	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
414	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
414	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0
414	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
417	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-7.2
417	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-7.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
417	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.1	1.2	-3.0	0.0	0.0	25.5	0.0	0.0	-7.2
419	536895.88	4816345.38	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
419	536895.88	4816345.38	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
419	536895.88	4816345.38	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
421	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
421	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
421	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-8.3
423	536885.33	4816534.46	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
423	536885.33	4816534.46	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
423	536885.33	4816534.46	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
426	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.5
426	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.5
426	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.0	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.5
430	536842.61	4816561.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
430	536842.61	4816561.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
430	536842.61	4816561.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
432	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
432	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
432	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	26.6	0.0	0.0	-8.6
434	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
434	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
434	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
436	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
436	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
436	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
441	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
441	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
441	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.3	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-8.8
443	536831.48	4816585.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
443	536831.48	4816585.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
443	536831.48	4816585.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
447	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-6.3
447	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-6.3
447	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	24.0	0.0	0.0	-6.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
449	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
449	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
449	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
451	536866.53	4816583.53	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
451	536866.53	4816583.53	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
451	536866.53	4816583.53	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
453	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
453	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
453	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.6	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-9.0
455	536845.16	4816595.57	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
455	536845.16	4816595.57	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
455	536845.16	4816595.57	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
458	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
458	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
458	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.7	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-9.1
462	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
462	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
462	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
464	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
464	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
464	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	66.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
468	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	2.7
468	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	-3.3
468	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	63.9	2.0	-3.0	0.0	0.0	16.9	0.0	0.0	2.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
471	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.5
471	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.5
471	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	66.1	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-9.5
475	536886.90	4816613.22	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
475	536886.90	4816613.22	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
475	536886.90	4816613.22	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	67.1	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
477	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-9.2
477	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-12.2
477	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-9.2
479	536918.59	4816552.53	345.25	1	D	A	82.5	0.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
479	536918.59	4816552.53	345.25	1	N	A	82.5	0.0	-3.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
479	536918.59	4816552.53	345.25	1	E	A	82.5	0.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
484	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-0.1
484	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-6.1
484	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	19.3	0.0	0.0	-0.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
489	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	2.1
489	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	-4.0
489	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.3	2.0	-3.0	0.0	0.0	17.1	0.0	0.0	2.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
492	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	0.2
492	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	-5.8
492	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	18.9	0.0	0.0	0.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
495	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	1.2
495	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.8
495	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.5	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.8
498	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.3
498	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.3
498	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.3
500	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.0
500	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.0
500	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
502	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	1.3
502	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	-4.7
502	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	17.6	0.0	0.0	1.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
505	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	0.4
505	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	-5.6
505	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.6	2.1	-3.0	0.0	0.0	18.5	0.0	0.0	0.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
509	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	1.1
509	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.9
509	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.6	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-186.9
515	536867.83	4816521.17	347.00	1	D	A	90.0	0.0	0.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.4
515	536867.83	4816521.17	347.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
515	536867.83	4816521.17	347.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
517	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	0.9
517	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
517	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.7	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
518	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.4
518	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
518	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.4
519	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1
519	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
519	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
520	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	0.9
520	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
520	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.8	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-187.1
524	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-3.5
524	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.5
524	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	66.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.1	-191.5
527	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.2

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
527	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.2
527	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	65.9	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-191.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
530	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	53.4	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	27.4
530	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	53.4	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	-160.6
530	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	53.4	0.5	-2.8	0.0	0.0	0.0	0.0	0.0	-160.6

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
534	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1
534	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1
534	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	64.6	1.5	-3.0	0.0	0.0	18.6	0.0	0.0	-3.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
538	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.5
538	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.5
538	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	64.7	1.5	-3.0	0.0	0.0	26.9	0.0	0.0	-11.5
540	536869.70	4816527.58	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
540	536869.70	4816527.58	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
540	536869.70	4816527.58	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
543	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
543	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.5
543	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.8	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
545	536917.05	4816573.37	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
545	536917.05	4816573.37	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
545	536917.05	4816573.37	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
548	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
548	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
548	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.5
549	536918.65	4816580.36	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
549	536918.65	4816580.36	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
549	536918.65	4816580.36	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
552	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.6
552	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
552	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	26.9	0.0	0.0	-9.6
555	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
555	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
555	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.2
556	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
556	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
556	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.0	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
559	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.7

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
559	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	-15.7
559	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.7
562	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
562	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
562	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.2	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
566	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
566	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
566	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	67.1	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
570	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
570	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
570	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.8	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.7
572	536861.54	4816601.66	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
572	536861.54	4816601.66	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
572	536861.54	4816601.66	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	66.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
574	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-12.9
574	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-12.9
574	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-12.9
577	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
577	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
577	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
580	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
580	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
580	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	67.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
583	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
583	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
583	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
586	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
586	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
586	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
588	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
588	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
588	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
590	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
590	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
590	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	66.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-13.2
592	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
592	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
592	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
594	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
594	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
594	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	67.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
597	536556.84	4816080.23	348.88	0	D	A	59.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	0.1
597	536556.84	4816080.23	348.88	0	N	A	-40.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	-99.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
597	536556.84	4816080.23	348.88	0	E	A	-40.5	10.7	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	23.4	0.0	0.0	-99.9
600	536554.14	4816085.79	349.13	0	D	A	59.5	-2.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-15.4
600	536554.14	4816085.79	349.13	0	N	A	-40.5	-2.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-115.4
600	536554.14	4816085.79	349.13	0	E	A	-40.5	-2.9	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.2	0.0	0.0	-115.4
602	536558.89	4816076.01	348.68	1	D	A	59.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
602	536558.89	4816076.01	348.68	1	N	A	-40.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
602	536558.89	4816076.01	348.68	1	E	A	-40.5	3.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
603	536556.19	4816081.57	348.94	1	D	A	59.5	10.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
603	536556.19	4816081.57	348.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
603	536556.19	4816081.57	348.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
604	536556.95	4816080.00	348.86	1	D	A	59.5	3.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	32.8	-44.6
604	536556.95	4816080.00	348.86	1	N	A	-40.5	3.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	32.8	-144.6
604	536556.95	4816080.00	348.86	1	E	A	-40.5	3.4	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	28.0	0.0	32.8	-144.6
606	536556.72	4816080.46	348.89	1	D	A	59.5	10.9	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
606	536556.72	4816080.46	348.89	1	N	A	-40.5	10.9	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.3
606	536556.72	4816080.46	348.89	1	E	A	-40.5	10.9	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.3
608	536559.14	4816075.48	348.66	1	D	A	59.5	1.1	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
608	536559.14	4816075.48	348.66	1	N	A	-40.5	1.1	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
608	536559.14	4816075.48	348.66	1	E	A	-40.5	1.1	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
610	536556.85	4816080.20	348.87	1	D	A	59.5	9.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
610	536556.85	4816080.20	348.87	1	N	A	-40.5	9.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
610	536556.85	4816080.20	348.87	1	E	A	-40.5	9.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
617	536554.43	4816085.18	349.10	1	D	A	59.5	2.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
617	536554.43	4816085.18	349.10	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
617	536554.43	4816085.18	349.10	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
620	536554.07	4816085.93	349.14	1	D	A	59.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
620	536554.07	4816085.93	349.14	1	N	A	-40.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
620	536554.07	4816085.93	349.14	1	E	A	-40.5	-7.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
632	536550.10	4816086.22	349.30	0	D	A	59.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-6.9
632	536550.10	4816086.22	349.30	0	N	A	-40.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-106.9
632	536550.10	4816086.22	349.30	0	E	A	-40.5	5.8	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.1	0.0	0.0	-106.9
633	536552.46	4816081.07	349.01	0	D	A	59.5	8.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-2.6
633	536552.46	4816081.07	349.01	0	N	A	-40.5	8.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-102.6
633	536552.46	4816081.07	349.01	0	E	A	-40.5	8.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	23.8	0.0	0.0	-102.6
636	536551.24	4816083.72	349.16	1	D	A	59.5	9.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
636	536551.24	4816083.72	349.16	1	N	A	-40.5	9.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.7
636	536551.24	4816083.72	349.16	1	E	A	-40.5	9.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.7
638	536553.60	4816078.57	348.86	1	D	A	59.5	3.1	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
638	536553.60	4816078.57	348.86	1	N	A	-40.5	3.1	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
638	536553.60	4816078.57	348.86	1	E	A	-40.5	3.1	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
641	536553.74	4816078.26	348.84	1	D	A	59.5	1.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-47.5
641	536553.74	4816078.26	348.84	1	N	A	-40.5	1.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-147.5
641	536553.74	4816078.26	348.84	1	E	A	-40.5	1.3	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-147.5
643	536551.67	4816082.79	349.10	1	D	A	59.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
643	536551.67	4816082.79	349.10	1	N	A	-40.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
643	536551.67	4816082.79	349.10	1	E	A	-40.5	10.5	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
647	536550.44	4816085.47	349.26	1	D	A	59.5	7.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
647	536550.44	4816085.47	349.26	1	N	A	-40.5	7.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
647	536550.44	4816085.47	349.26	1	E	A	-40.5	7.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
649	536552.80	4816080.32	348.96	1	D	A	59.5	7.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.8
649	536552.80	4816080.32	348.96	1	N	A	-40.5	7.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
649	536552.80	4816080.32	348.96	1	E	A	-40.5	7.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
651	536550.11	4816086.19	349.30	1	D	A	59.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
651	536550.11	4816086.19	349.30	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
651	536550.11	4816086.19	349.30	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
684	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.5	0.0	0.0	-3.5
684	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.5	0.0	0.0	-103.5
684	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	25.5	0.0	0.0	-103.5
687	536519.09	4816100.46	350.53	1	D	A	59.5	9.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
687	536519.09	4816100.46	350.53	1	N	A	-40.5	9.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
687	536519.09	4816100.46	350.53	1	E	A	-40.5	9.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
690	536515.27	4816098.69	350.56	1	D	A	59.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
690	536515.27	4816098.69	350.56	1	N	A	-40.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
690	536515.27	4816098.69	350.56	1	E	A	-40.5	12.4	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
692	536515.27	4816098.69	350.56	1	D	A	59.5	12.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
692	536515.27	4816098.69	350.56	1	N	A	-40.5	12.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
692	536515.27	4816098.69	350.56	1	E	A	-40.5	12.4	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
694	536523.20	4816102.36	350.50	1	D	A	59.5	-16.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-41.5
694	536523.20	4816102.36	350.50	1	N	A	-40.5	-16.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
694	536523.20	4816102.36	350.50	1	E	A	-40.5	-16.0	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.5
697	536518.34	4816100.11	350.54	1	D	A	59.5	10.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
697	536518.34	4816100.11	350.54	1	N	A	-40.5	10.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
697	536518.34	4816100.11	350.54	1	E	A	-40.5	10.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
700	536554.97	4816075.57	348.71	0	D	A	59.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	20.0	0.0	0.0	-1.0
700	536554.97	4816075.57	348.71	0	N	A	-40.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	20.0	0.0	0.0	-101.0
700	536554.97	4816075.57	348.71	0	E	A	-40.5	6.6	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	20.0	0.0	0.0	-101.0
702	536556.65	4816071.92	348.55	0	D	A	59.5	5.4	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	4.5
702	536556.65	4816071.92	348.55	0	N	A	-40.5	5.4	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	-95.5
702	536556.65	4816071.92	348.55	0	E	A	-40.5	5.4	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	13.4	0.0	0.0	-95.5
705	536557.77	4816069.48	348.44	0	D	A	59.5	2.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	7.3	0.0	0.0	7.8
705	536557.77	4816069.48	348.44	0	N	A	-40.5	2.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	7.3	0.0	0.0	-92.2
705	536557.77	4816069.48	348.44	0	E	A	-40.5	2.8	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	7.3	0.0	0.0	-92.2
707	536556.71	4816071.78	348.54	1	D	A	59.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	22.3	0.0	1.0	-5.8
707	536556.71	4816071.78	348.54	1	N	A	-40.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	22.3	0.0	1.0	-105.8
707	536556.71	4816071.78	348.54	1	E	A	-40.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	22.3	0.0	1.0	-105.8
709	536557.67	4816069.69	348.45	1	D	A	59.5	-0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	21.4	0.0	1.0	-11.6
709	536557.67	4816069.69	348.45	1	N	A	-40.5	-0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	21.4	0.0	1.0	-111.6
709	536557.67	4816069.69	348.45	1	E	A	-40.5	-0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	21.4	0.0	1.0	-111.6
712	536555.89	4816073.57	348.62	1	D	A	59.5	9.5	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
712	536555.89	4816073.57	348.62	1	N	A	-40.5	9.5	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
712	536555.89	4816073.57	348.62	1	E	A	-40.5	9.5	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
715	536557.96	4816069.06	348.42	1	D	A	59.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
715	536557.96	4816069.06	348.42	1	N	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
715	536557.96	4816069.06	348.42	1	E	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
717	536554.22	4816077.21	348.79	1	D	A	59.5	-0.2	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-49.1
717	536554.22	4816077.21	348.79	1	N	A	-40.5	-0.2	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-149.1
717	536554.22	4816077.21	348.79	1	E	A	-40.5	-0.2	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	28.0	0.0	33.2	-149.1
719	536556.70	4816071.80	348.54	1	D	A	59.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-11.4
719	536556.70	4816071.80	348.54	1	N	A	-40.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-111.4
719	536556.70	4816071.80	348.54	1	E	A	-40.5	5.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.7	0.0	2.2	-111.4
721	536557.66	4816069.72	348.45	1	D	A	59.5	-1.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.0	0.0	2.2	-17.6
721	536557.66	4816069.72	348.45	1	N	A	-40.5	-1.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.0	0.0	2.2	-117.6
721	536557.66	4816069.72	348.45	1	E	A	-40.5	-1.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.0	0.0	2.2	-117.6
722	536556.09	4816073.13	348.60	1	D	A	59.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
722	536556.09	4816073.13	348.60	1	N	A	-40.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
722	536556.09	4816073.13	348.60	1	E	A	-40.5	10.0	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
724	536554.76	4816076.04	348.74	1	D	A	59.5	5.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
724	536554.76	4816076.04	348.74	1	N	A	-40.5	5.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
724	536554.76	4816076.04	348.74	1	E	A	-40.5	5.5	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
726	536555.73	4816073.92	348.64	1	D	A	59.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
726	536555.73	4816073.92	348.64	1	N	A	-40.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
726	536555.73	4816073.92	348.64	1	E	A	-40.5	0.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
728	536556.52	4816072.19	348.56	1	D	A	59.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.8	0.0	1.0	-12.0
728	536556.52	4816072.19	348.56	1	N	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.8	0.0	1.0	-112.0
728	536556.52	4816072.19	348.56	1	E	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	22.8	0.0	1.0	-112.0
732	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-5.5
732	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-105.5
732	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	27.1	0.0	0.0	-105.5
735	536523.28	4816100.93	350.49	1	D	A	59.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
735	536523.28	4816100.93	350.49	1	N	A	-40.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
735	536523.28	4816100.93	350.49	1	E	A	-40.5	6.3	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
739	536518.36	4816098.85	350.53	1	D	A	59.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
739	536518.36	4816098.85	350.53	1	N	A	-40.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
739	536518.36	4816098.85	350.53	1	E	A	-40.5	11.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
742	536516.88	4816098.22	350.54	1	D	A	59.5	10.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
742	536516.88	4816098.22	350.54	1	N	A	-40.5	10.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
742	536516.88	4816098.22	350.54	1	E	A	-40.5	10.7	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
745	536523.78	4816101.14	350.49	1	D	A	59.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
745	536523.78	4816101.14	350.49	1	N	A	-40.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
745	536523.78	4816101.14	350.49	1	E	A	-40.5	5.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
748	536524.23	4816101.33	350.48	1	D	A	59.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
748	536524.23	4816101.33	350.48	1	N	A	-40.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
748	536524.23	4816101.33	350.48	1	E	A	-40.5	3.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
752	536519.33	4816099.26	350.52	1	D	A	59.5	11.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
752	536519.33	4816099.26	350.52	1	N	A	-40.5	11.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
752	536519.33	4816099.26	350.52	1	E	A	-40.5	11.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
768	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-5.2
768	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-105.2
768	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-105.2
771	536531.17	4816106.38	350.44	1	D	A	59.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
771	536531.17	4816106.38	350.44	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
771	536531.17	4816106.38	350.44	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
775	536529.03	4816105.30	350.46	1	D	A	59.5	8.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3
775	536529.03	4816105.30	350.46	1	N	A	-40.5	8.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
775	536529.03	4816105.30	350.46	1	E	A	-40.5	8.8	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
777	536525.15	4816103.35	350.49	1	D	A	59.5	0.4	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
777	536525.15	4816103.35	350.49	1	N	A	-40.5	0.4	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
777	536525.15	4816103.35	350.49	1	E	A	-40.5	0.4	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
778	536523.94	4816102.74	350.50	1	D	A	59.5	2.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
778	536523.94	4816102.74	350.50	1	N	A	-40.5	2.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
778	536523.94	4816102.74	350.50	1	E	A	-40.5	2.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
779	536527.81	4816104.69	350.47	1	D	A	59.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
779	536527.81	4816104.69	350.47	1	N	A	-40.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
779	536527.81	4816104.69	350.47	1	E	A	-40.5	10.1	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
780	536527.81	4816104.69	350.47	1	D	A	59.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
780	536527.81	4816104.69	350.47	1	N	A	-40.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
780	536527.81	4816104.69	350.47	1	E	A	-40.5	10.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
781	536526.68	4816104.11	350.48	1	D	A	59.5	8.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
781	536526.68	4816104.11	350.48	1	N	A	-40.5	8.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
781	536526.68	4816104.11	350.48	1	E	A	-40.5	8.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
782	536529.95	4816105.76	350.45	1	D	A	59.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.0
782	536529.95	4816105.76	350.45	1	N	A	-40.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
782	536529.95	4816105.76	350.45	1	E	A	-40.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
783	536525.34	4816103.44	350.49	1	D	A	59.5	6.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
783	536525.34	4816103.44	350.49	1	N	A	-40.5	6.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
783	536525.34	4816103.44	350.49	1	E	A	-40.5	6.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
784	536561.70	4816071.14	348.46	0	D	A	59.5	4.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	7.2	0.0	0.0	10.1
784	536561.70	4816071.14	348.46	0	N	A	-40.5	4.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	7.2	0.0	0.0	-89.9
784	536561.70	4816071.14	348.46	0	E	A	-40.5	4.4	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	7.2	0.0	0.0	-89.9
785	536560.21	4816073.61	348.57	0	D	A	59.5	4.8	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	13.8	0.0	0.0	3.8
785	536560.21	4816073.61	348.57	0	N	A	-40.5	4.8	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	13.8	0.0	0.0	-96.2
785	536560.21	4816073.61	348.57	0	E	A	-40.5	4.8	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	13.8	0.0	0.0	-96.2
787	536560.92	4816072.43	348.52	1	D	A	59.5	7.6	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-14.4
787	536560.92	4816072.43	348.52	1	N	A	-40.5	7.6	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
787	536560.92	4816072.43	348.52	1	E	A	-40.5	7.6	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
789	536559.98	4816073.99	348.59	1	D	A	59.5	3.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
789	536559.98	4816073.99	348.59	1	N	A	-40.5	3.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
789	536559.98	4816073.99	348.59	1	E	A	-40.5	3.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
791	536560.07	4816073.84	348.58	1	D	A	59.5	3.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-12.4
791	536560.07	4816073.84	348.58	1	N	A	-40.5	3.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-112.4
791	536560.07	4816073.84	348.58	1	E	A	-40.5	3.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	22.9	0.0	1.0	-112.4
793	536559.44	4816074.88	348.63	1	D	A	59.5	-11.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
793	536559.44	4816074.88	348.63	1	N	A	-40.5	-11.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
793	536559.44	4816074.88	348.63	1	E	A	-40.5	-11.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
795	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-5.9
795	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-105.9
795	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-105.9
798	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
798	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
798	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
800	536544.56	4816097.72	349.90	1	D	A	59.5	3.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
800	536544.56	4816097.72	349.90	1	N	A	-40.5	3.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
800	536544.56	4816097.72	349.90	1	E	A	-40.5	3.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
802	536546.12	4816094.99	349.79	1	D	A	59.5	6.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.3
802	536546.12	4816094.99	349.79	1	N	A	-40.5	6.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
802	536546.12	4816094.99	349.79	1	E	A	-40.5	6.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
804	536545.56	4816095.97	349.83	1	D	A	59.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
804	536545.56	4816095.97	349.83	1	N	A	-40.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
804	536545.56	4816095.97	349.83	1	E	A	-40.5	8.0	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
831	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-7.1
831	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-107.1
831	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	49.6	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-107.1
834	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-13.8
834	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
834	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-113.8
838	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
838	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
838	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
842	536547.73	4816099.05	349.79	1	D	A	59.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
842	536547.73	4816099.05	349.79	1	N	A	-40.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
842	536547.73	4816099.05	349.79	1	E	A	-40.5	6.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
848	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-7.0
848	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-107.0
848	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	49.5	0.4	-3.0	0.0	0.0	26.1	0.0	0.0	-107.0
852	536549.75	4816094.93	349.63	1	D	A	59.5	6.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
852	536549.75	4816094.93	349.63	1	N	A	-40.5	6.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
852	536549.75	4816094.93	349.63	1	E	A	-40.5	6.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
855	536550.20	4816093.98	349.59	1	D	A	59.5	3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
855	536550.20	4816093.98	349.59	1	N	A	-40.5	3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
855	536550.20	4816093.98	349.59	1	E	A	-40.5	3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
858	536549.23	4816096.02	349.67	1	D	A	59.5	3.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
858	536549.23	4816096.02	349.67	1	N	A	-40.5	3.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
858	536549.23	4816096.02	349.67	1	E	A	-40.5	3.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
861	536549.75	4816094.93	349.63	1	D	A	59.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
861	536549.75	4816094.93	349.63	1	N	A	-40.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
861	536549.75	4816094.93	349.63	1	E	A	-40.5	6.6	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
867	536499.88	4816089.50	350.59	0	D	A	59.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-14.4
867	536499.88	4816089.50	350.59	0	N	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-114.4
867	536499.88	4816089.50	350.59	0	E	A	-40.5	1.8	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-114.4
871	536502.16	4816090.86	350.59	0	D	A	59.5	5.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-10.3
871	536502.16	4816090.86	350.59	0	N	A	-40.5	5.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-110.3
871	536502.16	4816090.86	350.59	0	E	A	-40.5	5.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-110.3
876	536506.04	4816093.17	350.60	0	D	A	59.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-8.9
876	536506.04	4816093.17	350.60	0	N	A	-40.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-108.9
876	536506.04	4816093.17	350.60	0	E	A	-40.5	7.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-108.9
879	536503.76	4816091.81	350.60	1	D	A	59.5	10.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
879	536503.76	4816091.81	350.60	1	N	A	-40.5	10.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
879	536503.76	4816091.81	350.60	1	E	A	-40.5	10.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
884	536499.88	4816089.50	350.59	1	D	A	59.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
884	536499.88	4816089.50	350.59	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
884	536499.88	4816089.50	350.59	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
887	536504.41	4816092.20	350.60	1	D	A	59.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.0
887	536504.41	4816092.20	350.60	1	N	A	-40.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
887	536504.41	4816092.20	350.60	1	E	A	-40.5	9.5	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
921	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-7.4
921	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-107.4
921	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-107.4
926	536545.64	4816103.22	349.96	1	D	A	59.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
926	536545.64	4816103.22	349.96	1	N	A	-40.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
926	536545.64	4816103.22	349.96	1	E	A	-40.5	3.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
929	536544.57	4816105.31	350.06	1	D	A	59.5	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
929	536544.57	4816105.31	350.06	1	N	A	-40.5	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
929	536544.57	4816105.31	350.06	1	E	A	-40.5	4.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
931	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
931	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
931	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.1
933	536544.18	4816106.09	350.09	1	D	A	59.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
933	536544.18	4816106.09	350.09	1	N	A	-40.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
933	536544.18	4816106.09	350.09	1	E	A	-40.5	-0.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
936	536545.43	4816103.62	349.98	1	D	A	59.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
936	536545.43	4816103.62	349.98	1	N	A	-40.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
936	536545.43	4816103.62	349.98	1	E	A	-40.5	4.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
937	536544.37	4816105.71	350.08	1	D	A	59.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
937	536544.37	4816105.71	350.08	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
937	536544.37	4816105.71	350.08	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
943	536545.67	4816103.16	349.96	1	D	A	59.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
943	536545.67	4816103.16	349.96	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
943	536545.67	4816103.16	349.96	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
945	536544.95	4816104.57	350.02	1	D	A	59.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
945	536544.95	4816104.57	350.02	1	N	A	-40.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
945	536544.95	4816104.57	350.02	1	E	A	-40.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
948	536544.33	4816105.79	350.08	1	D	A	59.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
948	536544.33	4816105.79	350.08	1	N	A	-40.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
948	536544.33	4816105.79	350.08	1	E	A	-40.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
953	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-7.5
953	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-107.5
953	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-107.5
959	536547.42	4816092.51	349.67	1	D	A	59.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
959	536547.42	4816092.51	349.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
959	536547.42	4816092.51	349.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
961	536548.15	4816090.71	349.57	1	D	A	59.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
961	536548.15	4816090.71	349.57	1	N	A	-40.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
961	536548.15	4816090.71	349.57	1	E	A	-40.5	3.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
963	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
963	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
963	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.7
967	536547.86	4816091.43	349.61	1	D	A	59.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
967	536547.86	4816091.43	349.61	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
967	536547.86	4816091.43	349.61	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.2
979	536481.79	4816093.29	350.76	0	D	A	59.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-6.1
979	536481.79	4816093.29	350.76	0	N	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-106.1
979	536481.79	4816093.29	350.76	0	E	A	-40.5	10.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-106.1
980	536483.01	4816092.32	350.73	1	D	A	59.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.6
980	536483.01	4816092.32	350.73	1	N	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
980	536483.01	4816092.32	350.73	1	E	A	-40.5	5.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.6
981	536479.38	4816095.19	350.80	1	D	A	59.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
981	536479.38	4816095.19	350.80	1	N	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
981	536479.38	4816095.19	350.80	1	E	A	-40.5	7.4	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
983	536484.29	4816091.31	350.71	1	D	A	59.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
983	536484.29	4816091.31	350.71	1	N	A	-40.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
983	536484.29	4816091.31	350.71	1	E	A	-40.5	7.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
985	536480.84	4816094.04	350.77	1	D	A	59.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
985	536480.84	4816094.04	350.77	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
985	536480.84	4816094.04	350.77	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
986	536478.80	4816095.64	350.81	1	D	A	59.5	2.1	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
986	536478.80	4816095.64	350.81	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
986	536478.80	4816095.64	350.81	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
988	536477.70	4816096.51	350.83	1	D	A	59.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
988	536477.70	4816096.51	350.83	1	N	A	-40.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
988	536477.70	4816096.51	350.83	1	E	A	-40.5	0.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
989	536483.68	4816091.79	350.72	1	D	A	59.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
989	536483.68	4816091.79	350.72	1	N	A	-40.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
989	536483.68	4816091.79	350.72	1	E	A	-40.5	8.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
991	536479.97	4816094.72	350.79	1	D	A	59.5	4.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
991	536479.97	4816094.72	350.79	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
991	536479.97	4816094.72	350.79	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
993	536478.16	4816096.15	350.82	1	D	A	59.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
993	536478.16	4816096.15	350.82	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
993	536478.16	4816096.15	350.82	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
995	536477.31	4816096.82	350.83	1	D	A	59.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-36.4
995	536477.31	4816096.82	350.83	1	N	A	-40.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
995	536477.31	4816096.82	350.83	1	E	A	-40.5	-7.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-136.4
1002	536485.32	4816090.14	350.69	0	D	A	59.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-13.1
1002	536485.32	4816090.14	350.69	0	N	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-113.1
1002	536485.32	4816090.14	350.69	0	E	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-113.1
1004	536487.13	4816088.74	350.66	0	D	A	59.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-12.9
1004	536487.13	4816088.74	350.66	0	N	A	-40.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-112.9
1004	536487.13	4816088.74	350.66	0	E	A	-40.5	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-112.9
1005	536490.30	4816086.28	350.61	0	D	A	59.5	7.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-8.7
1005	536490.30	4816086.28	350.61	0	N	A	-40.5	7.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-108.7
1005	536490.30	4816086.28	350.61	0	E	A	-40.5	7.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-108.7
1007	536487.57	4816088.40	350.65	1	D	A	59.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1007	536487.57	4816088.40	350.65	1	N	A	-40.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1007	536487.57	4816088.40	350.65	1	E	A	-40.5	9.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1009	536491.64	4816085.24	350.58	1	D	A	59.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
1009	536491.64	4816085.24	350.58	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1009	536491.64	4816085.24	350.58	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
1010	536485.55	4816089.96	350.69	1	D	A	59.5	4.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1010	536485.55	4816089.96	350.69	1	N	A	-40.5	4.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1010	536485.55	4816089.96	350.69	1	E	A	-40.5	4.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1012	536488.45	4816087.71	350.64	1	D	A	59.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1012	536488.45	4816087.71	350.64	1	N	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1012	536488.45	4816087.71	350.64	1	E	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1014	536490.90	4816085.82	350.60	1	D	A	59.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
1014	536490.90	4816085.82	350.60	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1014	536490.90	4816085.82	350.60	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1017	536492.07	4816084.90	350.58	1	D	A	59.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
1017	536492.07	4816084.90	350.58	1	N	A	-40.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1017	536492.07	4816084.90	350.58	1	E	A	-40.5	1.0	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1020	536501.34	4816092.22	350.62	0	D	A	59.5	6.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-9.5
1020	536501.34	4816092.22	350.62	0	N	A	-40.5	6.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-109.5
1020	536501.34	4816092.22	350.62	0	E	A	-40.5	6.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-109.5
1024	536497.91	4816090.61	350.62	0	D	A	59.5	4.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-11.9
1024	536497.91	4816090.61	350.62	0	N	A	-40.5	4.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-111.9
1024	536497.91	4816090.61	350.62	0	E	A	-40.5	4.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.6	0.0	0.0	-111.9
1027	536500.08	4816091.63	350.62	1	D	A	59.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1027	536500.08	4816091.63	350.62	1	N	A	-40.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1027	536500.08	4816091.63	350.62	1	E	A	-40.5	8.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1030	536500.08	4816091.63	350.62	1	D	A	59.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1030	536500.08	4816091.63	350.62	1	N	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1030	536500.08	4816091.63	350.62	1	E	A	-40.5	8.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1037	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-9.9
1037	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-109.9
1037	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	51.3	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-109.9
1040	536529.30	4816102.62	350.44	1	D	A	59.5	-0.2	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1040	536529.30	4816102.62	350.44	1	N	A	-40.5	-0.2	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1040	536529.30	4816102.62	350.44	1	E	A	-40.5	-0.2	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1043	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1043	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1043	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1046	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
1046	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1046	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1049	536526.35	4816102.00	350.47	1	D	A	59.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
1049	536526.35	4816102.00	350.47	1	N	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1049	536526.35	4816102.00	350.47	1	E	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1051	536528.60	4816102.47	350.45	1	D	A	59.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
1051	536528.60	4816102.47	350.45	1	N	A	-40.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1051	536528.60	4816102.47	350.45	1	E	A	-40.5	3.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1052	536526.21	4816101.97	350.47	1	D	A	59.5	2.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
1052	536526.21	4816101.97	350.47	1	N	A	-40.5	2.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1052	536526.21	4816101.97	350.47	1	E	A	-40.5	2.9	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1055	536528.46	4816102.44	350.45	1	D	A	59.5	4.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
1055	536528.46	4816102.44	350.45	1	N	A	-40.5	4.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1055	536528.46	4816102.44	350.45	1	E	A	-40.5	4.2	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
1057	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
1057	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1057	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1062	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-8.2
1062	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-108.2
1062	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	49.3	0.4	-3.0	0.0	0.0	25.4	0.0	0.0	-108.2
1066	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1066	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1066	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1068	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1068	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1068	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1071	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.8
1071	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
1071	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
1073	536553.42	4816087.27	349.21	1	D	A	59.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1073	536553.42	4816087.27	349.21	1	N	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1073	536553.42	4816087.27	349.21	1	E	A	-40.5	4.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1091	536480.83	4816093.86	350.77	0	D	A	59.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-7.0
1091	536480.83	4816093.86	350.77	0	N	A	-40.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-107.0
1091	536480.83	4816093.86	350.77	0	E	A	-40.5	9.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-107.0
1093	536479.28	4816095.17	350.80	1	D	A	59.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.2
1093	536479.28	4816095.17	350.80	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1093	536479.28	4816095.17	350.80	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1094	536482.74	4816092.25	350.73	1	D	A	59.5	5.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1094	536482.74	4816092.25	350.73	1	N	A	-40.5	5.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1094	536482.74	4816092.25	350.73	1	E	A	-40.5	5.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1096	536477.68	4816096.50	350.83	1	D	A	59.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
1096	536477.68	4816096.50	350.83	1	N	A	-40.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
1096	536477.68	4816096.50	350.83	1	E	A	-40.5	0.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
1097	536478.73	4816095.62	350.81	1	D	A	59.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
1097	536478.73	4816095.62	350.81	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1097	536478.73	4816095.62	350.81	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1099	536480.68	4816093.99	350.77	1	D	A	59.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1099	536480.68	4816093.99	350.77	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1099	536480.68	4816093.99	350.77	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1100	536483.22	4816091.85	350.73	1	D	A	59.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
1100	536483.22	4816091.85	350.73	1	N	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
1100	536483.22	4816091.85	350.73	1	E	A	-40.5	5.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
1102	536478.04	4816096.20	350.82	1	D	A	59.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
1102	536478.04	4816096.20	350.82	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
1102	536478.04	4816096.20	350.82	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
1103	536479.85	4816094.68	350.79	1	D	A	59.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
1103	536479.85	4816094.68	350.79	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1103	536479.85	4816094.68	350.79	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1104	536482.64	4816092.34	350.74	1	D	A	59.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1104	536482.64	4816092.34	350.74	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1104	536482.64	4816092.34	350.74	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1107	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-9.0
1107	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-109.0
1107	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.9	0.0	0.0	-109.0
1110	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1110	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1110	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
1111	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
1111	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1111	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
1113	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1113	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1113	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1153	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-10.1
1153	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.1
1153	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.1
1155	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
1155	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
1155	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
1156	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1156	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1156	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1159	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
1159	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1159	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1161	536538.68	4816102.62	350.25	1	D	A	59.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
1161	536538.68	4816102.62	350.25	1	N	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1161	536538.68	4816102.62	350.25	1	E	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1164	536539.94	4816102.02	350.18	1	D	A	59.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
1164	536539.94	4816102.02	350.18	1	N	A	-40.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
1164	536539.94	4816102.02	350.18	1	E	A	-40.5	-3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
1170	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-9.6
1170	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-109.6
1170	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	49.4	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	-109.6
1173	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
1173	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
1173	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
1175	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
1175	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1175	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1177	536552.50	4816089.17	349.32	1	D	A	59.5	1.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1177	536552.50	4816089.17	349.32	1	N	A	-40.5	1.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1177	536552.50	4816089.17	349.32	1	E	A	-40.5	1.6	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1181	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
1181	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1181	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1185	536495.95	4816080.13	350.49	0	D	A	59.5	6.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.3
1185	536495.95	4816080.13	350.49	0	N	A	-40.5	6.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.3
1185	536495.95	4816080.13	350.49	0	E	A	-40.5	6.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.3
1189	536497.65	4816077.46	350.44	0	D	A	59.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.3
1189	536497.65	4816077.46	350.44	0	N	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.3
1189	536497.65	4816077.46	350.44	0	E	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.3
1192	536495.30	4816081.16	350.50	1	D	A	59.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
1192	536495.30	4816081.16	350.50	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1192	536495.30	4816081.16	350.50	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1193	536496.15	4816079.82	350.48	1	D	A	59.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
1193	536496.15	4816079.82	350.48	1	N	A	-40.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1193	536496.15	4816079.82	350.48	1	E	A	-40.5	0.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1196	536496.79	4816078.82	350.46	1	D	A	59.5	1.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
1196	536496.79	4816078.82	350.46	1	N	A	-40.5	1.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
1196	536496.79	4816078.82	350.46	1	E	A	-40.5	1.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
1198	536497.63	4816077.49	350.44	1	D	A	59.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
1198	536497.63	4816077.49	350.44	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1198	536497.63	4816077.49	350.44	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1205	536501.46	4816069.94	350.11	0	D	A	59.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-15.5
1205	536501.46	4816069.94	350.11	0	N	A	-40.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.5
1205	536501.46	4816069.94	350.11	0	E	A	-40.5	3.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.5
1207	536502.69	4816067.22	349.99	0	D	A	59.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.8
1207	536502.69	4816067.22	349.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
1207	536502.69	4816067.22	349.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
1208	536501.58	4816069.68	350.10	1	D	A	59.5	4.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
1208	536501.58	4816069.68	350.10	1	N	A	-40.5	4.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1208	536501.58	4816069.68	350.10	1	E	A	-40.5	4.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
1209	536502.81	4816066.95	349.98	1	D	A	59.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
1209	536502.81	4816066.95	349.98	1	N	A	-40.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1209	536502.81	4816066.95	349.98	1	E	A	-40.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1212	536501.80	4816069.18	350.08	1	D	A	59.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
1212	536501.80	4816069.18	350.08	1	N	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1212	536501.80	4816069.18	350.08	1	E	A	-40.5	5.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1214	536503.04	4816066.45	349.96	1	D	A	59.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1214	536503.04	4816066.45	349.96	1	N	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1214	536503.04	4816066.45	349.96	1	E	A	-40.5	3.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1217	536502.70	4816067.22	349.99	0	D	A	59.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.8
1217	536502.70	4816067.22	349.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
1217	536502.70	4816067.22	349.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.8
1219	536501.49	4816069.94	350.11	0	D	A	59.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-15.6
1219	536501.49	4816069.94	350.11	0	N	A	-40.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
1219	536501.49	4816069.94	350.11	0	E	A	-40.5	3.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-115.6
1223	536502.82	4816066.96	349.98	1	D	A	59.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
1223	536502.82	4816066.96	349.98	1	N	A	-40.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1223	536502.82	4816066.96	349.98	1	E	A	-40.5	5.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1224	536501.61	4816069.67	350.10	1	D	A	59.5	4.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
1224	536501.61	4816069.67	350.10	1	N	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1224	536501.61	4816069.67	350.10	1	E	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1226	536503.24	4816066.01	349.94	1	D	A	59.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
1226	536503.24	4816066.01	349.94	1	N	A	-40.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1226	536503.24	4816066.01	349.94	1	E	A	-40.5	1.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1227	536502.03	4816068.73	350.06	1	D	A	59.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1227	536502.03	4816068.73	350.06	1	N	A	-40.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1227	536502.03	4816068.73	350.06	1	E	A	-40.5	6.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1237	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-10.5
1237	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.5
1237	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-110.5
1239	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-15.5
1239	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1239	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1241	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
1241	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1241	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1242	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
1242	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1242	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1245	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1245	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1245	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1248	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-10.4
1248	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-110.4
1248	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-110.4
1251	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1251	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1251	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1253	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1253	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1253	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.7
1255	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
1255	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1255	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1257	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.0
1257	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
1257	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.0
1264	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.1	0.0	0.0	10.4
1264	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.1	0.0	0.0	-89.6
1264	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	5.1	0.0	0.0	-89.6
1266	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1266	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1266	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1269	536558.58	4816067.70	348.40	1	D	A	59.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1269	536558.58	4816067.70	348.40	1	N	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1269	536558.58	4816067.70	348.40	1	E	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1326	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-9.9
1326	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-109.9
1326	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.0	0.0	0.0	-109.9
1330	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
1330	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1330	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1333	536505.42	4816094.12	350.62	1	D	A	59.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1333	536505.42	4816094.12	350.62	1	N	A	-40.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1333	536505.42	4816094.12	350.62	1	E	A	-40.5	6.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1338	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.5	0.0	0.0	-10.5
1338	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.5	0.0	0.0	-110.5
1338	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	25.5	0.0	0.0	-110.5
1341	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1341	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1341	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1342	536548.82	4816089.09	349.47	1	D	A	59.5	0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1342	536548.82	4816089.09	349.47	1	N	A	-40.5	0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1342	536548.82	4816089.09	349.47	1	E	A	-40.5	0.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1344	536549.18	4816088.25	349.42	1	D	A	59.5	-1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
1344	536549.18	4816088.25	349.42	1	N	A	-40.5	-1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
1344	536549.18	4816088.25	349.42	1	E	A	-40.5	-1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
1346	536549.15	4816088.31	349.42	1	D	A	59.5	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1346	536549.15	4816088.31	349.42	1	N	A	-40.5	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1346	536549.15	4816088.31	349.42	1	E	A	-40.5	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1347	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1347	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1347	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1350	536500.08	4816073.10	350.28	0	D	A	59.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-11.9
1350	536500.08	4816073.10	350.28	0	N	A	-40.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-111.9
1350	536500.08	4816073.10	350.28	0	E	A	-40.5	6.9	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-111.9
1354	536500.08	4816073.10	350.28	1	D	A	59.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
1354	536500.08	4816073.10	350.28	1	N	A	-40.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
1354	536500.08	4816073.10	350.28	1	E	A	-40.5	6.9	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
1360	536498.38	4816076.90	350.43	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-13.4
1360	536498.38	4816076.90	350.43	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.4
1360	536498.38	4816076.90	350.43	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-113.4
1364	536497.38	4816079.14	350.46	0	D	A	59.5	1.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-17.1
1364	536497.38	4816079.14	350.46	0	N	A	-40.5	1.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-117.1
1364	536497.38	4816079.14	350.46	0	E	A	-40.5	1.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-117.1
1367	536498.37	4816076.93	350.43	1	D	A	59.5	5.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
1367	536498.37	4816076.93	350.43	1	N	A	-40.5	5.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1367	536498.37	4816076.93	350.43	1	E	A	-40.5	5.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1369	536497.41	4816079.08	350.46	1	D	A	59.5	0.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
1369	536497.41	4816079.08	350.46	1	N	A	-40.5	0.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
1369	536497.41	4816079.08	350.46	1	E	A	-40.5	0.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
1371	536497.12	4816079.73	350.47	1	D	A	59.5	-7.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-35.8
1371	536497.12	4816079.73	350.47	1	N	A	-40.5	-7.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
1371	536497.12	4816079.73	350.47	1	E	A	-40.5	-7.0	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
1375	536499.74	4816073.41	350.30	0	D	A	59.5	5.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-12.9
1375	536499.74	4816073.41	350.30	0	N	A	-40.5	5.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.9
1375	536499.74	4816073.41	350.30	0	E	A	-40.5	5.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-112.9
1378	536500.82	4816071.30	350.18	0	D	A	59.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-19.1
1378	536500.82	4816071.30	350.18	0	N	A	-40.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1
1378	536500.82	4816071.30	350.18	0	E	A	-40.5	-0.4	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-119.1
1380	536500.89	4816071.15	350.17	1	D	A	59.5	-2.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
1380	536500.89	4816071.15	350.17	1	N	A	-40.5	-2.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1380	536500.89	4816071.15	350.17	1	E	A	-40.5	-2.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1383	536499.79	4816073.31	350.29	1	D	A	59.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1383	536499.79	4816073.31	350.29	1	N	A	-40.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1383	536499.79	4816073.31	350.29	1	E	A	-40.5	6.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1384	536500.87	4816071.20	350.17	1	D	A	59.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
1384	536500.87	4816071.20	350.17	1	N	A	-40.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
1384	536500.87	4816071.20	350.17	1	E	A	-40.5	-1.5	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
1395	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-12.4
1395	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-112.4
1395	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	27.2	0.0	0.0	-112.4
1397	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1397	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1397	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1399	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
1399	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1399	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1400	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1400	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1400	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1401	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
1401	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1401	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1403	536530.98	4816102.92	350.43	1	D	A	59.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
1403	536530.98	4816102.92	350.43	1	N	A	-40.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1403	536530.98	4816102.92	350.43	1	E	A	-40.5	3.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1405	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-11.4
1405	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-111.4
1405	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-111.4
1408	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1408	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1408	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1411	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
1411	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1411	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1414	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
1414	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1414	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1416	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.2
1416	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1416	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1419	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-10.6
1419	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-110.6
1419	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-110.6
1423	536509.87	4816095.21	350.59	1	D	A	59.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.3
1423	536509.87	4816095.21	350.59	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1423	536509.87	4816095.21	350.59	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1426	536509.87	4816095.21	350.59	1	D	A	59.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1426	536509.87	4816095.21	350.59	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1426	536509.87	4816095.21	350.59	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1427	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	4.6	0.0	0.0	9.7
1427	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	4.6	0.0	0.0	-90.3
1427	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	49.2	0.4	-3.0	0.0	0.0	4.6	0.0	0.0	-90.3
1429	536562.78	4816069.35	348.40	1	D	A	59.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.7
1429	536562.78	4816069.35	348.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1429	536562.78	4816069.35	348.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1441	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-12.0
1441	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.0
1441	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.0
1443	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2
1443	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1443	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1445	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1445	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1445	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1446	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1446	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1446	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1448	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
1448	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1448	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1450	536539.49	4816108.88	350.32	1	D	A	59.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1450	536539.49	4816108.88	350.32	1	N	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1450	536539.49	4816108.88	350.32	1	E	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1463	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-12.0
1463	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.0
1463	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	50.6	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.0
1465	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1
1465	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1465	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1467	536536.28	4816108.62	350.41	1	D	A	59.5	0.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1467	536536.28	4816108.62	350.41	1	N	A	-40.5	0.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1467	536536.28	4816108.62	350.41	1	E	A	-40.5	0.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1469	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1469	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1469	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1471	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
1471	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
1471	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
1472	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
1472	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1472	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1498	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-12.4
1498	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.4
1498	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	26.3	0.0	0.0	-112.4
1500	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1500	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1500	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1502	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
1502	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1502	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.3
1504	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1504	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1504	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1507	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1507	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1507	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1508	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
1508	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
1508	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
1517	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-12.3
1517	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.3
1517	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.2	0.0	0.0	-112.3
1520	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1520	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1520	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1522	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1522	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1522	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1524	536542.13	4816100.50	350.06	1	D	A	59.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
1524	536542.13	4816100.50	350.06	1	N	A	-40.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
1524	536542.13	4816100.50	350.06	1	E	A	-40.5	-0.5	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
1526	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
1526	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1526	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1531	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-12.4
1531	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-112.4
1531	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-112.4
1533	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1533	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1533	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1535	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1535	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1535	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1537	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1537	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1537	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1560	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-11.0
1560	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-111.0
1560	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-111.0
1563	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
1563	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1563	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1564	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
1564	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1564	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1567	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-12.9
1567	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-112.9
1567	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	49.7	0.4	-3.0	0.0	0.0	26.3	0.0	0.0	-112.9
1570	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1570	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1570	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1572	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1572	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1572	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1575	536546.27	4816101.98	349.91	1	D	A	59.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
1575	536546.27	4816101.98	349.91	1	N	A	-40.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
1575	536546.27	4816101.98	349.91	1	E	A	-40.5	-1.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
1576	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
1576	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1576	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1582	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-13.1
1582	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.1
1582	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.1
1584	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1584	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1584	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1587	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1587	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1587	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1590	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1590	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1590	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.0
1591	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
1591	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1591	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1593	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
1593	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1593	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1621	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-10.8
1621	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-110.8
1621	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-110.8
1625	536493.42	4816083.54	350.55	1	D	A	59.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
1625	536493.42	4816083.54	350.55	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1625	536493.42	4816083.54	350.55	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1627	536493.65	4816083.28	350.54	1	D	A	59.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
1627	536493.65	4816083.28	350.54	1	N	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1627	536493.65	4816083.28	350.54	1	E	A	-40.5	5.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1634	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-13.2
1634	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-113.2
1634	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	26.0	0.0	0.0	-113.2
1636	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
1636	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1636	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
1637	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
1637	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
1637	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
1638	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
1638	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1638	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1641	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
1641	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1641	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
1650	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-13.9
1650	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.9
1650	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-113.9
1651	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1651	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1651	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1653	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1653	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1653	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1655	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
1655	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1655	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1656	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
1656	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1656	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1658	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
1658	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1658	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1684	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-14.0
1684	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-114.0
1684	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	26.1	0.0	0.0	-114.0
1687	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1687	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
1687	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
1689	536534.74	4816103.25	350.40	1	D	A	59.5	-4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3
1689	536534.74	4816103.25	350.40	1	N	A	-40.5	-4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1689	536534.74	4816103.25	350.40	1	E	A	-40.5	-4.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1691	536533.96	4816103.22	350.40	1	D	A	59.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
1691	536533.96	4816103.22	350.40	1	N	A	-40.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1691	536533.96	4816103.22	350.40	1	E	A	-40.5	-2.9	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1693	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
1693	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1693	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1696	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
1696	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1696	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1700	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-14.3
1700	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.3
1700	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	50.1	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.3
1703	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1703	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1703	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1704	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1704	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1704	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1706	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1706	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1706	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1709	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
1709	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1709	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1710	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
1710	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1710	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1715	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-14.4
1715	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.4
1715	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	26.4	0.0	0.0	-114.4
1717	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
1717	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1717	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1719	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1719	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1719	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1720	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1720	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1720	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1721	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
1721	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1721	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1722	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
1722	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
1722	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
1749	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-12.9
1749	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-112.9
1749	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	24.5	0.0	0.0	-112.9
1753	536498.16	4816088.33	350.58	1	D	A	59.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
1753	536498.16	4816088.33	350.58	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1753	536498.16	4816088.33	350.58	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1754	536499.02	4816088.96	350.59	1	D	A	59.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
1754	536499.02	4816088.96	350.59	1	N	A	-40.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1754	536499.02	4816088.96	350.59	1	E	A	-40.5	-2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1755	536498.37	4816088.48	350.58	1	D	A	59.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1755	536498.37	4816088.48	350.58	1	N	A	-40.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1755	536498.37	4816088.48	350.58	1	E	A	-40.5	3.3	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
1800	536487.50	4816089.14	350.66	0	D	A	59.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-14.2
1800	536487.50	4816089.14	350.66	0	N	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.2
1800	536487.50	4816089.14	350.66	0	E	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.2
1802	536486.53	4816089.60	350.67	0	D	A	59.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-20.4
1802	536486.53	4816089.60	350.67	0	N	A	-40.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-120.4
1802	536486.53	4816089.60	350.67	0	E	A	-40.5	-3.8	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-120.4
1804	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
1804	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1804	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1807	536487.40	4816089.18	350.66	1	D	A	59.5	2.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
1807	536487.40	4816089.18	350.66	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1807	536487.40	4816089.18	350.66	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1810	536486.43	4816089.65	350.68	1	D	A	59.5	-6.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-35.9
1810	536486.43	4816089.65	350.68	1	N	A	-40.5	-6.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
1810	536486.43	4816089.65	350.68	1	E	A	-40.5	-6.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
1845	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.3
1845	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.3
1845	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.3
1848	536498.51	4816075.91	350.41	1	D	A	59.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
1848	536498.51	4816075.91	350.41	1	N	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
1848	536498.51	4816075.91	350.41	1	E	A	-40.5	2.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
1851	536491.19	4816088.40	350.63	0	D	A	59.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-16.0
1851	536491.19	4816088.40	350.63	0	N	A	-40.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-116.0
1851	536491.19	4816088.40	350.63	0	E	A	-40.5	0.4	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-116.0
1854	536490.26	4816088.43	350.64	0	D	A	59.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-17.7
1854	536490.26	4816088.43	350.64	0	N	A	-40.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-117.7
1854	536490.26	4816088.43	350.64	0	E	A	-40.5	-1.3	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-117.7
1857	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
1857	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1857	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1860	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
1860	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1860	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1875	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-16.4
1875	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.4
1875	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	26.9	0.0	0.0	-116.4
1878	536496.74	4816080.62	350.49	1	D	A	59.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
1878	536496.74	4816080.62	350.49	1	N	A	-40.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1878	536496.74	4816080.62	350.49	1	E	A	-40.5	2.4	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
1891	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-14.1
1891	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-114.1
1891	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-114.1
1894	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
1894	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1894	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1897	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
1897	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1897	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
1936	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-14.1
1936	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-114.1
1936	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.1	0.0	0.0	-114.1
1939	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
1939	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1939	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
1941	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
1941	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1941	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
1944	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-14.3
1944	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.3
1944	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.3
1947	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
1947	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
1947	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
1948	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
1948	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1948	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
1981	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-14.8
1981	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.8
1981	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	24.2	0.0	0.0	-114.8
1984	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
1984	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1984	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
1987	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
1987	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1987	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2040	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-15.0
2040	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-115.0
2040	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-115.0
2042	536496.29	4816082.00	350.51	1	D	A	59.5	0.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
2042	536496.29	4816082.00	350.51	1	N	A	-40.5	0.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2042	536496.29	4816082.00	350.51	1	E	A	-40.5	0.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2104	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-16.3
2104	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-116.3
2104	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.4	0.0	0.0	-116.3
2108	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2108	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2108	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2109	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2109	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2109	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2112	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-15.9
2112	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-115.9
2112	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-115.9
2116	536496.12	4816083.40	350.53	1	D	A	59.5	-5.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.2
2116	536496.12	4816083.40	350.53	1	N	A	-40.5	-5.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2116	536496.12	4816083.40	350.53	1	E	A	-40.5	-5.0	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.2
2118	536496.14	4816083.07	350.52	1	D	A	59.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2118	536496.14	4816083.07	350.52	1	N	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2118	536496.14	4816083.07	350.52	1	E	A	-40.5	-0.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2247	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-17.3
2247	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-117.3
2247	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	24.3	0.0	0.0	-117.3
2250	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
2250	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2250	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2253	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
2253	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
2253	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
623	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-3.6
623	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-191.6
623	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.9	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-191.6
625	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.8
625	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.8
625	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.8
628	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
628	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.5
628	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.5

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
654	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-3.8
654	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-191.8
654	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.3	0.0	0.0	-191.8
656	536871.56	4816492.87	346.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
656	536871.56	4816492.87	346.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1
656	536871.56	4816492.87	346.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
659	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-3.9
659	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-191.9
659	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.2	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-191.9
662	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.1
662	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1
662	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.1
663	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-7.9
663	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9
663	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-195.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
665	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-4.0
665	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
665	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.0
669	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
669	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
669	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
671	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
671	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0
671	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.5	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
674	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-4.1
674	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.1
674	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	64.3	1.3	-3.0	0.0	0.0	26.4	0.0	0.0	-192.1
675	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-8.2
675	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
675	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-196.2
678	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
678	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0
678	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	65.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-196.0

Point Source, ISO 9613, Name: "Sobeys - Compactor", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
754	536434.61	4816335.71	350.34	0	D	A	88.0	0.0	-7.8	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	26.6	0.0	0.0	-4.6
754	536434.61	4816335.71	350.34	0	N	A	88.0	0.0	-188.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	26.6	0.0	0.0	-184.8
754	536434.61	4816335.71	350.34	0	E	A	88.0	0.0	-188.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	26.6	0.0	0.0	-184.8

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
756	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-7.8
756	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-185.0
756	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	63.1	2.5	-3.0	0.0	0.0	27.5	0.0	0.0	-185.0
758	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.4
758	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.6
758	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	64.7	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.6
760	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.1
760	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.3
760	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	64.5	2.9	-3.0	0.0	0.0	28.0	0.0	1.0	-188.3

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
809	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.5	0.0	0.0	-9.4
809	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.5	0.0	0.0	-186.6
809	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	64.4	2.8	-3.0	0.0	0.0	27.5	0.0	0.0	-186.6

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
812	536728.99	4815966.55	344.26	0	D	A	62.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.1	0.0	0.0	2.4
812	536728.99	4815966.55	344.26	0	N	A	-40.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.1	0.0	0.0	-100.6
812	536728.99	4815966.55	344.26	0	E	A	-40.5	11.0	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	17.1	0.0	0.0	-100.6
816	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	13.5
816	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-89.5
816	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-89.5
891	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	10.9
891	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-92.1
891	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	57.0	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-92.1
895	536751.17	4815961.31	343.93	1	D	A	62.5	1.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-15.7
895	536751.17	4815961.31	343.93	1	N	A	-40.5	1.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-118.7
895	536751.17	4815961.31	343.93	1	E	A	-40.5	1.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-118.7
897	536752.75	4815960.60	343.91	1	D	A	62.5	2.8	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-14.7
897	536752.75	4815960.60	343.91	1	N	A	-40.5	2.8	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-117.7
897	536752.75	4815960.60	343.91	1	E	A	-40.5	2.8	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.2	-117.7
899	536753.58	4815960.23	343.89	1	D	A	62.5	0.1	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-6.3
899	536753.58	4815960.23	343.89	1	N	A	-40.5	0.1	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-109.3
899	536753.58	4815960.23	343.89	1	E	A	-40.5	0.1	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-109.3
901	536754.86	4815959.66	343.87	1	D	A	62.5	2.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	3.8
901	536754.86	4815959.66	343.87	1	N	A	-40.5	2.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-99.2
901	536754.86	4815959.66	343.87	1	E	A	-40.5	2.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-99.2
903	536757.57	4815958.44	343.83	1	D	A	62.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	7.6
903	536757.57	4815958.44	343.83	1	N	A	-40.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.4

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
903	536757.57	4815958.44	343.83	1	E	A	-40.5	6.2	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.4
905	536749.36	4815962.12	343.96	1	D	A	62.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	2.4
905	536749.36	4815962.12	343.96	1	N	A	-40.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-100.7
905	536749.36	4815962.12	343.96	1	E	A	-40.5	-1.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-100.7
1084	536754.68	4815978.41	343.91	0	D	A	62.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	11.1
1084	536754.68	4815978.41	343.91	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.9
1084	536754.68	4815978.41	343.91	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.9
1087	536753.37	4815977.71	343.94	0	D	A	62.5	0.0	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	8.2
1087	536753.37	4815977.71	343.94	0	N	A	-40.5	0.0	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-94.8
1087	536753.37	4815977.71	343.94	0	E	A	-40.5	0.0	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-94.8
1088	536751.82	4815976.88	343.96	0	D	A	62.5	4.0	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	8.0
1088	536751.82	4815976.88	343.96	0	N	A	-40.5	4.0	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	-95.0
1088	536751.82	4815976.88	343.96	0	E	A	-40.5	4.0	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	4.1	0.0	0.0	-95.0
1090	536749.86	4815975.83	344.00	0	D	A	62.5	2.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.4	0.0	0.0	2.7
1090	536749.86	4815975.83	344.00	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.4	0.0	0.0	-100.3
1090	536749.86	4815975.83	344.00	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	8.4	0.0	0.0	-100.3
1116	536729.41	4815967.77	344.26	0	D	A	62.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	18.1	0.0	0.0	-1.4
1116	536729.41	4815967.77	344.26	0	N	A	-40.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	18.1	0.0	0.0	-104.4
1116	536729.41	4815967.77	344.26	0	E	A	-40.5	8.1	0.0	0.0	0.0	56.0	0.9	-2.9	0.0	0.0	18.1	0.0	0.0	-104.4
1117	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	10.6
1117	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-92.4
1117	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-92.4
1140	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	16.2
1140	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	-86.8
1140	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	57.1	1.0	-2.9	0.0	0.0	0.0	0.0	0.0	-86.8
1143	536753.71	4815959.35	343.88	1	D	A	62.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-22.6
1143	536753.71	4815959.35	343.88	1	N	A	-40.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-125.6
1143	536753.71	4815959.35	343.88	1	E	A	-40.5	-5.2	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-125.6
1144	536757.69	4815958.02	343.82	1	D	A	62.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	7.3
1144	536757.69	4815958.02	343.82	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.7
1144	536757.69	4815958.02	343.82	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-95.7
1146	536754.71	4815959.01	343.87	1	D	A	62.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	5.2
1146	536754.71	4815959.01	343.87	1	N	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.8
1146	536754.71	4815959.01	343.87	1	E	A	-40.5	3.8	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	4.2	-97.8
1259	536741.39	4815963.05	344.05	0	D	A	62.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	5.4
1259	536741.39	4815963.05	344.05	0	N	A	-40.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	-97.6
1259	536741.39	4815963.05	344.05	0	E	A	-40.5	7.4	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	-97.6
1262	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	10.7
1262	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.3
1262	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.3
1293	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	6.9
1293	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	-96.1
1293	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.2	0.0	0.0	-96.1
1295	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	10.7
1295	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.3
1295	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-92.3
1319	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	1.4
1319	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	-101.7
1319	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.6	0.0	0.0	-101.7
1322	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	9.4
1322	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-93.6
1322	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-93.6
1435	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	6.5
1435	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-96.6
1435	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	56.9	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-96.6
1436	536752.20	4815959.81	343.90	1	D	A	62.5	4.5	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-12.9
1436	536752.20	4815959.81	343.90	1	N	A	-40.5	4.5	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-115.9
1436	536752.20	4815959.81	343.90	1	E	A	-40.5	4.5	0.0	0.0	0.0	58.6	1.1	-2.9	0.0	0.0	0.0	0.0	23.1	-115.9
1437	536753.48	4815959.42	343.88	1	D	A	62.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-14.0
1437	536753.48	4815959.42	343.88	1	N	A	-40.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-117.0
1437	536753.48	4815959.42	343.88	1	E	A	-40.5	-7.6	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	7.7	0.0	4.2	-117.0
1438	536749.69	4815960.57	343.94	1	D	A	62.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	3.4
1438	536749.69	4815960.57	343.94	1	N	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-99.6

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1438	536749.69	4815960.57	343.94	1	E	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-99.6
1473	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.4	0.0	0.0	1.7
1473	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.4	0.0	0.0	-101.3
1473	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.4	0.0	0.0	-101.3
1474	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	8.6
1474	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	-94.4
1474	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.6	-94.4
1477	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	13.9
1477	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-89.1
1477	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-89.1
1479	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	55.8	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-6.7
1479	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	55.8	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-109.7
1479	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	55.8	0.8	-2.9	0.0	0.0	20.5	0.0	0.0	-109.7
1481	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	59.2	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	7.5
1481	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	59.2	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-95.5
1481	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	59.2	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-95.5
1483	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.7	0.0	0.0	4.0
1483	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.7	0.0	0.0	-99.0
1483	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.7	0.0	0.0	-99.0
1486	536748.01	4815967.04	344.02	1	D	A	62.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-0.1
1486	536748.01	4815967.04	344.02	1	N	A	-40.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-103.1
1486	536748.01	4815967.04	344.02	1	E	A	-40.5	-3.3	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-103.1
1487	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.8	0.0	0.0	2.9
1487	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.8	0.0	0.0	-100.1
1487	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.8	0.0	0.0	-100.1
1488	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	8.8
1488	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-94.2
1488	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-94.2
1511	536753.07	4815968.14	343.97	0	D	A	62.5	5.1	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	5.3
1511	536753.07	4815968.14	343.97	0	N	A	-40.5	5.1	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-97.8
1511	536753.07	4815968.14	343.97	0	E	A	-40.5	5.1	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	7.7	0.0	0.0	-97.8
1512	536754.88	4815968.80	343.96	0	D	A	62.5	-2.2	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	5.6	0.0	0.0	0.0
1512	536754.88	4815968.80	343.96	0	N	A	-40.5	-2.2	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	5.6	0.0	0.0	-103.0
1512	536754.88	4815968.80	343.96	0	E	A	-40.5	-2.2	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	5.6	0.0	0.0	-103.0
1596	536755.99	4815969.33	343.95	0	D	A	62.5	2.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.7	0.0	0.0	6.8
1596	536755.99	4815969.33	343.95	0	N	A	-40.5	2.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.7	0.0	0.0	-96.2
1596	536755.99	4815969.33	343.95	0	E	A	-40.5	2.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	3.7	0.0	0.0	-96.2
1597	536757.49	4815970.09	343.93	0	D	A	62.5	1.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	9.5
1597	536757.49	4815970.09	343.93	0	N	A	-40.5	1.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-93.5
1597	536757.49	4815970.09	343.93	0	E	A	-40.5	1.7	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-93.5
1646	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.5	0.0	0.0	-2.0
1646	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.5	0.0	0.0	-105.0
1646	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	14.5	0.0	0.0	-105.0
1648	536745.90	4815972.67	344.08	1	D	A	62.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.8
1648	536745.90	4815972.67	344.08	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.2
1648	536745.90	4815972.67	344.08	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.2
1659	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.5	0.0	0.0	0.7
1659	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.5	0.0	0.0	-102.3
1659	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	11.5	0.0	0.0	-102.3
1661	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	7.2
1661	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	-95.8
1661	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.2	-95.8
1667	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	12.0
1667	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.1
1667	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-91.1
1670	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.1	0.0	0.0	-0.2
1670	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.1	0.0	0.0	-103.2
1670	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	12.1	0.0	0.0	-103.2
1756	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.5	0.0	0.0	2.8
1756	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.5	0.0	0.0	-100.2
1756	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	56.7	0.9	-2.9	0.0	0.0	8.5	0.0	0.0	-100.2
1758	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	6.8
1758	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-96.2

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1758	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-96.2
1765	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.9	0.0	0.0	-4.7
1765	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.9	0.0	0.0	-107.7
1765	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	56.1	0.9	-2.9	0.0	0.0	15.9	0.0	0.0	-107.7
1768	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	5.4
1768	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.6
1768	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.6
1775	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.6	0.0	0.0	-0.7
1775	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.6	0.0	0.0	-103.7
1775	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	11.6	0.0	0.0	-103.7
1776	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	6.0
1776	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.0
1776	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.0
1797	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.9	0.0	0.0	-3.2
1797	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.9	0.0	0.0	-106.2
1797	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	56.3	0.9	-2.9	0.0	0.0	13.9	0.0	0.0	-106.2
1798	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	5.1
1798	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.9
1798	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	59.1	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-97.9
1841	536758.98	4815970.84	343.92	0	D	A	62.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	10.4
1841	536758.98	4815970.84	343.92	0	N	A	-40.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.6
1841	536758.98	4815970.84	343.92	0	E	A	-40.5	2.7	0.0	0.0	0.0	56.8	0.9	-2.9	0.0	0.0	0.0	0.0	0.0	-92.6
1881	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	0.1
1881	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	-102.9
1881	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	56.5	0.9	-2.9	0.0	0.0	10.1	0.0	0.0	-102.9
1884	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	5.4
1884	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.6
1884	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	58.9	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.6
1900	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	15.1	0.0	0.0	-5.1
1900	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	15.1	0.0	0.0	-108.1
1900	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	56.2	0.9	-2.9	0.0	0.0	15.1	0.0	0.0	-108.1
1903	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.2
1903	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.8
1903	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.8
1906	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.3	0.0	0.0	-2.4
1906	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.3	0.0	0.0	-105.4
1906	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	12.3	0.0	0.0	-105.4
1908	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.5
1908	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
1908	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
1916	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	13.0	0.0	0.0	-3.1
1916	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	13.0	0.0	0.0	-106.1
1916	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	56.4	0.9	-2.9	0.0	0.0	13.0	0.0	0.0	-106.1
1918	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	4.4
1918	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
1918	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	59.0	1.2	-2.9	0.0	0.0	0.0	0.0	2.6	-98.6
1920	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.1	0.0	0.0	0.8
1920	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.1	0.0	0.0	-102.3
1920	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	56.6	0.9	-2.9	0.0	0.0	9.1	0.0	0.0	-102.3
1921	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	5.2
1921	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.8
1921	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	58.8	1.1	-2.9	0.0	0.0	0.0	0.0	2.2	-97.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
819	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-7.6
819	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-110.6
819	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	26.5	0.0	0.0	-110.6
825	536415.57	4816238.21	352.92	1	D	A	62.5	13.5	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-11.5
825	536415.57	4816238.21	352.92	1	N	A	-40.5	13.5	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
825	536415.57	4816238.21	352.92	1	E	A	-40.5	13.5	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-114.5
971	536365.14	4816214.12	354.64	0	D	A	62.5	10.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-11.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
971	536365.14	4816214.12	354.64	0	N	A	-40.5	10.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-114.9
971	536365.14	4816214.12	354.64	0	E	A	-40.5	10.9	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-114.9
973	536355.19	4816209.36	354.81	0	D	A	62.5	9.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-13.1
973	536355.19	4816209.36	354.81	0	N	A	-40.5	9.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-116.1
973	536355.19	4816209.36	354.81	0	E	A	-40.5	9.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-116.1
975	536350.68	4816207.21	354.89	0	D	A	62.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-27.8
975	536350.68	4816207.21	354.89	0	N	A	-40.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-130.8
975	536350.68	4816207.21	354.89	0	E	A	-40.5	-4.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-130.8
977	536354.25	4816208.91	354.83	1	D	A	62.5	9.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
977	536354.25	4816208.91	354.83	1	N	A	-40.5	9.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
977	536354.25	4816208.91	354.83	1	E	A	-40.5	9.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
998	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-9.6
998	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-112.6
998	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-112.6
1000	536362.80	4816207.33	354.67	1	D	A	62.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
1000	536362.80	4816207.33	354.67	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1000	536362.80	4816207.33	354.67	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1077	536436.24	4816248.09	352.25	0	D	A	62.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-9.4
1077	536436.24	4816248.09	352.25	0	N	A	-40.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-112.4
1077	536436.24	4816248.09	352.25	0	E	A	-40.5	11.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-112.4
1081	536433.88	4816246.96	352.31	1	D	A	62.5	8.8	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
1081	536433.88	4816246.96	352.31	1	N	A	-40.5	8.8	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1081	536433.88	4816246.96	352.31	1	E	A	-40.5	8.8	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1121	536382.11	4816216.66	354.24	0	D	A	62.5	4.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.2
1121	536382.11	4816216.66	354.24	0	N	A	-40.5	4.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.2
1121	536382.11	4816216.66	354.24	0	E	A	-40.5	4.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.2
1125	536388.62	4816219.93	353.93	0	D	A	62.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-11.5
1125	536388.62	4816219.93	353.93	0	N	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.5
1125	536388.62	4816219.93	353.93	0	E	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.5
1133	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-9.4
1133	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-112.4
1133	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-112.4
1148	536387.50	4816224.80	354.12	0	D	A	62.5	11.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-11.2
1148	536387.50	4816224.80	354.12	0	N	A	-40.5	11.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.3
1148	536387.50	4816224.80	354.12	0	E	A	-40.5	11.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-114.3
1150	536392.70	4816227.29	353.87	1	D	A	62.5	1.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
1150	536392.70	4816227.29	353.87	1	N	A	-40.5	1.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1150	536392.70	4816227.29	353.87	1	E	A	-40.5	1.1	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1201	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-10.7
1201	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-113.7
1201	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-113.7
1203	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
1203	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1203	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1231	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	25.9	0.0	0.0	-10.4
1231	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	25.9	0.0	0.0	-113.4
1231	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	25.9	0.0	0.0	-113.4
1274	536427.65	4816264.74	352.96	0	D	A	62.5	9.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-11.6
1274	536427.65	4816264.74	352.96	0	N	A	-40.5	9.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-114.6
1274	536427.65	4816264.74	352.96	0	E	A	-40.5	9.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.1	0.0	0.0	-114.6
1277	536432.06	4816267.06	352.80	0	D	A	62.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-19.0
1277	536432.06	4816267.06	352.80	0	N	A	-40.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.0
1277	536432.06	4816267.06	352.80	0	E	A	-40.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.0
1285	536448.74	4816254.07	351.95	0	D	A	62.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-18.3
1285	536448.74	4816254.07	351.95	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-121.3
1285	536448.74	4816254.07	351.95	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-121.3
1290	536445.78	4816252.65	352.02	0	D	A	62.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-13.1
1290	536445.78	4816252.65	352.02	0	N	A	-40.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-116.1
1290	536445.78	4816252.65	352.02	0	E	A	-40.5	7.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-116.1
1292	536442.75	4816251.20	352.09	0	D	A	62.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-18.1
1292	536442.75	4816251.20	352.09	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-121.1
1292	536442.75	4816251.20	352.09	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-121.1
1299	536397.83	4816229.74	353.61	0	D	A	62.5	9.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-11.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1299	536397.83	4816229.74	353.61	0	N	A	-40.5	9.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-114.7
1299	536397.83	4816229.74	353.61	0	E	A	-40.5	9.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-114.7
1303	536393.38	4816227.61	353.83	0	D	A	62.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-28.4
1303	536393.38	4816227.61	353.83	0	N	A	-40.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-131.4
1303	536393.38	4816227.61	353.83	0	E	A	-40.5	-6.2	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	27.0	0.0	0.0	-131.4
1307	536400.52	4816231.02	353.48	1	D	A	62.5	5.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1307	536400.52	4816231.02	353.48	1	N	A	-40.5	5.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1307	536400.52	4816231.02	353.48	1	E	A	-40.5	5.6	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1308	536396.07	4816228.90	353.70	1	D	A	62.5	7.9	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1308	536396.07	4816228.90	353.70	1	N	A	-40.5	7.9	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1308	536396.07	4816228.90	353.70	1	E	A	-40.5	7.9	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1315	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-10.1
1315	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-113.1
1315	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-113.1
1357	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-10.4
1357	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-113.5
1357	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-113.5
1388	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-10.5
1388	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-113.5
1388	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.0	0.0	0.0	-113.5
1434	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-11.0
1434	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-114.0
1434	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-114.0
1455	536452.77	4816276.74	351.89	0	D	A	62.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-11.7
1455	536452.77	4816276.74	351.89	0	N	A	-40.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-114.7
1455	536452.77	4816276.74	351.89	0	E	A	-40.5	8.2	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-114.7
1458	536456.12	4816277.77	351.72	0	D	A	62.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-23.8
1458	536456.12	4816277.77	351.72	0	N	A	-40.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-126.8
1458	536456.12	4816277.77	351.72	0	E	A	-40.5	-4.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-126.8
1492	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-12.6
1492	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-115.6
1492	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.2	0.0	0.0	-115.6
1541	536344.98	4816204.48	354.93	0	D	A	62.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-15.2
1541	536344.98	4816204.48	354.93	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-118.2
1541	536344.98	4816204.48	354.93	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-118.2
1545	536340.77	4816202.47	354.98	0	D	A	62.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-17.8
1545	536340.77	4816202.47	354.98	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
1545	536340.77	4816202.47	354.98	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
1547	536343.84	4816203.94	354.95	1	D	A	62.5	9.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
1547	536343.84	4816203.94	354.95	1	N	A	-40.5	9.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1547	536343.84	4816203.94	354.95	1	E	A	-40.5	9.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1550	536339.63	4816201.92	355.00	1	D	A	62.5	-1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
1550	536339.63	4816201.92	355.00	1	N	A	-40.5	-1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
1550	536339.63	4816201.92	355.00	1	E	A	-40.5	-1.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
1556	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-11.8
1556	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-114.8
1556	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.1	0.0	0.0	-114.8
1602	536347.21	4816199.92	354.88	0	D	A	62.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-16.3
1602	536347.21	4816199.92	354.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-119.4
1602	536347.21	4816199.92	354.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.6	0.0	0.0	-119.4
1604	536350.72	4816201.58	354.84	0	D	A	62.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-17.7
1604	536350.72	4816201.58	354.84	0	N	A	-40.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.7
1604	536350.72	4816201.58	354.84	0	E	A	-40.5	5.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-120.7
1606	536346.94	4816199.79	354.88	1	D	A	62.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
1606	536346.94	4816199.79	354.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1606	536346.94	4816199.79	354.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1607	536350.46	4816201.45	354.84	1	D	A	62.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
1607	536350.46	4816201.45	354.84	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1607	536350.46	4816201.45	354.84	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1614	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-13.7
1614	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-116.7
1614	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-116.7
1616	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1616	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1616	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
1631	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-12.3
1631	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-115.3
1631	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-115.3
1645	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-12.5
1645	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-115.5
1645	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	25.0	0.0	0.0	-115.5
1664	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-15.1
1664	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-118.1
1664	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-118.1
1676	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-13.1
1676	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-116.2
1676	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-116.2
1725	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-13.5
1725	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-116.5
1725	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-116.5
1726	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-13.6
1726	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-116.6
1726	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-116.6
1732	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-15.6
1732	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
1732	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-118.6
1738	536356.11	4816204.13	354.78	0	D	A	62.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-17.6
1738	536356.11	4816204.13	354.78	0	N	A	-40.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-120.6
1738	536356.11	4816204.13	354.78	0	E	A	-40.5	5.3	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-120.6
1742	536358.48	4816205.25	354.74	0	D	A	62.5	2.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-20.1
1742	536358.48	4816205.25	354.74	0	N	A	-40.5	2.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
1742	536358.48	4816205.25	354.74	0	E	A	-40.5	2.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
1744	536355.17	4816203.68	354.80	1	D	A	62.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
1744	536355.17	4816203.68	354.80	1	N	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
1744	536355.17	4816203.68	354.80	1	E	A	-40.5	1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
1746	536357.53	4816204.80	354.76	1	D	A	62.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1746	536357.53	4816204.80	354.76	1	N	A	-40.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1746	536357.53	4816204.80	354.76	1	E	A	-40.5	6.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1762	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-16.0
1762	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.0
1762	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-119.0
1772	536449.63	4816310.01	351.46	0	D	A	62.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-14.0
1772	536449.63	4816310.01	351.46	0	N	A	-40.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.0
1772	536449.63	4816310.01	351.46	0	E	A	-40.5	6.2	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.0
1778	536449.90	4816310.20	351.45	0	D	A	62.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-14.1
1778	536449.90	4816310.20	351.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.1
1778	536449.90	4816310.20	351.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-117.1
1781	536468.03	4816272.53	351.38	0	D	A	62.5	4.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-14.5
1781	536468.03	4816272.53	351.38	0	N	A	-40.5	4.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-117.5
1781	536468.03	4816272.53	351.38	0	E	A	-40.5	4.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-117.5
1784	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-14.4
1784	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-117.4
1784	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-117.4
1788	536447.09	4816274.68	352.20	0	D	A	62.5	0.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-19.7
1788	536447.09	4816274.68	352.20	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-122.7
1788	536447.09	4816274.68	352.20	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-122.7
1790	536448.61	4816275.34	352.11	0	D	A	62.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-16.7
1790	536448.61	4816275.34	352.11	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-119.7
1790	536448.61	4816275.34	352.11	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-119.7
1793	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-15.8
1793	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-118.8
1793	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-118.8
1794	536403.80	4816232.59	353.33	1	D	A	62.5	5.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1794	536403.80	4816232.59	353.33	1	N	A	-40.5	5.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1794	536403.80	4816232.59	353.33	1	E	A	-40.5	5.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1811	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-15.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1811	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-118.8
1811	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-118.8
1813	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1813	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1813	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1834	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-14.8
1834	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-117.8
1834	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-117.8
1838	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-15.3
1838	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-118.3
1838	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-118.3
1864	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-15.2
1864	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-118.2
1864	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-118.2
1888	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-15.3
1888	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-118.3
1888	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-118.3
1911	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-16.7
1911	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-119.7
1911	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-119.7
1914	536404.33	4816229.46	353.24	1	D	A	62.5	4.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
1914	536404.33	4816229.46	353.24	1	N	A	-40.5	4.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1914	536404.33	4816229.46	353.24	1	E	A	-40.5	4.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1925	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-15.7
1925	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-118.7
1925	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.4	0.0	0.0	-118.7
1929	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-16.9
1929	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-119.9
1929	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-119.9
1932	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1932	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1932	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1964	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-16.0
1964	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-119.0
1964	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	25.6	0.0	0.0	-119.0
1967	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-16.4
1967	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-119.4
1967	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-119.4
1970	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-17.4
1970	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-120.4
1970	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	26.5	0.0	0.0	-120.4
1971	536343.73	4816197.95	354.92	1	D	A	62.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1971	536343.73	4816197.95	354.92	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1971	536343.73	4816197.95	354.92	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1973	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-16.8
1973	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-119.9
1973	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-119.9
1977	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-17.4
1977	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-120.5
1977	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-120.5
1978	536400.70	4816226.18	353.36	1	D	A	62.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
1978	536400.70	4816226.18	353.36	1	N	A	-40.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1978	536400.70	4816226.18	353.36	1	E	A	-40.5	3.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1991	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-18.0
1991	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.0
1991	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	26.7	0.0	0.0	-121.0
1994	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
1994	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1994	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1999	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-17.2
1999	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-120.2
1999	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-120.2
2002	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-17.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2002	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-120.4
2002	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-120.4
2006	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-17.8
2006	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
2006	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
2009	536402.65	4816227.52	353.28	1	D	A	62.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
2009	536402.65	4816227.52	353.28	1	N	A	-40.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2009	536402.65	4816227.52	353.28	1	E	A	-40.5	3.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2013	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-16.3
2013	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.3
2013	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.3
2024	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-18.0
2024	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.0
2024	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.0
2025	536405.48	4816237.96	353.37	1	D	A	62.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
2025	536405.48	4816237.96	353.37	1	N	A	-40.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2025	536405.48	4816237.96	353.37	1	E	A	-40.5	3.4	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2036	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-16.5
2036	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.5
2036	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.5
2045	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-18.0
2045	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.0
2045	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.0
2048	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
2048	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2048	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2051	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-16.5
2051	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.6
2051	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-119.6
2055	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-18.8
2055	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.8
2055	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-121.8
2060	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-18.7
2060	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
2060	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-121.7
2061	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
2061	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2061	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2065	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-18.4
2065	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.4
2065	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.4
2067	536405.48	4816231.60	353.22	1	D	A	62.5	2.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.3
2067	536405.48	4816231.60	353.22	1	N	A	-40.5	2.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
2067	536405.48	4816231.60	353.22	1	E	A	-40.5	2.9	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
2071	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-18.3
2071	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.3
2071	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.3
2074	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
2074	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2074	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2089	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-17.8
2089	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-120.8
2089	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.8	0.0	0.0	-120.8
2093	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-18.7
2093	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.7
2093	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-121.7
2096	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
2096	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
2096	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
2101	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-17.2
2101	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-120.2
2101	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	24.8	0.0	0.0	-120.2
2145	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-18.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2145	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.9
2145	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-121.9
2148	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
2148	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2148	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	60.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2153	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-19.2
2153	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-122.2
2153	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-122.2
2156	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2156	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2156	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2176	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-18.2
2176	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-121.2
2176	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-121.2
2188	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-18.4
2188	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-121.4
2188	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-121.4
2193	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-19.1
2193	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-122.2
2193	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.2	0.0	0.0	-122.2
2206	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-19.1
2206	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-122.1
2206	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-122.1
2210	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-19.0
2210	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-122.0
2210	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	25.9	0.0	0.0	-122.0
2215	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-20.3
2215	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-123.3
2215	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-123.3
2218	536398.99	4816225.19	353.43	1	D	A	62.5	1.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
2218	536398.99	4816225.19	353.43	1	N	A	-40.5	1.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2218	536398.99	4816225.19	353.43	1	E	A	-40.5	1.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2235	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-18.5
2235	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-121.5
2235	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-121.5
2258	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-18.6
2258	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-121.7
2258	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-121.7
2278	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-19.6
2278	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.6
2278	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.6
2291	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-19.8
2291	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-122.8
2291	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	26.2	0.0	0.0	-122.8
2297	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-20.0
2297	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-123.0
2297	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-123.0
2300	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
2300	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2300	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2360	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-20.2
2360	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-123.2
2360	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-123.2
2408	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-21.2
2408	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
2408	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-124.2
2417	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-20.7
2417	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-123.7
2417	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-123.7
2420	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
2420	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2420	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2423	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-19.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2423	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-122.5
2423	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	25.3	0.0	0.0	-122.5
2443	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-20.7
2443	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-123.7
2443	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-123.7
2445	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
2445	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2445	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2462	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-20.8
2462	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-123.8
2462	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-123.8
2465	536415.52	4816258.17	353.39	1	D	A	62.5	-1.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
2465	536415.52	4816258.17	353.39	1	N	A	-40.5	-1.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2465	536415.52	4816258.17	353.39	1	E	A	-40.5	-1.3	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
2501	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-20.7
2501	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
2501	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
2513	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-21.8
2513	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.8
2513	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-124.8
2570	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-21.2
2570	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.2
2570	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.2
2589	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-21.1
2589	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-124.1
2589	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	25.7	0.0	0.0	-124.1
3111	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-24.8
3111	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-127.8
3111	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	26.3	0.0	0.0	-127.8
3215	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-26.1
3215	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.1
3215	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.1
3315	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-26.6
3315	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
3315	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-129.6
3690	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-26.8
3690	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3690	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3693	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-26.9
3693	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3693	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3702	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-26.9
3702	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3702	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3705	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-26.9
3705	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3705	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-129.9
3740	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-27.1
3740	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.2
3740	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.2
3756	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-27.3
3756	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.3
3756	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.3
3773	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-27.4
3773	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.4
3773	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.4
3776	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-27.4
3776	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.5
3776	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-130.5
3895	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-31.7
3895	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-134.7
3895	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-134.7
3913	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-32.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3913	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-135.3
3913	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	27.1	0.0	0.0	-135.3
3920	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-31.2
3920	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-134.2
3920	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-134.2
3923	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-31.4
3923	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-134.4
3923	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	25.2	0.0	0.0	-134.4
3939	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-35.7
3939	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-138.7
3939	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	24.9	0.0	0.0	-138.7

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
910	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-10.2
910	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-187.4
910	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	65.3	3.1	-3.0	0.0	0.0	27.1	0.0	0.0	-187.4
913	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-13.9
913	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1
913	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	66.7	3.5	-3.0	0.0	0.0	28.0	0.0	1.0	-191.1

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1729	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-23.2
1729	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-26.2
1729	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	26.0	0.0	0.0	-23.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1818	536791.45	4816508.05	341.02	0	D	A	59.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-19.1
1818	536791.45	4816508.05	341.02	0	N	A	-40.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-119.1
1818	536791.45	4816508.05	341.02	0	E	A	-40.5	11.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-119.1
1822	536795.43	4816499.26	341.11	0	D	A	59.5	7.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-23.1
1822	536795.43	4816499.26	341.11	0	N	A	-40.5	7.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
1822	536795.43	4816499.26	341.11	0	E	A	-40.5	7.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-123.1
1825	536789.70	4816511.89	340.98	1	D	A	59.5	7.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
1825	536789.70	4816511.89	340.98	1	N	A	-40.5	7.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1825	536789.70	4816511.89	340.98	1	E	A	-40.5	7.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1827	536792.26	4816506.25	341.04	1	D	A	59.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
1827	536792.26	4816506.25	341.04	1	N	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1827	536792.26	4816506.25	341.04	1	E	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
1830	536795.11	4816499.97	341.11	1	D	A	59.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
1830	536795.11	4816499.97	341.11	1	N	A	-40.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1830	536795.11	4816499.97	341.11	1	E	A	-40.5	8.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
2018	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-19.9
2018	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-119.9
2018	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	27.4	0.0	0.0	-119.9
2019	536835.24	4816629.56	340.17	1	D	A	59.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2019	536835.24	4816629.56	340.17	1	N	A	-40.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2019	536835.24	4816629.56	340.17	1	E	A	-40.5	10.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2021	536825.78	4816625.19	340.26	1	D	A	59.5	10.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2021	536825.78	4816625.19	340.26	1	N	A	-40.5	10.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2021	536825.78	4816625.19	340.26	1	E	A	-40.5	10.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.7
2029	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-19.1
2029	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
2029	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-119.1
2030	536907.16	4816461.73	340.40	1	D	A	59.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
2030	536907.16	4816461.73	340.40	1	N	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2030	536907.16	4816461.73	340.40	1	E	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2032	536913.12	4816464.83	340.40	1	D	A	59.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2032	536913.12	4816464.83	340.40	1	N	A	-40.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2032	536913.12	4816464.83	340.40	1	E	A	-40.5	8.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2079	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-19.6
2079	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-119.6
2079	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-119.6
2081	536891.26	4816453.63	340.74	1	D	A	59.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
2081	536891.26	4816453.63	340.74	1	N	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2081	536891.26	4816453.63	340.74	1	E	A	-40.5	9.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2084	536896.31	4816456.12	340.61	1	D	A	59.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
2084	536896.31	4816456.12	340.61	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
2084	536896.31	4816456.12	340.61	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
2123	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-20.5
2123	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-120.5
2123	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-120.5
2126	536783.44	4816525.69	341.03	1	D	A	59.5	10.3	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
2126	536783.44	4816525.69	341.03	1	N	A	-40.5	10.3	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2126	536783.44	4816525.69	341.03	1	E	A	-40.5	10.3	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2131	536806.73	4816467.88	341.19	0	D	A	59.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-20.3
2131	536806.73	4816467.88	341.19	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-120.3
2131	536806.73	4816467.88	341.19	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-120.3
2136	536807.64	4816463.63	341.19	0	D	A	59.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-48.8
2136	536807.64	4816463.63	341.19	0	N	A	-40.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-148.8
2136	536807.64	4816463.63	341.19	0	E	A	-40.5	-19.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-148.8
2139	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2139	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2139	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2141	536806.73	4816467.88	341.19	1	D	A	59.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2141	536806.73	4816467.88	341.19	1	N	A	-40.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2141	536806.73	4816467.88	341.19	1	E	A	-40.5	9.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2160	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-21.1
2160	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-121.1
2160	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-121.1
2163	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-20.5
2163	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-120.5
2163	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	26.9	0.0	0.0	-120.5
2165	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
2165	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2165	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2170	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-21.4
2170	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
2170	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-121.4
2172	536846.85	4816634.93	340.08	1	D	A	59.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
2172	536846.85	4816634.93	340.08	1	N	A	-40.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2172	536846.85	4816634.93	340.08	1	E	A	-40.5	11.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2223	536917.59	4816467.15	340.40	0	D	A	59.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-26.2
2223	536917.59	4816467.15	340.40	0	N	A	-40.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-126.2
2223	536917.59	4816467.15	340.40	0	E	A	-40.5	4.3	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	26.7	0.0	0.0	-126.2
2227	536921.81	4816469.34	340.40	0	D	A	59.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-22.2
2227	536921.81	4816469.34	340.40	0	N	A	-40.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.2
2227	536921.81	4816469.34	340.40	0	E	A	-40.5	8.3	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-122.2
2230	536920.63	4816468.73	340.40	1	D	A	59.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
2230	536920.63	4816468.73	340.40	1	N	A	-40.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2230	536920.63	4816468.73	340.40	1	E	A	-40.5	9.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2239	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-21.1
2239	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-121.1
2239	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-121.1
2242	536818.68	4816440.93	341.55	1	D	A	59.5	8.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
2242	536818.68	4816440.93	341.55	1	N	A	-40.5	8.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2242	536818.68	4816440.93	341.55	1	E	A	-40.5	8.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2263	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-21.2
2263	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-121.2
2263	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	26.8	0.0	0.0	-121.2
2265	536900.91	4816458.49	340.49	1	D	A	59.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2265	536900.91	4816458.49	340.49	1	N	A	-40.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
2265	536900.91	4816458.49	340.49	1	E	A	-40.5	9.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
2284	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	25.9	0.0	0.0	-20.6
2284	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	25.9	0.0	0.0	-120.6
2284	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	25.9	0.0	0.0	-120.6
2286	536988.75	4816484.61	339.64	1	D	A	59.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
2286	536988.75	4816484.61	339.64	1	N	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
2286	536988.75	4816484.61	339.64	1	E	A	-40.5	4.1	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
2287	536994.22	4816485.29	339.56	1	D	A	59.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
2287	536994.22	4816485.29	339.56	1	N	A	-40.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2287	536994.22	4816485.29	339.56	1	E	A	-40.5	9.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2305	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-21.3
2305	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
2305	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-121.3
2308	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
2308	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2308	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
2314	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-21.6
2314	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.6
2314	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-121.6
2317	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2317	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2317	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2328	536809.84	4816456.23	341.21	0	D	A	59.5	2.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.4
2328	536809.84	4816456.23	341.21	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
2328	536809.84	4816456.23	341.21	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
2333	536810.89	4816453.47	341.27	0	D	A	59.5	6.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-23.0
2333	536810.89	4816453.47	341.27	0	N	A	-40.5	6.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2333	536810.89	4816453.47	341.27	0	E	A	-40.5	6.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2336	536809.82	4816456.26	341.21	1	D	A	59.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
2336	536809.82	4816456.26	341.21	1	N	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
2336	536809.82	4816456.26	341.21	1	E	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
2339	536810.88	4816453.50	341.27	1	D	A	59.5	6.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2339	536810.88	4816453.50	341.27	1	N	A	-40.5	6.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2339	536810.88	4816453.50	341.27	1	E	A	-40.5	6.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2342	536809.78	4816456.39	341.21	1	D	A	59.5	0.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
2342	536809.78	4816456.39	341.21	1	N	A	-40.5	0.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2342	536809.78	4816456.39	341.21	1	E	A	-40.5	0.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2344	536810.83	4816453.63	341.27	1	D	A	59.5	6.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
2344	536810.83	4816453.63	341.27	1	N	A	-40.5	6.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2344	536810.83	4816453.63	341.27	1	E	A	-40.5	6.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2349	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-22.0
2349	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-122.0
2349	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-122.0
2352	536799.18	4816490.88	341.22	1	D	A	59.5	6.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
2352	536799.18	4816490.88	341.22	1	N	A	-40.5	6.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2352	536799.18	4816490.88	341.22	1	E	A	-40.5	6.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2355	536800.48	4816487.80	341.26	1	D	A	59.5	4.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2355	536800.48	4816487.80	341.26	1	N	A	-40.5	4.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2355	536800.48	4816487.80	341.26	1	E	A	-40.5	4.0	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2366	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-21.6
2366	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-121.6
2366	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-121.6
2369	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
2369	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
2369	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
2375	536804.98	4816475.13	341.21	0	D	A	59.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-22.0
2375	536804.98	4816475.13	341.21	0	N	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-122.0
2375	536804.98	4816475.13	341.21	0	E	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.5	0.0	0.0	-122.0
2378	536804.98	4816475.13	341.21	1	D	A	59.5	7.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2378	536804.98	4816475.13	341.21	1	N	A	-40.5	7.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2378	536804.98	4816475.13	341.21	1	E	A	-40.5	7.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.4
2381	536804.98	4816475.13	341.21	1	D	A	59.5	7.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2381	536804.98	4816475.13	341.21	1	N	A	-40.5	7.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2381	536804.98	4816475.13	341.21	1	E	A	-40.5	7.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2412	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-22.2
2412	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-122.2
2412	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-122.2
2413	536787.11	4816517.60	340.98	1	D	A	59.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
2413	536787.11	4816517.60	340.98	1	N	A	-40.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2413	536787.11	4816517.60	340.98	1	E	A	-40.5	8.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2427	536791.98	4816609.94	340.45	0	D	A	59.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-26.0
2427	536791.98	4816609.94	340.45	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-126.0
2427	536791.98	4816609.94	340.45	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-126.0
2431	536787.59	4816607.97	340.54	0	D	A	59.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-25.4
2431	536787.59	4816607.97	340.54	0	N	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-125.4
2431	536787.59	4816607.97	340.54	0	E	A	-40.5	7.1	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-125.4
2435	536772.15	4816550.54	341.13	0	D	A	59.5	5.8	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-25.4
2435	536772.15	4816550.54	341.13	0	N	A	-40.5	5.8	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.4
2435	536772.15	4816550.54	341.13	0	E	A	-40.5	5.8	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.4
2439	536773.69	4816547.15	341.08	0	D	A	59.5	5.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-25.5
2439	536773.69	4816547.15	341.08	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
2439	536773.69	4816547.15	341.08	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-125.5
2448	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-21.8
2448	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-121.8
2448	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-121.8
2450	536945.22	4816478.77	340.17	1	D	A	59.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2450	536945.22	4816478.77	340.17	1	N	A	-40.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2450	536945.22	4816478.77	340.17	1	E	A	-40.5	8.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2453	536949.09	4816480.03	340.12	1	D	A	59.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-35.2
2453	536949.09	4816480.03	340.12	1	N	A	-40.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
2453	536949.09	4816480.03	340.12	1	E	A	-40.5	0.1	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
2470	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.5
2470	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.5
2470	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.5
2473	536811.92	4816450.86	341.33	1	D	A	59.5	1.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
2473	536811.92	4816450.86	341.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2473	536811.92	4816450.86	341.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2480	536812.85	4816448.65	341.37	1	D	A	59.5	5.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
2480	536812.85	4816448.65	341.37	1	N	A	-40.5	5.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2480	536812.85	4816448.65	341.37	1	E	A	-40.5	5.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2482	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2482	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2482	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2487	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.6
2487	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.6
2487	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.6
2490	536808.33	4816461.22	341.17	1	D	A	59.5	7.0	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
2490	536808.33	4816461.22	341.17	1	N	A	-40.5	7.0	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2490	536808.33	4816461.22	341.17	1	E	A	-40.5	7.0	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2493	536807.93	4816462.60	341.18	1	D	A	59.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
2493	536807.93	4816462.60	341.18	1	N	A	-40.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2493	536807.93	4816462.60	341.18	1	E	A	-40.5	3.3	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2496	536808.62	4816460.20	341.17	1	D	A	59.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
2496	536808.62	4816460.20	341.17	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2496	536808.62	4816460.20	341.17	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2506	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-22.3
2506	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
2506	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-122.3
2509	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
2509	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2509	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2545	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-23.1
2545	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-123.1
2545	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-123.1
2547	536803.75	4816479.24	341.23	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2547	536803.75	4816479.24	341.23	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2547	536803.75	4816479.24	341.23	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2550	536803.31	4816480.48	341.24	1	D	A	59.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
2550	536803.31	4816480.48	341.24	1	N	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2550	536803.31	4816480.48	341.24	1	E	A	-40.5	7.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2583	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-22.6
2583	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-122.6
2583	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-122.6
2586	536955.13	4816481.72	340.05	1	D	A	59.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
2586	536955.13	4816481.72	340.05	1	N	A	-40.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2586	536955.13	4816481.72	340.05	1	E	A	-40.5	8.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2605	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-23.2
2605	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
2605	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-123.2
2607	536847.20	4816432.81	341.46	1	D	A	59.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
2607	536847.20	4816432.81	341.46	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2607	536847.20	4816432.81	341.46	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2610	536849.17	4816433.37	341.42	1	D	A	59.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
2610	536849.17	4816433.37	341.42	1	N	A	-40.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2610	536849.17	4816433.37	341.42	1	E	A	-40.5	1.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2614	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-23.6
2614	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
2614	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
2623	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-23.3
2623	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
2623	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-123.3
2625	536877.46	4816446.83	340.88	1	D	A	59.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
2625	536877.46	4816446.83	340.88	1	N	A	-40.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2625	536877.46	4816446.83	340.88	1	E	A	-40.5	6.5	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2636	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-23.9
2636	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
2636	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
2647	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-24.0
2647	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-124.0
2647	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-124.0
2650	536780.20	4816532.81	341.05	1	D	A	59.5	6.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
2650	536780.20	4816532.81	341.05	1	N	A	-40.5	6.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2650	536780.20	4816532.81	341.05	1	E	A	-40.5	6.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2667	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-24.3
2667	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-124.3
2667	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-124.3
2670	536909.38	4816644.53	339.65	1	D	A	59.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
2670	536909.38	4816644.53	339.65	1	N	A	-40.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
2670	536909.38	4816644.53	339.65	1	E	A	-40.5	4.6	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
2673	536906.59	4816644.05	339.70	1	D	A	59.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
2673	536906.59	4816644.05	339.70	1	N	A	-40.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2673	536906.59	4816644.05	339.70	1	E	A	-40.5	9.3	0.0	0.0	0.0	67.6	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2684	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-23.2
2684	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-123.2
2684	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-123.2
2687	536976.07	4816484.33	339.81	1	D	A	59.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
2687	536976.07	4816484.33	339.81	1	N	A	-40.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
2687	536976.07	4816484.33	339.81	1	E	A	-40.5	7.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
2698	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-23.9
2698	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
2698	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.9
2701	536824.47	4816435.94	341.66	1	D	A	59.5	5.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
2701	536824.47	4816435.94	341.66	1	N	A	-40.5	5.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
2701	536824.47	4816435.94	341.66	1	E	A	-40.5	5.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
2705	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-23.8
2705	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-123.8
2705	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-123.8
2707	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2707	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2707	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2712	536914.81	4816645.72	339.56	0	D	A	59.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-24.6
2712	536914.81	4816645.72	339.56	0	N	A	-40.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.6
2712	536914.81	4816645.72	339.56	0	E	A	-40.5	9.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.6
2715	536914.81	4816645.72	339.56	1	D	A	59.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
2715	536914.81	4816645.72	339.56	1	N	A	-40.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2715	536914.81	4816645.72	339.56	1	E	A	-40.5	9.1	0.0	0.0	0.0	67.8	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2718	536914.81	4816645.72	339.56	1	D	A	59.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
2718	536914.81	4816645.72	339.56	1	N	A	-40.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
2718	536914.81	4816645.72	339.56	1	E	A	-40.5	9.1	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
2721	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-24.7
2721	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-124.7
2721	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-124.7
2739	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-24.8
2739	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
2739	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-124.8
2750	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-23.5
2750	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.5
2750	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.5
2753	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
2753	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2753	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
2757	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-25.0
2757	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
2757	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-125.0
2783	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-24.5
2783	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.5
2783	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-124.5
2786	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
2786	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2786	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
2807	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-24.1
2807	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-124.1
2807	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-124.1
2809	536970.55	4816484.18	339.88	1	D	A	59.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.6
2809	536970.55	4816484.18	339.88	1	N	A	-40.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
2809	536970.55	4816484.18	339.88	1	E	A	-40.5	7.0	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
2814	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-25.3
2814	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-125.3
2814	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-125.3
2820	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.7
2820	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
2820	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
2822	536821.99	4816437.72	341.61	1	D	A	59.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
2822	536821.99	4816437.72	341.61	1	N	A	-40.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
2822	536821.99	4816437.72	341.61	1	E	A	-40.5	4.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
2833	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-24.5
2833	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-124.5
2833	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-124.5
2836	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
2836	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
2836	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
2841	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-24.7
2841	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-124.7
2841	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-124.7
2844	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
2844	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
2844	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
2884	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-25.0
2884	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-125.0
2884	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-125.0
2887	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2887	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2887	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2893	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.2
2893	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
2893	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.2
2896	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
2896	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2896	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2900	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-25.7
2900	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
2900	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-125.7
2902	536900.14	4816643.04	339.81	1	D	A	59.5	6.5	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
2902	536900.14	4816643.04	339.81	1	N	A	-40.5	6.5	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
2902	536900.14	4816643.04	339.81	1	E	A	-40.5	6.5	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
2905	536897.12	4816642.65	339.86	1	D	A	59.5	2.0	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
2905	536897.12	4816642.65	339.86	1	N	A	-40.5	2.0	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
2905	536897.12	4816642.65	339.86	1	E	A	-40.5	2.0	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
2910	536832.64	4816432.46	341.75	0	D	A	59.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.9
2910	536832.64	4816432.46	341.75	0	N	A	-40.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.9
2910	536832.64	4816432.46	341.75	0	E	A	-40.5	0.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.9
2914	536833.85	4816432.27	341.73	0	D	A	59.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.7
2914	536833.85	4816432.27	341.73	0	N	A	-40.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.7
2914	536833.85	4816432.27	341.73	0	E	A	-40.5	1.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.7
2916	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
2916	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2916	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2919	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.3
2919	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.3
2919	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.3
2922	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
2922	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2922	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
2948	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-25.1
2948	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-125.1
2948	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-125.1
2951	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2951	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2951	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2957	536828.70	4816433.64	341.74	0	D	A	59.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.8
2957	536828.70	4816433.64	341.74	0	N	A	-40.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.8
2957	536828.70	4816433.64	341.74	0	E	A	-40.5	3.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.8
2960	536829.78	4816433.18	341.75	0	D	A	59.5	-6.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-35.9
2960	536829.78	4816433.18	341.75	0	N	A	-40.5	-6.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-135.9
2960	536829.78	4816433.18	341.75	0	E	A	-40.5	-6.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-135.9
2962	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
2962	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
2962	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.2
2967	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-26.0
2967	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.0
2967	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.0
2970	536873.55	4816641.97	339.96	1	D	A	59.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
2970	536873.55	4816641.97	339.96	1	N	A	-40.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2970	536873.55	4816641.97	339.96	1	E	A	-40.5	6.0	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2973	536870.82	4816641.78	339.96	1	D	A	59.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-34.7
2973	536870.82	4816641.78	339.96	1	N	A	-40.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
2973	536870.82	4816641.78	339.96	1	E	A	-40.5	1.7	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.7
2978	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-25.4
2978	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
2978	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
2980	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
2980	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
2980	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
2986	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2986	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
2986	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.6
2989	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2989	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2989	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2994	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-25.5
2994	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.5
2994	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-125.5
2996	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
2996	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
2996	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.3
3000	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-25.4
3000	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
3000	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-125.4
3003	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
3003	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3003	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3007	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-25.9
3007	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
3007	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
3010	536767.41	4816568.32	341.10	1	D	A	59.5	5.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.8	-28.6
3010	536767.41	4816568.32	341.10	1	N	A	-40.5	5.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.8	-128.6
3010	536767.41	4816568.32	341.10	1	E	A	-40.5	5.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.8	-128.6
3043	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-26.1
3043	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.1
3043	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.1
3063	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-26.4
3063	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.4
3063	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	66.4	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-126.4
3065	536867.60	4816641.40	339.97	1	D	A	59.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
3065	536867.60	4816641.40	339.97	1	N	A	-40.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3065	536867.60	4816641.40	339.97	1	E	A	-40.5	7.0	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3092	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.0
3092	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
3092	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.0
3095	536826.66	4816434.62	341.70	1	D	A	59.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
3095	536826.66	4816434.62	341.70	1	N	A	-40.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
3095	536826.66	4816434.62	341.70	1	E	A	-40.5	2.5	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.5
3098	536827.57	4816434.13	341.72	1	D	A	59.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.0
3098	536827.57	4816434.13	341.72	1	N	A	-40.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-138.0
3098	536827.57	4816434.13	341.72	1	E	A	-40.5	-5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-138.0
3103	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-26.5
3103	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
3103	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
3108	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-26.8
3108	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-126.8
3108	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-126.8
3115	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-26.6
3115	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
3115	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-126.6
3118	536797.03	4816495.76	341.16	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
3118	536797.03	4816495.76	341.16	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
3118	536797.03	4816495.76	341.16	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
3122	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-26.8
3122	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-126.8
3122	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-126.8
3125	536859.13	4816639.87	340.00	1	D	A	59.5	6.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
3125	536859.13	4816639.87	340.00	1	N	A	-40.5	6.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
3125	536859.13	4816639.87	340.00	1	E	A	-40.5	6.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
3130	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-26.8
3130	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
3130	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-126.8
3133	536890.49	4816641.99	339.91	1	D	A	59.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3133	536890.49	4816641.99	339.91	1	N	A	-40.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
3133	536890.49	4816641.99	339.91	1	E	A	-40.5	6.7	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
3162	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-25.9
3162	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-125.9
3162	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-125.9
3165	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
3165	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3165	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3169	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-26.9
3169	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.9
3169	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-126.9
3172	536767.10	4816571.26	341.08	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.3	-30.1
3172	536767.10	4816571.26	341.08	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3172	536767.10	4816571.26	341.08	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.3	-130.1
3176	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.1
3176	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
3176	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.1
3182	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-26.6
3182	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3182	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3186	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
3186	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3186	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3190	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
3190	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
3190	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
3203	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-26.1
3203	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
3203	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-126.1
3204	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
3204	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
3204	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
3208	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-27.2
3208	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-127.2
3208	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-127.2
3210	536880.59	4816642.00	339.94	1	D	A	59.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
3210	536880.59	4816642.00	339.94	1	N	A	-40.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3210	536880.59	4816642.00	339.94	1	E	A	-40.5	6.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3237	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-27.2
3237	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.2
3237	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	27.4	0.0	0.0	-127.2
3240	536797.94	4816493.74	341.19	1	D	A	59.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
3240	536797.94	4816493.74	341.19	1	N	A	-40.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3240	536797.94	4816493.74	341.19	1	E	A	-40.5	3.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3246	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-27.4
3246	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.4
3246	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	27.1	0.0	0.0	-127.4
3249	536863.20	4816640.73	339.99	1	D	A	59.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
3249	536863.20	4816640.73	339.99	1	N	A	-40.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
3249	536863.20	4816640.73	339.99	1	E	A	-40.5	5.9	0.0	0.0	0.0	67.3	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
3255	536922.02	4816647.43	339.42	0	D	A	59.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-30.8
3255	536922.02	4816647.43	339.42	0	N	A	-40.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.8
3255	536922.02	4816647.43	339.42	0	E	A	-40.5	2.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.8
3258	536919.93	4816646.94	339.46	0	D	A	59.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-30.1
3258	536919.93	4816646.94	339.46	0	N	A	-40.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.1
3258	536919.93	4816646.94	339.46	0	E	A	-40.5	3.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	27.0	0.0	0.0	-130.1
3260	536920.89	4816647.16	339.44	1	D	A	59.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
3260	536920.89	4816647.16	339.44	1	N	A	-40.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3260	536920.89	4816647.16	339.44	1	E	A	-40.5	6.3	0.0	0.0	0.0	67.9	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3263	536920.89	4816647.16	339.44	1	D	A	59.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.6
3263	536920.89	4816647.16	339.44	1	N	A	-40.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
3263	536920.89	4816647.16	339.44	1	E	A	-40.5	6.3	0.0	0.0	0.0	67.7	2.7	-3.0	0.0	0.0	28.0	0.0	1.0	-130.6
3296	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-27.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3296	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3296	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3312	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-27.5
3312	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3312	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3326	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-27.7
3326	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-127.7
3326	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	27.2	0.0	0.0	-127.7
3328	536855.32	4816638.72	340.02	1	D	A	59.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
3328	536855.32	4816638.72	340.02	1	N	A	-40.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3328	536855.32	4816638.72	340.02	1	E	A	-40.5	5.5	0.0	0.0	0.0	67.2	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3332	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-27.6
3332	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
3332	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
3337	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.8
3337	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
3337	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
3345	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-27.8
3345	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
3345	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-127.8
3362	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-26.7
3362	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.7
3362	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.7
3365	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
3365	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3365	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3370	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-27.8
3370	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.8
3370	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-127.8
3384	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-27.5
3384	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
3384	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-127.5
3386	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
3386	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3386	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3396	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-27.9
3396	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
3396	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.3	0.0	0.0	-127.9
3430	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-27.3
3430	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-127.3
3430	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	26.5	0.0	0.0	-127.3
3433	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
3433	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3433	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3467	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.4
3467	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.4
3467	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.4
3471	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-28.1
3471	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-128.1
3471	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-128.1
3473	536802.22	4816483.56	341.27	1	D	A	59.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
3473	536802.22	4816483.56	341.27	1	N	A	-40.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3473	536802.22	4816483.56	341.27	1	E	A	-40.5	2.0	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3499	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.6
3499	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
3499	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.6
3501	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-28.5
3501	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
3501	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.5
3502	536885.32	4816641.86	339.92	1	D	A	59.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
3502	536885.32	4816641.86	339.92	1	N	A	-40.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3502	536885.32	4816641.86	339.92	1	E	A	-40.5	4.9	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3514	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3514	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
3514	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
3516	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.7
3516	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
3516	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.7
3522	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-28.8
3522	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.8
3522	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.4	0.0	0.0	-128.8
3527	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-28.7
3527	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.7
3527	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-128.7
3528	536877.02	4816642.10	339.95	1	D	A	59.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
3528	536877.02	4816642.10	339.95	1	N	A	-40.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3528	536877.02	4816642.10	339.95	1	E	A	-40.5	4.7	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3553	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-28.6
3553	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-128.6
3553	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-128.6
3555	536801.65	4816485.02	341.28	1	D	A	59.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
3555	536801.65	4816485.02	341.28	1	N	A	-40.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
3555	536801.65	4816485.02	341.28	1	E	A	-40.5	1.1	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
3557	536801.92	4816484.37	341.27	1	D	A	59.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-41.7
3557	536801.92	4816484.37	341.27	1	N	A	-40.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.7
3557	536801.92	4816484.37	341.27	1	E	A	-40.5	-8.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.7
3579	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-28.8
3579	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
3579	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-128.8
3633	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-28.8
3633	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-128.8
3633	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.7	0.0	0.0	-128.8
3634	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
3634	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
3634	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.0
3637	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-28.7
3637	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.7
3637	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.7
3638	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
3638	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3638	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3664	536963.97	4816483.74	339.95	0	D	A	59.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.7
3664	536963.97	4816483.74	339.95	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.7
3664	536963.97	4816483.74	339.95	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.7
3665	536964.81	4816483.90	339.94	0	D	A	59.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-35.8
3665	536964.81	4816483.90	339.94	0	N	A	-40.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-135.8
3665	536964.81	4816483.90	339.94	0	E	A	-40.5	-4.8	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-135.8
3667	536964.13	4816483.77	339.95	1	D	A	59.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
3667	536964.13	4816483.77	339.95	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3667	536964.13	4816483.77	339.95	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3682	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-29.7
3682	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-129.7
3682	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	27.5	0.0	0.0	-129.7
3683	536801.18	4816486.13	341.28	1	D	A	59.5	0.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
3683	536801.18	4816486.13	341.28	1	N	A	-40.5	0.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
3683	536801.18	4816486.13	341.28	1	E	A	-40.5	0.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
3758	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-30.2
3758	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
3758	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-130.2
3770	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-30.3
3770	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-130.3
3770	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-130.3
3784	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-30.7
3784	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-130.7
3784	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-130.7
3785	536893.75	4816642.26	339.91	1	D	A	59.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-33.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3785	536893.75	4816642.26	339.91	1	N	A	-40.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
3785	536893.75	4816642.26	339.91	1	E	A	-40.5	2.8	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
3794	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-30.9
3794	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-130.9
3794	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	27.4	0.0	0.0	-130.9
3822	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-31.4
3822	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-131.4
3822	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-131.4
3824	536895.65	4816642.46	339.88	1	D	A	59.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
3824	536895.65	4816642.46	339.88	1	N	A	-40.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
3824	536895.65	4816642.46	339.88	1	E	A	-40.5	1.4	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
3826	536894.84	4816642.36	339.89	1	D	A	59.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-42.2
3826	536894.84	4816642.36	339.89	1	N	A	-40.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
3826	536894.84	4816642.36	339.89	1	E	A	-40.5	-5.6	0.0	0.0	0.0	67.5	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-142.2
3871	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-31.6
3871	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-131.6
3871	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.1	0.0	0.0	-131.6
3873	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-35.6
3873	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
3873	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
3875	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-32.3
3875	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-132.3
3875	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-132.3
3876	536887.53	4816641.81	339.90	1	D	A	59.5	1.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-35.4
3876	536887.53	4816641.81	339.90	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
3876	536887.53	4816641.81	339.90	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-135.4
3909	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-33.1
3909	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-133.1
3909	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	27.1	0.0	0.0	-133.1
3910	536883.22	4816641.91	339.94	1	D	A	59.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-36.2
3910	536883.22	4816641.91	339.94	1	N	A	-40.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
3910	536883.22	4816641.91	339.94	1	E	A	-40.5	0.3	0.0	0.0	0.0	67.4	2.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
3928	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-35.6
3928	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-135.6
3928	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	27.4	0.0	0.0	-135.6
3929	536779.12	4816535.20	341.05	1	D	A	59.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-38.6
3929	536779.12	4816535.20	341.05	1	N	A	-40.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
3929	536779.12	4816535.20	341.05	1	E	A	-40.5	-4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
3932	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-36.0
3932	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-136.0
3932	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.3	0.0	0.0	-136.0

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1868	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-14.2
1868	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-114.2
1868	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-114.2
1871	537014.55	4816421.48	338.77	1	D	A	59.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
1871	537014.55	4816421.48	338.77	1	N	A	-40.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1871	537014.55	4816421.48	338.77	1	E	A	-40.5	13.7	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
2180	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-17.3
2180	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-117.3
2180	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	23.3	0.0	0.0	-117.3
2182	537019.34	4816425.64	338.89	1	D	A	59.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
2182	537019.34	4816425.64	338.89	1	N	A	-40.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2182	537019.34	4816425.64	338.89	1	E	A	-40.5	10.6	0.0	0.0	0.0	66.6	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-124.9
2196	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-17.7
2196	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-117.7
2196	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-117.7
2199	537012.41	4816422.54	338.80	1	D	A	59.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
2199	537012.41	4816422.54	338.80	1	N	A	-40.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
2199	537012.41	4816422.54	338.80	1	E	A	-40.5	5.6	0.0	0.0	0.0	66.5	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2202	537007.39	4816420.42	338.74	1	D	A	59.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
2202	537007.39	4816420.42	338.74	1	N	A	-40.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2202	537007.39	4816420.42	338.74	1	E	A	-40.5	8.6	0.0	0.0	0.0	66.4	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2401	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-18.9
2401	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-118.9
2401	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.0	0.0	0.0	-118.9
2404	536995.92	4816415.15	338.66	1	D	A	59.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2404	536995.92	4816415.15	338.66	1	N	A	-40.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2404	536995.92	4816415.15	338.66	1	E	A	-40.5	9.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2524	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-20.0
2524	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-120.0
2524	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	24.2	0.0	0.0	-120.0
2527	536986.79	4816410.65	338.57	1	D	A	59.5	3.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
2527	536986.79	4816410.65	338.57	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
2527	536986.79	4816410.65	338.57	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
2530	536984.23	4816409.45	338.52	1	D	A	59.5	5.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
2530	536984.23	4816409.45	338.52	1	N	A	-40.5	5.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2530	536984.23	4816409.45	338.52	1	E	A	-40.5	5.1	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.7
2533	536982.37	4816408.58	338.49	1	D	A	59.5	-0.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-35.5
2533	536982.37	4816408.58	338.49	1	N	A	-40.5	-0.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.5
2533	536982.37	4816408.58	338.49	1	E	A	-40.5	-0.7	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-135.5
2555	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-20.3
2555	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-120.3
2555	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-120.3
2557	536979.10	4816407.30	338.44	1	D	A	59.5	7.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
2557	536979.10	4816407.30	338.44	1	N	A	-40.5	7.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2557	536979.10	4816407.30	338.44	1	E	A	-40.5	7.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2619	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-23.7
2619	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-123.7
2619	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-123.7
2641	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-20.4
2641	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-120.4
2641	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-120.4
2644	536998.27	4816413.19	338.58	1	D	A	59.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
2644	536998.27	4816413.19	338.58	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2644	536998.27	4816413.19	338.58	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2760	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-24.6
2760	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
2760	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
2765	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-21.3
2765	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.3
2765	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.3
2768	537001.82	4816418.05	338.70	1	D	A	59.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
2768	537001.82	4816418.05	338.70	1	N	A	-40.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2768	537001.82	4816418.05	338.70	1	E	A	-40.5	6.8	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2853	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-21.7
2853	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.7
2853	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-121.7
2856	536994.44	4816410.17	338.49	1	D	A	59.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2856	536994.44	4816410.17	338.49	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2856	536994.44	4816410.17	338.49	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2939	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-22.1
2939	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-122.1
2939	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-122.1
2942	537001.78	4816415.40	338.63	1	D	A	59.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
2942	537001.78	4816415.40	338.63	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2942	537001.78	4816415.40	338.63	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
2944	537003.51	4816416.22	338.62	1	D	A	59.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
2944	537003.51	4816416.22	338.62	1	N	A	-40.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
2944	537003.51	4816416.22	338.62	1	E	A	-40.5	0.6	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
3033	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-22.2
3033	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-122.2
3033	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.6	0.0	0.0	-122.2

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3035	536987.82	4816401.26	338.40	1	D	A	59.5	2.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
3035	536987.82	4816401.26	338.40	1	N	A	-40.5	2.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3035	536987.82	4816401.26	338.40	1	E	A	-40.5	2.0	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3038	536988.61	4816400.01	338.40	1	D	A	59.5	1.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.4
3038	536988.61	4816400.01	338.40	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
3038	536988.61	4816400.01	338.40	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.4
3055	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-23.0
3055	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-123.0
3055	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-123.0
3058	536989.37	4816411.85	338.59	1	D	A	59.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
3058	536989.37	4816411.85	338.59	1	N	A	-40.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3058	536989.37	4816411.85	338.59	1	E	A	-40.5	5.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3222	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-24.3
3222	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.3
3222	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.3
3225	536975.05	4816405.76	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
3225	536975.05	4816405.76	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3225	536975.05	4816405.76	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3230	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-24.1
3230	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.1
3230	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.1
3232	536980.54	4816405.26	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
3232	536980.54	4816405.26	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3232	536980.54	4816405.26	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3289	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.1	0.0	0.0	-24.1
3289	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.1	0.0	0.0	-124.1
3289	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.1	0.0	0.0	-124.1
3292	536982.93	4816404.80	338.40	1	D	A	59.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.0
3292	536982.93	4816404.80	338.40	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
3292	536982.93	4816404.80	338.40	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
3306	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-24.5
3306	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.5
3306	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-124.5
3308	536975.96	4816405.40	338.40	1	D	A	59.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
3308	536975.96	4816405.40	338.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
3308	536975.96	4816405.40	338.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.1
3349	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-24.7
3349	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-124.7
3349	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.4	0.0	0.0	-124.7
3351	536978.21	4816405.45	338.40	1	D	A	59.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
3351	536978.21	4816405.45	338.40	1	N	A	-40.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3351	536978.21	4816405.45	338.40	1	E	A	-40.5	3.4	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3355	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-24.9
3355	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-124.9
3355	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-124.9
3357	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
3357	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3357	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
3389	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-24.3
3389	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-124.3
3389	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.8	0.0	0.0	-124.3
3391	536986.64	4816402.68	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
3391	536986.64	4816402.68	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3391	536986.64	4816402.68	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3415	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-24.1
3415	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-124.1
3415	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.5	0.0	0.0	-124.1
3417	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
3417	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3417	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3422	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.9	0.0	0.0	-24.6
3422	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.9	0.0	0.0	-124.6
3422	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.9	0.0	0.0	-124.6

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3425	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.6
3425	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3425	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.6
3438	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-24.4
3438	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-124.4
3438	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-124.4
3440	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-31.7
3440	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
3440	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
3462	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-25.4
3462	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-125.4
3462	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-125.4
3464	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
3464	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3464	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3488	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-24.3
3488	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-124.3
3488	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-124.3
3490	536989.87	4816400.19	338.40	1	D	A	59.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-42.6
3490	536989.87	4816400.19	338.40	1	N	A	-40.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-142.6
3490	536989.87	4816400.19	338.40	1	E	A	-40.5	-7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-142.6
3566	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-25.2
3566	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-125.2
3566	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.8	0.0	0.0	-125.2
3568	536992.41	4816408.02	338.42	1	D	A	59.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.4
3568	536992.41	4816408.02	338.42	1	N	A	-40.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3568	536992.41	4816408.02	338.42	1	E	A	-40.5	2.6	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3586	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-25.2
3586	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-125.2
3586	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	23.6	0.0	0.0	-125.2
3588	536990.16	4816403.21	338.40	1	D	A	59.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.5
3588	536990.16	4816403.21	338.40	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
3588	536990.16	4816403.21	338.40	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.5
3610	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-26.3
3610	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-126.3
3610	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.5	0.0	0.0	-126.3
3611	536974.06	4816405.12	338.40	1	D	A	59.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
3611	536974.06	4816405.12	338.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
3611	536974.06	4816405.12	338.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
3656	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-26.3
3656	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.3
3656	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.3
3657	536991.55	4816412.87	338.60	1	D	A	59.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
3657	536991.55	4816412.87	338.60	1	N	A	-40.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3657	536991.55	4816412.87	338.60	1	E	A	-40.5	1.8	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3660	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-26.0
3660	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-126.0
3660	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	23.7	0.0	0.0	-126.0
3661	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-33.2
3661	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3661	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-133.2
3921	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-31.5
3921	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-131.5
3921	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	24.6	0.0	0.0	-131.5
3922	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-37.9
3922	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.9
3922	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1951	536904.07	4816459.11	339.02	0	D	A	58.4	3.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-28.0
1951	536904.07	4816459.11	339.02	0	N	A	-48.6	3.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-135.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1951	536904.07	4816459.11	339.02	0	E	A	-48.6	3.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-135.0
1953	536895.17	4816454.40	339.25	0	D	A	58.4	12.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-18.2
1953	536895.17	4816454.40	339.25	0	N	A	-48.6	12.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
1953	536895.17	4816454.40	339.25	0	E	A	-48.6	12.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
1956	536899.09	4816456.48	339.15	1	D	A	58.4	11.2	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-24.0
1956	536899.09	4816456.48	339.15	1	N	A	-48.6	11.2	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-131.0
1956	536899.09	4816456.48	339.15	1	E	A	-48.6	11.2	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-131.0
1959	536890.20	4816451.77	339.38	1	D	A	58.4	8.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-26.7
1959	536890.20	4816451.77	339.38	1	N	A	-48.6	8.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.6
1959	536890.20	4816451.77	339.38	1	E	A	-48.6	8.4	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.6
2270	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-21.0
2270	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.0
2270	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.0
2271	536849.20	4816431.92	340.08	1	D	A	58.4	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
2271	536849.20	4816431.92	340.08	1	N	A	-48.6	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
2271	536849.20	4816431.92	340.08	1	E	A	-48.6	7.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
2273	536845.46	4816430.44	340.18	1	D	A	58.4	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.6
2273	536845.46	4816430.44	340.18	1	N	A	-48.6	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
2273	536845.46	4816430.44	340.18	1	E	A	-48.6	3.5	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
2321	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-21.1
2321	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-128.1
2321	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-128.1
2323	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-25.3
2323	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-132.3
2323	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-132.3
2386	536906.49	4816463.95	339.00	0	D	A	58.4	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-26.2
2386	536906.49	4816463.95	339.00	0	N	A	-48.6	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-133.2
2386	536906.49	4816463.95	339.00	0	E	A	-48.6	4.9	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-133.2
2390	536910.99	4816466.06	339.00	0	D	A	58.4	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-22.8
2390	536910.99	4816466.06	339.00	0	N	A	-48.6	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-129.8
2390	536910.99	4816466.06	339.00	0	E	A	-48.6	8.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-129.8
2393	536909.44	4816465.33	339.00	1	D	A	58.4	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-25.6
2393	536909.44	4816465.33	339.00	1	N	A	-48.6	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6
2393	536909.44	4816465.33	339.00	1	E	A	-48.6	9.8	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6
2395	536913.95	4816467.44	339.00	1	D	A	58.4	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-40.4
2395	536913.95	4816467.44	339.00	1	N	A	-48.6	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.4
2395	536913.95	4816467.44	339.00	1	E	A	-48.6	-4.9	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.4
2457	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-21.9
2457	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.9
2457	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-128.9
2459	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.0
2459	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.0
2459	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.0
2518	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-22.2
2518	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.2
2518	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-129.2
2519	536850.69	4816438.00	339.78	1	D	A	58.4	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.8
2519	536850.69	4816438.00	339.78	1	N	A	-48.6	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
2519	536850.69	4816438.00	339.78	1	E	A	-48.6	7.5	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
2520	536853.68	4816439.10	339.69	1	D	A	58.4	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
2520	536853.68	4816439.10	339.69	1	N	A	-48.6	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
2520	536853.68	4816439.10	339.69	1	E	A	-48.6	-1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
2537	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-22.1
2537	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-129.1
2537	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-129.1
2540	536913.43	4816464.20	339.00	1	D	A	58.4	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
2540	536913.43	4816464.20	339.00	1	N	A	-48.6	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
2540	536913.43	4816464.20	339.00	1	E	A	-48.6	9.0	0.0	0.0	0.0	65.8	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
2560	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-22.3
2560	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-129.3
2560	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-129.3
2561	536877.52	4816457.90	339.21	1	D	A	58.4	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
2561	536877.52	4816457.90	339.21	1	N	A	-48.6	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2561	536877.52	4816457.90	339.21	1	E	A	-48.6	8.4	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-133.5
2564	536876.48	4816460.49	339.13	1	D	A	58.4	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-31.8
2564	536876.48	4816460.49	339.13	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
2564	536876.48	4816460.49	339.13	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
2567	536876.48	4816460.49	339.13	1	D	A	58.4	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-31.8
2567	536876.48	4816460.49	339.13	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
2567	536876.48	4816460.49	339.13	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
2594	536830.50	4816436.63	340.12	0	D	A	58.4	3.7	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-26.3
2594	536830.50	4816436.63	340.12	0	N	A	-48.6	3.7	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
2594	536830.50	4816436.63	340.12	0	E	A	-48.6	3.7	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
2597	536833.04	4816436.02	340.12	0	D	A	58.4	4.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-25.5
2597	536833.04	4816436.02	340.12	0	N	A	-48.6	4.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.5
2597	536833.04	4816436.02	340.12	0	E	A	-48.6	4.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.5
2600	536831.89	4816436.30	340.12	1	D	A	58.4	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.8
2600	536831.89	4816436.30	340.12	1	N	A	-48.6	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
2600	536831.89	4816436.30	340.12	1	E	A	-48.6	7.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.8
2630	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-23.2
2630	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.2
2630	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.2
2632	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.3
2632	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
2632	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.3
2655	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-23.4
2655	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
2655	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-130.3
2658	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.4
2658	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.4
2658	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.4
2728	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-23.5
2728	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-130.4
2728	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-130.4
2731	536909.02	4816461.73	339.00	1	D	A	58.4	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-32.1
2731	536909.02	4816461.73	339.00	1	N	A	-48.6	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
2731	536909.02	4816461.73	339.00	1	E	A	-48.6	3.3	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
2733	536906.51	4816460.40	339.00	1	D	A	58.4	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-29.9
2733	536906.51	4816460.40	339.00	1	N	A	-48.6	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.9
2733	536906.51	4816460.40	339.00	1	E	A	-48.6	5.5	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.9
2744	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-23.8
2744	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.8
2744	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-130.8
2747	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-27.9
2747	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.9
2747	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-134.9
2774	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-24.0
2774	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
2774	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
2777	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.2
2777	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.2
2777	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.2
2826	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-24.2
2826	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.2
2826	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.2
2829	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.4
2829	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.4
2829	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.4
2860	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-24.3
2860	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.3
2860	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.3
2862	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.6
2862	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
2862	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
2867	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-24.4
2867	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2867	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.4
2870	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-28.6
2870	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
2870	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
2874	536830.17	4816430.97	340.47	0	D	A	58.4	5.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-24.8
2874	536830.17	4816430.97	340.47	0	N	A	-48.6	5.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-131.8
2874	536830.17	4816430.97	340.47	0	E	A	-48.6	5.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-131.8
2878	536828.74	4816431.82	340.45	0	D	A	58.4	-9.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-39.0
2878	536828.74	4816431.82	340.45	0	N	A	-48.6	-9.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-146.0
2878	536828.74	4816431.82	340.45	0	E	A	-48.6	-9.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-146.0
2880	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-28.7
2880	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-135.7
2880	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-135.7
2927	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-25.0
2927	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.0
2927	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-132.0
2930	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-29.0
2930	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
2930	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
2933	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-24.8
2933	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.8
2933	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-131.8
2935	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-29.1
2935	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
2935	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
3049	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-25.3
3049	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.3
3049	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-132.3
3051	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-29.4
3051	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.4
3051	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-136.4
3083	536894.27	4816470.01	339.05	0	D	A	58.4	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-25.7
3083	536894.27	4816470.01	339.05	0	N	A	-48.6	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
3083	536894.27	4816470.01	339.05	0	E	A	-48.6	5.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-132.7
3086	536894.27	4816470.01	339.05	1	D	A	58.4	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-29.6
3086	536894.27	4816470.01	339.05	1	N	A	-48.6	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.6
3086	536894.27	4816470.01	339.05	1	E	A	-48.6	5.7	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-136.6
3089	536893.70	4816471.32	339.01	1	D	A	58.4	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
3089	536893.70	4816471.32	339.01	1	N	A	-48.6	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
3089	536893.70	4816471.32	339.01	1	E	A	-48.6	-0.6	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-141.1
3156	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.0
3156	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.0
3156	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.0
3158	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
3158	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.0
3158	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.0
3196	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-26.3
3196	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
3196	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.3
3199	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.3
3199	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.3
3199	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.3
3266	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-26.6
3266	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.6
3266	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-133.6
3269	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.6
3269	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
3269	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
3282	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-26.6
3282	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.6
3282	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-133.6
3285	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.7
3285	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3285	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	64.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
3320	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-26.7
3320	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-133.7
3320	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-133.7
3323	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.9
3323	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
3323	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
3341	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-26.8
3341	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-133.8
3341	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-133.8
3342	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.9
3342	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
3342	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.9
3444	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-27.1
3444	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-134.1
3444	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-134.1
3446	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-31.4
3446	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
3446	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	65.7	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
3450	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-27.1
3450	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.1
3450	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.1
3452	536896.37	4816465.47	339.10	1	D	A	58.4	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.4
3452	536896.37	4816465.47	339.10	1	N	A	-48.6	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
3452	536896.37	4816465.47	339.10	1	E	A	-48.6	3.9	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.4
3455	536896.63	4816464.97	339.10	1	D	A	58.4	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-32.3
3455	536896.63	4816464.97	339.10	1	N	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
3455	536896.63	4816464.97	339.10	1	E	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
3458	536896.63	4816464.97	339.10	1	D	A	58.4	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-32.3
3458	536896.63	4816464.97	339.10	1	N	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
3458	536896.63	4816464.97	339.10	1	E	A	-48.6	1.2	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-139.3
3477	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-27.3
3477	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-134.3
3477	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-134.3
3478	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-31.6
3478	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
3478	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
3494	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-27.6
3494	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-134.6
3494	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-134.6
3496	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.6
3496	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
3496	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.6
3505	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-27.5
3505	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.5
3505	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.5
3507	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.7
3507	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.7
3507	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.7
3518	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-27.7
3518	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.7
3518	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.7
3520	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
3520	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
3520	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
3532	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-27.7
3532	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.7
3532	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.7
3533	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
3533	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
3533	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	65.1	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
3543	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-27.8
3543	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3543	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-134.8
3544	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-31.9
3544	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
3544	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.4	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-138.9
3547	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
3547	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3547	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3549	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
3549	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3549	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3551	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.1
3551	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3551	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.1
3571	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.0
3571	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.0
3571	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.0
3572	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.0
3572	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
3572	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.0
3575	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-28.0
3575	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
3575	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-135.0
3576	536860.82	4816441.81	339.51	1	D	A	58.4	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.1
3576	536860.82	4816441.81	339.51	1	N	A	-48.6	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
3576	536860.82	4816441.81	339.51	1	E	A	-48.6	2.4	0.0	0.0	0.0	64.9	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.1
3592	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-27.9
3592	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.9
3592	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-134.9
3593	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-32.2
3593	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-139.2
3593	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-139.2
3595	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-30.4
3595	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.4
3595	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-137.4
3613	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-28.6
3613	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.6
3613	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-135.6
3615	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-32.5
3615	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.5
3615	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	65.6	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-139.5
3624	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.7
3624	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.7
3624	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.7
3625	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.6
3625	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.6
3625	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.6
3646	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.8
3646	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.8
3646	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-135.8
3647	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-32.9
3647	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.9
3647	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-139.9
3670	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-28.9
3670	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-135.9
3670	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-135.9
3672	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.0
3672	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
3672	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
3676	536832.20	4816429.90	340.47	0	D	A	58.4	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.6
3676	536832.20	4816429.90	340.47	0	N	A	-48.6	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.6
3676	536832.20	4816429.90	340.47	0	E	A	-48.6	0.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.6
3678	536831.63	4816430.12	340.49	0	D	A	58.4	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-37.8
3678	536831.63	4816430.12	340.49	0	N	A	-48.6	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-144.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3678	536831.63	4816430.12	340.49	0	E	A	-48.6	-7.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-144.8
3679	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-33.0
3679	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
3679	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.0
3697	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-28.9
3697	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-135.9
3697	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	63.7	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-135.9
3698	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-33.2
3698	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-140.1
3698	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-140.1
3708	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.2
3708	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.2
3708	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.2
3709	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.2
3709	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
3709	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.2
3721	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-29.1
3721	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-136.1
3721	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-136.1
3722	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.3
3722	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.3
3722	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	65.0	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.3
3736	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.4
3736	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.4
3736	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.4
3738	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-33.4
3738	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.4
3738	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-140.4
3753	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-29.5
3753	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.5
3753	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-136.5
3754	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-33.5
3754	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.5
3754	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	64.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-140.5
3797	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.0
3797	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.0
3797	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.0
3799	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.0
3799	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.0
3799	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.0
3829	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-30.3
3829	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-137.3
3829	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-137.3
3831	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-34.6
3831	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.6
3831	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.6
3845	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.8
3845	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.8
3845	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.8
3846	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.7
3846	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
3846	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.7
3848	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-30.6
3848	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-137.6
3848	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-137.6
3849	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
3849	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
3849	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
3851	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.9
3851	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
3851	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
3852	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
3852	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3852	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
3855	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-30.9
3855	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
3855	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-137.9
3856	536827.69	4816435.96	340.20	1	D	A	58.4	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-34.9
3856	536827.69	4816435.96	340.20	1	N	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
3856	536827.69	4816435.96	340.20	1	E	A	-48.6	-0.9	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-141.9
3861	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-31.2
3861	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.2
3861	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.2
3862	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.2
3862	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.2
3862	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.2
3865	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-31.0
3865	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-138.0
3865	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-138.0
3866	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.3
3866	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.3
3866	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.3
3878	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-31.3
3878	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.3
3878	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.3
3880	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.6
3880	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
3880	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
3883	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-31.4
3883	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-138.3
3883	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.6	0.0	0.0	-138.3
3884	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
3884	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
3884	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.6
3886	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-31.5
3886	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.5
3886	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.5
3887	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.7
3887	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
3887	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.7
3889	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-31.8
3889	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.8
3889	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-138.8
3890	536828.55	4816436.86	340.14	1	D	A	58.4	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-35.8
3890	536828.55	4816436.86	340.14	1	N	A	-48.6	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
3890	536828.55	4816436.86	340.14	1	E	A	-48.6	-1.8	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
3892	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-31.6
3892	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.6
3892	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.6
3894	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-35.9
3894	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
3894	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.2	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-142.8
3898	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-31.9
3898	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.9
3898	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	26.8	0.0	0.0	-138.9
3899	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-36.1
3899	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.1
3899	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	65.3	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.1
3901	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-32.2
3901	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
3901	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
3903	536828.03	4816436.56	340.16	1	D	A	58.4	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-36.2
3903	536828.03	4816436.56	340.16	1	N	A	-48.6	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
3903	536828.03	4816436.56	340.16	1	E	A	-48.6	-2.2	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
3905	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-32.2
3905	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3905	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-139.2
3906	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-36.2
3906	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
3906	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	64.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-143.2
3907	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-32.0
3907	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-139.0
3907	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	26.7	0.0	0.0	-139.0
3908	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-36.3
3908	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
3908	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	65.6	1.9	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
3911	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-31.9
3911	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-138.9
3911	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-138.9
3912	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-36.3
3912	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
3912	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.3
3914	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-32.3
3914	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-139.3
3914	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-139.3
3915	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-36.7
3915	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.7
3915	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-143.7
3916	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-32.9
3916	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-139.9
3916	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-139.9
3917	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-37.3
3917	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
3917	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
3918	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-33.3
3918	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-140.3
3918	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-140.3
3919	536829.11	4816436.92	340.12	1	D	A	58.4	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-37.3
3919	536829.11	4816436.92	340.12	1	N	A	-48.6	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
3919	536829.11	4816436.92	340.12	1	E	A	-48.6	-3.3	0.0	0.0	0.0	64.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-144.3
3924	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-33.9
3924	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-140.9
3924	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-140.9
3925	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-38.3
3925	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.3
3925	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.3
3926	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-34.4
3926	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-141.4
3926	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-141.4
3927	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-38.8
3927	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.8
3927	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-145.8
3930	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-34.8
3930	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-141.8
3930	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-141.8
3931	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-39.2
3931	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-146.2
3931	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-146.2
3933	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-35.5
3933	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-142.5
3933	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	27.0	0.0	0.0	-142.5
3934	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-39.6
3934	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-146.5
3934	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	64.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-146.5
3935	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-36.4
3935	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-143.4
3935	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-143.4
3936	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-40.8
3936	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3936	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-147.8
3937	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-37.6
3937	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-144.6
3937	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	64.3	1.7	-3.0	0.0	0.0	26.5	0.0	0.0	-144.6
3938	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-42.0
3938	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-149.0
3938	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	65.9	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-149.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2574	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-22.2
2574	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.2
2574	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.0	0.0	0.0	-122.2
2576	536994.66	4816487.29	339.51	1	D	A	59.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
2576	536994.66	4816487.29	339.51	1	N	A	-40.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2576	536994.66	4816487.29	339.51	1	E	A	-40.5	7.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2579	536990.92	4816486.27	339.58	1	D	A	59.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
2579	536990.92	4816486.27	339.58	1	N	A	-40.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
2579	536990.92	4816486.27	339.58	1	E	A	-40.5	3.2	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
2677	536957.48	4816510.17	339.53	0	D	A	59.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-23.8
2677	536957.48	4816510.17	339.53	0	N	A	-40.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
2677	536957.48	4816510.17	339.53	0	E	A	-40.5	8.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-123.8
2679	536958.50	4816510.81	339.50	1	D	A	59.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.9
2679	536958.50	4816510.81	339.50	1	N	A	-40.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
2679	536958.50	4816510.81	339.50	1	E	A	-40.5	5.9	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.9
2680	536955.84	4816509.16	339.56	1	D	A	59.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.9
2680	536955.84	4816509.16	339.56	1	N	A	-40.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2680	536955.84	4816509.16	339.56	1	E	A	-40.5	3.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2691	536960.06	4816523.96	339.50	0	D	A	59.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-24.0
2691	536960.06	4816523.96	339.50	0	N	A	-40.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
2691	536960.06	4816523.96	339.50	0	E	A	-40.5	8.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-124.0
2693	536960.06	4816523.96	339.50	1	D	A	59.5	8.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.9
2693	536960.06	4816523.96	339.50	1	N	A	-40.5	8.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2693	536960.06	4816523.96	339.50	1	E	A	-40.5	8.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.9
2791	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-23.7
2791	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
2791	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-123.7
2794	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
2794	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2794	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2799	536963.72	4816507.19	339.51	0	D	A	59.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-24.2
2799	536963.72	4816507.19	339.51	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-124.2
2799	536963.72	4816507.19	339.51	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-124.2
2802	536963.72	4816507.19	339.51	1	D	A	59.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
2802	536963.72	4816507.19	339.51	1	N	A	-40.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2802	536963.72	4816507.19	339.51	1	E	A	-40.5	7.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
3015	536955.26	4816509.49	339.57	0	D	A	59.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.5
3015	536955.26	4816509.49	339.57	0	N	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
3015	536955.26	4816509.49	339.57	0	E	A	-40.5	3.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
3019	536956.14	4816511.39	339.55	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.7
3019	536956.14	4816511.39	339.55	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
3019	536956.14	4816511.39	339.55	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
3022	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
3022	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3022	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3026	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-25.6
3026	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
3026	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-125.6
3029	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
3029	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3029	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3069	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-25.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3069	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-125.5
3069	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.5	0.0	0.0	-125.5
3072	536965.11	4816502.71	339.57	1	D	A	59.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
3072	536965.11	4816502.71	339.57	1	N	A	-40.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3072	536965.11	4816502.71	339.57	1	E	A	-40.5	5.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3076	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-26.0
3076	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.0
3076	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.0
3079	536958.41	4816517.56	339.51	1	D	A	59.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
3079	536958.41	4816517.56	339.51	1	N	A	-40.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3079	536958.41	4816517.56	339.51	1	E	A	-40.5	6.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-129.8
3137	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-26.4
3137	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
3137	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
3140	536956.87	4816513.09	339.54	1	D	A	59.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
3140	536956.87	4816513.09	339.54	1	N	A	-40.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3140	536956.87	4816513.09	339.54	1	E	A	-40.5	2.2	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3143	536957.51	4816514.76	339.52	1	D	A	59.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
3143	536957.51	4816514.76	339.52	1	N	A	-40.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3143	536957.51	4816514.76	339.52	1	E	A	-40.5	2.8	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3148	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-26.4
3148	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
3148	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-126.4
3151	536971.30	4816535.80	339.40	1	D	A	59.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-30.3
3151	536971.30	4816535.80	339.40	1	N	A	-40.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3151	536971.30	4816535.80	339.40	1	E	A	-40.5	5.9	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-130.3
3251	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-26.3
3251	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
3251	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-126.3
3253	536978.53	4816487.38	339.72	1	D	A	59.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.8
3253	536978.53	4816487.38	339.72	1	N	A	-40.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3253	536978.53	4816487.38	339.72	1	E	A	-40.5	4.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
3272	536971.80	4816491.00	339.74	0	D	A	59.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-30.7
3272	536971.80	4816491.00	339.74	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.7
3272	536971.80	4816491.00	339.74	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.7
3275	536970.83	4816492.15	339.73	0	D	A	59.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-28.5
3275	536970.83	4816492.15	339.73	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.5
3275	536970.83	4816492.15	339.73	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.5
3278	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
3278	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
3278	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-130.9
3300	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-26.4
3300	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
3300	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-126.4
3303	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.0
3303	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
3303	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
3375	536962.05	4816516.73	339.44	0	D	A	59.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-27.5
3375	536962.05	4816516.73	339.44	0	N	A	-40.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
3375	536962.05	4816516.73	339.44	0	E	A	-40.5	4.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
3379	536961.97	4816518.13	339.44	0	D	A	59.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-47.6
3379	536961.97	4816518.13	339.44	0	N	A	-40.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-147.6
3379	536961.97	4816518.13	339.44	0	E	A	-40.5	-15.7	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-147.6
3381	536962.05	4816516.74	339.44	1	D	A	59.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-31.4
3381	536962.05	4816516.74	339.44	1	N	A	-40.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3381	536962.05	4816516.74	339.44	1	E	A	-40.5	4.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.4
3401	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-27.5
3401	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
3401	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-127.5
3404	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
3404	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3404	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3408	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-27.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3408	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-127.0
3408	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.2	0.0	0.0	-127.0
3411	536975.81	4816488.20	339.74	1	D	A	59.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-31.5
3411	536975.81	4816488.20	339.74	1	N	A	-40.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3411	536975.81	4816488.20	339.74	1	E	A	-40.5	4.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
3484	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-27.9
3484	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
3484	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-127.9
3486	536963.11	4816522.94	339.45	1	D	A	59.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-31.8
3486	536963.11	4816522.94	339.45	1	N	A	-40.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3486	536963.11	4816522.94	339.45	1	E	A	-40.5	4.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3509	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-27.6
3509	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-127.6
3509	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-127.6
3511	536969.49	4816493.76	339.71	1	D	A	59.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
3511	536969.49	4816493.76	339.71	1	N	A	-40.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3511	536969.49	4816493.76	339.71	1	E	A	-40.5	3.6	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
3537	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-28.4
3537	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.4
3537	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-128.4
3539	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.2
3539	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
3539	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
3561	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.4
3561	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
3561	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.4
3563	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
3563	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3563	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3582	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-28.5
3582	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
3582	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	26.8	0.0	0.0	-128.5
3584	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.4
3584	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3584	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3598	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.7
3598	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
3598	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.7
3599	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
3599	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
3599	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
3602	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-28.2
3602	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.2
3602	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-128.2
3605	536968.23	4816495.51	339.68	1	D	A	59.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
3605	536968.23	4816495.51	339.68	1	N	A	-40.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
3605	536968.23	4816495.51	339.68	1	E	A	-40.5	3.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
3618	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-28.9
3618	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.9
3618	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-128.9
3620	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
3620	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3620	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3629	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.2
3629	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.2
3629	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.2
3630	536962.06	4816519.10	339.45	1	D	A	59.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
3630	536962.06	4816519.10	339.45	1	N	A	-40.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3630	536962.06	4816519.10	339.45	1	E	A	-40.5	2.8	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3642	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-29.3
3642	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
3642	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-129.3
3643	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3643	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3643	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3650	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-28.6
3650	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.6
3650	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-128.6
3652	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.1
3652	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3652	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
3685	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.0
3685	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.0
3685	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.0
3688	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.3
3688	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
3688	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.3
3712	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.7
3712	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.7
3712	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.7
3713	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
3713	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3713	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3717	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.6
3717	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
3717	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
3718	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
3718	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3718	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
3725	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.6
3725	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
3725	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.6
3727	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
3727	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3727	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3731	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.3
3731	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.3
3731	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.3
3733	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.6
3733	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3733	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.6
3741	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-29.1
3741	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-129.1
3741	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.1	0.0	0.0	-129.1
3743	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
3743	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3743	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	66.8	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3748	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-29.4
3748	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.4
3748	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.4	0.0	0.0	-129.4
3749	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
3749	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3749	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3762	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-29.9
3762	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.9
3762	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-129.9
3765	536964.52	4816518.50	339.41	1	D	A	59.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.0
3765	536964.52	4816518.50	339.41	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
3765	536964.52	4816518.50	339.41	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
3766	536964.33	4816517.70	339.41	1	D	A	59.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-47.2
3766	536964.33	4816517.70	339.41	1	N	A	-40.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-147.2
3766	536964.33	4816517.70	339.41	1	E	A	-40.5	-11.3	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-147.2
3779	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.1
3779	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.1
3779	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.1
3781	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3781	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
3781	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.0
3788	536965.53	4816522.84	339.41	0	D	A	59.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-32.0
3788	536965.53	4816522.84	339.41	0	N	A	-40.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-132.0
3788	536965.53	4816522.84	339.41	0	E	A	-40.5	0.0	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-132.0
3790	536965.38	4816522.09	339.41	0	D	A	59.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-34.9
3790	536965.38	4816522.09	339.41	0	N	A	-40.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9
3790	536965.38	4816522.09	339.41	0	E	A	-40.5	-2.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-134.9
3791	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.1
3791	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
3791	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.1
3801	536964.01	4816517.02	339.41	0	D	A	59.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.4
3801	536964.01	4816517.02	339.41	0	N	A	-40.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.4
3801	536964.01	4816517.02	339.41	0	E	A	-40.5	1.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.4
3803	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.3
3803	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
3803	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.3
3806	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.5
3806	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
3806	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
3808	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
3808	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
3808	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
3810	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.5
3810	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
3810	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.5
3812	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.4
3812	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
3812	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.8	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.4
3814	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-30.0
3814	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.0
3814	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	26.3	0.0	0.0	-130.0
3815	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-34.5
3815	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
3815	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	66.7	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-134.5
3818	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.7
3818	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.7
3818	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.7
3820	536965.18	4816521.17	339.41	1	D	A	59.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
3820	536965.18	4816521.17	339.41	1	N	A	-40.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
3820	536965.18	4816521.17	339.41	1	E	A	-40.5	1.4	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.6
3833	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-30.9
3833	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.9
3833	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-130.9
3834	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.8
3834	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
3834	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	66.9	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
3837	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.0
3837	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
3837	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.0
3838	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
3838	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3838	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3839	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.1
3839	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
3839	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
3841	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
3841	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3841	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3842	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.1
3842	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
3842	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.1
3843	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																			
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3843	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3843	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
3858	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-31.5
3858	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.5
3858	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.8	0.0	0.0	-131.5
3859	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.3
3859	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
3859	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	67.1	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.3
3869	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-31.7
3869	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
3869	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	26.9	0.0	0.0	-131.7
3870	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-35.6
3870	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6
3870	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	67.0	2.5	-3.0	0.0	0.0	28.0	0.0	1.0	-135.6

Receiver
Name: Building F1 Tower - North Facade
ID: POR
X: 536534.39 m
Y: 4816217.06 m
Z: 380.04 m

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	48.2
2	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	45.2
2	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	48.2
4	536434.35	4816320.06	359.29	1	D	A	100.1	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	14.4
4	536434.35	4816320.06	359.29	1	N	A	100.1	0.0	-3.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	11.4
4	536434.35	4816320.06	359.29	1	E	A	100.1	0.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	14.4
7	536434.35	4816320.06	359.29	1	D	A	100.1	0.0	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	13.9
7	536434.35	4816320.06	359.29	1	N	A	100.1	0.0	-3.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	10.9
7	536434.35	4816320.06	359.29	1	E	A	100.1	0.0	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	13.9

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
9	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	-1.8	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	49.2
9	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-137.1
9	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-137.1
10	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	-1.8	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	15.1
10	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-171.2
10	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	58.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-171.2
12	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	-1.8	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	14.4
12	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-171.9
12	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-171.9
14	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	-1.8	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	47.7
14	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-138.6
14	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-138.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
20	536661.19	4816008.16	345.74	0	D	A	101.5	0.0	0.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	16.7
20	536661.19	4816008.16	345.74	0	N	A	101.5	0.0	-188.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	-171.3
20	536661.19	4816008.16	345.74	0	E	A	101.5	0.0	-188.0	0.0	0.0	58.8	2.1	-1.5	0.0	0.0	25.4	0.0	0.0	-171.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
26	536661.02	4816040.71	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	9.5
26	536661.02	4816040.71	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	3.5
26	536661.02	4816040.71	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.0	0.0	0.0	9.5
28	536661.02	4816040.71	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	8.9	-0.3
28	536661.02	4816040.71	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	8.9	-6.3
28	536661.02	4816040.71	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	8.9	-0.3

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
32	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	9.6
32	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	3.5
32	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	27.0	0.0	0.0	9.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
38	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	9.0
38	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	3.0
38	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	58.4	1.2	-2.9	0.0	0.0	26.8	0.0	0.0	9.0
39	536690.88	4816044.90	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	6.2
39	536690.88	4816044.90	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	0.2
39	536690.88	4816044.90	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.5	1.2	-2.9	0.0	0.0	27.9	0.0	1.7	6.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
43	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	8.4
43	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	2.4
43	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	26.9	0.0	0.0	8.4
45	536672.37	4816013.41	348.64	1	D	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-12.1
45	536672.37	4816013.41	348.64	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-18.1
45	536672.37	4816013.41	348.64	1	E	A	92.5	0.0	0.0	0.0	0.0	58.9	1.2	-2.9	0.0	0.0	27.9	0.0	19.4	-12.1

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
47	536415.97	4816336.50	359.79	0	D	A	88.0	0.0	0.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.0
47	536415.97	4816336.50	359.79	0	N	A	88.0	0.0	-3.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	31.9
47	536415.97	4816336.50	359.79	0	E	A	88.0	0.0	0.0	0.0	0.0	55.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.0
49	536415.97	4816336.50	359.79	1	D	A	88.0	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
49	536415.97	4816336.50	359.79	1	N	A	88.0	0.0	-3.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-1.1
49	536415.97	4816336.50	359.79	1	E	A	88.0	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	1.9
51	536415.97	4816336.50	359.79	1	D	A	88.0	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4
51	536415.97	4816336.50	359.79	1	N	A	88.0	0.0	-3.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-1.6
51	536415.97	4816336.50	359.79	1	E	A	88.0	0.0	0.0	0.0	0.0	59.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	1.4

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
56	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	6.0
56	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	3.0
56	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	62.0	1.9	-3.0	0.0	0.0	27.5	0.0	0.0	6.0

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
59	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	41.7
59	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-146.3
59	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	53.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-146.3
61	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	58.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	7.4
61	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	58.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-180.6
61	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	58.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-180.6
62	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	6.8
62	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.2
62	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	58.6	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.2
64	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	38.8
64	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	-149.2
64	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	55.1	1.2	-3.0	0.0	0.0	0.0	0.0	1.0	-149.2
66	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	40.6
66	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-147.4
66	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	53.5	1.0	-3.0	0.0	0.0	0.0	0.0	1.0	-147.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
71	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	16.4
71	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	-168.6
71	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	55.3	0.6	-3.0	0.0	0.0	25.6	0.0	0.0	-168.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
74	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	9.1
74	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	3.0
74	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	53.8	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	9.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
80	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.5	0.0	0.0	8.9
80	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.5	0.0	0.0	2.9
80	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.3	0.8	-3.0	0.0	0.0	24.5	0.0	0.0	8.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
83	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	8.2
83	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	2.2
83	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.0	0.0	0.0	8.2

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
87	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	6.4
87	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	6.4
87	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	6.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
93	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.7	0.0	0.0	8.1
93	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.7	0.0	0.0	2.1
93	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	54.9	0.9	-3.0	0.0	0.0	24.7	0.0	0.0	8.1

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
96	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	5.1
96	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	-175.1
96	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	60.2	2.4	-3.0	0.0	0.0	27.6	0.0	0.0	5.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
102	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	5.5
102	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-0.5
102	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	5.5
104	536869.76	4816329.54	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	61.0	-57.2
104	536869.76	4816329.54	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	61.0	-63.2
104	536869.76	4816329.54	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	61.0	-57.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
108	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	5.6
108	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	-0.4
108	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.1	0.0	0.0	5.6
110	536873.10	4816334.96	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	61.6	-58.0
110	536873.10	4816334.96	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	61.6	-64.1
110	536873.10	4816334.96	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	61.6	-58.0

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
113	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	4.7
113	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	-175.6

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
113	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	60.5	2.5	-3.0	0.0	0.0	27.6	0.0	0.0	4.7

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
116	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
116	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
116	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	29.3
118	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
118	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
118	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
120	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
120	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
120	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
121	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
121	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
121	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
126	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	5.2
126	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	-0.8
126	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
130	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.8
130	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.8
130	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	29.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
133	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	3.2
133	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	-2.8
133	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	57.2	1.1	-2.8	0.0	0.0	26.9	0.0	0.0	3.2
137	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	0.5
137	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	-5.5
137	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.3	1.1	-2.8	0.0	0.0	27.8	0.0	1.7	0.5
139	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-1.9
139	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-7.9
139	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.8	0.0	0.0	27.8	0.0	1.1	-1.9
142	536676.36	4816072.85	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-1.5
142	536676.36	4816072.85	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-7.5
142	536676.36	4816072.85	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-2.8	0.0	0.0	27.8	0.0	1.0	-1.5

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
144	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
144	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.2
144	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
146	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
146	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
146	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-3.8
153	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
153	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-3.3
153	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-0.3
155	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
155	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
155	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
164	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.6	0.0	0.0	11.4
164	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.6	0.0	0.0	-176.6
164	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	60.2	0.7	-3.0	0.0	0.0	20.6	0.0	0.0	11.4

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
168	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.2	0.0	0.0	5.1
168	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.2	0.0	0.0	-0.9
168	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	54.4	0.8	-3.0	0.0	0.0	25.2	0.0	0.0	5.1

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
172	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	28.9
172	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	25.9
172	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	55.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	28.9
173	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
173	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
173	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.1
177	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.6
177	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.6
177	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	56.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.6
181	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6
181	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.6
181	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
188	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	2.9
188	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	-3.1
188	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	57.7	1.1	-2.8	0.0	0.0	26.6	0.0	0.0	2.9
189	536692.85	4816072.45	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	0.5
189	536692.85	4816072.45	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	-5.5
189	536692.85	4816072.45	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	57.8	1.1	-2.8	0.0	0.0	27.8	0.0	1.1	0.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
195	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
195	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
195	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.1	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.1
199	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
199	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
199	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-10.7
202	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
202	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
202	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.1
204	536652.35	4816055.92	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0
204	536652.35	4816055.92	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0
204	536652.35	4816055.92	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.0

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
207	536439.12	4816311.15	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	53.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	27.4
207	536439.12	4816311.15	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	53.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	27.4
207	536439.12	4816311.15	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	53.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	27.4
210	536439.12	4816311.15	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.5
210	536439.12	4816311.15	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.5
210	536439.12	4816311.15	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.5
212	536439.12	4816311.15	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
212	536439.12	4816311.15	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
212	536439.12	4816311.15	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
216	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
216	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
216	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.2
218	536658.35	4816058.96	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0
218	536658.35	4816058.96	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0
218	536658.35	4816058.96	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-2.8	0.0	0.0	27.8	0.0	3.9	-5.0

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
221	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	5.0
221	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	-1.0
221	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	54.8	0.9	-3.0	0.0	0.0	24.8	0.0	0.0	5.0

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
226	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	2.6
226	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	-3.5
226	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.9	0.0	0.0	2.6

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
230	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
230	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
230	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
235	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
235	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5
235	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	60.2	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-0.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
241	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
241	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
241	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.3	1.0	-2.8	0.0	0.0	26.9	0.0	0.0	-0.3
243	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
243	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
243	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.4	1.0	-2.8	0.0	0.0	27.8	0.0	9.7	-11.0
245	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
245	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
245	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.4	1.1	-2.8	0.0	0.0	27.8	0.0	1.9	-4.3
247	536652.42	4816049.31	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2
247	536652.42	4816049.31	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2
247	536652.42	4816049.31	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	58.2	1.1	-2.8	0.0	0.0	27.8	0.0	1.0	-3.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
252	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	2.6
252	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	-3.5
252	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	65.0	2.2	-3.0	0.0	0.0	25.8	0.0	0.0	2.6

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
254	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
254	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
254	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	54.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.7
255	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
255	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
255	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
257	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
257	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
257	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	54.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.9
259	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
259	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
259	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
264	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.8	0.0	0.0	-0.9
264	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.8	0.0	0.0	-0.9
264	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	26.8	0.0	0.0	-0.9
266	536657.36	4816035.78	348.89	1	D	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5
266	536657.36	4816035.78	348.89	1	N	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5
266	536657.36	4816035.78	348.89	1	E	A	82.1	0.0	0.0	0.0	0.0	57.9	1.1	-2.9	0.0	0.0	27.9	0.0	18.6	-20.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
269	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.3
269	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
269	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
271	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-11.6
271	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-199.6
271	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	27.8	0.0	19.5	-199.6
272	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	2.2
272	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-185.8
272	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.0	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-185.8
275	536650.61	4816061.31	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	6.0
275	536650.61	4816061.31	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.0
275	536650.61	4816061.31	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
278	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.3
278	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
278	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	56.9	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.7
280	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-0.6
280	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
280	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
282	536654.75	4816063.25	348.64	1	D	A	90.2	0.0	0.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	6.1
282	536654.75	4816063.25	348.64	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.9
282	536654.75	4816063.25	348.64	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-181.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
287	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.2
287	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
287	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.8
288	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-0.6
288	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
288	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.0	0.4	-2.8	0.0	0.0	27.8	0.0	8.4	-188.6
290	536660.26	4816066.32	348.39	1	D	A	90.2	0.0	0.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	3.6
290	536660.26	4816066.32	348.39	1	N	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
290	536660.26	4816066.32	348.39	1	E	A	90.2	0.0	-188.0	0.0	0.0	60.0	0.5	-2.7	0.0	0.0	27.7	0.0	1.0	-184.4

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
293	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
293	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
293	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	55.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.0
295	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
295	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
295	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	58.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
297	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
297	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
297	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	55.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.5
298	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
298	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
298	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	59.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
303	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.1
303	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.9
303	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-178.9
305	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-24.7
305	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-212.7
305	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.1	0.4	-2.8	0.0	0.0	27.8	0.0	32.3	-212.7
306	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	1.8
306	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.2
306	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.3	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.2
308	536644.57	4816051.91	349.14	1	D	A	90.2	0.0	0.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.6
308	536644.57	4816051.91	349.14	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.4
308	536644.57	4816051.91	349.14	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.1	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
313	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	9.0
313	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-179.0
313	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.2	0.4	-2.8	0.0	0.0	26.4	0.0	0.0	-179.0
317	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-25.0
317	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-213.0
317	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.3	0.4	-2.9	0.0	0.0	27.9	0.0	32.5	-213.0
319	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	1.7
319	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.3
319	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	4.6	-186.3
335	536646.27	4816048.23	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.5
335	536646.27	4816048.23	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.5
335	536646.27	4816048.23	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.2	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.5

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
341	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.4	0.0	0.0	5.2
341	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.4	0.0	0.0	-0.8
341	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	59.6	1.3	-3.0	0.0	0.0	22.4	0.0	0.0	5.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
346	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	8.7
346	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	-179.3
346	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.5	0.4	-2.9	0.0	0.0	26.4	0.0	0.0	-179.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
349	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-25.5
349	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-213.5
349	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.6	0.4	-2.8	0.0	0.0	27.8	0.0	32.7	-213.5
350	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	1.4
350	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.6
350	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.7	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.6
352	536649.47	4816041.32	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	5.2
352	536649.47	4816041.32	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.8
352	536649.47	4816041.32	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.5	0.4	-2.8	0.0	0.0	27.8	0.0	1.0	-182.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
357	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.0	0.0	0.0	5.5
357	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.0	0.0	0.0	-0.5
357	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	22.0	0.0	0.0	5.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
362	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	8.5
362	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	-179.5
362	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	26.3	0.0	0.0	-179.5
365	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-25.8
365	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-213.8
365	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	57.7	0.4	-2.8	0.0	0.0	27.8	0.0	32.8	-213.8
366	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	1.3
366	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.7
366	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.8	0.5	-2.8	0.0	0.0	27.8	0.0	4.6	-186.7
369	536651.29	4816037.21	348.89	1	D	A	90.2	0.0	0.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	5.1
369	536651.29	4816037.21	348.89	1	N	A	90.2	0.0	-188.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-182.9
369	536651.29	4816037.21	348.89	1	E	A	90.2	0.0	-188.0	0.0	0.0	58.6	0.5	-2.8	0.0	0.0	27.8	0.0	1.0	-182.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
372	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	1.4
372	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	1.4
372	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	55.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	1.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
378	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	0.2
378	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	-5.8
378	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	0.2
382	536710.77	4815996.75	348.39	1	D	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-4.7
382	536710.77	4815996.75	348.39	1	N	A	85.5	0.0	-6.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-10.8
382	536710.77	4815996.75	348.39	1	E	A	85.5	0.0	0.0	0.0	0.0	60.1	1.4	-2.9	0.0	0.0	27.9	0.0	3.8	-4.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
389	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1
389	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1
389	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	22.8	0.0	0.0	1.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
393	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	1.0
393	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	-5.0
393	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	25.5	0.0	0.0	1.0

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
397	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-3.8
397	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-174.0
397	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	60.2	4.9	-3.0	0.0	0.0	27.9	0.0	0.0	-3.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
402	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.7
402	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	-5.3
402	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.7

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
407	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-0.8
407	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-6.8
407	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.3	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-0.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
411	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.9
411	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-6.9
411	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.4	1.2	-3.0	0.0	0.0	26.9	0.0	0.0	-0.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
415	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-4.3
415	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-174.6
415	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	60.5	5.1	-3.0	0.0	0.0	27.9	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
418	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-1.3
418	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-7.3
418	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	26.8	0.0	0.0	-1.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
422	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.1
422	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	-6.0
422	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
425	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.0
425	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	-6.0
425	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	58.9	1.2	-3.0	0.0	0.0	25.4	0.0	0.0	0.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
428	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-1.0
428	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-7.0
428	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.9	0.0	0.0	-1.0
429	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	22.6	-25.9
429	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	22.6	-31.9
429	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	28.0	0.0	22.6	-25.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
433	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-2.1
433	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-8.1
433	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	26.9	0.0	0.0	-2.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
437	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-1.9
437	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-8.0
437	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	26.7	0.0	0.0	-1.9
438	536701.96	4816020.79	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-6.8
438	536701.96	4816020.79	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-12.9
438	536701.96	4816020.79	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.3	1.3	-2.9	0.0	0.0	27.9	0.0	3.7	-6.8

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
444	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7
444	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7
444	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.7

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
448	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8
448	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8
448	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.6	0.0	0.0	-5.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
452	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-1.6
452	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-7.7
452	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	26.0	0.0	0.0	-1.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
456	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	24.9	0.0	0.0	-0.6
456	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	24.9	0.0	0.0	-6.7
456	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	24.9	0.0	0.0	-0.6
457	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.3	-27.2
457	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.3	-33.2
457	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	23.3	-27.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
460	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	1.8
460	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	-4.2
460	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	22.9	0.0	0.0	1.8

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
465	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	2.4
465	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	-3.6
465	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	22.0	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
469	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-3.3
469	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-9.3

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
469	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	59.8	1.4	-3.0	0.0	0.0	27.7	0.0	0.0	-3.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
472	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	5.3
472	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	-182.7
472	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	58.6	0.8	-2.7	0.0	0.0	26.0	0.0	0.0	-182.7
473	536707.14	4816053.41	345.47	1	D	A	85.0	0.0	0.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	1.7
473	536707.14	4816053.41	345.47	1	N	A	85.0	0.0	-188.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	-186.3
473	536707.14	4816053.41	345.47	1	E	A	85.0	0.0	-188.0	3.0	0.0	58.7	0.8	-2.7	0.0	0.0	27.7	0.0	1.9	-186.3

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
476	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4
476	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4
476	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.5	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
480	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-2.6
480	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-8.6
480	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	26.8	0.0	0.0	-2.6
481	536692.76	4815990.81	348.14	1	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-24.0
481	536692.76	4815990.81	348.14	1	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-30.1
481	536692.76	4815990.81	348.14	1	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-2.9	0.0	0.0	27.9	0.0	20.3	-24.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
487	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
487	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
487	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
491	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
491	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5
491	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.6	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
494	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.6
494	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.6
494	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	61.7	0.9	-3.0	0.0	0.0	27.4	0.0	0.0	-5.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
499	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-0.4
499	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-6.4
499	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-0.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
503	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.7	0.0	0.0	-1.2
503	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.7	0.0	0.0	-7.2
503	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.1	1.8	-3.0	0.0	0.0	24.7	0.0	0.0	-1.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
506	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.4	0.0	0.0	-1.9
506	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.4	0.0	0.0	-7.9
506	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.4	0.0	0.0	-1.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
511	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	-3.2
511	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	-9.2
511	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	26.7	0.0	0.0	-3.2
513	536700.98	4815972.90	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-25.2
513	536700.98	4815972.90	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-31.3
513	536700.98	4815972.90	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.5	1.4	-2.9	0.0	0.0	27.9	0.0	20.9	-25.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
523	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
523	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-9.4
523	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
525	536721.07	4815978.96	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.4
525	536721.07	4815978.96	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-14.5
525	536721.07	4815978.96	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
529	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
529	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-9.4
529	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.7	0.0	0.0	-3.4
532	536717.54	4815975.77	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-14.1
532	536717.54	4815975.77	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-20.2
532	536717.54	4815975.77	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	9.5	-14.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
537	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-3.4
537	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-9.4
537	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	26.6	0.0	0.0	-3.4
539	536730.95	4815985.25	349.64	1	D	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.5
539	536730.95	4815985.25	349.64	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-14.5
539	536730.95	4815985.25	349.64	1	E	A	82.5	0.0	0.0	0.0	0.0	60.7	1.5	-2.9	0.0	0.0	27.9	0.0	3.8	-8.5

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
542	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
542	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
542	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	20.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
546	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2
546	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-10.2
546	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.6	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
550	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-3.5
550	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-9.6
550	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	26.0	0.0	0.0	-3.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
554	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-3.9
554	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-9.9
554	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	64.2	2.0	-3.0	0.0	0.0	26.3	0.0	0.0	-3.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
558	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-4.2
558	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-10.2
558	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-4.2
560	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	22.5	-28.7
560	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	22.5	-34.7
560	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	22.5	-28.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
565	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-5.0
565	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-11.0
565	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-5.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
568	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.5	0.0	0.0	-3.6
568	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.5	0.0	0.0	-9.6
568	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	25.5	0.0	0.0	-3.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
575	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-4.0
575	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-10.1
575	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	25.8	0.0	0.0	-4.0
578	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-29.1
578	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-35.2
578	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-29.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
581	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-4.0
581	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-10.1
581	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	25.7	0.0	0.0	-4.0
584	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-29.3
584	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-35.3
584	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	22.8	-29.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
587	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-4.3
587	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-10.4
587	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.4	0.0	0.0	-4.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
589	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
589	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
589	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
591	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-4.2
591	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-10.2
591	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	25.5	0.0	0.0	-4.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
593	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1
593	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1
593	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
596	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5
596	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5
596	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	61.4	1.1	-3.0	0.0	0.0	27.6	0.0	0.0	-8.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
599	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
599	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
599	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	19.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
601	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9
601	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9
601	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	18.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
605	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.1	0.0	0.0	-4.1
605	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.1	0.0	0.0	-10.1
605	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	25.1	0.0	0.0	-4.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
607	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
607	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8
607	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
611	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
611	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
611	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
613	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
613	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7
613	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
614	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
614	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6
614	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.6

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
618	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
618	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
618	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
621	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	28.0
621	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.0
621	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
626	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	-4.7
626	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	-10.8
626	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-3.0	0.0	0.0	25.2	0.0	0.0	-4.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
627	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
627	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
627	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	64.9	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
631	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.9
631	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1
631	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
635	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.9
635	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1
635	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.1

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
637	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-3.9
637	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-191.9
637	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	26.8	0.0	0.0	-3.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
639	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
639	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.2
639	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	64.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-160.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
642	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0
642	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
642	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.0

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
644	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
644	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
644	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	65.5	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
646	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-7.7
646	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-7.7
646	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	62.7	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-7.7

Point Source, ISO 9613, Name: "Sobeys - Compactor", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
650	536434.61	4816335.71	350.34	0	D	A	88.0	0.0	-7.8	0.0	0.0	55.0	0.5	-3.0	0.0	0.0	21.0	0.0	0.0	6.9
650	536434.61	4816335.71	350.34	0	N	A	88.0	0.0	-188.0	0.0	0.0	55.0	0.5	-3.0	0.0	0.0	21.0	0.0	0.0	-173.4
650	536434.61	4816335.71	350.34	0	E	A	88.0	0.0	-188.0	0.0	0.0	55.0	0.5	-3.0	0.0	0.0	21.0	0.0	0.0	-173.4
653	536434.61	4816335.71	350.34	1	D	A	88.0	0.0	-7.8	0.0	0.0	59.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-5.5
653	536434.61	4816335.71	350.34	1	N	A	88.0	0.0	-188.0	0.0	0.0	59.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-185.7
653	536434.61	4816335.71	350.34	1	E	A	88.0	0.0	-188.0	0.0	0.0	59.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-185.7
655	536434.61	4816335.71	350.34	1	D	A	88.0	0.0	-7.8	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
655	536434.61	4816335.71	350.34	1	N	A	88.0	0.0	-188.0	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-186.2
655	536434.61	4816335.71	350.34	1	E	A	88.0	0.0	-188.0	0.0	0.0	59.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-186.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
658	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
658	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
658	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	18.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
661	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-8.3
661	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-8.3
661	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	25.3	0.0	0.0	-8.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
666	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-7.2
666	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-13.3
666	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.7	2.1	-3.0	0.0	0.0	26.0	0.0	0.0	-7.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
668	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.7
668	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-12.7
668	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
672	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.8
672	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-12.8
672	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.2	0.0	0.0	-6.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
676	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-7.3
676	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-13.3
676	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	25.7	0.0	0.0	-7.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
681	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-2.2
681	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-182.4
681	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	61.1	2.1	-3.0	0.0	0.0	27.2	0.0	0.0	-182.4
683	536729.74	4815964.66	344.25	1	D	A	93.1	0.0	-7.8	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-8.7
683	536729.74	4815964.66	344.25	1	N	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-188.9
683	536729.74	4815964.66	344.25	1	E	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	5.8	-188.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
685	536415.57	4816238.21	352.92	0	D	A	62.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.5
685	536415.57	4816238.21	352.92	0	N	A	-40.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
685	536415.57	4816238.21	352.92	0	E	A	-40.5	13.5	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-77.5
688	536423.55	4816242.03	352.64	1	D	A	62.5	6.8	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.4
688	536423.55	4816242.03	352.64	1	N	A	-40.5	6.8	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
688	536423.55	4816242.03	352.64	1	E	A	-40.5	6.8	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
691	536415.99	4816238.42	352.90	1	D	A	62.5	10.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-10.6
691	536415.99	4816238.42	352.90	1	N	A	-40.5	10.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.6
691	536415.99	4816238.42	352.90	1	E	A	-40.5	10.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.6
693	536419.38	4816240.04	352.78	1	D	A	62.5	11.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-5.8
693	536419.38	4816240.04	352.78	1	N	A	-40.5	11.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-108.8
693	536419.38	4816240.04	352.78	1	E	A	-40.5	11.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-108.8
695	536409.25	4816235.19	353.13	1	D	A	62.5	9.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
695	536409.25	4816235.19	353.13	1	N	A	-40.5	9.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
695	536409.25	4816235.19	353.13	1	E	A	-40.5	9.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
696	536421.22	4816240.91	352.72	1	D	A	62.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	18.6
696	536421.22	4816240.91	352.72	1	N	A	-40.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-84.4
696	536421.22	4816240.91	352.72	1	E	A	-40.5	10.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-84.4
730	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	25.0
730	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
730	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.0
733	536460.65	4816259.24	351.49	1	D	A	62.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
733	536460.65	4816259.24	351.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
733	536460.65	4816259.24	351.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
736	536459.00	4816258.55	351.55	1	D	A	62.5	3.9	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
736	536459.00	4816258.55	351.55	1	N	A	-40.5	3.9	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
736	536459.00	4816258.55	351.55	1	E	A	-40.5	3.9	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
738	536455.86	4816257.22	351.68	1	D	A	62.5	6.4	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.0
738	536455.86	4816257.22	351.68	1	N	A	-40.5	6.4	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
738	536455.86	4816257.22	351.68	1	E	A	-40.5	6.4	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
741	536452.56	4816255.82	351.81	1	D	A	62.5	4.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
741	536452.56	4816255.82	351.81	1	N	A	-40.5	4.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
741	536452.56	4816255.82	351.81	1	E	A	-40.5	4.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
744	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-4.8
744	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
744	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	51.1	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-107.9
747	536460.54	4816259.19	351.49	1	D	A	62.5	1.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
747	536460.54	4816259.19	351.49	1	N	A	-40.5	1.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
747	536460.54	4816259.19	351.49	1	E	A	-40.5	1.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
749	536457.93	4816258.09	351.60	1	D	A	62.5	6.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.7
749	536457.93	4816258.09	351.60	1	N	A	-40.5	6.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
749	536457.93	4816258.09	351.60	1	E	A	-40.5	6.3	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.7
751	536453.61	4816256.26	351.77	1	D	A	62.5	7.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
751	536453.61	4816256.26	351.77	1	N	A	-40.5	7.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
751	536453.61	4816256.26	351.77	1	E	A	-40.5	7.1	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
753	536457.23	4816257.79	351.62	1	D	A	62.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	14.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
753	536457.23	4816257.79	351.62	1	N	A	-40.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-89.0
753	536457.23	4816257.79	351.62	1	E	A	-40.5	4.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-89.0
759	536436.24	4816248.09	352.25	0	D	A	62.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	24.5
759	536436.24	4816248.09	352.25	0	N	A	-40.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
759	536436.24	4816248.09	352.25	0	E	A	-40.5	11.1	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-78.5
761	536441.46	4816250.58	352.12	1	D	A	62.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
761	536441.46	4816250.58	352.12	1	N	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
761	536441.46	4816250.58	352.12	1	E	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
763	536435.68	4816247.83	352.27	1	D	A	62.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-10.2
763	536435.68	4816247.83	352.27	1	N	A	-40.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.2
763	536435.68	4816247.83	352.27	1	E	A	-40.5	10.6	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-113.2
765	536439.69	4816249.74	352.17	1	D	A	62.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
765	536439.69	4816249.74	352.17	1	N	A	-40.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
765	536439.69	4816249.74	352.17	1	E	A	-40.5	7.1	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.6
767	536434.44	4816247.23	352.30	1	D	A	62.5	8.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
767	536434.44	4816247.23	352.30	1	N	A	-40.5	8.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
767	536434.44	4816247.23	352.30	1	E	A	-40.5	8.1	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
772	536438.22	4816249.04	352.20	1	D	A	62.5	9.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-6.9
772	536438.22	4816249.04	352.20	1	N	A	-40.5	9.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
772	536438.22	4816249.04	352.20	1	E	A	-40.5	9.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.9
774	536432.45	4816246.28	352.35	1	D	A	62.5	6.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-10.1
774	536432.45	4816246.28	352.35	1	N	A	-40.5	6.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
774	536432.45	4816246.28	352.35	1	E	A	-40.5	6.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
801	536438.21	4816249.03	352.21	1	D	A	62.5	9.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
801	536438.21	4816249.03	352.21	1	N	A	-40.5	9.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.2
801	536438.21	4816249.03	352.21	1	E	A	-40.5	9.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.2
826	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
826	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
826	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-79.8
828	536446.06	4816252.79	352.01	1	D	A	62.5	8.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
828	536446.06	4816252.79	352.01	1	N	A	-40.5	8.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
828	536446.06	4816252.79	352.01	1	E	A	-40.5	8.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
830	536442.36	4816251.02	352.10	1	D	A	62.5	-1.1	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
830	536442.36	4816251.02	352.10	1	N	A	-40.5	-1.1	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
830	536442.36	4816251.02	352.10	1	E	A	-40.5	-1.1	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
832	536444.09	4816251.84	352.06	1	D	A	62.5	6.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
832	536444.09	4816251.84	352.06	1	N	A	-40.5	6.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
832	536444.09	4816251.84	352.06	1	E	A	-40.5	6.6	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
833	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-6.6
833	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
833	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.6
835	536448.41	4816253.91	351.96	1	D	A	62.5	3.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
835	536448.41	4816253.91	351.96	1	N	A	-40.5	3.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
835	536448.41	4816253.91	351.96	1	E	A	-40.5	3.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
837	536444.71	4816252.14	352.04	1	D	A	62.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
837	536444.71	4816252.14	352.04	1	N	A	-40.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
837	536444.71	4816252.14	352.04	1	E	A	-40.5	7.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
843	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	23.0
843	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.0
843	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.0
845	536436.71	4816269.54	352.62	1	D	A	62.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.4
845	536436.71	4816269.54	352.62	1	N	A	-40.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
845	536436.71	4816269.54	352.62	1	E	A	-40.5	8.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
847	536441.24	4816271.98	352.44	1	D	A	62.5	5.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6
847	536441.24	4816271.98	352.44	1	N	A	-40.5	5.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
847	536441.24	4816271.98	352.44	1	E	A	-40.5	5.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.6
850	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
850	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
850	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-109.8
853	536437.97	4816270.22	352.57	1	D	A	62.5	9.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
853	536437.97	4816270.22	352.57	1	N	A	-40.5	9.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
853	536437.97	4816270.22	352.57	1	E	A	-40.5	9.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
856	536442.49	4816272.65	352.39	1	D	A	62.5	-0.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
856	536442.49	4816272.65	352.39	1	N	A	-40.5	-0.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
856	536442.49	4816272.65	352.39	1	E	A	-40.5	-0.1	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
859	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	20.5
859	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-82.5
859	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-82.5
863	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.5
863	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.5
863	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.5
865	536460.76	4816288.21	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
865	536460.76	4816288.21	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
865	536460.76	4816288.21	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
868	536460.76	4816288.21	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
868	536460.76	4816288.21	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
868	536460.76	4816288.21	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
872	536368.61	4816210.13	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	13.8
872	536368.61	4816210.13	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	-89.2
872	536368.61	4816210.13	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	8.5	0.0	0.0	-89.2
874	536368.61	4816210.13	354.57	1	D	A	62.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
874	536368.61	4816210.13	354.57	1	N	A	-40.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
874	536368.61	4816210.13	354.57	1	E	A	-40.5	13.1	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
877	536377.86	4816214.59	354.41	1	D	A	62.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-14.3
877	536377.86	4816214.59	354.41	1	N	A	-40.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-117.3
877	536377.86	4816214.59	354.41	1	E	A	-40.5	-11.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-117.3
880	536369.13	4816216.02	354.57	0	D	A	62.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	11.7
880	536369.13	4816216.02	354.57	0	N	A	-40.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	-91.3
880	536369.13	4816216.02	354.57	0	E	A	-40.5	5.5	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	3.0	0.0	0.0	-91.3
883	536359.04	4816211.20	354.75	0	D	A	62.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	21.4
883	536359.04	4816211.20	354.75	0	N	A	-40.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.6
883	536359.04	4816211.20	354.75	0	E	A	-40.5	12.8	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.6
885	536360.63	4816211.96	354.72	1	D	A	62.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
885	536360.63	4816211.96	354.72	1	N	A	-40.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
885	536360.63	4816211.96	354.72	1	E	A	-40.5	13.5	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-110.0
889	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.4
889	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
889	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-80.6
892	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
892	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
892	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
894	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.4
894	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
894	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
898	536455.99	4816298.49	351.39	0	D	A	62.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
898	536455.99	4816298.49	351.39	0	N	A	-40.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
898	536455.99	4816298.49	351.39	0	E	A	-40.5	9.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
900	536455.99	4816298.49	351.39	1	D	A	62.5	9.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.2
900	536455.99	4816298.49	351.39	1	N	A	-40.5	9.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
900	536455.99	4816298.49	351.39	1	E	A	-40.5	9.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
904	536455.99	4816298.49	351.39	1	D	A	62.5	9.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9
904	536455.99	4816298.49	351.39	1	N	A	-40.5	9.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
904	536455.99	4816298.49	351.39	1	E	A	-40.5	9.7	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
907	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
907	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
907	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
908	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
908	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
908	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
911	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
911	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
911	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
914	536428.31	4816265.09	352.94	0	D	A	62.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	22.3
914	536428.31	4816265.09	352.94	0	N	A	-40.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
914	536428.31	4816265.09	352.94	0	E	A	-40.5	10.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-80.7
916	536424.83	4816263.25	353.06	1	D	A	62.5	3.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
916	536424.83	4816263.25	353.06	1	N	A	-40.5	3.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
916	536424.83	4816263.25	353.06	1	E	A	-40.5	3.2	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
919	536426.74	4816264.26	352.99	1	D	A	62.5	3.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
919	536426.74	4816264.26	352.99	1	N	A	-40.5	3.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
919	536426.74	4816264.26	352.99	1	E	A	-40.5	3.4	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
922	536430.22	4816266.09	352.87	1	D	A	62.5	7.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
922	536430.22	4816266.09	352.87	1	N	A	-40.5	7.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
922	536430.22	4816266.09	352.87	1	E	A	-40.5	7.5	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
924	536425.28	4816263.49	353.04	1	D	A	62.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
924	536425.28	4816263.49	353.04	1	N	A	-40.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
924	536425.28	4816263.49	353.04	1	E	A	-40.5	4.9	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
928	536429.69	4816265.81	352.89	1	D	A	62.5	8.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
928	536429.69	4816265.81	352.89	1	N	A	-40.5	8.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
928	536429.69	4816265.81	352.89	1	E	A	-40.5	8.4	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
930	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
930	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
930	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-110.3
932	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
932	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
932	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
935	536428.31	4816265.09	352.94	1	D	A	62.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	19.8
935	536428.31	4816265.09	352.94	1	N	A	-40.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
935	536428.31	4816265.09	352.94	1	E	A	-40.5	10.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
938	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	22.1
938	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
938	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-80.9
940	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-11.2
940	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
940	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
942	536408.17	4816254.15	353.66	1	D	A	62.5	9.0	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-9.3
942	536408.17	4816254.15	353.66	1	N	A	-40.5	9.0	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.3
942	536408.17	4816254.15	353.66	1	E	A	-40.5	9.0	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.3
944	536413.40	4816257.01	353.47	1	D	A	62.5	6.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
944	536413.40	4816257.01	353.47	1	N	A	-40.5	6.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
944	536413.40	4816257.01	353.47	1	E	A	-40.5	6.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
946	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	19.8
946	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
946	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-83.2
949	536381.81	4816216.51	354.26	0	D	A	62.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	3.1
949	536381.81	4816216.51	354.26	0	N	A	-40.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	-99.9
949	536381.81	4816216.51	354.26	0	E	A	-40.5	2.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	9.8	0.0	0.0	-99.9
951	536387.91	4816219.58	353.96	0	D	A	62.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	12.6
951	536387.91	4816219.58	353.96	0	N	A	-40.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	-90.4
951	536387.91	4816219.58	353.96	0	E	A	-40.5	10.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	8.4	0.0	0.0	-90.4
955	536393.55	4816222.41	353.69	0	D	A	62.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	10.3
955	536393.55	4816222.41	353.69	0	N	A	-40.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
955	536393.55	4816222.41	353.69	0	E	A	-40.5	-0.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.7
956	536381.82	4816216.52	354.26	1	D	A	62.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
956	536381.82	4816216.52	354.26	1	N	A	-40.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
956	536381.82	4816216.52	354.26	1	E	A	-40.5	3.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
958	536388.33	4816219.79	353.94	1	D	A	62.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
958	536388.33	4816219.79	353.94	1	N	A	-40.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0
958	536388.33	4816219.79	353.94	1	E	A	-40.5	11.0	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-111.0
962	536452.96	4816276.80	351.88	0	D	A	62.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	22.0
962	536452.96	4816276.80	351.88	0	N	A	-40.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.0
962	536452.96	4816276.80	351.88	0	E	A	-40.5	8.5	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.0
965	536452.96	4816276.80	351.88	1	D	A	62.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
965	536452.96	4816276.80	351.88	1	N	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
965	536452.96	4816276.80	351.88	1	E	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
969	536451.82	4816276.45	351.94	1	D	A	62.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
969	536451.82	4816276.45	351.94	1	N	A	-40.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
969	536451.82	4816276.45	351.94	1	E	A	-40.5	6.6	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
970	536452.96	4816276.80	351.88	1	D	A	62.5	8.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
970	536452.96	4816276.80	351.88	1	N	A	-40.5	8.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
970	536452.96	4816276.80	351.88	1	E	A	-40.5	8.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
972	536452.90	4816276.78	351.89	1	D	A	62.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	19.2
972	536452.90	4816276.78	351.89	1	N	A	-40.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-83.8
972	536452.90	4816276.78	351.89	1	E	A	-40.5	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-83.8
982	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	21.5
982	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.5
982	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-81.5
984	536463.54	4816284.75	351.38	1	D	A	62.5	7.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.6
984	536463.54	4816284.75	351.38	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
984	536463.54	4816284.75	351.38	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.6
987	536463.54	4816284.75	351.38	1	D	A	62.5	7.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.2
987	536463.54	4816284.75	351.38	1	N	A	-40.5	7.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
987	536463.54	4816284.75	351.38	1	E	A	-40.5	7.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
990	536392.10	4816227.00	353.90	0	D	A	62.5	4.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
990	536392.10	4816227.00	353.90	0	N	A	-40.5	4.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
990	536392.10	4816227.00	353.90	0	E	A	-40.5	4.2	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
992	536386.88	4816224.50	354.15	0	D	A	62.5	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	19.8
992	536386.88	4816224.50	354.15	0	N	A	-40.5	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
992	536386.88	4816224.50	354.15	0	E	A	-40.5	9.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
994	536382.28	4816222.31	354.37	0	D	A	62.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	7.8
994	536382.28	4816222.31	354.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.2
994	536382.28	4816222.31	354.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.2
996	536389.48	4816225.75	354.02	1	D	A	62.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-9.7
996	536389.48	4816225.75	354.02	1	N	A	-40.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
996	536389.48	4816225.75	354.02	1	E	A	-40.5	9.3	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
997	536383.71	4816222.99	354.30	1	D	A	62.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.9
997	536383.71	4816222.99	354.30	1	N	A	-40.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
997	536383.71	4816222.99	354.30	1	E	A	-40.5	6.4	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.9
999	536391.61	4816226.77	353.92	1	D	A	62.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	3.4
999	536391.61	4816226.77	353.92	1	N	A	-40.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-99.6
999	536391.61	4816226.77	353.92	1	E	A	-40.5	5.7	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-99.6
1001	536389.11	4816225.57	354.04	1	D	A	62.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	0.6
1001	536389.11	4816225.57	354.04	1	N	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-102.4
1001	536389.11	4816225.57	354.04	1	E	A	-40.5	2.7	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	7.8	0.0	1.6	-102.4
1013	536397.73	4816229.69	353.62	0	D	A	62.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	20.8
1013	536397.73	4816229.69	353.62	0	N	A	-40.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.2
1013	536397.73	4816229.69	353.62	0	E	A	-40.5	9.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-82.2
1016	536397.73	4816229.69	353.62	1	D	A	62.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-8.6
1016	536397.73	4816229.69	353.62	1	N	A	-40.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1016	536397.73	4816229.69	353.62	1	E	A	-40.5	9.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-111.6
1029	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	20.5
1029	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.6
1029	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.6
1032	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
1032	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.3
1032	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.3
1034	536421.26	4816261.32	353.19	1	D	A	62.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
1034	536421.26	4816261.32	353.19	1	N	A	-40.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1034	536421.26	4816261.32	353.19	1	E	A	-40.5	7.8	0.0	0.0	0.0	60.6	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1036	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
1036	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.2
1036	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-112.2
1039	536421.63	4816261.52	353.17	1	D	A	62.5	7.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1039	536421.63	4816261.52	353.17	1	N	A	-40.5	7.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1039	536421.63	4816261.52	353.17	1	E	A	-40.5	7.1	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1042	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	18.0
1042	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-85.0
1042	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-85.0
1045	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
1045	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1045	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
1048	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1048	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1048	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1053	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.0
1053	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1053	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1058	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
1058	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
1058	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
1060	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1060	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1060	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1063	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
1063	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1063	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1067	536465.48	4816280.33	351.38	0	D	A	62.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
1067	536465.48	4816280.33	351.38	0	N	A	-40.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1067	536465.48	4816280.33	351.38	0	E	A	-40.5	5.8	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
1070	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1070	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1070	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1074	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1074	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1074	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1076	536454.80	4816299.06	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	19.9
1076	536454.80	4816299.06	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1076	536454.80	4816299.06	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.1
1079	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
1079	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1079	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1082	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1082	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1082	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1086	536453.76	4816301.05	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	7.8
1086	536453.76	4816301.05	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-95.2
1086	536453.76	4816301.05	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-95.2
1108	536468.03	4816272.53	351.38	0	D	A	62.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.6
1108	536468.03	4816272.53	351.38	0	N	A	-40.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1108	536468.03	4816272.53	351.38	0	E	A	-40.5	4.7	0.0	0.0	0.0	50.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.5
1109	536468.03	4816272.53	351.38	1	D	A	62.5	4.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
1109	536468.03	4816272.53	351.38	1	N	A	-40.5	4.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1109	536468.03	4816272.53	351.38	1	E	A	-40.5	4.7	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1112	536467.83	4816273.22	351.39	1	D	A	62.5	1.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1112	536467.83	4816273.22	351.39	1	N	A	-40.5	1.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1112	536467.83	4816273.22	351.39	1	E	A	-40.5	1.8	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
1114	536468.23	4816271.80	351.38	1	D	A	62.5	1.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7
1114	536468.23	4816271.80	351.38	1	N	A	-40.5	1.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1114	536468.23	4816271.80	351.38	1	E	A	-40.5	1.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1123	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.3
1123	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
1123	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-83.7
1126	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1126	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1126	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1129	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1129	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1129	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1135	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1135	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1135	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	50.5	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1137	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1137	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1137	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1141	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.1

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1141	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1141	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	57.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1157	536403.85	4816241.73	353.57	0	D	A	62.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	19.0
1157	536403.85	4816241.73	353.57	0	N	A	-40.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1157	536403.85	4816241.73	353.57	0	E	A	-40.5	7.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.0
1160	536403.74	4816241.98	353.59	1	D	A	62.5	7.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-14.5
1160	536403.74	4816241.98	353.59	1	N	A	-40.5	7.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
1160	536403.74	4816241.98	353.59	1	E	A	-40.5	7.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-117.5
1163	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-10.5
1163	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.5
1163	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.5
1166	536403.55	4816242.41	353.61	1	D	A	62.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	14.4
1166	536403.55	4816242.41	353.61	1	N	A	-40.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-88.6
1166	536403.55	4816242.41	353.61	1	E	A	-40.5	6.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-88.6
1168	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	18.9
1168	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1168	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.1
1171	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-15.4
1171	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1171	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.4
1174	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1174	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1174	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1178	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	15.0
1178	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
1178	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
1180	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	17.7
1180	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-85.3
1180	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-85.3
1225	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.5
1225	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1225	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	51.6	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
1228	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1228	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1228	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1232	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-11.3
1232	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1232	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.3
1234	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.8
1234	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1234	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1236	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	15.9
1236	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.1
1236	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.1
1238	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.4
1238	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1238	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1240	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.9
1240	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1240	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1243	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
1243	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1243	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1246	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1246	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1246	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1247	536468.49	4816270.56	351.38	1	D	A	62.5	0.4	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1247	536468.49	4816270.56	351.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1247	536468.49	4816270.56	351.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1250	536468.60	4816269.50	351.38	1	D	A	62.5	0.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1250	536468.60	4816269.50	351.38	1	N	A	-40.5	0.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1250	536468.60	4816269.50	351.38	1	E	A	-40.5	0.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1252	536468.54	4816270.03	351.38	1	D	A	62.5	3.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1252	536468.54	4816270.03	351.38	1	N	A	-40.5	3.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1252	536468.54	4816270.03	351.38	1	E	A	-40.5	3.3	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1256	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
1256	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1256	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	51.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.7
1258	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1258	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1258	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1260	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
1260	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1260	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.3
1267	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	18.2
1267	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
1267	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	50.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-84.8
1270	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2
1270	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1270	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1272	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
1272	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1272	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-114.8
1275	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1275	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1275	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1278	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	18.1
1278	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
1278	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	51.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
1280	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1280	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1280	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1282	536444.13	4816273.40	352.33	1	D	A	62.5	4.2	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
1282	536444.13	4816273.40	352.33	1	N	A	-40.5	4.2	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1282	536444.13	4816273.40	352.33	1	E	A	-40.5	4.2	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-115.5
1284	536445.57	4816274.03	352.27	1	D	A	62.5	-2.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1284	536445.57	4816274.03	352.27	1	N	A	-40.5	-2.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1284	536445.57	4816274.03	352.27	1	E	A	-40.5	-2.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1286	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
1286	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1286	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.1
1288	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	15.6
1288	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.4
1288	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-87.4
1301	536449.63	4816310.01	351.46	0	D	A	62.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
1301	536449.63	4816310.01	351.46	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1301	536449.63	4816310.01	351.46	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1302	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.3
1302	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1302	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.3
1305	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-16.9
1305	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1305	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.9
1309	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	14.5
1309	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.5
1309	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.5
1311	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	16.7
1311	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.3
1311	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.3
1314	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
1314	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1314	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	51.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
1316	536460.30	4816278.45	351.51	1	D	A	62.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2
1316	536460.30	4816278.45	351.51	1	N	A	-40.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1316	536460.30	4816278.45	351.51	1	E	A	-40.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1320	536460.30	4816278.45	351.51	1	D	A	62.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1320	536460.30	4816278.45	351.51	1	N	A	-40.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1320	536460.30	4816278.45	351.51	1	E	A	-40.5	3.9	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1324	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
1324	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
1324	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.2
1327	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.7
1327	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1327	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.7
1331	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.1
1331	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.1
1331	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.1
1334	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.4
1334	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1334	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
1336	536343.48	4816203.77	354.95	0	D	A	62.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	17.6
1336	536343.48	4816203.77	354.95	0	N	A	-40.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1336	536343.48	4816203.77	354.95	0	E	A	-40.5	9.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1339	536343.48	4816203.77	354.95	1	D	A	62.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-11.7
1339	536343.48	4816203.77	354.95	1	N	A	-40.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1339	536343.48	4816203.77	354.95	1	E	A	-40.5	9.7	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
1343	536449.90	4816310.20	351.45	0	D	A	62.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
1343	536449.90	4816310.20	351.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1343	536449.90	4816310.20	351.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1345	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1345	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1345	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.4
1349	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
1349	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
1349	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
1351	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	14.4
1351	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.6
1351	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-88.6
1353	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	16.6
1353	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.5
1353	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-86.5
1355	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
1355	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1355	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1356	536396.16	4816223.72	353.57	1	D	A	62.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-11.6
1356	536396.16	4816223.72	353.57	1	N	A	-40.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.6
1356	536396.16	4816223.72	353.57	1	E	A	-40.5	6.9	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.6
1377	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
1377	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1377	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
1379	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1379	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1379	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1382	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-11.9
1382	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
1382	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.9
1385	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	12.8
1385	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.2
1385	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.2
1386	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
1386	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1386	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.4
1389	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
1389	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1389	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1391	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.3
1391	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
1391	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.3
1393	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1393	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1393	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1407	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.4
1407	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
1407	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-85.6
1409	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1409	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1409	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1413	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-12.4
1413	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
1413	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	51.4	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-115.4
1415	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.1
1415	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
1415	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.1
1417	536347.35	4816199.98	354.88	0	D	A	62.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	6.2
1417	536347.35	4816199.98	354.88	0	N	A	-40.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-96.8
1417	536347.35	4816199.98	354.88	0	E	A	-40.5	6.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-96.8
1420	536350.86	4816201.65	354.84	0	D	A	62.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	6.0
1420	536350.86	4816201.65	354.84	0	N	A	-40.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	-97.0
1420	536350.86	4816201.65	354.84	0	E	A	-40.5	4.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	7.0	0.0	0.0	-97.0
1422	536348.40	4816200.48	354.87	1	D	A	62.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-12.8
1422	536348.40	4816200.48	354.87	1	N	A	-40.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-115.8
1422	536348.40	4816200.48	354.87	1	E	A	-40.5	8.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-115.8
1425	536351.91	4816202.14	354.82	1	D	A	62.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-22.8
1425	536351.91	4816202.14	354.82	1	N	A	-40.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1425	536351.91	4816202.14	354.82	1	E	A	-40.5	-1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
1442	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
1442	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1442	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1444	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1444	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1444	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1447	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1447	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1447	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1451	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.9
1451	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1451	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1452	536403.80	4816232.59	353.33	1	D	A	62.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-12.6
1452	536403.80	4816232.59	353.33	1	N	A	-40.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1452	536403.80	4816232.59	353.33	1	E	A	-40.5	5.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1456	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	13.5
1456	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-89.6
1456	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-89.6
1457	536374.13	4816218.41	354.55	1	D	A	62.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.8
1457	536374.13	4816218.41	354.55	1	N	A	-40.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1457	536374.13	4816218.41	354.55	1	E	A	-40.5	7.1	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
1459	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	13.0
1459	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	-90.0
1459	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	3.4	0.0	0.0	-90.0
1460	536379.69	4816221.07	354.50	1	D	A	62.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-13.0
1460	536379.69	4816221.07	354.50	1	N	A	-40.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1460	536379.69	4816221.07	354.50	1	E	A	-40.5	6.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-116.0
1482	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.0
1482	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
1482	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
1485	536404.33	4816229.46	353.24	1	D	A	62.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1485	536404.33	4816229.46	353.24	1	N	A	-40.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1485	536404.33	4816229.46	353.24	1	E	A	-40.5	4.6	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1495	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
1495	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1495	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1497	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1497	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1497	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	55.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1503	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-14.1
1503	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1503	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.1
1505	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1505	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1505	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1509	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
1509	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1509	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1510	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1510	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1510	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1513	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
1513	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1513	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
1515	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.5
1515	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.5
1515	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.5
1516	536452.80	4816302.87	351.41	1	D	A	62.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	13.0
1516	536452.80	4816302.87	351.41	1	N	A	-40.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-90.1
1516	536452.80	4816302.87	351.41	1	E	A	-40.5	2.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-90.1
1521	536356.96	4816204.53	354.77	0	D	A	62.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	8.3
1521	536356.96	4816204.53	354.77	0	N	A	-40.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	-94.7
1521	536356.96	4816204.53	354.77	0	E	A	-40.5	7.2	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	7.4	0.0	0.0	-94.7
1523	536356.96	4816204.53	354.77	1	D	A	62.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
1523	536356.96	4816204.53	354.77	1	N	A	-40.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1523	536356.96	4816204.53	354.77	1	E	A	-40.5	7.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1525	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.8
1525	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1525	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1528	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1528	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1528	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1529	536468.11	4816265.40	351.37	1	D	A	62.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
1529	536468.11	4816265.40	351.37	1	N	A	-40.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1529	536468.11	4816265.40	351.37	1	E	A	-40.5	-6.7	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
1530	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1530	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1530	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1532	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
1532	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1532	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1536	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1536	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1536	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1538	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6
1538	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1538	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1539	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.7
1539	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1539	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1542	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
1542	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1542	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1543	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.7
1543	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
1543	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.8
1546	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	12.7
1546	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.3
1546	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-90.3
1549	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1549	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1549	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1552	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1552	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1552	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1554	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1554	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1554	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1565	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
1565	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1565	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1566	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
1566	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1566	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1568	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.4
1568	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1568	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1571	536452.93	4816304.47	351.39	1	D	A	62.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	3.5
1571	536452.93	4816304.47	351.39	1	N	A	-40.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-99.5
1571	536452.93	4816304.47	351.39	1	E	A	-40.5	-4.4	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-99.5
1574	536452.86	4816304.61	351.39	1	D	A	62.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-2.3
1574	536452.86	4816304.61	351.39	1	N	A	-40.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-105.3
1574	536452.86	4816304.61	351.39	1	E	A	-40.5	-13.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-105.3
1577	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
1577	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1577	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1579	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8
1579	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1579	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.8
1583	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.3
1583	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1583	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.3
1586	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.6
1586	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.4
1586	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.4
1589	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	14.4
1589	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-88.7
1589	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-88.7
1601	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.4
1601	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
1601	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.6
1603	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
1603	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1603	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1605	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1605	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1605	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1608	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.3
1608	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1608	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1610	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1610	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1610	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
1613	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1613	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1613	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1617	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
1617	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1617	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1618	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-19.9
1618	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1618	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1620	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1620	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1620	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1624	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.2
1624	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1624	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-87.8
1626	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1626	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1626	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.3
1628	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1628	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1628	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	50.8	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1629	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1629	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1629	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1632	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
1632	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1632	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1633	536400.70	4816226.18	353.36	1	D	A	62.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.3
1633	536400.70	4816226.18	353.36	1	N	A	-40.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1633	536400.70	4816226.18	353.36	1	E	A	-40.5	3.9	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.4
1663	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.8
1663	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
1663	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
1665	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1665	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1665	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1668	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-20.1
1668	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1668	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
1671	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.1
1671	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.0
1671	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.0
1673	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	13.6
1673	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
1673	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-89.4
1675	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.8
1675	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
1675	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.2
1677	536402.65	4816227.52	353.28	1	D	A	62.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.6
1677	536402.65	4816227.52	353.28	1	N	A	-40.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1677	536402.65	4816227.52	353.28	1	E	A	-40.5	3.6	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
1680	536405.48	4816237.96	353.37	0	D	A	62.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
1680	536405.48	4816237.96	353.37	0	N	A	-40.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
1680	536405.48	4816237.96	353.37	0	E	A	-40.5	3.4	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.3
1682	536405.49	4816237.93	353.37	1	D	A	62.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.8
1682	536405.49	4816237.93	353.37	1	N	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1682	536405.49	4816237.93	353.37	1	E	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
1685	536405.10	4816238.95	353.42	1	D	A	62.5	-12.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-30.9
1685	536405.10	4816238.95	353.42	1	N	A	-40.5	-12.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
1685	536405.10	4816238.95	353.42	1	E	A	-40.5	-12.7	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-133.9
1712	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
1712	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
1712	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
1714	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.5
1714	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1714	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.5
1716	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.9
1716	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1716	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.9
1718	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	11.8
1718	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-91.2
1718	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.6	-91.2
1730	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1730	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1730	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1731	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
1731	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
1731	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
1734	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-15.7
1734	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1734	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1736	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
1736	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1736	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
1740	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1740	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1740	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1741	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.9
1741	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1741	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1743	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.2
1743	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1743	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1745	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	12.0
1745	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.0
1745	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.0
1766	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
1766	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1766	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1769	536405.48	4816231.60	353.22	1	D	A	62.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.1
1769	536405.48	4816231.60	353.22	1	N	A	-40.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1769	536405.48	4816231.60	353.22	1	E	A	-40.5	2.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.1
1785	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.1
1785	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
1785	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	50.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-88.9
1787	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1787	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1787	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1789	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1789	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1789	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
1806	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.0
1806	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1806	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1809	536406.36	4816234.93	353.26	1	D	A	62.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.4
1809	536406.36	4816234.93	353.26	1	N	A	-40.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1809	536406.36	4816234.93	353.26	1	E	A	-40.5	2.6	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.5
1815	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
1815	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
1815	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
1817	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.8
1817	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
1817	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
1820	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-16.2
1820	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1820	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	50.7	0.5	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1823	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-22.5
1823	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
1823	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
1831	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1831	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1831	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1833	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1833	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1833	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
1835	536433.25	4816267.69	352.76	1	D	A	62.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1835	536433.25	4816267.69	352.76	1	N	A	-40.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1835	536433.25	4816267.69	352.76	1	E	A	-40.5	0.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1837	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1837	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1837	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1839	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.1
1839	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1839	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1842	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	11.1
1842	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-91.9
1842	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-91.9
1844	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1844	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1844	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1847	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1847	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1847	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
1850	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1850	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1850	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1853	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	11.4
1853	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.7
1853	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.7
1856	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
1856	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
1856	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-89.4
1859	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1859	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1859	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1862	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.0
1862	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1862	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.0
1870	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	3.8
1870	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	-99.3
1870	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	9.7	0.0	0.0	-99.3
1873	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
1873	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1873	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1876	536379.89	4816215.57	354.35	1	D	A	62.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	0.9
1876	536379.89	4816215.57	354.35	1	N	A	-40.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	-102.2
1876	536379.89	4816215.57	354.35	1	E	A	-40.5	3.7	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	9.4	0.0	1.3	-102.2
1879	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1879	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1879	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1882	536406.13	4816233.27	353.23	1	D	A	62.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-15.9
1882	536406.13	4816233.27	353.23	1	N	A	-40.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1882	536406.13	4816233.27	353.23	1	E	A	-40.5	2.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.9
1885	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	4.7
1885	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-98.3
1885	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	8.6	0.0	0.0	-98.3
1887	536342.89	4816197.36	354.93	1	D	A	62.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-20.0
1887	536342.89	4816197.36	354.93	1	N	A	-40.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
1887	536342.89	4816197.36	354.93	1	E	A	-40.5	1.6	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
1889	536344.33	4816198.37	354.91	1	D	A	62.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-18.4
1889	536344.33	4816198.37	354.91	1	N	A	-40.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
1889	536344.33	4816198.37	354.91	1	E	A	-40.5	3.1	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
1896	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	13.1
1896	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1896	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1899	536349.11	4816206.46	354.90	1	D	A	62.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1899	536349.11	4816206.46	354.90	1	N	A	-40.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1899	536349.11	4816206.46	354.90	1	E	A	-40.5	5.0	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.1
1902	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.0

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1902	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
1902	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
1904	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-21.0
1904	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1904	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1907	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-16.6
1907	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1907	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1924	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1924	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
1924	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
1926	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1926	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1926	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-123.8
1928	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.8
1928	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1928	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.8
1931	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	10.4
1931	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-92.6
1931	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-92.6
1937	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	5.4
1937	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	-97.6
1937	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	7.1	0.0	0.0	-97.6
1940	536353.40	4816202.85	354.82	1	D	A	62.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1940	536353.40	4816202.85	354.82	1	N	A	-40.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1940	536353.40	4816202.85	354.82	1	E	A	-40.5	4.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1943	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
1943	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
1943	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
1946	536398.99	4816225.19	353.43	1	D	A	62.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.7
1946	536398.99	4816225.19	353.43	1	N	A	-40.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1946	536398.99	4816225.19	353.43	1	E	A	-40.5	1.7	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-119.7
1958	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
1958	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
1958	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	51.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.7
1960	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1960	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1960	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-125.3
1961	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4
1961	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1961	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1962	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1962	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1962	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
1965	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	9.8
1965	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
1965	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-93.2
1980	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1980	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
1980	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
1982	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
1982	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1982	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
1985	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.5
1985	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1985	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1988	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	9.7
1988	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-93.3
1988	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-93.3
1990	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1990	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
1990	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
1993	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1993	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
1993	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-120.4
2046	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	8.0
2046	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.0
2046	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.0
2049	536377.04	4816219.80	354.59	1	D	A	62.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-18.3
2049	536377.04	4816219.80	354.59	1	N	A	-40.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
2049	536377.04	4816219.80	354.59	1	E	A	-40.5	1.4	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-121.3
2099	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	7.1
2099	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.9
2099	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	3.1	0.0	0.0	-95.9
2102	536371.28	4816217.05	354.54	1	D	A	62.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-19.1
2102	536371.28	4816217.05	354.54	1	N	A	-40.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2102	536371.28	4816217.05	354.54	1	E	A	-40.5	0.9	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-122.1
2252	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.2
2252	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
2252	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
2255	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
2255	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2255	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2257	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2257	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2257	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-124.4
2260	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	5.8
2260	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-97.2
2260	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.2	-97.2
2351	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
2351	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2351	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2354	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
2354	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2354	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2357	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
2357	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2357	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2359	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
2359	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2359	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2362	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
2362	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2362	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2364	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
2364	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2364	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2367	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
2367	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2367	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2370	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
2370	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2370	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2372	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
2372	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2372	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2374	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
2374	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2374	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2377	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
2377	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2377	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.5
2380	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
2380	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2380	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.2
2403	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.7

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2403	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2403	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2405	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
2405	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
2405	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
2407	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
2407	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
2407	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
2436	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
2436	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
2436	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
2438	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2438	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2438	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
2441	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
2441	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
2441	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.6
2447	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
2447	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
2447	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
2449	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
2449	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2449	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2451	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
2451	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2451	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2454	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2454	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
2454	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	50.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.7
2455	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
2455	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
2455	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
2456	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-29.7
2456	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2456	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2484	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-3.3
2484	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.3
2484	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.3
2485	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
2485	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2485	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
2488	536378.19	4816214.75	354.41	1	D	A	62.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-6.1
2488	536378.19	4816214.75	354.41	1	N	A	-40.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.2
2488	536378.19	4816214.75	354.41	1	E	A	-40.5	-3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.2
2546	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-3.8
2546	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.8
2546	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-106.8
2549	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2549	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2549	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2552	536378.67	4816214.98	354.41	1	D	A	62.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-6.7
2552	536378.67	4816214.98	354.41	1	N	A	-40.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.7
2552	536378.67	4816214.98	354.41	1	E	A	-40.5	-4.1	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-109.7
2849	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
2849	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.4
2849	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.4
2851	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-32.8
2851	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
2851	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
2854	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
2854	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
2854	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
2872	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	2.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2872	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
2872	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	50.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.6
2875	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
2875	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
2875	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
2877	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
2877	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
2877	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
3060	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-9.0
3060	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.0
3060	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.0
3062	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
3062	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3062	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-131.8
3064	536378.44	4816214.87	354.42	1	D	A	62.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-11.8
3064	536378.44	4816214.87	354.42	1	N	A	-40.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-114.8
3064	536378.44	4816214.87	354.42	1	E	A	-40.5	-9.2	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-114.8
3154	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-9.5
3154	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.5
3154	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	55.0	0.8	-3.0	0.0	0.0	9.5	0.0	0.0	-112.5
3157	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
3157	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3157	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
3160	536377.94	4816214.63	354.41	1	D	A	62.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-12.3
3160	536377.94	4816214.63	354.41	1	N	A	-40.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-115.3
3160	536377.94	4816214.63	354.41	1	E	A	-40.5	-9.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	9.3	0.0	1.3	-115.3
3419	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-3.6
3419	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-106.6
3419	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-106.6
3421	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-38.0
3421	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.0
3421	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-141.0
3424	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-38.5
3424	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
3424	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
3427	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-7.7
3427	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-110.7
3427	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	55.5	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-110.7
3429	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-4.8
3429	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-107.8
3429	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	1.0	-107.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
699	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-6.9
699	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-12.9
699	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.0	0.0	0.0	-6.9

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
703	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-7.2
703	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-13.2
703	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	65.2	2.2	-3.0	0.0	0.0	25.3	0.0	0.0	-7.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
706	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
706	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
706	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	64.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	15.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
711	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
711	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.9
711	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
714	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
714	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.8
714	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.9

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
716	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.8
716	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	11.8
716	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	17.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
718	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.7
718	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	11.7
718	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	65.6	2.3	-3.0	0.0	0.0	0.0	0.0	0.0	17.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
723	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-2.4
723	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-190.4
723	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	22.8	0.0	0.0	-2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
729	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-7.4
729	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-195.4
729	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	60.4	1.0	-3.0	0.0	0.0	27.6	0.0	0.0	-7.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
755	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
755	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
755	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.1	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.0

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
757	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-9.5
757	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-9.5
757	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	65.2	1.6	-3.0	0.0	0.0	24.3	0.0	0.0	-9.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
806	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
806	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
806	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
808	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
808	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
808	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
810	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
810	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3
810	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	65.6	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.3

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
813	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	15.9
813	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-172.1
813	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.2	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-172.1

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
817	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.2
817	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.8
817	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
820	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
820	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9
820	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
822	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
822	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9
822	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-164.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
840	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	23.0
840	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-165.0
840	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	63.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-165.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
974	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
974	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
974	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.5	2.4	-3.0	0.0	0.0	0.0	0.0	0.0	-156.8
976	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	18.9
976	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	-158.3
976	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.9	2.5	-3.0	0.0	0.0	0.0	0.0	1.1	-158.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
978	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	-2.7
978	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	-102.7
978	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.2	0.0	0.0	-102.7
1003	536517.86	4816098.64	350.53	0	D	A	59.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-3.8
1003	536517.86	4816098.64	350.53	0	N	A	-40.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-103.8
1003	536517.86	4816098.64	350.53	0	E	A	-40.5	11.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	24.3	0.0	0.0	-103.8

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1006	536524.77	4816101.56	350.48	0	D	A	59.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-14.8
1006	536524.77	4816101.56	350.48	0	N	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-114.8
1006	536524.77	4816101.56	350.48	0	E	A	-40.5	0.3	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-114.8
1092	536531.50	4816106.55	350.44	0	D	A	59.5	3.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-11.8
1092	536531.50	4816106.55	350.44	0	N	A	-40.5	3.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-111.8
1092	536531.50	4816106.55	350.44	0	E	A	-40.5	3.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-111.8
1098	536527.50	4816104.53	350.47	0	D	A	59.5	8.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-6.6
1098	536527.50	4816104.53	350.47	0	N	A	-40.5	8.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-106.6
1098	536527.50	4816104.53	350.47	0	E	A	-40.5	8.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-106.6
1105	536523.81	4816102.67	350.50	0	D	A	59.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.4	0.0	0.0	-13.7
1105	536523.81	4816102.67	350.50	0	N	A	-40.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.4	0.0	0.0	-113.7
1105	536523.81	4816102.67	350.50	0	E	A	-40.5	1.3	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.4	0.0	0.0	-113.7
1149	536558.61	4816076.58	348.71	0	D	A	59.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-12.2
1149	536558.61	4816076.58	348.71	0	N	A	-40.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.2
1149	536558.61	4816076.58	348.71	0	E	A	-40.5	5.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-112.2
1152	536555.91	4816082.14	348.96	0	D	A	59.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-8.1
1152	536555.91	4816082.14	348.96	0	N	A	-40.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.1
1152	536555.91	4816082.14	348.96	0	E	A	-40.5	9.4	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-108.1
1187	536550.79	4816084.71	349.21	0	D	A	59.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-8.7
1187	536550.79	4816084.71	349.21	0	N	A	-40.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.7
1187	536550.79	4816084.71	349.21	0	E	A	-40.5	8.5	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.7
1195	536553.14	4816079.56	348.92	0	D	A	59.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-11.3
1195	536553.14	4816079.56	348.92	0	N	A	-40.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-111.3
1195	536553.14	4816079.56	348.92	0	E	A	-40.5	6.3	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-111.3
1204	536503.76	4816091.81	350.60	0	D	A	59.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-5.2
1204	536503.76	4816091.81	350.60	0	N	A	-40.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-105.2
1204	536503.76	4816091.81	350.60	0	E	A	-40.5	10.2	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	23.8	0.0	0.0	-105.2
1211	536483.14	4816092.22	350.73	0	D	A	59.5	9.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-5.8
1211	536483.14	4816092.22	350.73	0	N	A	-40.5	9.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-105.8
1211	536483.14	4816092.22	350.73	0	E	A	-40.5	9.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.9	0.0	0.0	-105.8
1216	536478.59	4816095.81	350.81	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-9.1
1216	536478.59	4816095.81	350.81	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-109.1
1216	536478.59	4816095.81	350.81	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-109.1
1218	536483.31	4816092.08	350.73	1	D	A	59.5	8.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-18.0
1218	536483.31	4816092.08	350.73	1	N	A	-40.5	8.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1218	536483.31	4816092.08	350.73	1	E	A	-40.5	8.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.0
1220	536479.50	4816095.09	350.79	1	D	A	59.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
1220	536479.50	4816095.09	350.79	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1220	536479.50	4816095.09	350.79	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1222	536477.98	4816096.29	350.82	1	D	A	59.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1222	536477.98	4816096.29	350.82	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1222	536477.98	4816096.29	350.82	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1294	536488.50	4816087.68	350.64	0	D	A	59.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-5.2
1294	536488.50	4816087.68	350.64	0	N	A	-40.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-105.2
1294	536488.50	4816087.68	350.64	0	E	A	-40.5	10.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-105.2
1297	536487.34	4816088.58	350.66	1	D	A	59.5	8.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-18.2
1297	536487.34	4816088.58	350.66	1	N	A	-40.5	8.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1297	536487.34	4816088.58	350.66	1	E	A	-40.5	8.7	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.2
1362	536478.56	4816095.76	350.81	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-9.1
1362	536478.56	4816095.76	350.81	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-109.1
1362	536478.56	4816095.76	350.81	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	22.6	0.0	0.0	-109.1
1368	536482.16	4816092.74	350.75	0	D	A	59.5	7.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.8	0.0	0.0	-7.1
1368	536482.16	4816092.74	350.75	0	N	A	-40.5	7.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.8	0.0	0.0	-107.1
1368	536482.16	4816092.74	350.75	0	E	A	-40.5	7.7	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	22.8	0.0	0.0	-107.1
1372	536477.96	4816096.27	350.82	1	D	A	59.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
1372	536477.96	4816096.27	350.82	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1372	536477.96	4816096.27	350.82	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
1374	536479.44	4816095.03	350.79	1	D	A	59.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1374	536479.44	4816095.03	350.79	1	N	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1374	536479.44	4816095.03	350.79	1	E	A	-40.5	2.9	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1376	536482.31	4816092.62	350.74	1	D	A	59.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1376	536482.31	4816092.62	350.74	1	N	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
1376	536482.31	4816092.62	350.74	1	E	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1402	536556.09	4816073.13	348.60	0	D	A	59.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-8.0
1402	536556.09	4816073.13	348.60	0	N	A	-40.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.0
1402	536556.09	4816073.13	348.60	0	E	A	-40.5	10.0	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-108.0
1432	536500.08	4816091.63	350.62	0	D	A	59.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-6.5
1432	536500.08	4816091.63	350.62	0	N	A	-40.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-106.5
1432	536500.08	4816091.63	350.62	0	E	A	-40.5	8.8	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-106.5
1440	536545.56	4816095.97	349.83	0	D	A	59.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-8.4
1440	536545.56	4816095.97	349.83	0	N	A	-40.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-108.4
1440	536545.56	4816095.97	349.83	0	E	A	-40.5	8.0	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-108.4
1466	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-9.0
1466	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.0
1466	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.0
1476	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-8.5
1476	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-108.5
1476	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-108.5
1493	536547.73	4816099.05	349.79	0	D	A	59.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-9.5
1493	536547.73	4816099.05	349.79	0	N	A	-40.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.5
1493	536547.73	4816099.05	349.79	0	E	A	-40.5	6.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-109.5
1561	536496.43	4816079.37	350.47	0	D	A	59.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-8.1
1561	536496.43	4816079.37	350.47	0	N	A	-40.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-108.1
1561	536496.43	4816079.37	350.47	0	E	A	-40.5	8.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-108.1
1599	536549.75	4816094.93	349.63	0	D	A	59.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-10.0
1599	536549.75	4816094.93	349.63	0	N	A	-40.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.0
1599	536549.75	4816094.93	349.63	0	E	A	-40.5	6.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.0
1639	536560.92	4816072.43	348.52	0	D	A	59.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-10.6
1639	536560.92	4816072.43	348.52	0	N	A	-40.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-110.6
1639	536560.92	4816072.43	348.52	0	E	A	-40.5	7.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	25.4	0.0	0.0	-110.6
1647	536505.42	4816094.12	350.62	0	D	A	59.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.8	0.0	0.0	-9.0
1647	536505.42	4816094.12	350.62	0	N	A	-40.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.8	0.0	0.0	-109.0
1647	536505.42	4816094.12	350.62	0	E	A	-40.5	6.2	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	23.8	0.0	0.0	-109.0
1654	536502.26	4816068.17	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-11.5
1654	536502.26	4816068.17	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
1654	536502.26	4816068.17	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
1660	536502.28	4816068.16	350.03	0	D	A	59.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-11.5
1660	536502.28	4816068.16	350.03	0	N	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
1660	536502.28	4816068.16	350.03	0	E	A	-40.5	7.8	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	26.2	0.0	0.0	-111.5
1707	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-10.8
1707	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.8
1707	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-110.8
1723	536498.08	4816077.57	350.44	0	D	A	59.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-9.3
1723	536498.08	4816077.57	350.44	0	N	A	-40.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-109.3
1723	536498.08	4816077.57	350.44	0	E	A	-40.5	6.9	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-109.3
1728	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-10.3
1728	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-110.3
1728	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-110.3
1774	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.0	0.0	0.0	-9.9
1774	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.0	0.0	0.0	-109.9
1774	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	24.0	0.0	0.0	-109.9
1780	536500.65	4816071.82	350.21	0	D	A	59.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-13.7
1780	536500.65	4816071.82	350.21	0	N	A	-40.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-113.7
1780	536500.65	4816071.82	350.21	0	E	A	-40.5	3.2	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	24.0	0.0	0.0	-113.7
1782	536499.66	4816074.05	350.33	0	D	A	59.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-12.2
1782	536499.66	4816074.05	350.33	0	N	A	-40.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-112.2
1782	536499.66	4816074.05	350.33	0	E	A	-40.5	4.5	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-112.2
1792	536499.53	4816073.83	350.32	0	D	A	59.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-12.1
1792	536499.53	4816073.83	350.32	0	N	A	-40.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-112.1
1792	536499.53	4816073.83	350.32	0	E	A	-40.5	4.6	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-112.1
1796	536500.60	4816071.72	350.20	0	D	A	59.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-14.1
1796	536500.60	4816071.72	350.20	0	N	A	-40.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-114.1
1796	536500.60	4816071.72	350.20	0	E	A	-40.5	2.7	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	23.9	0.0	0.0	-114.1
1812	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-11.2
1812	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.2
1812	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.2

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1828	536536.28	4816103.19	350.35	0	D	A	59.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-11.3
1828	536536.28	4816103.19	350.35	0	N	A	-40.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.3
1828	536536.28	4816103.19	350.35	0	E	A	-40.5	4.3	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	25.1	0.0	0.0	-111.3
1866	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-10.0
1866	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-110.0
1866	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-110.0
1893	536530.98	4816102.92	350.43	0	D	A	59.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-11.2
1893	536530.98	4816102.92	350.43	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-111.2
1893	536530.98	4816102.92	350.43	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-111.2
1910	536551.32	4816091.63	349.47	0	D	A	59.5	4.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-12.7
1910	536551.32	4816091.63	349.47	0	N	A	-40.5	4.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-112.7
1910	536551.32	4816091.63	349.47	0	E	A	-40.5	4.0	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-112.7
1913	536550.75	4816092.83	349.55	0	D	A	59.5	-9.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-25.7
1913	536550.75	4816092.83	349.55	0	N	A	-40.5	-9.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-125.7
1913	536550.75	4816092.83	349.55	0	E	A	-40.5	-9.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-125.7
1917	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-10.6
1917	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-110.6
1917	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-110.6
1922	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-11.9
1922	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-111.9
1922	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-111.9
1935	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-12.7
1935	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-112.7
1935	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-112.7
1950	536539.49	4816108.88	350.32	0	D	A	59.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-12.2
1950	536539.49	4816108.88	350.32	0	N	A	-40.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.2
1950	536539.49	4816108.88	350.32	0	E	A	-40.5	2.7	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.2
1955	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-12.8
1955	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-112.8
1955	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-112.8
1969	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-12.5
1969	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.5
1969	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-112.5
2004	536552.34	4816089.50	349.34	0	D	A	59.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-13.6
2004	536552.34	4816089.50	349.34	0	N	A	-40.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-113.6
2004	536552.34	4816089.50	349.34	0	E	A	-40.5	3.4	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-113.6
2022	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-12.2
2022	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-112.2
2022	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-112.2
2027	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-13.4
2027	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-113.4
2027	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.6	0.0	0.0	-113.4
2031	536487.31	4816089.23	350.66	0	D	A	59.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.1	0.0	0.0	-11.9
2031	536487.31	4816089.23	350.66	0	N	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.1	0.0	0.0	-111.9
2031	536487.31	4816089.23	350.66	0	E	A	-40.5	3.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.1	0.0	0.0	-111.9
2034	536487.31	4816089.23	350.66	1	D	A	59.5	3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.5
2034	536487.31	4816089.23	350.66	1	N	A	-40.5	3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2034	536487.31	4816089.23	350.66	1	E	A	-40.5	3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.5
2038	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-14.1
2038	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-114.1
2038	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-114.1
2043	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-14.2
2043	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.2
2043	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.2
2053	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-14.3
2053	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2053	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	25.3	0.0	0.0	-114.3
2058	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-14.3
2058	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-114.3
2058	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-114.3
2069	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-12.7
2069	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-112.7
2069	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.3	0.0	0.0	-112.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2072	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2072	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2072	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2083	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-14.3
2083	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-114.3
2083	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	24.8	0.0	0.0	-114.3
2087	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-14.9
2087	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.9
2087	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-114.9
2091	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-14.3
2091	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-114.3
2091	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	52.4	0.6	-3.0	0.0	0.0	24.7	0.0	0.0	-114.3
2094	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-13.0
2094	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-113.0
2094	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.4	0.0	0.0	-113.0
2097	536491.96	4816088.45	350.62	1	D	A	59.5	-3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
2097	536491.96	4816088.45	350.62	1	N	A	-40.5	-3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
2097	536491.96	4816088.45	350.62	1	E	A	-40.5	-3.3	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-130.1
2114	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	-15.3
2114	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	-115.3
2114	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	54.8	0.8	-3.0	0.0	0.0	25.3	0.0	0.0	-115.3
2119	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-13.1
2119	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-113.1
2119	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.2	0.0	0.0	-113.1
2121	536489.08	4816088.61	350.64	1	D	A	59.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
2121	536489.08	4816088.61	350.64	1	N	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2121	536489.08	4816088.61	350.64	1	E	A	-40.5	2.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2125	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-13.6
2125	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-113.6
2125	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-113.6
2132	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-15.3
2132	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-115.3
2132	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	25.2	0.0	0.0	-115.3
2138	536498.51	4816075.91	350.41	0	D	A	59.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-13.9
2138	536498.51	4816075.91	350.41	0	N	A	-40.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-113.9
2138	536498.51	4816075.91	350.41	0	E	A	-40.5	2.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	23.7	0.0	0.0	-113.9
2161	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-13.9
2161	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.9
2161	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-113.9
2164	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-15.7
2164	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.7
2164	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	25.3	0.0	0.0	-115.7
2179	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-14.4
2179	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-114.4
2179	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-114.4
2229	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-16.8
2229	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-116.8
2229	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	54.7	0.8	-3.0	0.0	0.0	25.4	0.0	0.0	-116.8
2249	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-15.2
2249	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-115.2
2249	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-115.2
2267	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-15.7
2267	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-115.7
2267	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-115.7
2269	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-15.9
2269	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-115.9
2269	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	23.5	0.0	0.0	-115.9
2399	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-16.8
2399	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-116.8
2399	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	23.6	0.0	0.0	-116.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1022	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-5.6
1022	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-193.6
1022	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	59.7	1.0	-2.9	0.0	0.0	26.4	0.0	0.0	-193.6
1025	536719.71	4816019.69	347.39	1	D	A	78.6	0.0	0.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-8.7
1025	536719.71	4816019.69	347.39	1	N	A	78.6	0.0	-188.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-196.7
1025	536719.71	4816019.69	347.39	1	E	A	78.6	0.0	-188.0	0.0	0.0	59.8	1.0	-2.9	0.0	0.0	27.9	0.0	1.6	-196.7

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1120	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.8	0.0	0.0	-6.3
1120	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.8	0.0	0.0	-183.5
1120	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	64.8	3.0	-3.0	0.0	0.0	23.8	0.0	0.0	-183.5

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1132	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	7.2
1132	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	-170.0
1132	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	65.2	3.1	-3.0	0.0	0.0	9.9	0.0	0.0	-170.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1694	536728.99	4815966.55	344.26	0	D	A	62.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-13.1
1694	536728.99	4815966.55	344.26	0	N	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-116.1
1694	536728.99	4815966.55	344.26	0	E	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-116.1
1697	536728.99	4815966.55	344.26	1	D	A	62.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-23.4
1697	536728.99	4815966.55	344.26	1	N	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-126.4
1697	536728.99	4815966.55	344.26	1	E	A	-40.5	11.0	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-126.4
1752	536751.71	4815961.07	343.92	0	D	A	62.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-16.6
1752	536751.71	4815961.07	343.92	0	N	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.6
1752	536751.71	4815961.07	343.92	0	E	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.6
1757	536757.65	4815958.41	343.83	0	D	A	62.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-16.0
1757	536757.65	4815958.41	343.83	0	N	A	-40.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.0
1757	536757.65	4815958.41	343.83	0	E	A	-40.5	8.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.0
1760	536751.71	4815961.07	343.92	1	D	A	62.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.2
1760	536751.71	4815961.07	343.92	1	N	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
1760	536751.71	4815961.07	343.92	1	E	A	-40.5	7.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
1761	536757.65	4815958.41	343.83	1	D	A	62.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-20.7
1761	536757.65	4815958.41	343.83	1	N	A	-40.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.7
1761	536757.65	4815958.41	343.83	1	E	A	-40.5	8.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.7
1972	536754.46	4815978.29	343.92	0	D	A	62.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-20.0
1972	536754.46	4815978.29	343.92	0	N	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.0
1972	536754.46	4815978.29	343.92	0	E	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.0
1974	536751.19	4815976.54	343.97	0	D	A	62.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-17.0
1974	536751.19	4815976.54	343.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
1974	536751.19	4815976.54	343.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-120.0
1975	536754.67	4815978.41	343.91	1	D	A	62.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.0
1975	536754.67	4815978.41	343.91	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
1975	536754.67	4815978.41	343.91	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
1976	536751.40	4815976.66	343.97	1	D	A	62.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-19.6
1976	536751.40	4815976.66	343.97	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-122.6
1976	536751.40	4815976.66	343.97	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-122.6
1996	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-15.6
1996	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-118.6
1996	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-118.6
1998	536757.21	4815958.18	343.83	1	D	A	62.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-20.3
1998	536757.21	4815958.18	343.83	1	N	A	-40.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
1998	536757.21	4815958.18	343.83	1	E	A	-40.5	8.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2008	536729.41	4815967.77	344.26	0	D	A	62.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-15.9
2008	536729.41	4815967.77	344.26	0	N	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-118.9
2008	536729.41	4815967.77	344.26	0	E	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-118.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2011	536729.41	4815967.77	344.26	1	D	A	62.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-20.3
2011	536729.41	4815967.77	344.26	1	N	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2011	536729.41	4815967.77	344.26	1	E	A	-40.5	8.1	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-123.3
2062	536741.39	4815963.05	344.05	0	D	A	62.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-16.7
2062	536741.39	4815963.05	344.05	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-119.8
2062	536741.39	4815963.05	344.05	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-119.8
2064	536741.39	4815963.05	344.05	1	D	A	62.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.3
2064	536741.39	4815963.05	344.05	1	N	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2064	536741.39	4815963.05	344.05	1	E	A	-40.5	7.4	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.3
2076	536746.64	4815961.50	343.98	0	D	A	62.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-16.9
2076	536746.64	4815961.50	343.98	0	N	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.9
2076	536746.64	4815961.50	343.98	0	E	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-119.9
2078	536746.64	4815961.50	343.98	1	D	A	62.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-21.6
2078	536746.64	4815961.50	343.98	1	N	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.6
2078	536746.64	4815961.50	343.98	1	E	A	-40.5	7.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-124.6
2105	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-17.4
2105	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-120.4
2105	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-120.4
2107	536738.33	4815966.96	344.13	1	D	A	62.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-21.8
2107	536738.33	4815966.96	344.13	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-124.9
2107	536738.33	4815966.96	344.13	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-124.9
2150	536751.59	4815960.00	343.91	0	D	A	62.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-18.2
2150	536751.59	4815960.00	343.91	0	N	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.2
2150	536751.59	4815960.00	343.91	0	E	A	-40.5	6.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.2
2154	536749.42	4815960.66	343.94	0	D	A	62.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-28.1
2154	536749.42	4815960.66	343.94	0	N	A	-40.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-131.1
2154	536749.42	4815960.66	343.94	0	E	A	-40.5	-3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-131.1
2157	536751.39	4815960.06	343.91	1	D	A	62.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-22.4
2157	536751.39	4815960.06	343.91	1	N	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-125.4
2157	536751.39	4815960.06	343.91	1	E	A	-40.5	6.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-125.4
2167	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-18.3
2167	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
2167	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-121.3
2169	536736.86	4815964.34	344.12	1	D	A	62.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-22.7
2169	536736.86	4815964.34	344.12	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-125.7
2169	536736.86	4815964.34	344.12	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-125.7
2173	536757.76	4815979.61	343.86	0	D	A	62.5	4.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-19.1
2173	536757.76	4815979.61	343.86	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.2
2173	536757.76	4815979.61	343.86	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.2
2175	536755.94	4815979.00	343.89	0	D	A	62.5	-0.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-24.7
2175	536755.94	4815979.00	343.89	0	N	A	-40.5	-0.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-127.8
2175	536755.94	4815979.00	343.89	0	E	A	-40.5	-0.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.6	0.0	0.0	-127.8
2177	536757.37	4815979.48	343.87	1	D	A	62.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-21.1
2177	536757.37	4815979.48	343.87	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
2177	536757.37	4815979.48	343.87	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
2184	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-18.3
2184	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
2184	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
2186	536749.67	4815967.29	344.00	1	D	A	62.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.0
2186	536749.67	4815967.29	344.00	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
2186	536749.67	4815967.29	344.00	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
2190	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-18.3
2190	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
2190	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-121.3
2192	536753.36	4815968.24	343.97	1	D	A	62.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.0
2192	536753.36	4815968.24	343.97	1	N	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
2192	536753.36	4815968.24	343.97	1	E	A	-40.5	5.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.0
2198	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-18.4
2198	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.4
2198	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-121.4
2201	536745.94	4815966.80	344.05	1	D	A	62.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-23.1
2201	536745.94	4815966.80	344.05	1	N	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.1
2201	536745.94	4815966.80	344.05	1	E	A	-40.5	5.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-126.1

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2211	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-19.0
2211	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2211	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	27.1	0.0	0.0	-122.0
2213	536724.58	4815968.14	344.34	1	D	A	62.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-29.2
2213	536724.58	4815968.14	344.34	1	N	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-132.2
2213	536724.58	4815968.14	344.34	1	E	A	-40.5	5.1	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	9.3	-132.2
2237	536756.22	4815969.44	343.94	0	D	A	62.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-20.4
2237	536756.22	4815969.44	343.94	0	N	A	-40.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.4
2237	536756.22	4815969.44	343.94	0	E	A	-40.5	3.8	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.4
2240	536757.72	4815970.20	343.93	0	D	A	62.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-24.3
2240	536757.72	4815970.20	343.93	0	N	A	-40.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-127.3
2240	536757.72	4815970.20	343.93	0	E	A	-40.5	-0.1	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-127.3
2243	536756.43	4815969.55	343.94	1	D	A	62.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-22.6
2243	536756.43	4815969.55	343.94	1	N	A	-40.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
2243	536756.43	4815969.55	343.94	1	E	A	-40.5	4.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
2245	536757.93	4815970.31	343.93	1	D	A	62.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.2
2245	536757.93	4815970.31	343.93	1	N	A	-40.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
2245	536757.93	4815970.31	343.93	1	E	A	-40.5	-3.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-133.2
2274	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-19.7
2274	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
2274	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-122.7
2276	536746.21	4815973.03	344.07	1	D	A	62.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-24.4
2276	536746.21	4815973.03	344.07	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-127.4
2276	536746.21	4815973.03	344.07	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-127.4
2289	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-20.0
2289	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
2289	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-123.0
2290	536745.14	4815967.56	344.06	1	D	A	62.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-24.6
2290	536745.14	4815967.56	344.06	1	N	A	-40.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-127.6
2290	536745.14	4815967.56	344.06	1	E	A	-40.5	4.1	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-127.6
2293	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-19.9
2293	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.9
2293	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-122.9
2295	536761.02	4815971.79	343.88	1	D	A	62.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-23.0
2295	536761.02	4815971.79	343.88	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.0
2295	536761.02	4815971.79	343.88	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.0
2324	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-20.2
2324	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.3
2324	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.7	0.0	0.0	-123.3
2326	536748.03	4815974.71	344.03	1	D	A	62.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-23.2
2326	536748.03	4815974.71	344.03	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
2326	536748.03	4815974.71	344.03	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
2410	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-20.7
2410	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.8
2410	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-123.8
2411	536748.11	4815962.95	343.98	1	D	A	62.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-25.4
2411	536748.11	4815962.95	343.98	1	N	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.4
2411	536748.11	4815962.95	343.98	1	E	A	-40.5	3.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.4
2461	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-21.3
2461	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
2461	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	27.0	0.0	0.0	-124.3
2464	536733.59	4815967.39	344.19	1	D	A	62.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-25.7
2464	536733.59	4815967.39	344.19	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-128.7
2464	536733.59	4815967.39	344.19	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-128.7
2478	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-21.3
2478	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.3
2478	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-124.3
2481	536743.14	4815966.63	344.08	1	D	A	62.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-25.8
2481	536743.14	4815966.63	344.08	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.8
2481	536743.14	4815966.63	344.08	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-128.8
2515	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-21.5
2515	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-124.5
2515	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-124.5

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2517	536745.07	4815971.17	344.09	1	D	A	62.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-26.1
2517	536745.07	4815971.17	344.09	1	N	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.1
2517	536745.07	4815971.17	344.09	1	E	A	-40.5	2.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.1
2535	536758.66	4815970.68	343.92	0	D	A	62.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-23.6
2535	536758.66	4815970.68	343.92	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-126.6
2535	536758.66	4815970.68	343.92	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-126.6
2539	536759.49	4815971.10	343.91	0	D	A	62.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-25.7
2539	536759.49	4815971.10	343.91	0	N	A	-40.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-128.7
2539	536759.49	4815971.10	343.91	0	E	A	-40.5	-1.5	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	26.6	0.0	0.0	-128.7
2542	536758.93	4815970.82	343.92	1	D	A	62.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.8
2542	536758.93	4815970.82	343.92	1	N	A	-40.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8
2542	536758.93	4815970.82	343.92	1	E	A	-40.5	2.4	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.8
2544	536759.75	4815971.24	343.90	1	D	A	62.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-37.0
2544	536759.75	4815971.24	343.90	1	N	A	-40.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.0
2544	536759.75	4815971.24	343.90	1	E	A	-40.5	-9.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-140.0
2562	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-21.9
2562	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-125.0
2562	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.8	0.0	0.0	-125.0
2565	536745.83	4815965.58	344.04	1	D	A	62.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.6
2565	536745.83	4815965.58	344.04	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.6
2565	536745.83	4815965.58	344.04	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.6
2591	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-22.2
2591	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
2591	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	26.7	0.0	0.0	-125.2
2593	536746.74	4815964.25	344.01	1	D	A	62.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.8
2593	536746.74	4815964.25	344.01	1	N	A	-40.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2593	536746.74	4815964.25	344.01	1	E	A	-40.5	2.0	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2602	536741.43	4815966.71	344.10	0	D	A	62.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-22.3
2602	536741.43	4815966.71	344.10	0	N	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
2602	536741.43	4815966.71	344.10	0	E	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
2604	536741.43	4815966.71	344.10	1	D	A	62.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
2604	536741.43	4815966.71	344.10	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2604	536741.43	4815966.71	344.10	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2609	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-22.3
2609	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
2609	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-125.3
2612	536744.84	4815969.57	344.08	1	D	A	62.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
2612	536744.84	4815969.57	344.08	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2612	536744.84	4815969.57	344.08	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2616	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-22.5
2616	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-125.5
2616	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	26.9	0.0	0.0	-125.5
2618	536735.27	4815967.24	344.17	1	D	A	62.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-26.9
2618	536735.27	4815967.24	344.17	1	N	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9
2618	536735.27	4815967.24	344.17	1	E	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	3.4	-129.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2015	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	9.4	0.0	0.0	1.5
2015	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	9.4	0.0	0.0	-98.5
2015	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	9.4	0.0	0.0	-98.5
2017	536792.55	4816505.62	341.05	1	D	A	59.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.9	0.0	1.7	0.7
2017	536792.55	4816505.62	341.05	1	N	A	-40.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.9	0.0	1.7	-99.3
2017	536792.55	4816505.62	341.05	1	E	A	-40.5	12.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.9	0.0	1.7	-99.3
2134	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
2134	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2134	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2203	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-1.1
2203	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-101.1
2203	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-101.1
2205	536783.44	4816525.69	341.03	1	D	A	59.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-2.0
2205	536783.44	4816525.69	341.03	1	N	A	-40.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2205	536783.44	4816525.69	341.03	1	E	A	-40.5	10.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.0
2208	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2208	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2208	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2217	536806.50	4816468.94	341.19	0	D	A	59.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	1.1
2217	536806.50	4816468.94	341.19	0	N	A	-40.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-98.9
2217	536806.50	4816468.94	341.19	0	E	A	-40.5	8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	5.5	0.0	0.0	-98.9
2220	536807.41	4816464.68	341.19	0	D	A	59.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.9
2220	536807.41	4816464.68	341.19	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2220	536807.41	4816464.68	341.19	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2222	536806.17	4816470.47	341.20	1	D	A	59.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	1.3
2222	536806.17	4816470.47	341.20	1	N	A	-40.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.7
2222	536806.17	4816470.47	341.20	1	E	A	-40.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.7
2225	536807.08	4816466.21	341.19	1	D	A	59.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.2
2225	536807.08	4816466.21	341.19	1	N	A	-40.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.8
2225	536807.08	4816466.21	341.19	1	E	A	-40.5	7.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.8
2231	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-0.3
2231	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-100.3
2231	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	0.0	-100.3
2233	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-0.6
2233	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-100.6
2233	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	8.2	0.0	0.0	-100.6
2234	536776.99	4816539.88	341.05	1	D	A	59.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-2.5
2234	536776.99	4816539.88	341.05	1	N	A	-40.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.5
2234	536776.99	4816539.88	341.05	1	E	A	-40.5	10.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-102.5
2262	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
2262	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
2262	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.3
2280	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	1.1
2280	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	-98.9
2280	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	-98.9
2281	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
2281	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2281	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2283	536817.40	4816442.27	341.53	1	D	A	59.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.5
2283	536817.40	4816442.27	341.53	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
2283	536817.40	4816442.27	341.53	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
2299	536799.53	4816490.05	341.23	0	D	A	59.5	7.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-3.3
2299	536799.53	4816490.05	341.23	0	N	A	-40.5	7.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-103.3
2299	536799.53	4816490.05	341.23	0	E	A	-40.5	7.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-103.3
2302	536800.83	4816486.97	341.27	0	D	A	59.5	-1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-12.4
2302	536800.83	4816486.97	341.27	0	N	A	-40.5	-1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-112.4
2302	536800.83	4816486.97	341.27	0	E	A	-40.5	-1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-112.4
2304	536799.66	4816489.73	341.24	1	D	A	59.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-3.7
2304	536799.66	4816489.73	341.24	1	N	A	-40.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-103.7
2304	536799.66	4816489.73	341.24	1	E	A	-40.5	8.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-103.7
2307	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-2.9
2307	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-102.9
2307	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	9.2	0.0	0.0	-102.9
2310	536787.11	4816517.60	340.98	1	D	A	59.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-3.8
2310	536787.11	4816517.60	340.98	1	N	A	-40.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.8
2310	536787.11	4816517.60	340.98	1	E	A	-40.5	8.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.8
2312	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
2312	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2312	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2315	536924.11	4816470.54	340.40	1	D	A	59.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-30.5
2315	536924.11	4816470.54	340.40	1	N	A	-40.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-130.5
2315	536924.11	4816470.54	340.40	1	E	A	-40.5	2.2	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	28.8	-130.5
2318	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.4	0.0	0.0	-1.2
2318	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.4	0.0	0.0	-101.2
2318	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.4	0.0	0.0	-101.2
2320	536772.90	4816548.89	341.10	1	D	A	59.5	8.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-3.8
2320	536772.90	4816548.89	341.10	1	N	A	-40.5	8.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2320	536772.90	4816548.89	341.10	1	E	A	-40.5	8.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-103.8
2329	536804.34	4816477.43	341.22	0	D	A	59.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	8.5	0.0	0.0	-8.5
2329	536804.34	4816477.43	341.22	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	8.5	0.0	0.0	-108.5
2329	536804.34	4816477.43	341.22	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	8.5	0.0	0.0	-108.5
2331	536805.17	4816474.43	341.21	0	D	A	59.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.9	0.0	0.0	-2.8
2331	536805.17	4816474.43	341.21	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.9	0.0	0.0	-102.8
2331	536805.17	4816474.43	341.21	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	7.9	0.0	0.0	-102.8
2334	536804.59	4816476.52	341.22	1	D	A	59.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-6.6
2334	536804.59	4816476.52	341.22	1	N	A	-40.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.6
2334	536804.59	4816476.52	341.22	1	E	A	-40.5	5.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-106.6
2337	536805.43	4816473.52	341.20	1	D	A	59.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.6
2337	536805.43	4816473.52	341.20	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
2337	536805.43	4816473.52	341.20	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
2340	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2340	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2340	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2343	536810.61	4816454.21	341.25	1	D	A	59.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.8
2343	536810.61	4816454.21	341.25	1	N	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.2
2343	536810.61	4816454.21	341.25	1	E	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.2
2346	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
2346	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2346	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2383	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	7.8	0.0	0.0	-2.0
2383	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	7.8	0.0	0.0	-102.0
2383	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	7.8	0.0	0.0	-102.0
2389	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	1.5
2389	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-98.5
2389	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-98.5
2392	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	4.0
2392	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.0
2392	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.0
2418	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	0.2
2418	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-99.8
2418	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-99.8
2421	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.7
2421	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.3
2421	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-96.3
2422	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.2
2422	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
2422	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.8
2424	536991.21	4816484.91	339.60	1	D	A	59.5	8.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	30.7	-55.1
2424	536991.21	4816484.91	339.60	1	N	A	-40.5	8.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	30.7	-155.1
2424	536991.21	4816484.91	339.60	1	E	A	-40.5	8.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	30.7	-155.1
2425	536996.68	4816485.60	339.52	1	D	A	59.5	5.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.9	-58.7
2425	536996.68	4816485.60	339.52	1	N	A	-40.5	5.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.9	-158.7
2425	536996.68	4816485.60	339.52	1	E	A	-40.5	5.4	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.9	-158.7
2428	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
2428	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
2428	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
2430	536940.75	4816477.23	340.22	1	D	A	59.5	3.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-32.2
2430	536940.75	4816477.23	340.22	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-132.2
2430	536940.75	4816477.23	340.22	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-132.2
2433	536937.66	4816476.02	340.26	1	D	A	59.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-72.8
2433	536937.66	4816476.02	340.26	1	N	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-172.8
2433	536937.66	4816476.02	340.26	1	E	A	-40.5	9.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	78.1	-172.8
2467	536808.23	4816461.56	341.18	0	D	A	59.5	6.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
2467	536808.23	4816461.56	341.18	0	N	A	-40.5	6.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
2467	536808.23	4816461.56	341.18	0	E	A	-40.5	6.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
2469	536808.92	4816459.16	341.16	0	D	A	59.5	-1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-2.9
2469	536808.92	4816459.16	341.16	0	N	A	-40.5	-1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.9
2469	536808.92	4816459.16	341.16	0	E	A	-40.5	-1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-102.9
2472	536808.33	4816461.22	341.17	1	D	A	59.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	3.0
2472	536808.33	4816461.22	341.17	1	N	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2472	536808.33	4816461.22	341.17	1	E	A	-40.5	7.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.0
2475	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
2475	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2475	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2476	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	2.9
2476	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.1
2476	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.1
2491	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.8	0.0	0.0	-3.6
2491	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.8	0.0	0.0	-103.6
2491	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	8.8	0.0	0.0	-103.6
2494	536803.31	4816480.48	341.24	1	D	A	59.5	7.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-4.9
2494	536803.31	4816480.48	341.24	1	N	A	-40.5	7.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-104.9
2494	536803.31	4816480.48	341.24	1	E	A	-40.5	7.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-104.9
2502	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
2502	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
2502	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
2504	536945.70	4816478.92	340.16	1	D	A	59.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-26.9
2504	536945.70	4816478.92	340.16	1	N	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-126.9
2504	536945.70	4816478.92	340.16	1	E	A	-40.5	9.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-126.9
2507	536942.87	4816477.99	340.19	1	D	A	59.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-79.7
2507	536942.87	4816477.99	340.19	1	N	A	-40.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-179.7
2507	536942.87	4816477.99	340.19	1	E	A	-40.5	3.4	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	78.8	-179.7
2510	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-1.9
2510	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-101.9
2510	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	7.0	0.0	0.0	-101.9
2512	536770.42	4816555.03	341.15	1	D	A	59.5	7.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-4.9
2512	536770.42	4816555.03	341.15	1	N	A	-40.5	7.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-104.9
2512	536770.42	4816555.03	341.15	1	E	A	-40.5	7.6	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-104.9
2525	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-0.6
2525	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-100.6
2525	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-100.6
2553	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	6.3	0.0	0.0	-1.6
2553	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	6.3	0.0	0.0	-101.6
2553	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	6.3	0.0	0.0	-101.6
2556	536768.50	4816561.97	341.14	1	D	A	59.5	3.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-8.9
2556	536768.50	4816561.97	341.14	1	N	A	-40.5	3.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-108.9
2556	536768.50	4816561.97	341.14	1	E	A	-40.5	3.8	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-108.9
2558	536769.13	4816559.30	341.15	1	D	A	59.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-7.7
2558	536769.13	4816559.30	341.15	1	N	A	-40.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-107.7
2558	536769.13	4816559.30	341.15	1	E	A	-40.5	4.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-107.7
2568	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	9.0	0.0	0.0	-4.4
2568	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	9.0	0.0	0.0	-104.4
2568	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	9.0	0.0	0.0	-104.4
2569	536780.20	4816532.81	341.05	1	D	A	59.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-5.5
2569	536780.20	4816532.81	341.05	1	N	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.5
2569	536780.20	4816532.81	341.05	1	E	A	-40.5	6.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-105.5
2596	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-0.8
2596	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-100.8
2596	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-100.8
2599	536847.92	4816433.01	341.45	1	D	A	59.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	2.3
2599	536847.92	4816433.01	341.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.7
2599	536847.92	4816433.01	341.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-97.7
2621	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	3.8
2621	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
2621	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
2624	536955.13	4816481.72	340.05	1	D	A	59.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-27.8
2624	536955.13	4816481.72	340.05	1	N	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-127.8
2624	536955.13	4816481.72	340.05	1	E	A	-40.5	8.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-127.8
2637	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.8
2637	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
2637	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
2639	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
2639	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2639	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2642	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-3.8
2642	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-103.8
2642	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	66.1	2.3	-3.0	0.0	0.0	7.2	0.0	0.0	-103.8
2648	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	-1.5
2648	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	-101.5
2648	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	5.4	0.0	0.0	-101.5
2656	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.5
2656	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
2656	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.5
2662	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	3.9
2662	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2662	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.1
2664	536825.64	4816435.19	341.68	1	D	A	59.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-5.7
2664	536825.64	4816435.19	341.68	1	N	A	-40.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-105.7
2664	536825.64	4816435.19	341.68	1	E	A	-40.5	-2.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-105.7
2666	536914.81	4816645.72	339.56	0	D	A	59.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-4.4
2666	536914.81	4816645.72	339.56	0	N	A	-40.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-104.4
2666	536914.81	4816645.72	339.56	0	E	A	-40.5	9.1	0.0	0.0	0.0	66.2	2.3	-3.0	0.0	0.0	7.5	0.0	0.0	-104.4
2669	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
2669	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
2669	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
2678	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	5.5	0.0	0.0	-2.1
2678	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	5.5	0.0	0.0	-102.1
2678	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	5.5	0.0	0.0	-102.1
2688	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.9
2688	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2688	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.1
2690	536976.07	4816484.33	339.81	1	D	A	59.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-35.7
2690	536976.07	4816484.33	339.81	1	N	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-135.7
2690	536976.07	4816484.33	339.81	1	E	A	-40.5	7.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-135.7
2699	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-0.6
2699	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-100.6
2699	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	3.7	0.0	0.0	-100.6
2702	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	1.1
2702	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.9
2702	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-98.9
2704	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	3.1
2704	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
2704	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
2709	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
2709	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2709	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2711	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-36.2
2711	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-136.2
2711	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-136.2
2714	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	3.8	0.0	0.0	-1.1
2714	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	3.8	0.0	0.0	-101.1
2714	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	3.8	0.0	0.0	-101.1
2717	536767.45	4816567.96	341.11	1	D	A	59.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-7.6
2717	536767.45	4816567.96	341.11	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-107.6
2717	536767.45	4816567.96	341.11	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-107.6
2726	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.2	0.0	0.0	-2.6
2726	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.2	0.0	0.0	-102.6
2726	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	5.2	0.0	0.0	-102.6
2729	536767.92	4816564.84	341.12	1	D	A	59.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-6.8
2729	536767.92	4816564.84	341.12	1	N	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-106.8
2729	536767.92	4816564.84	341.12	1	E	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	7.8	0.0	1.3	-106.8
2736	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-2.6
2736	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-102.6
2736	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-102.6
2738	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.6
2738	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2738	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.4
2741	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-4.9
2741	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-104.9
2741	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.9	0.0	0.0	-104.9
2745	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	2.1
2745	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2745	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2748	536970.55	4816484.18	339.88	1	D	A	59.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-36.5
2748	536970.55	4816484.18	339.88	1	N	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-136.5
2748	536970.55	4816484.18	339.88	1	E	A	-40.5	7.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-136.5
2756	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
2756	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2756	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2758	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-26.9
2758	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-126.9
2758	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	0.0	0.0	29.0	-126.9
2759	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.6
2759	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2759	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
2761	536815.26	4816444.54	341.48	1	D	A	59.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-2.4
2761	536815.26	4816444.54	341.48	1	N	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.4
2761	536815.26	4816444.54	341.48	1	E	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.4
2763	536816.10	4816443.64	341.50	1	D	A	59.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-3.6
2763	536816.10	4816443.64	341.50	1	N	A	-40.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-103.6
2763	536816.10	4816443.64	341.50	1	E	A	-40.5	0.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-103.6
2766	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.9
2766	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2766	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2772	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.2	0.0	0.0	-0.7
2772	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.2	0.0	0.0	-100.7
2772	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.2	0.0	0.0	-100.7
2775	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.5
2775	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
2775	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.5
2781	536833.07	4816432.39	341.74	0	D	A	59.5	2.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.4
2781	536833.07	4816432.39	341.74	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
2781	536833.07	4816432.39	341.74	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
2784	536834.28	4816432.20	341.73	0	D	A	59.5	-2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-7.2
2784	536834.28	4816432.20	341.73	0	N	A	-40.5	-2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-107.2
2784	536834.28	4816432.20	341.73	0	E	A	-40.5	-2.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-107.2
2787	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.4
2787	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
2787	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
2789	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-3.0
2789	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-103.0
2789	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-103.0
2792	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	0.3
2792	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.7
2792	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-99.7
2795	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	2.1
2795	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2795	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	63.8	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2797	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.4
2797	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
2797	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.6
2800	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-0.2
2800	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.2
2800	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-100.2
2808	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.3
2808	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
2808	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
2810	536828.79	4816433.60	341.74	1	D	A	59.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.4
2810	536828.79	4816433.60	341.74	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2810	536828.79	4816433.60	341.74	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.6
2812	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
2812	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2812	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2813	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	0.2
2813	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.8
2813	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-99.8
2815	536867.60	4816641.40	339.97	0	D	A	59.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
2815	536867.60	4816641.40	339.97	0	N	A	-40.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
2815	536867.60	4816641.40	339.97	0	E	A	-40.5	7.0	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
2819	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	1.7
2819	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3
2819	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.3
2830	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-3.6
2830	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-103.6
2830	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-103.6
2832	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
2832	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
2832	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-98.4
2834	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-27.3
2834	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-127.3
2834	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-127.3
2837	536767.05	4816572.05	341.08	0	D	A	59.5	3.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	0.1
2837	536767.05	4816572.05	341.08	0	N	A	-40.5	3.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
2837	536767.05	4816572.05	341.08	0	E	A	-40.5	3.0	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
2839	536767.15	4816570.58	341.09	0	D	A	59.5	-0.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	3.0	0.0	0.0	-6.1
2839	536767.15	4816570.58	341.09	0	N	A	-40.5	-0.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	3.0	0.0	0.0	-106.1
2839	536767.15	4816570.58	341.09	0	E	A	-40.5	-0.2	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	3.0	0.0	0.0	-106.1
2842	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-3.6
2842	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-103.6
2842	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	5.5	0.0	0.0	-103.6
2845	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-7.4
2845	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-107.4
2845	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-107.4
2847	536797.03	4816495.76	341.16	1	D	A	59.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-8.3
2847	536797.03	4816495.76	341.16	1	N	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.3
2847	536797.03	4816495.76	341.16	1	E	A	-40.5	3.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.3
2861	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.5
2861	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
2861	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
2865	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.8
2865	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2865	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2866	536826.80	4816434.55	341.70	1	D	A	59.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-0.1
2866	536826.80	4816434.55	341.70	1	N	A	-40.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
2866	536826.80	4816434.55	341.70	1	E	A	-40.5	3.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.7	-100.1
2869	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	1.2
2869	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
2869	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
2879	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-5.2
2879	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-105.2
2879	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	6.2	0.0	0.0	-105.2
2897	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	1.4
2897	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
2897	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
2899	536809.29	4816457.89	341.18	1	D	A	59.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-1.1
2899	536809.29	4816457.89	341.18	1	N	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-101.1
2899	536809.29	4816457.89	341.18	1	E	A	-40.5	2.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-101.1
2901	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
2901	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
2901	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
2904	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.1
2904	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2904	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.9
2907	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-8.0
2907	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-108.0
2907	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	9.3	0.0	0.0	-108.0
2909	536797.94	4816493.74	341.19	1	D	A	59.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-8.9
2909	536797.94	4816493.74	341.19	1	N	A	-40.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.9
2909	536797.94	4816493.74	341.19	1	E	A	-40.5	3.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-108.9
2911	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-3.0
2911	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-103.0
2911	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	3.7	0.0	0.0	-103.0
2913	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.0
2913	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
2913	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
2924	536773.25	4816595.59	340.87	0	D	A	59.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.9
2924	536773.25	4816595.59	340.87	0	N	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1
2924	536773.25	4816595.59	340.87	0	E	A	-40.5	4.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1
2926	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	0.6
2926	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2926	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2929	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.8
2929	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2929	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2941	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	0.8
2941	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2941	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2949	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-7.2
2949	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-107.2
2949	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	66.3	2.3	-3.0	0.0	0.0	7.4	0.0	0.0	-107.2
2952	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.7
2952	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
2952	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.3
2954	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	0.4
2954	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
2954	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
2956	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-31.2
2956	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-131.2
2956	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-131.2
2959	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	0.3
2959	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
2959	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
2966	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	0.2
2966	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
2966	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.8
2969	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-38.4
2969	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-138.4
2969	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-138.4
2972	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.3
2972	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
2972	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.7
2979	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	0.1
2979	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
2979	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-99.9
2995	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.0
2995	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.0
2995	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.0
3001	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-8.8
3001	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-108.8
3001	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-108.8
3004	536802.22	4816483.56	341.27	1	D	A	59.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-9.9
3004	536802.22	4816483.56	341.27	1	N	A	-40.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-109.9
3004	536802.22	4816483.56	341.27	1	E	A	-40.5	2.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-109.9
3006	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
3006	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3006	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
3008	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
3008	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
3008	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
3020	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.2	0.0	0.0	-5.2
3020	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.2	0.0	0.0	-105.2
3020	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	5.2	0.0	0.0	-105.2
3023	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-2.0
3023	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.0
3023	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-102.0
3031	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-0.2
3031	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-100.2
3031	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-100.2
3036	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-6.0
3036	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-106.0
3036	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	5.3	0.0	0.0	-106.0
3048	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.7
3048	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
3048	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
3050	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-39.3
3050	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.3
3050	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.3
3053	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
3053	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3053	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3054	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-9.3
3054	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-109.3
3054	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.0	0.0	0.0	-109.3
3057	536801.68	4816484.96	341.28	1	D	A	59.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-10.4
3057	536801.68	4816484.96	341.28	1	N	A	-40.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.4
3057	536801.68	4816484.96	341.28	1	E	A	-40.5	1.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-110.4
3087	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
3087	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3087	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3090	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-32.4
3090	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-132.4
3090	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	27.9	0.0	3.7	-132.4
3183	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-10.3
3183	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-110.3
3183	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	9.1	0.0	0.0	-110.3
3185	536801.18	4816486.13	341.28	1	D	A	59.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-11.4
3185	536801.18	4816486.13	341.28	1	N	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-111.4
3185	536801.18	4816486.13	341.28	1	E	A	-40.5	0.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	7.8	0.0	1.7	-111.4
3202	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-1.6
3202	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
3202	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
3207	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-9.2
3207	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-109.2
3207	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	7.6	0.0	0.0	-109.2
3209	536774.69	4816544.95	341.05	1	D	A	59.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-11.7
3209	536774.69	4816544.95	341.05	1	N	A	-40.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-111.7
3209	536774.69	4816544.95	341.05	1	E	A	-40.5	0.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-111.7
3242	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-2.1
3242	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
3242	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	64.4	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
3244	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-31.0
3244	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-131.0
3244	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	0.0	0.0	28.9	-131.0
3247	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.3
3247	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3247	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
3250	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-34.0
3250	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-134.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3250	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-134.0
3267	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
3267	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3267	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3270	536964.13	4816483.77	339.95	1	D	A	59.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-41.0
3270	536964.13	4816483.77	339.95	1	N	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-141.0
3270	536964.13	4816483.77	339.95	1	E	A	-40.5	2.3	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	27.9	0.0	10.6	-141.0
3279	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
3279	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3279	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3313	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-9.4
3313	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-109.4
3313	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.9	2.3	-3.0	0.0	0.0	6.5	0.0	0.0	-109.4
3344	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-10.2
3344	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-110.2
3344	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	66.0	2.3	-3.0	0.0	0.0	6.7	0.0	0.0	-110.2
3398	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-10.3
3398	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-110.3
3398	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.9	2.2	-3.0	0.0	0.0	5.8	0.0	0.0	-110.3
3409	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-9.6
3409	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-109.6
3409	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	5.3	0.0	0.0	-109.6
3412	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-6.3
3412	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-106.3
3412	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	0.0	0.0	1.7	-106.3
3437	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-9.9
3437	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-109.9
3437	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	65.8	2.2	-3.0	0.0	0.0	4.6	0.0	0.0	-109.9
3463	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.9	0.0	0.0	-16.0
3463	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.9	0.0	0.0	-116.0
3463	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	8.9	0.0	0.0	-116.0
3465	536779.12	4816535.20	341.05	1	D	A	59.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-17.1
3465	536779.12	4816535.20	341.05	1	N	A	-40.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-117.1
3465	536779.12	4816535.20	341.05	1	E	A	-40.5	-4.7	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	7.8	0.0	1.7	-117.1
3470	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-7.3
3470	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3
3470	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.3

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2111	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-11.6
2111	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-111.6
2111	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-111.6
2387	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.8	0.0	0.0	-14.3
2387	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.8	0.0	0.0	-114.3
2387	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	19.8	0.0	0.0	-114.3
2396	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	19.9	0.0	0.0	-14.5
2396	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	19.9	0.0	0.0	-114.5
2396	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	19.9	0.0	0.0	-114.5
2522	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-15.6
2522	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-115.6
2522	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.2	0.0	0.0	-115.6
2634	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.4	0.0	0.0	-16.7
2634	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.4	0.0	0.0	-116.7
2634	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	20.4	0.0	0.0	-116.7
2646	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-16.8
2646	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-116.8
2646	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-116.8
2681	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.8	0.0	0.0	-19.7
2681	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.8	0.0	0.0	-119.7
2681	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.8	0.0	0.0	-119.7
2694	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.7	0.0	0.0	-17.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2694	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.7	0.0	0.0	-117.9
2694	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	65.1	2.1	-3.0	0.0	0.0	20.7	0.0	0.0	-117.9
2770	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-18.0
2770	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-118.0
2770	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.0	0.0	0.0	-118.0
2779	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-20.8
2779	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-120.8
2779	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.9	0.0	0.0	-120.8
2823	536993.62	4816409.43	338.47	0	D	A	59.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.1	0.0	0.0	-22.8
2823	536993.62	4816409.43	338.47	0	N	A	-40.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.1	0.0	0.0	-122.8
2823	536993.62	4816409.43	338.47	0	E	A	-40.5	2.9	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	21.1	0.0	0.0	-122.8
2828	536995.16	4816410.82	338.51	0	D	A	59.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.9	0.0	0.0	-22.1
2828	536995.16	4816410.82	338.51	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.9	0.0	0.0	-122.1
2828	536995.16	4816410.82	338.51	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.9	0.0	0.0	-122.1
2882	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.5	0.0	0.0	-19.4
2882	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.5	0.0	0.0	-119.4
2882	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	20.5	0.0	0.0	-119.4
2917	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-21.4
2917	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-121.4
2917	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-121.4
2936	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-19.7
2936	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-119.7
2936	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-119.7
3017	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-20.8
3017	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-120.8
3017	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-120.8
3028	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.0	0.0	0.0	-21.4
3028	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.0	0.0	0.0	-121.4
3028	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	21.0	0.0	0.0	-121.4
3040	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.2	0.0	0.0	-21.7
3040	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.2	0.0	0.0	-121.7
3040	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.2	0.0	0.0	-121.7
3045	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-21.2
3045	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-121.2
3045	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.7	0.0	0.0	-121.2
3093	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.8	0.0	0.0	-21.6
3093	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.8	0.0	0.0	-121.6
3093	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	20.8	0.0	0.0	-121.6
3096	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-21.3
3096	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-121.3
3096	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-121.3
3110	536986.44	4816402.86	338.40	0	D	A	59.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-24.1
3110	536986.44	4816402.86	338.40	0	N	A	-40.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-124.1
3110	536986.44	4816402.86	338.40	0	E	A	-40.5	2.1	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-124.1
3113	536987.21	4816402.12	338.40	0	D	A	59.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-28.9
3113	536987.21	4816402.12	338.40	0	N	A	-40.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-128.9
3113	536987.21	4816402.12	338.40	0	E	A	-40.5	-2.7	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-128.9
3135	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.5	0.0	0.0	-22.7
3135	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.5	0.0	0.0	-122.7
3135	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	21.5	0.0	0.0	-122.7
3139	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-23.4
3139	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-123.4
3139	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	22.2	0.0	0.0	-123.4
3153	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-22.9
3153	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-122.9
3153	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.7	0.0	0.0	-122.9
3163	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-21.8
3163	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.8
3163	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-121.8
3167	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.5	0.0	0.0	-23.9
3167	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.5	0.0	0.0	-123.9
3167	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	64.8	2.0	-3.0	0.0	0.0	22.5	0.0	0.0	-123.9
3206	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-23.2

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3206	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-123.2
3206	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.3	0.0	0.0	-123.2
3220	536990.12	4816403.00	338.40	0	D	A	59.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-25.3
3220	536990.12	4816403.00	338.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-125.3
3220	536990.12	4816403.00	338.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.9	0.0	0.0	-125.3
3224	536990.29	4816403.84	338.40	0	D	A	59.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-29.9
3224	536990.29	4816403.84	338.40	0	N	A	-40.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-129.9
3224	536990.29	4816403.84	338.40	0	E	A	-40.5	-3.6	0.0	0.0	0.0	64.9	2.0	-3.0	0.0	0.0	21.8	0.0	0.0	-129.9
3254	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-22.8
3254	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-122.8
3254	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.6	0.0	0.0	-122.8
3310	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-23.0
3310	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-123.0
3310	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.0	2.1	-3.0	0.0	0.0	20.3	0.0	0.0	-123.0
3316	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.4	0.0	0.0	-24.2
3316	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.4	0.0	0.0	-124.2
3316	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	64.9	2.1	-3.0	0.0	0.0	21.4	0.0	0.0	-124.2
3469	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-27.9
3469	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-127.9
3469	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	20.5	0.0	0.0	-127.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2128	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	3.1
2128	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-103.8
2128	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	63.8	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-103.8
2347	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	0.4
2347	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-106.6
2347	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-106.6
2348	536848.15	4816431.51	340.11	1	D	A	58.4	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	3.9
2348	536848.15	4816431.51	340.11	1	N	A	-48.6	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-103.1
2348	536848.15	4816431.51	340.11	1	E	A	-48.6	9.1	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-103.1
2415	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-0.1
2415	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-107.1
2415	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-107.1
2444	536909.59	4816465.40	339.00	0	D	A	58.4	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-2.2
2444	536909.59	4816465.40	339.00	0	N	A	-48.6	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-109.2
2444	536909.59	4816465.40	339.00	0	E	A	-48.6	10.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-109.2
2497	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-0.6
2497	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-107.5
2497	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-107.5
2499	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	2.9
2499	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-104.1
2499	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-104.1
2528	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	0.5
2528	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	-106.4
2528	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	4.6	0.0	0.0	-106.4
2531	536851.04	4816438.13	339.77	1	D	A	58.4	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	2.8
2531	536851.04	4816438.13	339.77	1	N	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-104.2
2531	536851.04	4816438.13	339.77	1	E	A	-48.6	8.0	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-104.2
2571	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	1.7
2571	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-105.3
2571	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	3.0	0.0	0.0	-105.3
2573	536876.66	4816460.04	339.15	1	D	A	58.4	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.1
2573	536876.66	4816460.04	339.15	1	N	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
2573	536876.66	4816460.04	339.15	1	E	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
2575	536877.94	4816456.85	339.24	1	D	A	58.4	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-2.5
2575	536877.94	4816456.85	339.24	1	N	A	-48.6	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-109.5
2575	536877.94	4816456.85	339.24	1	E	A	-48.6	6.7	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-109.5
2577	536876.64	4816460.08	339.15	1	D	A	58.4	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-2.2
2577	536876.64	4816460.08	339.15	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-109.2
2577	536876.64	4816460.08	339.15	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-109.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2580	536876.66	4816460.04	339.15	1	D	A	58.4	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.1
2580	536876.66	4816460.04	339.15	1	N	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
2580	536876.66	4816460.04	339.15	1	E	A	-48.6	3.7	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.1
2582	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-3.3
2582	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-110.3
2582	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	64.1	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-110.3
2585	536831.89	4816436.30	340.12	0	D	A	58.4	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	4.7
2585	536831.89	4816436.30	340.12	0	N	A	-48.6	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
2585	536831.89	4816436.30	340.12	0	E	A	-48.6	7.2	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-102.3
2587	536832.91	4816436.05	340.12	1	D	A	58.4	5.0	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	0.2
2587	536832.91	4816436.05	340.12	1	N	A	-48.6	5.0	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
2587	536832.91	4816436.05	340.12	1	E	A	-48.6	5.0	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
2651	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-0.1
2651	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-107.1
2651	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	4.3	0.0	0.0	-107.1
2653	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	1.9
2653	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.1
2653	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.1
2659	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-1.0
2659	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-107.9
2659	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-107.9
2661	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	1.6
2661	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-105.4
2661	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	0.0	0.0	2.0	-105.4
2683	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-2.0
2683	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-109.0
2683	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	5.6	0.0	0.0	-109.0
2685	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	1.2
2685	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.8
2685	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-105.8
2696	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-4.6
2696	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-111.5
2696	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-111.5
2706	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-1.8
2706	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-108.8
2706	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-108.8
2724	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-2.4
2724	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-109.4
2724	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-109.4
2742	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.2	0.0	0.0	-0.4
2742	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.2	0.0	0.0	-107.4
2742	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.2	0.0	0.0	-107.4
2743	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	0.6
2743	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.4
2743	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.4
2751	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-3.3
2751	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-110.3
2751	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.9	0.0	0.0	-110.3
2754	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-3.1
2754	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-110.1
2754	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-110.1
2803	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-0.6
2803	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-107.6
2803	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.1	0.0	0.0	-107.6
2805	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	0.2
2805	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
2805	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-106.8
2817	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-3.5
2817	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-110.5
2817	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	63.3	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-110.5
2864	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-3.0
2864	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-110.0
2864	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-110.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2885	536894.27	4816470.01	339.05	0	D	A	58.4	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-12.6
2885	536894.27	4816470.01	339.05	0	N	A	-48.6	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-119.6
2885	536894.27	4816470.01	339.05	0	E	A	-48.6	5.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	14.2	0.0	0.0	-119.6
2918	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-4.6
2918	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-111.6
2918	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-111.6
2921	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.1
2921	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
2921	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.1
2943	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-2.9
2943	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-109.9
2943	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	4.0	0.0	0.0	-109.9
2946	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.2
2946	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.2
2946	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.2
2961	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	4.4	0.0	0.0	-3.5
2961	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	4.4	0.0	0.0	-110.5
2961	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	4.4	0.0	0.0	-110.5
2964	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.4
2964	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.4
2964	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.4
2975	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-5.2
2975	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-112.2
2975	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-112.2
2977	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-1.7
2977	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.6
2977	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-108.6
2992	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.7	0.0	0.0	-5.4
2992	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.7	0.0	0.0	-112.4
2992	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	5.7	0.0	0.0	-112.4
2998	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-5.4
2998	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-112.4
2998	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.8	0.0	0.0	-112.4
3067	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.3	0.0	0.0	-3.6
3067	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.3	0.0	0.0	-110.6
3067	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.3	0.0	0.0	-110.6
3070	536896.40	4816465.40	339.10	1	D	A	58.4	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.0
3070	536896.40	4816465.40	339.10	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
3070	536896.40	4816465.40	339.10	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
3073	536896.40	4816465.40	339.10	1	D	A	58.4	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.0
3073	536896.40	4816465.40	339.10	1	N	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
3073	536896.40	4816465.40	339.10	1	E	A	-48.6	3.6	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.0
3074	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-5.4
3074	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-112.4
3074	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	5.1	0.0	0.0	-112.4
3082	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-5.5
3082	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-112.5
3082	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-112.5
3084	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-2.5
3084	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.5
3084	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.5
3099	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.9	0.0	0.0	-5.5
3099	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.9	0.0	0.0	-112.4
3099	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.9	0.0	0.0	-112.4
3104	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-5.7
3104	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-112.7
3104	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-112.7
3106	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-5.5
3106	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-112.5
3106	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.1	1.6	-3.0	0.0	0.0	4.9	0.0	0.0	-112.5
3116	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-0.7
3116	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-107.7
3116	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	0.0	-107.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3119	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.8
3119	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
3119	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
3121	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-2.0
3121	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-109.0
3121	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	0.0	0.0	1.3	-109.0
3124	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-1.8
3124	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
3124	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	1.0	-108.8
3127	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-6.4
3127	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-113.4
3127	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	63.2	1.6	-3.0	0.0	0.0	5.7	0.0	0.0	-113.4
3129	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-5.8
3129	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-112.8
3129	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	5.3	0.0	0.0	-112.8
3132	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-2.9
3132	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.9
3132	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-109.9
3150	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-5.7
3150	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-112.7
3150	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	63.0	1.5	-3.0	0.0	0.0	5.0	0.0	0.0	-112.7
3168	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.0	0.0	0.0	-5.1
3168	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.0	0.0	0.0	-112.1
3168	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.0	0.0	0.0	-112.1
3170	536897.09	4816464.12	339.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-17.0
3170	536897.09	4816464.12	339.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
3170	536897.09	4816464.12	339.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
3173	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-6.7
3173	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.7
3173	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	5.5	-113.7
3175	536897.09	4816464.12	339.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-17.0
3175	536897.09	4816464.12	339.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
3175	536897.09	4816464.12	339.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-124.0
3188	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-1.1
3188	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.1
3188	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.1
3191	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.3
3191	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.3
3191	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.3
3193	536895.24	4816467.79	339.09	0	D	A	58.4	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-10.5
3193	536895.24	4816467.79	339.09	0	N	A	-48.6	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-117.4
3193	536895.24	4816467.79	339.09	0	E	A	-48.6	0.5	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	6.8	0.0	0.0	-117.4
3195	536895.63	4816466.91	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	-8.2
3195	536895.63	4816466.91	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	-115.2
3195	536895.63	4816466.91	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	3.0	0.0	0.0	-115.2
3212	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.8	0.0	0.0	-6.2
3212	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.8	0.0	0.0	-113.2
3212	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	4.8	0.0	0.0	-113.2
3213	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.7
3213	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.7
3213	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.7
3227	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.9	0.0	0.0	-5.4
3227	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.9	0.0	0.0	-112.4
3227	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	3.9	0.0	0.0	-112.4
3229	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.8
3229	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.8
3229	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	62.6	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.8
3236	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.7	0.0	0.0	-6.4
3236	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.7	0.0	0.0	-113.4
3236	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	62.9	1.5	-3.0	0.0	0.0	4.7	0.0	0.0	-113.4
3239	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-3.9
3239	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.9
3239	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-110.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3256	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	-5.2
3256	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	-112.2
3256	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.5	0.0	0.0	-112.2
3259	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.0
3259	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.0
3259	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.0
3273	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-6.0
3273	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-113.0
3273	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.1	0.0	0.0	-113.0
3276	536878.88	4816454.52	339.31	1	D	A	58.4	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-14.3
3276	536878.88	4816454.52	339.31	1	N	A	-48.6	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-121.3
3276	536878.88	4816454.52	339.31	1	E	A	-48.6	-5.1	0.0	0.0	0.0	63.6	1.6	-3.0	0.0	0.0	0.0	0.0	5.4	-121.3
3287	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	5.0	0.0	0.0	-7.0
3287	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	5.0	0.0	0.0	-114.0
3287	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	5.0	0.0	0.0	-114.0
3290	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.3
3290	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
3290	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	62.7	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
3293	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-6.9
3293	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-113.9
3293	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	4.9	0.0	0.0	-113.9
3298	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-1.9
3298	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.9
3298	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-108.9
3301	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.2
3301	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
3301	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.2
3336	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.9	0.0	0.0	-6.5
3336	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.9	0.0	0.0	-113.5
3336	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.9	0.0	0.0	-113.5
3339	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-4.9
3339	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.8
3339	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-111.8
3363	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.2
3363	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.2
3363	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.2
3366	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-5.4
3366	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.4
3366	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.4
3368	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-7.9
3368	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-114.8
3368	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.5	0.0	0.0	-114.8
3378	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.3
3378	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.3
3378	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.3
3380	536827.57	4816435.66	340.22	1	D	A	58.4	-7.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-12.5
3380	536827.57	4816435.66	340.22	1	N	A	-48.6	-7.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-119.5
3380	536827.57	4816435.66	340.22	1	E	A	-48.6	-7.9	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-119.5
3385	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	-7.2
3385	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	-114.2
3385	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.8	0.0	0.0	-114.2
3387	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-5.7
3387	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.7
3387	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.7
3390	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.8	0.0	0.0	-8.4
3390	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.8	0.0	0.0	-115.4
3390	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	63.5	1.6	-3.0	0.0	0.0	4.8	0.0	0.0	-115.4
3393	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-3.6
3393	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.6
3393	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-110.6
3395	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-5.9
3395	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.9
3395	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-112.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3403	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-8.8
3403	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-115.8
3403	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.6	0.0	0.0	-115.8
3414	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-4.2
3414	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
3414	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.2
3416	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.1	0.0	0.0	-9.5
3416	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.1	0.0	0.0	-116.5
3416	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.1	0.0	0.0	-116.5
3432	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-9.4
3432	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-116.4
3432	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.8	0.0	0.0	-116.4
3435	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-9.7
3435	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-116.7
3435	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-116.7
3439	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-9.9
3439	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-116.8
3439	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.2	0.0	0.0	-116.8
3441	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-4.6
3441	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
3441	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-111.6
3443	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.7	0.0	0.0	-8.4
3443	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.7	0.0	0.0	-115.4
3443	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	62.5	1.5	-3.0	0.0	0.0	3.7	0.0	0.0	-115.4
3445	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-7.0
3445	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-114.0
3445	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-114.0
3447	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	-9.9
3447	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	-116.9
3447	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	63.4	1.6	-3.0	0.0	0.0	5.0	0.0	0.0	-116.9
3449	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.4	0.0	0.0	-9.6
3449	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.4	0.0	0.0	-116.6
3449	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	63.9	1.7	-3.0	0.0	0.0	4.4	0.0	0.0	-116.6
3451	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-16.0
3451	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-123.0
3451	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	64.0	1.7	-3.0	0.0	0.0	0.0	0.0	10.7	-123.0
3453	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-13.1
3453	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-120.1
3453	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-120.1
3456	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-13.4
3456	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-120.4
3456	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	7.8	0.0	0.0	-120.4
3459	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-5.7
3459	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
3459	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	62.4	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-112.7
3461	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-6.3
3461	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-113.3
3461	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-113.3
3472	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-7.3
3472	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.3
3472	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.3
3474	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-7.8
3474	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.8
3474	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-114.8
3476	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-8.2
3476	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-115.2
3476	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-115.2
3479	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-14.1
3479	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-121.1
3479	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	62.8	1.5	-3.0	0.0	0.0	5.9	0.0	0.0	-121.1
3481	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-10.6
3481	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-117.6
3481	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	63.1	1.5	-3.0	0.0	0.0	0.0	0.0	2.0	-117.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3483	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-9.9
3483	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-116.8
3483	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-116.8
3485	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-11.0
3485	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-118.0
3485	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	64.2	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-118.0

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2195	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-26.8
2195	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-29.8
2195	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	60.9	1.5	-3.0	0.0	0.0	27.5	0.0	0.0	-26.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2627	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
2627	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2627	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
2629	536993.65	4816487.02	339.53	1	D	A	59.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.8	-55.1
2629	536993.65	4816487.02	339.53	1	N	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.8	-155.1
2629	536993.65	4816487.02	339.53	1	E	A	-40.5	8.9	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	27.9	0.0	30.8	-155.1
2672	536958.33	4816510.70	339.51	0	D	A	59.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-6.4
2672	536958.33	4816510.70	339.51	0	N	A	-40.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-106.4
2672	536958.33	4816510.70	339.51	0	E	A	-40.5	6.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.7	0.0	0.0	-106.4
2674	536955.67	4816509.05	339.56	0	D	A	59.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-10.5
2674	536955.67	4816509.05	339.56	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-110.5
2674	536955.67	4816509.05	339.56	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-110.5
2676	536960.06	4816523.96	339.50	0	D	A	59.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-4.9
2676	536960.06	4816523.96	339.50	0	N	A	-40.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-104.9
2676	536960.06	4816523.96	339.50	0	E	A	-40.5	8.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-104.9
2719	536963.83	4816506.85	339.51	0	D	A	59.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	1.8
2719	536963.83	4816506.85	339.51	0	N	A	-40.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2719	536963.83	4816506.85	339.51	0	E	A	-40.5	6.7	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2722	536963.02	4816509.44	339.48	0	D	A	59.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-9.9
2722	536963.02	4816509.44	339.48	0	N	A	-40.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-109.9
2722	536963.02	4816509.44	339.48	0	E	A	-40.5	-1.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	3.4	0.0	0.0	-109.9
2732	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.2
2732	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2732	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2734	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-36.5
2734	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-136.5
2734	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-136.5
2857	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-6.2
2857	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-106.2
2857	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-106.2
2859	536955.69	4816510.42	339.56	0	D	A	59.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-7.7
2859	536955.69	4816510.42	339.56	0	N	A	-40.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-107.7
2859	536955.69	4816510.42	339.56	0	E	A	-40.5	6.2	0.0	0.0	0.0	65.2	2.1	-3.0	0.0	0.0	9.0	0.0	0.0	-107.7
2889	536958.41	4816517.56	339.51	0	D	A	59.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-7.4
2889	536958.41	4816517.56	339.51	0	N	A	-40.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-107.4
2889	536958.41	4816517.56	339.51	0	E	A	-40.5	6.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.4	0.0	0.0	-107.4
2891	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	1.0
2891	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
2891	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-99.0
2894	536965.49	4816501.47	339.59	1	D	A	59.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-5.5
2894	536965.49	4816501.47	339.59	1	N	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-105.5
2894	536965.49	4816501.47	339.59	1	E	A	-40.5	1.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	1.8	-105.5
2932	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-7.2
2932	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-107.2
2932	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	65.7	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-107.2
2938	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-8.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2938	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-108.1
2938	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	8.7	0.0	0.0	-108.1
2982	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
2982	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
2982	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
2984	536978.53	4816487.38	339.72	1	D	A	59.5	4.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-38.8
2984	536978.53	4816487.38	339.72	1	N	A	-40.5	4.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-138.8
2984	536978.53	4816487.38	339.72	1	E	A	-40.5	4.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-138.8
2987	536971.19	4816491.72	339.73	0	D	A	59.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.1
2987	536971.19	4816491.72	339.73	0	N	A	-40.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
2987	536971.19	4816491.72	339.73	0	E	A	-40.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.1
2990	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-31.8
2990	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-131.8
2990	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-131.8
3011	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.3
3011	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
3011	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
3013	536981.46	4816486.68	339.69	1	D	A	59.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-39.0
3013	536981.46	4816486.68	339.69	1	N	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.0
3013	536981.46	4816486.68	339.69	1	E	A	-40.5	4.7	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.0
3034	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-8.1
3034	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-108.1
3034	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.5	0.0	0.0	-108.1
3042	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-5.9
3042	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
3042	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	5.2	0.0	0.0	-105.9
3077	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-0.8
3077	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3077	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-100.8
3080	536975.81	4816488.20	339.74	1	D	A	59.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-39.5
3080	536975.81	4816488.20	339.74	1	N	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.5
3080	536975.81	4816488.20	339.74	1	E	A	-40.5	4.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-139.5
3101	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-8.6
3101	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-108.6
3101	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-108.6
3142	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-9.1
3142	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-109.1
3142	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.7	0.0	0.0	-109.1
3145	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-1.3
3145	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
3145	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.3
3147	536969.49	4816493.76	339.71	1	D	A	59.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-33.0
3147	536969.49	4816493.76	339.71	1	N	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-133.0
3147	536969.49	4816493.76	339.71	1	E	A	-40.5	3.6	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-133.0
3166	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-8.9
3166	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-108.9
3166	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.5	0.0	0.0	-108.9
3178	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-8.7
3178	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-108.7
3178	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-108.7
3180	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-9.2
3180	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-109.2
3180	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-109.2
3198	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-1.8
3198	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3198	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3201	536968.35	4816495.32	339.68	1	D	A	59.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-34.6
3201	536968.35	4816495.32	339.68	1	N	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-134.6
3201	536968.35	4816495.32	339.68	1	E	A	-40.5	2.0	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	3.7	-134.6
3216	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-9.0
3216	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.0
3216	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.0
3231	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-10.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3231	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-110.1
3231	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.9	0.0	0.0	-110.1
3234	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-9.9
3234	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-109.9
3234	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.6	0.0	0.0	-109.9
3261	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.4
3261	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3261	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.4
3264	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-41.0
3264	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-141.0
3264	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-141.0
3281	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.5
3281	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
3281	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.5
3284	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.3
3284	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.3
3284	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.3
3295	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-10.5
3295	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-110.5
3295	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-110.5
3304	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-10.3
3304	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-110.3
3304	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.6	0.0	0.0	-110.3
3307	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-9.8
3307	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.8
3307	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.0	0.0	0.0	-109.8
3317	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-2.8
3317	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
3317	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
3319	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.6
3319	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.6
3319	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.6
3322	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-10.2
3322	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-110.2
3322	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-110.2
3325	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.0
3325	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.0
3325	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.0
3327	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-6.7
3327	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.7
3327	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	3.7	-106.7
3329	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.1
3329	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
3329	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.1
3331	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-41.7
3331	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-141.7
3331	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	65.4	2.2	-3.0	0.0	0.0	27.9	0.0	10.7	-141.7
3334	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-10.3
3334	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-110.3
3334	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.2	0.0	0.0	-110.3
3340	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-10.7
3340	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-110.7
3340	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.4	0.0	0.0	-110.7
3347	536964.01	4816517.03	339.41	0	D	A	59.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-10.6
3347	536964.01	4816517.03	339.41	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-110.6
3347	536964.01	4816517.03	339.41	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-110.6
3348	536963.70	4816516.38	339.41	0	D	A	59.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-30.9
3348	536963.70	4816516.38	339.41	0	N	A	-40.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-130.9
3348	536963.70	4816516.38	339.41	0	E	A	-40.5	-18.8	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	7.1	0.0	0.0	-130.9
3350	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-11.7
3350	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-111.7
3350	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	8.1	0.0	0.0	-111.7
3353	536962.28	4816512.98	339.44	0	D	A	59.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-11.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3353	536962.28	4816512.98	339.44	0	N	A	-40.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-111.2
3353	536962.28	4816512.98	339.44	0	E	A	-40.5	0.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.6	0.0	0.0	-111.2
3354	536962.19	4816513.66	339.43	0	D	A	59.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-17.3
3354	536962.19	4816513.66	339.43	0	N	A	-40.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-117.3
3354	536962.19	4816513.66	339.43	0	E	A	-40.5	-5.4	0.0	0.0	0.0	65.4	2.1	-3.0	0.0	0.0	6.9	0.0	0.0	-117.3
3356	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-3.7
3356	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
3356	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
3358	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-42.4
3358	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-142.4
3358	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	65.3	2.1	-3.0	0.0	0.0	27.9	0.0	10.7	-142.4
3360	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-11.1
3360	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-111.1
3360	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.3	0.0	0.0	-111.1
3371	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.8
3371	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.8
3371	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.8
3373	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-11.3
3373	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-111.3
3373	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.2	0.0	0.0	-111.3
3376	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.9
3376	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
3376	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
3383	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-11.9
3383	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
3383	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-111.9
3400	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-12.3
3400	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.3
3400	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	65.6	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.3
3406	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-12.6
3406	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.6
3406	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	65.5	2.2	-3.0	0.0	0.0	7.8	0.0	0.0	-112.6

Receiver
Name: Building B2 Tower - East Facade
ID: POR
X: 536807.08 m
Y: 4816327.71 m
Z: 376.66 m

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
85	536869.76	4816329.54	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	47.2
85	536869.76	4816329.54	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	41.2
85	536869.76	4816329.54	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	47.9	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	47.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
86	536873.10	4816334.96	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	46.8
86	536873.10	4816334.96	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	40.8
86	536873.10	4816334.96	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	48.3	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	46.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 15-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
89	536921.39	4816355.66	345.77	0	D	A	92.5	0.0	0.0	0.0	0.0	52.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	42.1
89	536921.39	4816355.66	345.77	0	N	A	92.5	0.0	-6.0	0.0	0.0	52.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	36.1
89	536921.39	4816355.66	345.77	0	E	A	92.5	0.0	0.0	0.0	0.0	52.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	42.1
91	536921.39	4816355.66	345.77	1	D	A	92.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	6.5
91	536921.39	4816355.66	345.77	1	N	A	92.5	0.0	-6.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	0.5
91	536921.39	4816355.66	345.77	1	E	A	92.5	0.0	0.0	0.0	0.0	58.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	6.5

Point Source, ISO 9613, Name: "Sobeys - Packaged Chillers/Cooler Unit (4-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
94	536434.35	4816320.06	359.29	0	D	A	100.1	0.0	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.3	0.0	0.0	15.9
94	536434.35	4816320.06	359.29	0	N	A	100.1	0.0	-3.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.3	0.0	0.0	12.9
94	536434.35	4816320.06	359.29	0	E	A	100.1	0.0	0.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	23.3	0.0	0.0	15.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
98	536865.75	4816337.56	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	40.6
98	536865.75	4816337.56	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	34.6
98	536865.75	4816337.56	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	47.5	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	40.6
100	536865.75	4816337.56	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.1
100	536865.75	4816337.56	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-3.9
100	536865.75	4816337.56	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	2.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Fluid Cooler", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
105	536875.58	4816125.19	350.32	0	D	A	94.3	0.0	0.0	0.0	0.0	57.7	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	21.7
105	536875.58	4816125.19	350.32	0	N	A	94.3	0.0	-3.0	0.0	0.0	57.7	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	18.7
105	536875.58	4816125.19	350.32	0	E	A	94.3	0.0	0.0	0.0	0.0	57.7	1.4	-3.0	0.0	0.0	16.6	0.0	0.0	21.7

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
107	536876.37	4816316.45	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	48.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	39.4
107	536876.37	4816316.45	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	48.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	33.3
107	536876.37	4816316.45	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	48.7	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	39.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
111	536887.93	4816338.30	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.2
111	536887.93	4816338.30	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	32.2
111	536887.93	4816338.30	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
115	536885.25	4816352.06	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.2
115	536885.25	4816352.06	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	32.1
115	536885.25	4816352.06	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	49.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	38.2
117	536885.25	4816352.06	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	1.0
117	536885.25	4816352.06	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-5.0
117	536885.25	4816352.06	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	1.0

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
124	536820.59	4816211.30	344.53	0	D	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.2
124	536820.59	4816211.30	344.53	0	N	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.2
124	536820.59	4816211.30	344.53	0	E	A	85.0	0.0	0.0	0.0	0.0	52.7	0.4	-3.0	0.0	0.0	25.7	0.0	0.0	9.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
131	536864.48	4816333.89	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.8
131	536864.48	4816333.89	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.8
131	536864.48	4816333.89	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	47.4	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.8
132	536864.48	4816333.89	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.8
132	536864.48	4816333.89	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-6.8
132	536864.48	4816333.89	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-0.8

Point Source, ISO 9613, Name: "Teledyne DALSA - 15-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
135	537015.74	4816361.58	344.43	0	D	A	92.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
135	537015.74	4816361.58	344.43	0	N	A	92.5	0.0	-6.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	30.8
135	537015.74	4816361.58	344.43	0	E	A	92.5	0.0	0.0	0.0	0.0	57.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	36.8

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
138	536865.15	4816343.17	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.5
138	536865.15	4816343.17	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.5
138	536865.15	4816343.17	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	47.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.5
141	536865.15	4816343.17	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0
141	536865.15	4816343.17	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.0
141	536865.15	4816343.17	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.0

Point Source, ISO 9613, Name: "Firehall Number 3 - Exhaust Fan", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
152	536820.11	4816203.65	345.53	0	D	A	85.0	0.0	0.0	0.0	0.0	53.2	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.8
152	536820.11	4816203.65	345.53	0	N	A	85.0	0.0	0.0	0.0	0.0	53.2	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.8
152	536820.11	4816203.65	345.53	0	E	A	85.0	0.0	0.0	0.0	0.0	53.2	0.5	-3.0	0.0	0.0	25.6	0.0	0.0	8.8
156	536820.11	4816203.65	345.53	1	D	A	85.0	0.0	0.0	0.0	0.0	55.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	2.5
156	536820.11	4816203.65	345.53	1	N	A	85.0	0.0	0.0	0.0	0.0	55.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	2.5
156	536820.11	4816203.65	345.53	1	E	A	85.0	0.0	0.0	0.0	0.0	55.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	2.5

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
158	536912.04	4816588.26	347.50	0	D	A	94.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.1
158	536912.04	4816588.26	347.50	0	N	A	94.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.1
158	536912.04	4816588.26	347.50	0	E	A	94.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.1

Point Source, ISO 9613, Name: "Onward - 20-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
160	536912.04	4816588.26	347.50	1	D	A	94.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	6.6
160	536912.04	4816588.26	347.50	1	N	A	94.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	0.6
160	536912.04	4816588.26	347.50	1	E	A	94.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	6.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
161	536870.29	4816339.56	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0
161	536870.29	4816339.56	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	31.0
161	536870.29	4816339.56	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.1	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	37.0
162	536870.29	4816339.56	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2
162	536870.29	4816339.56	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.2
162	536870.29	4816339.56	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Dust Collector", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
167	536661.19	4816008.16	345.74	0	D	A	101.5	0.0	0.0	0.0	0.0	61.9	2.6	-3.0	0.0	0.0	27.5	0.0	0.0	12.5
167	536661.19	4816008.16	345.74	0	N	A	101.5	0.0	-188.0	0.0	0.0	61.9	2.6	-3.0	0.0	0.0	27.5	0.0	0.0	-175.5
167	536661.19	4816008.16	345.74	0	E	A	101.5	0.0	-188.0	0.0	0.0	61.9	2.6	-3.0	0.0	0.0	27.5	0.0	0.0	-175.5

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
169	536870.97	4816316.62	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9
169	536870.97	4816316.62	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.9
169	536870.97	4816316.62	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.2	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	36.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
171	536872.23	4816340.70	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	48.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
171	536872.23	4816340.70	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	48.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	30.7
171	536872.23	4816340.70	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	48.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	36.8
174	536872.23	4816340.70	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3
174	536872.23	4816340.70	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
174	536872.23	4816340.70	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-1.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
176	536908.07	4816364.63	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	35.9
176	536908.07	4816364.63	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	29.9
176	536908.07	4816364.63	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	35.9
178	536908.07	4816364.63	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1
178	536908.07	4816364.63	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
178	536908.07	4816364.63	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.1

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
179	536912.11	4816358.87	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.7
179	536912.11	4816358.87	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	29.7
179	536912.11	4816358.87	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.7
182	536912.11	4816358.87	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
182	536912.11	4816358.87	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
182	536912.11	4816358.87	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	58.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
184	536915.92	4816350.79	345.52	0	D	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.6
184	536915.92	4816350.79	345.52	0	N	A	85.5	0.0	-6.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	29.6
184	536915.92	4816350.79	345.52	0	E	A	85.5	0.0	0.0	0.0	0.0	52.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	35.6

Point Source, ISO 9613, Name: "565 Kumpf Drive - 10-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
186	536915.92	4816350.79	345.52	1	D	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2
186	536915.92	4816350.79	345.52	1	N	A	85.5	0.0	-6.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-6.2
186	536915.92	4816350.79	345.52	1	E	A	85.5	0.0	0.0	0.0	0.0	58.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-0.2

Point Source, ISO 9613, Name: "Sobeys - Idling Refrigeration Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
191	536450.78	4816313.41	351.99	0	D	A	101.9	0.0	-1.8	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	12.3
191	536450.78	4816313.41	351.99	0	N	A	101.9	0.0	-188.0	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-173.9
191	536450.78	4816313.41	351.99	0	E	A	101.9	0.0	-188.0	0.0	0.0	62.1	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-173.9
193	536450.78	4816313.41	351.99	1	D	A	101.9	0.0	-1.8	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	10.3
193	536450.78	4816313.41	351.99	1	N	A	101.9	0.0	-188.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-175.9
193	536450.78	4816313.41	351.99	1	E	A	101.9	0.0	-188.0	0.0	0.0	62.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-175.9

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
196	536886.32	4816345.11	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.2
196	536886.32	4816345.11	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	29.2
196	536886.32	4816345.11	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	49.8	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.2
198	536886.32	4816345.11	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0
198	536886.32	4816345.11	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
198	536886.32	4816345.11	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.0

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
201	536893.07	4816350.92	345.27	0	D	A	82.5	0.0	0.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.5
201	536893.07	4816350.92	345.27	0	N	A	82.5	0.0	-6.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	28.5
201	536893.07	4816350.92	345.27	0	E	A	82.5	0.0	0.0	0.0	0.0	50.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.5
205	536893.07	4816350.92	345.27	1	D	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3
205	536893.07	4816350.92	345.27	1	N	A	82.5	0.0	-6.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-8.3
205	536893.07	4816350.92	345.27	1	E	A	82.5	0.0	0.0	0.0	0.0	57.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-2.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
208	536801.75	4816086.63	340.68	0	D	A	97.1	0.0	-7.8	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	8.2
208	536801.75	4816086.63	340.68	0	N	A	97.1	0.0	-188.0	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	-172.1
208	536801.75	4816086.63	340.68	0	E	A	97.1	0.0	-7.8	3.0	0.0	58.7	2.2	-3.0	0.0	0.0	26.2	0.0	0.0	8.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
214	536690.88	4816044.90	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	9.3
214	536690.88	4816044.90	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	3.2
214	536690.88	4816044.90	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	60.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	9.3

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Compressed Air", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
217	536782.23	4816076.78	341.09	0	D	A	97.1	0.0	-7.8	3.0	0.0	59.1	2.3	-3.0	0.0	0.0	26.5	0.0	0.0	7.4
217	536782.23	4816076.78	341.09	0	N	A	97.1	0.0	-188.0	3.0	0.0	59.1	2.3	-3.0	0.0	0.0	26.5	0.0	0.0	-172.8
217	536782.23	4816076.78	341.09	0	E	A	97.1	0.0	-7.8	3.0	0.0	59.1	2.3	-3.0	0.0	0.0	26.5	0.0	0.0	7.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
220	536661.02	4816040.71	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	61.2	1.5	-2.9	0.0	0.0	25.3	0.0	0.0	7.4
220	536661.02	4816040.71	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.2	1.5	-2.9	0.0	0.0	25.3	0.0	0.0	1.4
220	536661.02	4816040.71	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	61.2	1.5	-2.9	0.0	0.0	25.3	0.0	0.0	7.4

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
222	536895.88	4816345.38	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	50.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.6
222	536895.88	4816345.38	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	50.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.6
222	536895.88	4816345.38	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	50.6	0.4	-3.0	0.0	0.0	0.0	0.0	0.0	30.6
224	536895.88	4816345.38	344.77	1	D	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
224	536895.88	4816345.38	344.77	1	N	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0
224	536895.88	4816345.38	344.77	1	E	A	78.6	0.0	0.0	0.0	0.0	57.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-6.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 15-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
228	536672.37	4816013.41	348.64	0	D	A	92.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	8.1
228	536672.37	4816013.41	348.64	0	N	A	92.5	0.0	-6.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	2.1
228	536672.37	4816013.41	348.64	0	E	A	92.5	0.0	0.0	0.0	0.0	61.7	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	8.1

Point Source, ISO 9613, Name: "Greystone - 15-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
231	536625.51	4816018.66	348.75	0	D	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	5.7
231	536625.51	4816018.66	348.75	0	N	A	92.5	0.0	-6.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	-0.3
231	536625.51	4816018.66	348.75	0	E	A	92.5	0.0	0.0	0.0	0.0	62.1	1.7	-2.6	0.0	0.0	25.6	0.0	0.0	5.7

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
232	536966.20	4816349.69	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
232	536966.20	4816349.69	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.3
232	536966.20	4816349.69	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.4

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
234	536970.45	4816325.51	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.2
234	536970.45	4816325.51	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.2
234	536970.45	4816325.51	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.2

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
236	536970.68	4816340.65	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.2
236	536970.68	4816340.65	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	26.1
236	536970.68	4816340.65	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	55.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	32.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - 5-ton HVAC", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
237	536918.39	4816354.53	345.52	0	D	A	82.5	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
237	536918.39	4816354.53	345.52	0	N	A	82.5	0.0	-6.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
237	536918.39	4816354.53	345.52	0	E	A	82.5	0.0	0.0	0.0	0.0	52.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	32.4
239	536918.39	4816354.53	345.52	1	D	A	82.5	0.0	0.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.4
239	536918.39	4816354.53	345.52	1	N	A	82.5	0.0	-6.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-9.4
239	536918.39	4816354.53	345.52	1	E	A	82.5	0.0	0.0	0.0	0.0	58.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-3.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
246	536790.71	4816089.26	345.38	0	D	A	90.0	0.0	0.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	9.3
246	536790.71	4816089.26	345.38	0	N	A	90.0	0.0	-188.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	-178.7
246	536790.71	4816089.26	345.38	0	E	A	90.0	0.0	0.0	0.0	0.0	58.6	0.6	-3.0	0.0	0.0	24.5	0.0	0.0	9.3

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
248	536924.87	4816349.18	344.77	0	D	A	78.6	0.0	0.0	0.0	0.0	52.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2
248	536924.87	4816349.18	344.77	0	N	A	78.6	0.0	0.0	0.0	0.0	52.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2

Point Source, ISO 9613, Name: "565 Kumpf Drive - Exhaust Fan", ID: "565Kumpf_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
248	536924.87	4816349.18	344.77	0	E	A	78.6	0.0	0.0	0.0	0.0	52.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	28.2

Point Source, ISO 9613, Name: "Onward - Rooftop Unit", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
250	536826.50	4816509.63	346.00	0	D	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
250	536826.50	4816509.63	346.00	0	N	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
250	536826.50	4816509.63	346.00	0	E	A	82.1	0.0	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
253	536826.50	4816509.63	346.00	1	D	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.5
253	536826.50	4816509.63	346.00	1	N	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.5
253	536826.50	4816509.63	346.00	1	E	A	82.1	0.0	0.0	0.0	0.0	56.8	1.0	-3.0	0.0	0.0	28.0	0.0	1.9	-2.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
260	536861.27	4816150.04	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.5	0.0	0.0	4.9
260	536861.27	4816150.04	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.5	0.0	0.0	4.9
260	536861.27	4816150.04	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.5	0.5	-3.0	0.0	0.0	22.5	0.0	0.0	4.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
262	536861.33	4816518.58	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.4
262	536861.33	4816518.58	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.6
262	536861.33	4816518.58	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.6
263	536861.33	4816518.58	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	57.5	0.5	-3.0	0.0	0.0	28.0	0.0	2.2	4.8
263	536861.33	4816518.58	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	57.5	0.5	-3.0	0.0	0.0	28.0	0.0	2.2	-183.2
263	536861.33	4816518.58	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	57.5	0.5	-3.0	0.0	0.0	28.0	0.0	2.2	-183.2

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
268	536870.07	4816135.80	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	18.8	0.0	0.0	8.1
268	536870.07	4816135.80	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	18.8	0.0	0.0	8.1
268	536870.07	4816135.80	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	18.8	0.0	0.0	8.1

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Make-up Air Unit", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
273	536864.23	4816133.04	349.32	0	D	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	19.3	0.0	0.0	7.5
273	536864.23	4816133.04	349.32	0	N	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	19.3	0.0	0.0	7.5
273	536864.23	4816133.04	349.32	0	E	A	82.1	0.0	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	19.3	0.0	0.0	7.5

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
277	536863.54	4816147.88	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.6	0.5	-3.0	0.0	0.0	21.8	0.0	0.0	5.4
277	536863.54	4816147.88	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.6	0.5	-3.0	0.0	0.0	21.8	0.0	0.0	5.4
277	536863.54	4816147.88	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.6	0.5	-3.0	0.0	0.0	21.8	0.0	0.0	5.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
281	536867.83	4816521.17	347.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	35.2
281	536867.83	4816521.17	347.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.8
281	536867.83	4816521.17	347.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-152.8
283	536867.83	4816521.17	347.00	1	D	A	90.0	0.0	0.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.6
283	536867.83	4816521.17	347.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.4
283	536867.83	4816521.17	347.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
286	536780.92	4816108.90	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	3.0

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
286	536780.92	4816108.90	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-3.0
286	536780.92	4816108.90	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	3.0

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
292	536869.91	4816146.29	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	19.0	0.0	0.0	8.1
292	536869.91	4816146.29	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	19.0	0.0	0.0	8.1
292	536869.91	4816146.29	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	19.0	0.0	0.0	8.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 10-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
294	537024.98	4816371.79	344.18	0	D	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	29.4
294	537024.98	4816371.79	344.18	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
294	537024.98	4816371.79	344.18	0	E	A	85.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	29.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 10-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
300	536775.99	4816106.35	345.88	0	D	A	85.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	2.9
300	536775.99	4816106.35	345.88	0	N	A	85.5	0.0	-6.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	-3.2
300	536775.99	4816106.35	345.88	0	E	A	85.5	0.0	0.0	0.0	0.0	58.1	1.2	-3.0	0.0	0.0	26.4	0.0	0.0	2.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
301	536904.16	4816494.80	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
301	536904.16	4816494.80	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
301	536904.16	4816494.80	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	56.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
302	536904.16	4816494.80	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6
302	536904.16	4816494.80	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6
302	536904.16	4816494.80	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-2.6

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
307	536861.90	4816138.66	347.82	0	D	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	20.2	0.0	0.0	6.7
307	536861.90	4816138.66	347.82	0	N	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	20.2	0.0	0.0	6.7
307	536861.90	4816138.66	347.82	0	E	A	81.4	0.0	0.0	0.0	0.0	57.0	0.6	-3.0	0.0	0.0	20.2	0.0	0.0	6.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
309	536852.63	4816537.06	346.00	0	D	A	90.0	0.0	0.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.7
309	536852.63	4816537.06	346.00	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
309	536852.63	4816537.06	346.00	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
311	536852.63	4816537.06	346.00	1	D	A	90.0	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.1
311	536852.63	4816537.06	346.00	1	N	A	90.0	0.0	-188.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.9
311	536852.63	4816537.06	346.00	1	E	A	90.0	0.0	-188.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.9

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
312	536855.64	4816537.84	346.50	0	D	A	90.0	0.0	0.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	34.7
312	536855.64	4816537.84	346.50	0	N	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
312	536855.64	4816537.84	346.50	0	E	A	90.0	0.0	-188.0	0.0	0.0	57.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-153.3
314	536855.64	4816537.84	346.50	1	D	A	90.0	0.0	0.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	4.1
314	536855.64	4816537.84	346.50	1	N	A	90.0	0.0	-188.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.9
314	536855.64	4816537.84	346.50	1	E	A	90.0	0.0	-188.0	0.0	0.0	58.2	0.6	-3.0	0.0	0.0	28.0	0.0	2.2	-183.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
316	536859.25	4816524.74	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	57.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
316	536859.25	4816524.74	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	57.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
316	536859.25	4816524.74	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	57.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
321	536859.25	4816524.74	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.4
321	536859.25	4816524.74	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.4
321	536859.25	4816524.74	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	57.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.5	-3.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
322	536895.35	4816513.18	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
322	536895.35	4816513.18	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
322	536895.35	4816513.18	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	57.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
324	536895.35	4816513.18	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	57.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1
324	536895.35	4816513.18	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	57.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1
324	536895.35	4816513.18	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	57.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-3.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Reefer Truck", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
327	536507.11	4816057.67	350.67	0	D	A	98.0	0.0	-3.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	6.6
327	536507.11	4816057.67	350.67	0	N	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-178.4
327	536507.11	4816057.67	350.67	0	E	A	98.0	0.0	-188.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	27.0	0.0	0.0	-178.4
329	536507.11	4816057.67	350.67	1	D	A	98.0	0.0	-3.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	4.3
329	536507.11	4816057.67	350.67	1	N	A	98.0	0.0	-188.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	-180.7
329	536507.11	4816057.67	350.67	1	E	A	98.0	0.0	-188.0	0.0	0.0	63.2	1.3	-3.0	0.0	0.0	28.0	0.0	1.3	-180.7

Point Source, ISO 9613, Name: "Waterloo Nissan - Rooftop Unit", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
333	536782.19	4816093.41	346.38	0	D	A	82.1	0.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-0.6
333	536782.19	4816093.41	346.38	0	N	A	82.1	0.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-0.6
333	536782.19	4816093.41	346.38	0	E	A	82.1	0.0	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	26.0	0.0	0.0	-0.6

Point Source, ISO 9613, Name: "Sobeys - Air Cooled Chiller (8-fan)", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
336	536415.97	4816336.50	359.79	0	D	A	88.0	0.0	0.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	22.3	0.0	0.0	4.8
336	536415.97	4816336.50	359.79	0	N	A	88.0	0.0	-3.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	22.3	0.0	0.0	1.8
336	536415.97	4816336.50	359.79	0	E	A	88.0	0.0	0.0	0.0	0.0	62.9	1.0	-3.0	0.0	0.0	22.3	0.0	0.0	4.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
338	536885.33	4816534.46	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
338	536885.33	4816534.46	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
338	536885.33	4816534.46	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.8
340	536885.33	4816534.46	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2
340	536885.33	4816534.46	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2
340	536885.33	4816534.46	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
343	536848.62	4816548.14	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
343	536848.62	4816548.14	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
343	536848.62	4816548.14	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	25.7
344	536848.62	4816548.14	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2
344	536848.62	4816548.14	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2
344	536848.62	4816548.14	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.2

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
347	536801.75	4816086.63	340.68	0	D	A	101.0	0.0	-17.8	3.0	0.0	58.7	4.5	-3.0	0.0	0.0	27.4	0.0	0.0	-1.4
347	536801.75	4816086.63	340.68	0	N	A	101.0	0.0	-188.0	3.0	0.0	58.7	4.5	-3.0	0.0	0.0	27.4	0.0	0.0	-171.6
347	536801.75	4816086.63	340.68	0	E	A	101.0	0.0	-17.8	3.0	0.0	58.7	4.5	-3.0	0.0	0.0	27.4	0.0	0.0	-1.4

Point Source, ISO 9613, Name: "Sobeys - Idling Truck", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
351	536446.75	4816311.74	351.57	0	D	A	93.1	0.0	0.0	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	3.8
351	536446.75	4816311.74	351.57	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-184.2
351	536446.75	4816311.74	351.57	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.2	2.3	-3.0	0.0	0.0	27.8	0.0	0.0	-184.2
354	536446.75	4816311.74	351.57	1	D	A	93.1	0.0	0.0	0.0	0.0	62.3	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	2.5
354	536446.75	4816311.74	351.57	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.3	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-185.5
354	536446.75	4816311.74	351.57	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.3	2.4	-3.0	0.0	0.0	28.0	0.0	1.0	-185.5

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
356	536996.51	4816351.84	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8
356	536996.51	4816351.84	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	21.8
356	536996.51	4816351.84	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	56.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	27.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
358	536876.89	4816553.16	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
358	536876.89	4816553.16	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
358	536876.89	4816553.16	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
360	536876.89	4816553.16	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.7
360	536876.89	4816553.16	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.7
360	536876.89	4816553.16	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-4.7

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
361	536842.61	4816561.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
361	536842.61	4816561.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
361	536842.61	4816561.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	58.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
363	536842.61	4816561.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.0
363	536842.61	4816561.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.0
363	536842.61	4816561.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	58.9	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.0

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
368	536692.85	4816072.45	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	0.4
368	536692.85	4816072.45	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-5.7
368	536692.85	4816072.45	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	0.4

Point Source, ISO 9613, Name: "Waterloo Nissan - Open Bay Door - Impact Wrench", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
371	536782.23	4816076.78	341.09	0	D	A	101.0	0.0	-17.8	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-2.0
371	536782.23	4816076.78	341.09	0	N	A	101.0	0.0	-188.0	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-172.2
371	536782.23	4816076.78	341.09	0	E	A	101.0	0.0	-17.8	3.0	0.0	59.1	4.6	-3.0	0.0	0.0	27.5	0.0	0.0	-2.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
373	537003.16	4816372.32	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.3
373	537003.16	4816372.32	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	21.3
373	537003.16	4816372.32	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
376	536676.36	4816072.85	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	60.2	1.4	-2.8	0.0	0.0	26.8	0.0	0.0	0.1
376	536676.36	4816072.85	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	60.2	1.4	-2.8	0.0	0.0	26.8	0.0	0.0	-6.0
376	536676.36	4816072.85	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	60.2	1.4	-2.8	0.0	0.0	26.8	0.0	0.0	0.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
377	537009.03	4816374.15	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.0
377	537009.03	4816374.15	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	21.0
377	537009.03	4816374.15	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	27.0

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
380	537012.51	4816364.27	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
380	537012.51	4816364.27	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.9
380	537012.51	4816364.27	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.9

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
383	536831.48	4816585.06	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
383	536831.48	4816585.06	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
383	536831.48	4816585.06	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.4
384	536831.48	4816585.06	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.8
384	536831.48	4816585.06	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.8
384	536831.48	4816585.06	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	28.0	0.0	2.9	-6.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
386	536866.53	4816583.53	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
386	536866.53	4816583.53	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
386	536866.53	4816583.53	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.2
388	536866.53	4816583.53	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.6
388	536866.53	4816583.53	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.6
388	536866.53	4816583.53	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	59.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.5	-5.6

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
392	536787.60	4816112.61	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	0.2
392	536787.60	4816112.61	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-5.8
392	536787.60	4816112.61	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	57.8	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	0.2

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
395	536894.41	4816579.89	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
395	536894.41	4816579.89	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
395	536894.41	4816579.89	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
396	536894.41	4816579.89	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.8
396	536894.41	4816579.89	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.8
396	536894.41	4816579.89	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-5.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
399	536918.59	4816552.53	345.25	0	D	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
399	536918.59	4816552.53	345.25	0	N	A	82.5	0.0	-3.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	22.2
399	536918.59	4816552.53	345.25	0	E	A	82.5	0.0	0.0	0.0	0.0	59.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	25.2
401	536918.59	4816552.53	345.25	1	D	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3
401	536918.59	4816552.53	345.25	1	N	A	82.5	0.0	-3.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-7.3
401	536918.59	4816552.53	345.25	1	E	A	82.5	0.0	0.0	0.0	0.0	59.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-4.3

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
403	537020.87	4816379.70	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.5
403	537020.87	4816379.70	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
403	537020.87	4816379.70	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	57.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
404	536845.16	4816595.57	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
404	536845.16	4816595.57	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
404	536845.16	4816595.57	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	59.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	24.0
405	536845.16	4816595.57	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.2
405	536845.16	4816595.57	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.2
405	536845.16	4816595.57	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.0	0.8	-3.0	0.0	0.0	28.0	0.0	2.9	-7.2

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
409	536785.32	4816107.57	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	0.1
409	536785.32	4816107.57	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	-6.0
409	536785.32	4816107.57	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	26.3	0.0	0.0	0.1

Point Source, ISO 9613, Name: "Teledyne DALSA - 5-ton HVAC", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
412	537023.46	4816375.21	343.93	0	D	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4
412	537023.46	4816375.21	343.93	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	20.4
412	537023.46	4816375.21	343.93	0	E	A	82.5	0.0	0.0	0.0	0.0	58.0	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	26.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
416	536660.26	4816066.32	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	7.1
416	536660.26	4816066.32	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-180.9
416	536660.26	4816066.32	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.6	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-180.9

Point Source, ISO 9613, Name: "101-139 Northfield Drive West - Exhaust Fan", ID: "101-139Northfield_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
420	536854.68	4816134.13	351.07	0	D	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	21.4	0.0	0.0	2.4
420	536854.68	4816134.13	351.07	0	N	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	21.4	0.0	0.0	2.4
420	536854.68	4816134.13	351.07	0	E	A	78.6	0.0	0.0	0.0	0.0	57.1	0.8	-3.0	0.0	0.0	21.4	0.0	0.0	2.4

Point Source, ISO 9613, Name: "Waterloo Nissan - 5-ton HVAC", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
424	536773.39	4816102.37	345.63	0	D	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-0.3
424	536773.39	4816102.37	345.63	0	N	A	82.5	0.0	-6.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-6.3
424	536773.39	4816102.37	345.63	0	E	A	82.5	0.0	0.0	0.0	0.0	58.2	1.2	-3.0	0.0	0.0	26.5	0.0	0.0	-0.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
427	536654.75	4816063.25	348.64	0	D	A	90.2	0.0	0.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	6.9
427	536654.75	4816063.25	348.64	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-181.1
427	536654.75	4816063.25	348.64	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.7	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-181.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
431	536658.35	4816058.96	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-2.8
431	536658.35	4816058.96	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-2.8
431	536658.35	4816058.96	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	60.8	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-2.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
435	536650.61	4816061.31	348.39	0	D	A	90.2	0.0	0.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	6.7
435	536650.61	4816061.31	348.39	0	N	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	-181.3
435	536650.61	4816061.31	348.39	0	E	A	90.2	0.0	-188.0	0.0	0.0	60.8	0.6	-2.7	0.0	0.0	24.8	0.0	0.0	-181.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
439	536652.35	4816055.92	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-3.1
439	536652.35	4816055.92	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-3.1
439	536652.35	4816055.92	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	60.9	1.4	-2.8	0.0	0.0	25.5	0.0	0.0	-3.1

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
440	536869.70	4816527.58	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	57.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
440	536869.70	4816527.58	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	57.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
440	536869.70	4816527.58	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	57.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.3
442	536869.70	4816527.58	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4
442	536869.70	4816527.58	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4
442	536869.70	4816527.58	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	58.0	0.8	-3.0	0.0	0.0	28.0	0.0	1.2	-6.4

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
445	536824.45	4816501.07	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.4
445	536824.45	4816501.07	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.6
445	536824.45	4816501.07	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.6
446	536824.45	4816501.07	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	56.4	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-0.8
446	536824.45	4816501.07	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	56.4	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-188.8
446	536824.45	4816501.07	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	56.4	0.6	-3.0	0.0	0.0	28.0	0.0	3.8	-188.8

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
450	536644.57	4816051.91	349.14	0	D	A	90.2	0.0	0.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	6.4
450	536644.57	4816051.91	349.14	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-181.6
450	536644.57	4816051.91	349.14	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.1	0.6	-2.7	0.0	0.0	24.7	0.0	0.0	-181.6

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
454	536652.42	4816049.31	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	25.4	0.0	0.0	-3.1
454	536652.42	4816049.31	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	25.4	0.0	0.0	-3.1
454	536652.42	4816049.31	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	61.1	1.4	-2.8	0.0	0.0	25.4	0.0	0.0	-3.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
459	536646.27	4816048.23	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.2	0.6	-2.7	0.0	0.0	24.6	0.0	0.0	6.5
459	536646.27	4816048.23	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.2	0.6	-2.7	0.0	0.0	24.6	0.0	0.0	-181.5
459	536646.27	4816048.23	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.2	0.6	-2.7	0.0	0.0	24.6	0.0	0.0	-181.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
461	536886.90	4816613.22	345.00	0	D	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
461	536886.90	4816613.22	345.00	0	N	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
461	536886.90	4816613.22	345.00	0	E	A	81.4	0.0	0.0	0.0	0.0	60.5	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	23.1
463	536886.90	4816613.22	345.00	1	D	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.7
463	536886.90	4816613.22	345.00	1	N	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.7
463	536886.90	4816613.22	345.00	1	E	A	81.4	0.0	0.0	0.0	0.0	60.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.5	-6.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
466	536871.56	4816492.87	346.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	31.3
466	536871.56	4816492.87	346.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.7
466	536871.56	4816492.87	346.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-156.7
467	536871.56	4816492.87	346.00	1	D	A	85.0	0.0	0.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	0.9
467	536871.56	4816492.87	346.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	-187.1
467	536871.56	4816492.87	346.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	56.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.8	-187.1

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 10-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
470	536710.77	4815996.75	348.39	0	D	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	20.4	0.0	0.0	4.7
470	536710.77	4815996.75	348.39	0	N	A	85.5	0.0	-6.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	20.4	0.0	0.0	-1.3
470	536710.77	4815996.75	348.39	0	E	A	85.5	0.0	0.0	0.0	0.0	61.8	1.6	-3.0	0.0	0.0	20.4	0.0	0.0	4.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
474	536649.47	4816041.32	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	6.6
474	536649.47	4816041.32	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	-181.4
474	536649.47	4816041.32	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.3	0.6	-2.8	0.0	0.0	24.4	0.0	0.0	-181.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Paintbooth Exhaust Stack", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
478	536651.29	4816037.21	348.89	0	D	A	90.2	0.0	0.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	24.2	0.0	0.0	6.7
478	536651.29	4816037.21	348.89	0	N	A	90.2	0.0	-188.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	24.2	0.0	0.0	-181.3
478	536651.29	4816037.21	348.89	0	E	A	90.2	0.0	-188.0	0.0	0.0	61.4	0.6	-2.8	0.0	0.0	24.2	0.0	0.0	-181.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Rooftop Unit", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
482	536657.36	4816035.78	348.89	0	D	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	25.1	0.0	0.0	-2.9
482	536657.36	4816035.78	348.89	0	N	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	25.1	0.0	0.0	-2.9
482	536657.36	4816035.78	348.89	0	E	A	82.1	0.0	0.0	0.0	0.0	61.4	1.5	-2.9	0.0	0.0	25.1	0.0	0.0	-2.9

Point Source, ISO 9613, Name: "Teledyne DALSA - Exhaust Fan", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
483	537019.12	4816382.98	343.43	0	D	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.9
483	537019.12	4816382.98	343.43	0	N	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.9
483	537019.12	4816382.98	343.43	0	E	A	78.6	0.0	0.0	0.0	0.0	57.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	22.9

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
485	536817.21	4816461.11	340.88	0	D	A	93.1	0.0	-10.8	0.0	0.0	53.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	30.4
485	536817.21	4816461.11	340.88	0	N	A	93.1	0.0	-188.0	0.0	0.0	53.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-146.8
485	536817.21	4816461.11	340.88	0	E	A	93.1	0.0	-188.0	0.0	0.0	53.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-146.8
486	536817.21	4816461.11	340.88	1	D	A	93.1	0.0	-10.8	0.0	0.0	54.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	0.7
486	536817.21	4816461.11	340.88	1	N	A	93.1	0.0	-188.0	0.0	0.0	54.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-176.5
486	536817.21	4816461.11	340.88	1	E	A	93.1	0.0	-188.0	0.0	0.0	54.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.1	-176.5

Point Source, ISO 9613, Name: "Onward - Process Exhaust Stack", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
488	536843.46	4816512.72	345.50	0	D	A	85.0	0.0	0.0	0.0	0.0	56.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	30.7
488	536843.46	4816512.72	345.50	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-157.3
488	536843.46	4816512.72	345.50	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-157.3
490	536843.46	4816512.72	345.50	1	D	A	85.0	0.0	0.0	0.0	0.0	57.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.4
490	536843.46	4816512.72	345.50	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.6
490	536843.46	4816512.72	345.50	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.6

Point Source, ISO 9613, Name: "Greystone - 10-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
493	536617.27	4816013.87	348.50	0	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-1.6
493	536617.27	4816013.87	348.50	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-7.6
493	536617.27	4816013.87	348.50	0	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-2.5	0.0	0.0	25.7	0.0	0.0	-1.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
496	536533.11	4816082.12	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-2.6
496	536533.11	4816082.12	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-8.7
496	536533.11	4816082.12	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.2	0.0	0.0	-2.6
497	536533.11	4816082.12	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.7
497	536533.11	4816082.12	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-10.7
497	536533.11	4816082.12	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
501	536538.72	4816070.90	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-2.6
501	536538.72	4816070.90	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-8.6
501	536538.72	4816070.90	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-2.6
504	536538.72	4816070.90	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.8
504	536538.72	4816070.90	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-10.8
504	536538.72	4816070.90	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.5	1.7	-3.0	0.0	0.0	28.0	0.0	1.1	-4.8

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
507	536839.27	4816517.46	345.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	30.6
507	536839.27	4816517.46	345.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.4
507	536839.27	4816517.46	345.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.4
508	536839.27	4816517.46	345.00	1	D	A	85.0	0.0	0.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.3
508	536839.27	4816517.46	345.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.7
508	536839.27	4816517.46	345.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.7

Point Source, ISO 9613, Name: "Onward - Process Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
510	536841.55	4816519.59	348.00	0	D	A	85.0	0.0	0.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	30.5
510	536841.55	4816519.59	348.00	0	N	A	85.0	0.0	-188.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.5
510	536841.55	4816519.59	348.00	0	E	A	85.0	0.0	-188.0	0.0	0.0	56.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-157.5
512	536841.55	4816519.59	348.00	1	D	A	85.0	0.0	0.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	0.2
512	536841.55	4816519.59	348.00	1	N	A	85.0	0.0	-188.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.8
512	536841.55	4816519.59	348.00	1	E	A	85.0	0.0	-188.0	0.0	0.0	57.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.9	-187.8

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
514	536917.05	4816573.37	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.6
514	536917.05	4816573.37	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	18.5
514	536917.05	4816573.37	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	59.7	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	24.6
516	536917.05	4816573.37	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-4.9
516	536917.05	4816573.37	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-10.9
516	536917.05	4816573.37	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-4.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
521	536517.55	4816074.51	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-3.0
521	536517.55	4816074.51	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-9.1
521	536517.55	4816074.51	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	27.1	0.0	0.0	-3.0
522	536517.55	4816074.51	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.1
522	536517.55	4816074.51	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-11.1
522	536517.55	4816074.51	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.1

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 10-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
526	536523.02	4816063.15	354.53	0	D	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0
526	536523.02	4816063.15	354.53	0	N	A	85.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-9.1
526	536523.02	4816063.15	354.53	0	E	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	27.0	0.0	0.0	-3.0
528	536523.02	4816063.15	354.53	1	D	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.2
528	536523.02	4816063.15	354.53	1	N	A	85.5	0.0	-6.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-11.2
528	536523.02	4816063.15	354.53	1	E	A	85.5	0.0	0.0	0.0	0.0	62.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-5.2

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
531	536918.65	4816580.36	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.3
531	536918.65	4816580.36	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
531	536918.65	4816580.36	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	59.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.3
533	536918.65	4816580.36	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1
533	536918.65	4816580.36	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-11.2
533	536918.65	4816580.36	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-5.1

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
535	536905.04	4816590.85	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
535	536905.04	4816590.85	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	18.1
535	536905.04	4816590.85	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	60.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	24.1
536	536905.04	4816590.85	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.4
536	536905.04	4816590.85	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-11.4
536	536905.04	4816590.85	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.4	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.4

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Building-Side Exhaust", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
541	536707.14	4816053.41	345.47	0	D	A	85.0	0.0	0.0	3.0	0.0	60.4	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	3.9
541	536707.14	4816053.41	345.47	0	N	A	85.0	0.0	-188.0	3.0	0.0	60.4	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	-184.1
541	536707.14	4816053.41	345.47	0	E	A	85.0	0.0	-188.0	3.0	0.0	60.4	0.9	-3.0	0.0	0.0	25.8	0.0	0.0	-184.1

Point Source, ISO 9613, Name: "Onward - 5-ton HVAC", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
544	536910.54	4816595.62	346.75	0	D	A	82.5	0.0	0.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
544	536910.54	4816595.62	346.75	0	N	A	82.5	0.0	-6.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	17.9
544	536910.54	4816595.62	346.75	0	E	A	82.5	0.0	0.0	0.0	0.0	60.2	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	23.9
547	536910.54	4816595.62	346.75	1	D	A	82.5	0.0	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.6
547	536910.54	4816595.62	346.75	1	N	A	82.5	0.0	-6.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-11.6
547	536910.54	4816595.62	346.75	1	E	A	82.5	0.0	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.1	-5.6

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Cooling Unit", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
551	536531.71	4816087.40	354.03	0	D	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.2
551	536531.71	4816087.40	354.03	0	N	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.2
551	536531.71	4816087.40	354.03	0	E	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	26.8	0.0	0.0	-6.2
553	536531.71	4816087.40	354.03	1	D	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.0	-9.4
553	536531.71	4816087.40	354.03	1	N	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.0	-9.4
553	536531.71	4816087.40	354.03	1	E	A	81.3	0.0	0.0	0.0	0.0	62.3	1.4	-3.0	0.0	0.0	28.0	0.0	2.0	-9.4

Point Source, ISO 9613, Name: "Sobeys - Rooftop Unit", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
557	536394.87	4816286.85	360.29	0	D	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	23.1	0.0	0.0	-3.1
557	536394.87	4816286.85	360.29	0	N	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	23.1	0.0	0.0	-3.1
557	536394.87	4816286.85	360.29	0	E	A	82.1	0.0	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	23.1	0.0	0.0	-3.1
561	536394.87	4816286.85	360.29	1	D	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	2.0	-10.8
561	536394.87	4816286.85	360.29	1	N	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	2.0	-10.8
561	536394.87	4816286.85	360.29	1	E	A	82.1	0.0	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	28.0	0.0	2.0	-10.8

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
563	536861.54	4816601.66	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.7
563	536861.54	4816601.66	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.7
563	536861.54	4816601.66	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.7
564	536861.54	4816601.66	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9
564	536861.54	4816601.66	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9
564	536861.54	4816601.66	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-8.9

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
567	536701.96	4816020.79	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	0.4
567	536701.96	4816020.79	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	-5.6
567	536701.96	4816020.79	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	22.3	0.0	0.0	0.4

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
569	536902.91	4816602.47	346.25	0	D	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
569	536902.91	4816602.47	346.25	0	N	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
569	536902.91	4816602.47	346.25	0	E	A	78.6	0.0	0.0	0.0	0.0	60.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.3
571	536902.91	4816602.47	346.25	1	D	A	78.6	0.0	0.0	0.0	0.0	60.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.3
571	536902.91	4816602.47	346.25	1	N	A	78.6	0.0	0.0	0.0	0.0	60.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.3
571	536902.91	4816602.47	346.25	1	E	A	78.6	0.0	0.0	0.0	0.0	60.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.2	-9.3

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
573	536901.34	4816609.30	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
573	536901.34	4816609.30	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
573	536901.34	4816609.30	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.1
576	536901.34	4816609.30	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
576	536901.34	4816609.30	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
576	536901.34	4816609.30	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5

Point Source, ISO 9613, Name: "Onward - Exhaust Fan", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
579	536900.13	4816611.29	344.75	0	D	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
579	536900.13	4816611.29	344.75	0	N	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
579	536900.13	4816611.29	344.75	0	E	A	78.6	0.0	0.0	0.0	0.0	60.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	20.0
582	536900.13	4816611.29	344.75	1	D	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
582	536900.13	4816611.29	344.75	1	N	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5
582	536900.13	4816611.29	344.75	1	E	A	78.6	0.0	0.0	0.0	0.0	60.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.2	-9.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
585	536730.95	4815985.25	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.8	0.0	0.0	4.2
585	536730.95	4815985.25	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.8	0.0	0.0	-1.8
585	536730.95	4815985.25	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	61.9	1.6	-3.0	0.0	0.0	17.8	0.0	0.0	4.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
595	536692.76	4815990.81	348.14	0	D	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-0.2
595	536692.76	4815990.81	348.14	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-6.2
595	536692.76	4815990.81	348.14	0	E	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-0.2

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
598	536721.07	4815978.96	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.6	0.0	0.0	3.2
598	536721.07	4815978.96	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.6	0.0	0.0	-2.9
598	536721.07	4815978.96	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.1	1.7	-3.0	0.0	0.0	18.6	0.0	0.0	3.2

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
609	536394.00	4816303.30	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-3.0
609	536394.00	4816303.30	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-6.0
609	536394.00	4816303.30	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	63.3	1.9	-3.0	0.0	0.0	23.4	0.0	0.0	-3.0
612	536394.00	4816303.30	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-9.6
612	536394.00	4816303.30	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-12.6
612	536394.00	4816303.30	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	64.0	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-9.6

Point Source, ISO 9613, Name: "Sobeys - 5-ton HVAC", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
615	536390.86	4816309.78	359.54	0	D	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.3	0.0	0.0	-3.1
615	536390.86	4816309.78	359.54	0	N	A	82.5	0.0	-3.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.3	0.0	0.0	-6.1
615	536390.86	4816309.78	359.54	0	E	A	82.5	0.0	0.0	0.0	0.0	63.4	1.9	-3.0	0.0	0.0	23.3	0.0	0.0	-3.1
616	536390.86	4816309.78	359.54	1	D	A	82.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-9.7
616	536390.86	4816309.78	359.54	1	N	A	82.5	0.0	-3.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-12.7
616	536390.86	4816309.78	359.54	1	E	A	82.5	0.0	0.0	0.0	0.0	64.1	2.0	-3.0	0.0	0.0	28.0	0.0	1.1	-9.7

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
619	536717.54	4815975.77	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	18.9	0.0	0.0	2.8
619	536717.54	4815975.77	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	18.9	0.0	0.0	-3.3
619	536717.54	4815975.77	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.2	1.7	-3.0	0.0	0.0	18.9	0.0	0.0	2.8

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
622	536545.64	4816071.23	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-5.8
622	536545.64	4816071.23	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-11.8
622	536545.64	4816071.23	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	27.4	0.0	0.0	-5.8
624	536545.64	4816071.23	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5
624	536545.64	4816071.23	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.5
624	536545.64	4816071.23	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	62.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-7.5

Point Source, ISO 9613, Name: "Teledyne DALSA - Idling Truck", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
629	536990.82	4816395.92	338.40	0	D	A	93.1	0.0	-10.8	0.0	0.0	57.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	26.9
629	536990.82	4816395.92	338.40	0	N	A	93.1	0.0	-188.0	0.0	0.0	57.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-150.3
629	536990.82	4816395.92	338.40	0	E	A	93.1	0.0	-188.0	0.0	0.0	57.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-150.3
630	536990.82	4816395.92	338.40	1	D	A	93.1	0.0	-10.8	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-7.1
630	536990.82	4816395.92	338.40	1	N	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-184.3
630	536990.82	4816395.92	338.40	1	E	A	93.1	0.0	-188.0	0.0	0.0	61.2	2.1	-3.0	0.0	0.0	28.0	0.0	1.0	-184.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - 5-ton HVAC", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
634	536700.98	4815972.90	349.64	0	D	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	0.8
634	536700.98	4815972.90	349.64	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	-5.2
634	536700.98	4815972.90	349.64	0	E	A	82.5	0.0	0.0	0.0	0.0	62.4	1.7	-3.0	0.0	0.0	20.6	0.0	0.0	0.8

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
640	536617.01	4816000.75	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.6	0.0	0.0	25.5	0.0	0.0	-4.7
640	536617.01	4816000.75	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.6	1.7	-2.6	0.0	0.0	25.5	0.0	0.0	-10.8
640	536617.01	4816000.75	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.6	1.7	-2.6	0.0	0.0	25.5	0.0	0.0	-4.7

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
645	536530.57	4816063.55	354.28	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-5.9
645	536530.57	4816063.55	354.28	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-11.9
645	536530.57	4816063.55	354.28	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	27.0	0.0	0.0	-5.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - 5-ton HVAC", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
648	536530.57	4816063.55	354.28	1	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-8.0
648	536530.57	4816063.55	354.28	1	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-14.1
648	536530.57	4816063.55	354.28	1	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.1	-8.0

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
652	536605.83	4815999.22	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.5	0.0	0.0	25.6	0.0	0.0	-5.1
652	536605.83	4815999.22	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.7	1.8	-2.5	0.0	0.0	25.6	0.0	0.0	-11.2
652	536605.83	4815999.22	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.7	1.8	-2.5	0.0	0.0	25.6	0.0	0.0	-5.1

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
657	536593.76	4816005.73	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	26.0	0.0	0.0	-5.3
657	536593.76	4816005.73	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	26.0	0.0	0.0	-11.3
657	536593.76	4816005.73	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.8	1.8	-2.7	0.0	0.0	26.0	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
660	536596.30	4815999.27	348.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-2.5	0.0	0.0	25.8	0.0	0.0	-5.4
660	536596.30	4815999.27	348.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-2.5	0.0	0.0	25.8	0.0	0.0	-11.4
660	536596.30	4815999.27	348.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-2.5	0.0	0.0	25.8	0.0	0.0	-5.4

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
664	536613.71	4815987.38	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-2.7	0.0	0.0	25.5	0.0	0.0	-4.9
664	536613.71	4815987.38	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	62.9	1.8	-2.7	0.0	0.0	25.5	0.0	0.0	-10.9
664	536613.71	4815987.38	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	62.9	1.8	-2.7	0.0	0.0	25.5	0.0	0.0	-4.9

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
667	536602.80	4815982.70	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-5.3
667	536602.80	4815982.70	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-11.3
667	536602.80	4815982.70	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	63.1	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-5.3

Point Source, ISO 9613, Name: "Greystone - 5-ton HVAC Unit", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
670	536599.19	4815980.04	349.25	0	D	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-5.4
670	536599.19	4815980.04	349.25	0	N	A	82.5	0.0	-6.0	0.0	0.0	63.2	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-11.5
670	536599.19	4815980.04	349.25	0	E	A	82.5	0.0	0.0	0.0	0.0	63.2	1.8	-2.6	0.0	0.0	25.6	0.0	0.0	-5.4

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
673	536439.12	4816311.15	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	62.3	1.2	-3.0	0.0	0.0	23.0	0.0	0.0	-4.9
673	536439.12	4816311.15	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	62.3	1.2	-3.0	0.0	0.0	23.0	0.0	0.0	-4.9
673	536439.12	4816311.15	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	62.3	1.2	-3.0	0.0	0.0	23.0	0.0	0.0	-4.9

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
677	536803.93	4816104.60	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-3.0
677	536803.93	4816104.60	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-191.0
677	536803.93	4816104.60	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.1	0.8	-3.0	0.0	0.0	25.8	0.0	0.0	-3.0

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
679	536954.56	4816508.27	339.58	0	D	A	93.1	0.0	-10.8	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	25.2

Point Source, ISO 9613, Name: "Onward - Idling Truck", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
679	536954.56	4816508.27	339.58	0	N	A	93.1	0.0	-188.0	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-152.0
679	536954.56	4816508.27	339.58	0	E	A	93.1	0.0	-188.0	0.0	0.0	58.5	1.7	-3.0	0.0	0.0	0.0	0.0	0.0	-152.0
680	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	62.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-8.0
680	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	62.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.2
680	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	62.0	2.3	-3.0	0.0	0.0	28.0	0.0	1.0	-185.2
682	536954.56	4816508.27	339.58	1	D	A	93.1	0.0	-10.8	0.0	0.0	59.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-4.4
682	536954.56	4816508.27	339.58	1	N	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.6
682	536954.56	4816508.27	339.58	1	E	A	93.1	0.0	-188.0	0.0	0.0	59.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-181.6

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
686	536407.39	4816286.96	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-5.8
686	536407.39	4816286.96	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-5.8
686	536407.39	4816286.96	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	63.1	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-5.8
689	536407.39	4816286.96	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.6	-13.1
689	536407.39	4816286.96	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.6	-13.1
689	536407.39	4816286.96	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	63.7	1.4	-3.0	0.0	0.0	28.0	0.0	1.6	-13.1

Point Source, ISO 9613, Name: "Waterloo Nissan - Exhaust Fan", ID: "WaterlooNissan_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
698	536792.11	4816086.55	345.13	0	D	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	-3.7
698	536792.11	4816086.55	345.13	0	N	A	78.6	0.0	-188.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	-191.7
698	536792.11	4816086.55	345.13	0	E	A	78.6	0.0	0.0	0.0	0.0	58.7	0.9	-3.0	0.0	0.0	25.7	0.0	0.0	-3.7

Point Source, ISO 9613, Name: "Sobeys - Exhaust Fan", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
701	536397.79	4816293.59	359.04	0	D	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-6.0
701	536397.79	4816293.59	359.04	0	N	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-6.0
701	536397.79	4816293.59	359.04	0	E	A	78.6	0.0	0.0	0.0	0.0	63.3	1.3	-3.0	0.0	0.0	23.0	0.0	0.0	-6.0
704	536397.79	4816293.59	359.04	1	D	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-12.9
704	536397.79	4816293.59	359.04	1	N	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-12.9
704	536397.79	4816293.59	359.04	1	E	A	78.6	0.0	0.0	0.0	0.0	63.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-12.9

Point Source, ISO 9613, Name: "Shoppers Drug Mart - Exhaust Fan", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
708	536503.25	4816045.85	353.78	0	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
708	536503.25	4816045.85	353.78	0	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
708	536503.25	4816045.85	353.78	0	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	26.8	0.0	0.0	-9.9
710	536503.25	4816045.85	353.78	1	D	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3
710	536503.25	4816045.85	353.78	1	N	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3
710	536503.25	4816045.85	353.78	1	E	A	78.6	0.0	0.0	0.0	0.0	63.4	1.3	-3.0	0.0	0.0	28.0	0.0	1.2	-12.3

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Incidental Truck Idling", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
713	536729.74	4815964.66	344.25	0	D	A	93.1	0.0	-7.8	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	26.9	0.0	0.0	-3.4
713	536729.74	4815964.66	344.25	0	N	A	93.1	0.0	-188.0	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	26.9	0.0	0.0	-183.6
713	536729.74	4815964.66	344.25	0	E	A	93.1	0.0	-188.0	0.0	0.0	62.4	2.4	-3.0	0.0	0.0	26.9	0.0	0.0	-183.6

Point Source, ISO 9613, Name: "Greystone - Exhaust Fan", ID: "Greystone_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
720	536621.34	4816015.88	347.75	0	D	A	78.6	0.0	0.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.3	0.0	0.0	-7.7
720	536621.34	4816015.88	347.75	0	N	A	78.6	0.0	-188.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.3	0.0	0.0	-195.7
720	536621.34	4816015.88	347.75	0	E	A	78.6	0.0	0.0	0.0	0.0	62.2	1.2	-2.4	0.0	0.0	25.3	0.0	0.0	-7.7

Point Source, ISO 9613, Name: "Sobeys - Compactor", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
725	536434.61	4816335.71	350.34	0	D	A	88.0	0.0	-7.8	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-6.7

Point Source, ISO 9613, Name: "Sobeys - Compactor", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
725	536434.61	4816335.71	350.34	0	N	A	88.0	0.0	-188.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-186.9
725	536434.61	4816335.71	350.34	0	E	A	88.0	0.0	-188.0	0.0	0.0	62.4	1.0	-3.0	0.0	0.0	26.5	0.0	0.0	-186.9
727	536434.61	4816335.71	350.34	1	D	A	88.0	0.0	-7.8	0.0	0.0	62.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-9.2
727	536434.61	4816335.71	350.34	1	N	A	88.0	0.0	-188.0	0.0	0.0	62.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-189.5
727	536434.61	4816335.71	350.34	1	E	A	88.0	0.0	-188.0	0.0	0.0	62.5	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-189.5

Point Source, ISO 9613, Name: "Heffner Cabinetry & Woodworking - Exhaust Fan", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
731	536719.71	4816019.69	347.39	0	D	A	78.6	0.0	0.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-7.0
731	536719.71	4816019.69	347.39	0	N	A	78.6	0.0	-188.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-195.0
731	536719.71	4816019.69	347.39	0	E	A	78.6	0.0	-188.0	0.0	0.0	61.1	1.1	-3.0	0.0	0.0	26.4	0.0	0.0	-195.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
734	536896.05	4816454.87	339.23	0	D	A	58.4	13.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	18.6
734	536896.05	4816454.87	339.23	0	N	A	-48.6	13.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
734	536896.05	4816454.87	339.23	0	E	A	-48.6	13.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-88.4
737	536896.05	4816454.87	339.23	1	D	A	58.4	13.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6
737	536896.05	4816454.87	339.23	1	N	A	-48.6	13.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
737	536896.05	4816454.87	339.23	1	E	A	-48.6	13.0	0.0	0.0	0.0	59.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.5
740	536901.38	4816457.69	339.09	1	D	A	58.4	9.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-15.5
740	536901.38	4816457.69	339.09	1	N	A	-48.6	9.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
740	536901.38	4816457.69	339.09	1	E	A	-48.6	9.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-122.5
743	536892.49	4816452.98	339.32	1	D	A	58.4	10.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-13.2
743	536892.49	4816452.98	339.32	1	N	A	-48.6	10.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-120.2
743	536892.49	4816452.98	339.32	1	E	A	-48.6	10.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-120.2
746	536904.02	4816459.08	339.02	1	D	A	58.4	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	5.9
746	536904.02	4816459.08	339.02	1	N	A	-48.6	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.1
746	536904.02	4816459.08	339.02	1	E	A	-48.6	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.1
750	536900.30	4816457.12	339.12	1	D	A	58.4	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.8
750	536900.30	4816457.12	339.12	1	N	A	-48.6	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
750	536900.30	4816457.12	339.12	1	E	A	-48.6	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
762	536904.02	4816459.08	339.02	1	D	A	58.4	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	5.9
762	536904.02	4816459.08	339.02	1	N	A	-48.6	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.1
762	536904.02	4816459.08	339.02	1	E	A	-48.6	3.2	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-101.1
764	536900.30	4816457.12	339.12	1	D	A	58.4	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.8
764	536900.30	4816457.12	339.12	1	N	A	-48.6	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
764	536900.30	4816457.12	339.12	1	E	A	-48.6	8.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.2
769	536848.15	4816431.51	340.11	0	D	A	58.4	9.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	17.5
769	536848.15	4816431.51	340.11	0	N	A	-48.6	9.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
769	536848.15	4816431.51	340.11	0	E	A	-48.6	9.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
770	536848.15	4816431.51	340.11	1	D	A	58.4	9.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-12.5
770	536848.15	4816431.51	340.11	1	N	A	-48.6	9.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-119.5
770	536848.15	4816431.51	340.11	1	E	A	-48.6	9.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-119.5
844	536859.83	4816436.46	339.75	0	D	A	58.4	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	16.1
844	536859.83	4816436.46	339.75	0	N	A	-48.6	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
844	536859.83	4816436.46	339.75	0	E	A	-48.6	8.4	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-90.9
846	536862.09	4816437.59	339.67	1	D	A	58.4	2.5	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
846	536862.09	4816437.59	339.67	1	N	A	-48.6	2.5	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
846	536862.09	4816437.59	339.67	1	E	A	-48.6	2.5	0.0	0.0	0.0	58.6	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.7
849	536859.83	4816436.46	339.75	1	D	A	58.4	8.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-13.8
849	536859.83	4816436.46	339.75	1	N	A	-48.6	8.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-120.8
849	536859.83	4816436.46	339.75	1	E	A	-48.6	8.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-120.8
851	536883.14	4816448.15	339.48	0	D	A	58.4	9.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
851	536883.14	4816448.15	339.48	0	N	A	-48.6	9.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
851	536883.14	4816448.15	339.48	0	E	A	-48.6	9.5	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
854	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-18.6
854	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
854	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
857	536883.14	4816448.15	339.48	1	D	A	58.4	9.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-14.0
857	536883.14	4816448.15	339.48	1	N	A	-48.6	9.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
857	536883.14	4816448.15	339.48	1	E	A	-48.6	9.5	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0
860	536851.04	4816438.13	339.77	0	D	A	58.4	8.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.9
860	536851.04	4816438.13	339.77	0	N	A	-48.6	8.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
860	536851.04	4816438.13	339.77	0	E	A	-48.6	8.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
862	536851.04	4816438.13	339.77	1	D	A	58.4	8.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-14.0
862	536851.04	4816438.13	339.77	1	N	A	-48.6	8.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0
862	536851.04	4816438.13	339.77	1	E	A	-48.6	8.0	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-121.0
873	536831.89	4816436.30	340.12	0	D	A	58.4	7.2	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
873	536831.89	4816436.30	340.12	0	N	A	-48.6	7.2	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
873	536831.89	4816436.30	340.12	0	E	A	-48.6	7.2	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
875	536831.47	4816436.40	340.12	1	D	A	58.4	6.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.2
875	536831.47	4816436.40	340.12	1	N	A	-48.6	6.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
875	536831.47	4816436.40	340.12	1	E	A	-48.6	6.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
878	536834.02	4816435.79	340.13	1	D	A	58.4	-0.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.2
878	536834.02	4816435.79	340.13	1	N	A	-48.6	-0.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
878	536834.02	4816435.79	340.13	1	E	A	-48.6	-0.6	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
925	536845.71	4816436.25	339.93	0	D	A	58.4	6.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
925	536845.71	4816436.25	339.93	0	N	A	-48.6	6.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
925	536845.71	4816436.25	339.93	0	E	A	-48.6	6.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
927	536845.71	4816436.25	339.93	1	D	A	58.4	6.9	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.0
927	536845.71	4816436.25	339.93	1	N	A	-48.6	6.9	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.0
927	536845.71	4816436.25	339.93	1	E	A	-48.6	6.9	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.0
957	536842.39	4816429.57	340.26	0	D	A	58.4	6.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.9
957	536842.39	4816429.57	340.26	0	N	A	-48.6	6.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
957	536842.39	4816429.57	340.26	0	E	A	-48.6	6.2	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
960	536842.39	4816429.57	340.26	1	D	A	58.4	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.2
960	536842.39	4816429.57	340.26	1	N	A	-48.6	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
960	536842.39	4816429.57	340.26	1	E	A	-48.6	6.2	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.2
964	536909.59	4816465.40	339.00	0	D	A	58.4	10.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
964	536909.59	4816465.40	339.00	0	N	A	-48.6	10.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
964	536909.59	4816465.40	339.00	0	E	A	-48.6	10.0	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
966	536909.59	4816465.40	339.00	1	D	A	58.4	10.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
966	536909.59	4816465.40	339.00	1	N	A	-48.6	10.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
966	536909.59	4816465.40	339.00	1	E	A	-48.6	10.0	0.0	0.0	0.0	60.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
968	536909.59	4816465.40	339.00	1	D	A	58.4	10.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-15.1
968	536909.59	4816465.40	339.00	1	N	A	-48.6	10.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-122.1
968	536909.59	4816465.40	339.00	1	E	A	-48.6	10.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-122.1
1008	536905.53	4816463.50	339.00	1	D	A	58.4	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	2.5
1008	536905.53	4816463.50	339.00	1	N	A	-48.6	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-104.4
1008	536905.53	4816463.50	339.00	1	E	A	-48.6	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-104.4
1011	536905.53	4816463.50	339.00	1	D	A	58.4	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.2
1011	536905.53	4816463.50	339.00	1	N	A	-48.6	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
1011	536905.53	4816463.50	339.00	1	E	A	-48.6	-0.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
1018	536857.67	4816440.57	339.60	0	D	A	58.4	7.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.6
1018	536857.67	4816440.57	339.60	0	N	A	-48.6	7.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
1018	536857.67	4816440.57	339.60	0	E	A	-48.6	7.0	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
1019	536857.67	4816440.57	339.60	1	D	A	58.4	7.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-15.3
1019	536857.67	4816440.57	339.60	1	N	A	-48.6	7.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-122.3
1019	536857.67	4816440.57	339.60	1	E	A	-48.6	7.0	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-122.3
1026	536877.52	4816457.90	339.21	0	D	A	58.4	8.4	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.4
1026	536877.52	4816457.90	339.21	0	N	A	-48.6	8.4	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
1026	536877.52	4816457.90	339.21	0	E	A	-48.6	8.4	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
1028	536877.52	4816457.90	339.21	1	D	A	58.4	8.4	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-15.4
1028	536877.52	4816457.90	339.21	1	N	A	-48.6	8.4	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.4
1028	536877.52	4816457.90	339.21	1	E	A	-48.6	8.4	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-122.4
1031	536876.40	4816460.68	339.13	1	D	A	58.4	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	4.4
1031	536876.40	4816460.68	339.13	1	N	A	-48.6	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.6
1031	536876.40	4816460.68	339.13	1	E	A	-48.6	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.6
1033	536877.65	4816457.57	339.22	1	D	A	58.4	8.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	12.2
1033	536877.65	4816457.57	339.22	1	N	A	-48.6	8.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-94.7
1033	536877.65	4816457.57	339.22	1	E	A	-48.6	8.0	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	0.0	0.0	1.3	-94.7
1035	536876.35	4816460.80	339.13	1	D	A	58.4	-1.5	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	3.1
1035	536876.35	4816460.80	339.13	1	N	A	-48.6	-1.5	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-103.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1035	536876.35	4816460.80	339.13	1	E	A	-48.6	-1.5	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-103.9
1038	536876.40	4816460.68	339.13	1	D	A	58.4	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	4.4
1038	536876.40	4816460.68	339.13	1	N	A	-48.6	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.6
1038	536876.40	4816460.68	339.13	1	E	A	-48.6	-0.2	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-102.6
1069	536830.12	4816431.00	340.47	0	D	A	58.4	5.2	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	14.1
1069	536830.12	4816431.00	340.47	0	N	A	-48.6	5.2	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
1069	536830.12	4816431.00	340.47	0	E	A	-48.6	5.2	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
1072	536830.12	4816431.00	340.47	1	D	A	58.4	5.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.0
1072	536830.12	4816431.00	340.47	1	N	A	-48.6	5.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
1072	536830.12	4816431.00	340.47	1	E	A	-48.6	5.2	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.0
1131	536913.43	4816464.20	339.00	0	D	A	58.4	9.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	13.6
1131	536913.43	4816464.20	339.00	0	N	A	-48.6	9.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
1131	536913.43	4816464.20	339.00	0	E	A	-48.6	9.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
1134	536915.39	4816465.32	339.00	1	D	A	58.4	5.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1134	536915.39	4816465.32	339.00	1	N	A	-48.6	5.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
1134	536915.39	4816465.32	339.00	1	E	A	-48.6	5.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.0
1136	536911.94	4816463.35	339.00	1	D	A	58.4	6.5	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
1136	536911.94	4816463.35	339.00	1	N	A	-48.6	6.5	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
1136	536911.94	4816463.35	339.00	1	E	A	-48.6	6.5	0.0	0.0	0.0	60.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
1138	536913.43	4816464.20	339.00	1	D	A	58.4	9.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-16.2
1138	536913.43	4816464.20	339.00	1	N	A	-48.6	9.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-123.2
1138	536913.43	4816464.20	339.00	1	E	A	-48.6	9.0	0.0	0.0	0.0	56.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-123.2
1139	536910.53	4816462.55	339.00	1	D	A	58.4	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	3.4
1139	536910.53	4816462.55	339.00	1	N	A	-48.6	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6
1139	536910.53	4816462.55	339.00	1	E	A	-48.6	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6
1142	536910.53	4816462.55	339.00	1	D	A	58.4	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	3.4
1142	536910.53	4816462.55	339.00	1	N	A	-48.6	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6
1142	536910.53	4816462.55	339.00	1	E	A	-48.6	1.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-103.6
1184	536835.97	4816435.22	340.13	0	D	A	58.4	5.0	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1184	536835.97	4816435.22	340.13	0	N	A	-48.6	5.0	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
1184	536835.97	4816435.22	340.13	0	E	A	-48.6	5.0	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
1186	536835.97	4816435.22	340.13	1	D	A	58.4	5.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.6
1186	536835.97	4816435.22	340.13	1	N	A	-48.6	5.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
1186	536835.97	4816435.22	340.13	1	E	A	-48.6	5.0	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
1188	536869.59	4816445.68	339.47	0	D	A	58.4	6.5	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.4
1188	536869.59	4816445.68	339.47	0	N	A	-48.6	6.5	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
1188	536869.59	4816445.68	339.47	0	E	A	-48.6	6.5	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
1190	536870.88	4816446.21	339.44	1	D	A	58.4	2.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-25.4
1190	536870.88	4816446.21	339.44	1	N	A	-48.6	2.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
1190	536870.88	4816446.21	339.44	1	E	A	-48.6	2.3	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-132.4
1191	536869.59	4816445.68	339.47	1	D	A	58.4	6.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-16.5
1191	536869.59	4816445.68	339.47	1	N	A	-48.6	6.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.5
1191	536869.59	4816445.68	339.47	1	E	A	-48.6	6.5	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.5
1210	536868.72	4816440.93	339.62	0	D	A	58.4	6.0	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.2
1210	536868.72	4816440.93	339.62	0	N	A	-48.6	6.0	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
1210	536868.72	4816440.93	339.62	0	E	A	-48.6	6.0	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
1213	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
1213	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1213	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-128.6
1215	536868.72	4816440.93	339.62	1	D	A	58.4	6.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-16.8
1215	536868.72	4816440.93	339.62	1	N	A	-48.6	6.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.8
1215	536868.72	4816440.93	339.62	1	E	A	-48.6	6.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.8
1265	536873.63	4816447.34	339.42	0	D	A	58.4	6.3	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.0
1265	536873.63	4816447.34	339.42	0	N	A	-48.6	6.3	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
1265	536873.63	4816447.34	339.42	0	E	A	-48.6	6.3	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
1268	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
1268	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
1268	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	59.1	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
1271	536873.63	4816447.34	339.42	1	D	A	58.4	6.3	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-16.9
1271	536873.63	4816447.34	339.42	1	N	A	-48.6	6.3	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.9
1271	536873.63	4816447.34	339.42	1	E	A	-48.6	6.3	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-123.9
1287	536877.28	4816445.22	339.52	0	D	A	58.4	6.2	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1287	536877.28	4816445.22	339.52	0	N	A	-48.6	6.2	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1287	536877.28	4816445.22	339.52	0	E	A	-48.6	6.2	0.0	0.0	0.0	54.0	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
1289	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1289	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1289	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
1291	536877.28	4816445.22	339.52	1	D	A	58.4	6.2	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.0
1291	536877.28	4816445.22	339.52	1	N	A	-48.6	6.2	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.0
1291	536877.28	4816445.22	339.52	1	E	A	-48.6	6.2	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.0
1323	536907.46	4816460.91	339.00	0	D	A	58.4	7.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	12.5
1323	536907.46	4816460.91	339.00	0	N	A	-48.6	7.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1323	536907.46	4816460.91	339.00	0	E	A	-48.6	7.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1325	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.5
1325	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
1325	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
1328	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-17.3
1328	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-124.3
1328	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	56.4	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-124.3
1329	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.1
1329	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.9
1329	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.9
1332	536907.46	4816460.91	339.00	1	D	A	58.4	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	10.1
1332	536907.46	4816460.91	339.00	1	N	A	-48.6	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.9
1332	536907.46	4816460.91	339.00	1	E	A	-48.6	7.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	1.9	-96.9
1335	536873.79	4816443.47	339.52	0	D	A	58.4	5.6	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.5
1335	536873.79	4816443.47	339.52	0	N	A	-48.6	5.6	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1335	536873.79	4816443.47	339.52	0	E	A	-48.6	5.6	0.0	0.0	0.0	53.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
1337	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1337	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
1337	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	59.0	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
1340	536873.79	4816443.47	339.52	1	D	A	58.4	5.6	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.4
1340	536873.79	4816443.47	339.52	1	N	A	-48.6	5.6	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.4
1340	536873.79	4816443.47	339.52	1	E	A	-48.6	5.6	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.4
1361	536863.09	4816442.86	339.49	0	D	A	58.4	5.1	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.4
1361	536863.09	4816442.86	339.49	0	N	A	-48.6	5.1	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1361	536863.09	4816442.86	339.49	0	E	A	-48.6	5.1	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
1363	536863.09	4816442.86	339.49	1	D	A	58.4	5.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-17.5
1363	536863.09	4816442.86	339.49	1	N	A	-48.6	5.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.5
1363	536863.09	4816442.86	339.49	1	E	A	-48.6	5.1	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-124.5
1396	536855.54	4816434.43	339.89	0	D	A	58.4	4.2	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.3
1396	536855.54	4816434.43	339.89	0	N	A	-48.6	4.2	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1396	536855.54	4816434.43	339.89	0	E	A	-48.6	4.2	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1398	536855.54	4816434.43	339.89	1	D	A	58.4	4.2	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-17.7
1398	536855.54	4816434.43	339.89	1	N	A	-48.6	4.2	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-124.7
1398	536855.54	4816434.43	339.89	1	E	A	-48.6	4.2	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-124.7
1410	536833.71	4816429.35	340.43	0	D	A	58.4	3.3	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	12.3
1410	536833.71	4816429.35	340.43	0	N	A	-48.6	3.3	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1410	536833.71	4816429.35	340.43	0	E	A	-48.6	3.3	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
1412	536833.71	4816429.35	340.43	1	D	A	58.4	3.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.8
1412	536833.71	4816429.35	340.43	1	N	A	-48.6	3.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
1412	536833.71	4816429.35	340.43	1	E	A	-48.6	3.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
1428	536842.23	4816435.08	340.03	0	D	A	58.4	3.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1428	536842.23	4816435.08	340.03	0	N	A	-48.6	3.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
1428	536842.23	4816435.08	340.03	0	E	A	-48.6	3.8	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
1430	536842.23	4816435.08	340.03	1	D	A	58.4	3.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.0
1430	536842.23	4816435.08	340.03	1	N	A	-48.6	3.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
1430	536842.23	4816435.08	340.03	1	E	A	-48.6	3.8	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
1468	536852.96	4816433.41	339.97	0	D	A	58.4	3.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.7
1468	536852.96	4816433.41	339.97	0	N	A	-48.6	3.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
1468	536852.96	4816433.41	339.97	0	E	A	-48.6	3.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
1470	536852.96	4816433.41	339.97	1	D	A	58.4	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-18.2
1470	536852.96	4816433.41	339.97	1	N	A	-48.6	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.2
1470	536852.96	4816433.41	339.97	1	E	A	-48.6	3.6	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.2
1553	536839.53	4816428.92	340.32	0	D	A	58.4	2.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	11.2
1553	536839.53	4816428.92	340.32	0	N	A	-48.6	2.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1553	536839.53	4816428.92	340.32	0	E	A	-48.6	2.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
1555	536839.53	4816428.92	340.32	1	D	A	58.4	2.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.9
1555	536839.53	4816428.92	340.32	1	N	A	-48.6	2.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
1555	536839.53	4816428.92	340.32	1	E	A	-48.6	2.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
1619	536863.89	4816438.50	339.65	0	D	A	58.4	3.5	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1619	536863.89	4816438.50	339.65	0	N	A	-48.6	3.5	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
1619	536863.89	4816438.50	339.65	0	E	A	-48.6	3.5	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
1622	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
1622	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
1622	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
1623	536863.89	4816438.50	339.65	1	D	A	58.4	3.5	0.0	0.0	0.0	54.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-18.9
1623	536863.89	4816438.50	339.65	1	N	A	-48.6	3.5	0.0	0.0	0.0	54.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.9
1623	536863.89	4816438.50	339.65	1	E	A	-48.6	3.5	0.0	0.0	0.0	54.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-125.9
1640	536865.93	4816439.53	339.66	0	D	A	58.4	3.6	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1640	536865.93	4816439.53	339.66	0	N	A	-48.6	3.6	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
1640	536865.93	4816439.53	339.66	0	E	A	-48.6	3.6	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
1642	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
1642	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
1642	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	58.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-130.8
1643	536865.93	4816439.53	339.66	1	D	A	58.4	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-18.9
1643	536865.93	4816439.53	339.66	1	N	A	-48.6	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-125.9
1643	536865.93	4816439.53	339.66	1	E	A	-48.6	3.6	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-125.9
1666	536837.91	4816428.72	340.35	0	D	A	58.4	1.9	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	10.8
1666	536837.91	4816428.72	340.35	0	N	A	-48.6	1.9	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
1666	536837.91	4816428.72	340.35	0	E	A	-48.6	1.9	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-96.2
1669	536837.91	4816428.72	340.35	1	D	A	58.4	1.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.3
1669	536837.91	4816428.72	340.35	1	N	A	-48.6	1.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
1669	536837.91	4816428.72	340.35	1	E	A	-48.6	1.9	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
1688	536894.25	4816470.07	339.04	0	D	A	58.4	5.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	0.4
1688	536894.25	4816470.07	339.04	0	N	A	-48.6	5.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	-106.6
1688	536894.25	4816470.07	339.04	0	E	A	-48.6	5.6	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	10.1	0.0	0.0	-106.6
1690	536894.99	4816468.36	339.09	0	D	A	58.4	-9.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-4.0
1690	536894.99	4816468.36	339.09	0	N	A	-48.6	-9.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-111.0
1690	536894.99	4816468.36	339.09	0	E	A	-48.6	-9.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-111.0
1692	536894.68	4816469.07	339.07	1	D	A	58.4	2.2	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
1692	536894.68	4816469.07	339.07	1	N	A	-48.6	2.2	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
1692	536894.68	4816469.07	339.07	1	E	A	-48.6	2.2	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
1695	536894.27	4816470.01	339.05	1	D	A	58.4	5.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-19.1
1695	536894.27	4816470.01	339.05	1	N	A	-48.6	5.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-126.1
1695	536894.27	4816470.01	339.05	1	E	A	-48.6	5.7	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-126.1
1698	536893.77	4816471.15	339.02	1	D	A	58.4	0.9	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-15.9
1698	536893.77	4816471.15	339.02	1	N	A	-48.6	0.9	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-122.8
1698	536893.77	4816471.15	339.02	1	E	A	-48.6	0.9	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	20.6	0.0	1.0	-122.8
1824	536827.88	4816433.42	340.36	0	D	A	58.4	1.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	10.0
1824	536827.88	4816433.42	340.36	0	N	A	-48.6	1.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
1824	536827.88	4816433.42	340.36	0	E	A	-48.6	1.3	0.0	0.0	0.0	52.1	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
1826	536827.88	4816433.42	340.36	1	D	A	58.4	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.0
1826	536827.88	4816433.42	340.36	1	N	A	-48.6	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.0
1826	536827.88	4816433.42	340.36	1	E	A	-48.6	1.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.0
1829	536835.36	4816428.89	340.39	0	D	A	58.4	1.1	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	10.0
1829	536835.36	4816428.89	340.39	0	N	A	-48.6	1.1	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
1829	536835.36	4816428.89	340.39	0	E	A	-48.6	1.1	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
1832	536835.36	4816428.89	340.39	1	D	A	58.4	1.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.1
1832	536835.36	4816428.89	340.39	1	N	A	-48.6	1.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
1832	536835.36	4816428.89	340.39	1	E	A	-48.6	1.1	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
1861	536832.13	4816429.93	340.47	0	D	A	58.4	0.9	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1861	536832.13	4816429.93	340.47	0	N	A	-48.6	0.9	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1861	536832.13	4816429.93	340.47	0	E	A	-48.6	0.9	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1863	536832.13	4816429.93	340.47	1	D	A	58.4	0.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.3
1863	536832.13	4816429.93	340.47	1	N	A	-48.6	0.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.3
1863	536832.13	4816429.93	340.47	1	E	A	-48.6	0.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.3
1865	536860.82	4816441.81	339.51	0	D	A	58.4	2.4	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1865	536860.82	4816441.81	339.51	0	N	A	-48.6	2.4	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1865	536860.82	4816441.81	339.51	0	E	A	-48.6	2.4	0.0	0.0	0.0	53.4	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1867	536860.82	4816441.81	339.51	1	D	A	58.4	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.1
1867	536860.82	4816441.81	339.51	1	N	A	-48.6	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1867	536860.82	4816441.81	339.51	1	E	A	-48.6	2.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1869	536866.65	4816444.48	339.52	0	D	A	58.4	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1869	536866.65	4816444.48	339.52	0	N	A	-48.6	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1869	536866.65	4816444.48	339.52	0	E	A	-48.6	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1872	536866.65	4816444.48	339.52	1	D	A	58.4	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.1
1872	536866.65	4816444.48	339.52	1	N	A	-48.6	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1872	536866.65	4816444.48	339.52	1	E	A	-48.6	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1877	536871.32	4816442.24	339.54	0	D	A	58.4	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1877	536871.32	4816442.24	339.54	0	N	A	-48.6	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1877	536871.32	4816442.24	339.54	0	E	A	-48.6	2.7	0.0	0.0	0.0	53.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.2
1880	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
1880	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1880	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	58.9	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1883	536871.32	4816442.24	339.54	1	D	A	58.4	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.2
1883	536871.32	4816442.24	339.54	1	N	A	-48.6	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1883	536871.32	4816442.24	339.54	1	E	A	-48.6	2.7	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.1
1909	536876.54	4816448.53	339.43	0	D	A	58.4	3.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	9.6
1909	536876.54	4816448.53	339.43	0	N	A	-48.6	3.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
1909	536876.54	4816448.53	339.43	0	E	A	-48.6	3.1	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-97.4
1912	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-24.9
1912	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1912	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	59.2	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-131.9
1915	536876.54	4816448.53	339.43	1	D	A	58.4	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.3
1915	536876.54	4816448.53	339.43	1	N	A	-48.6	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.3
1915	536876.54	4816448.53	339.43	1	E	A	-48.6	3.1	0.0	0.0	0.0	54.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.3
1927	536836.56	4816428.75	340.36	0	D	A	58.4	0.6	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.5
1927	536836.56	4816428.75	340.36	0	N	A	-48.6	0.6	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
1927	536836.56	4816428.75	340.36	0	E	A	-48.6	0.6	0.0	0.0	0.0	51.9	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
1930	536836.56	4816428.75	340.36	1	D	A	58.4	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.6
1930	536836.56	4816428.75	340.36	1	N	A	-48.6	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
1930	536836.56	4816428.75	340.36	1	E	A	-48.6	0.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
1997	536838.09	4816434.61	340.12	0	D	A	58.4	0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.3
1997	536838.09	4816434.61	340.12	0	N	A	-48.6	0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
1997	536838.09	4816434.61	340.12	0	E	A	-48.6	0.9	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.7
2000	536838.09	4816434.61	340.12	1	D	A	58.4	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.8
2000	536838.09	4816434.61	340.12	1	N	A	-48.6	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2000	536838.09	4816434.61	340.12	1	E	A	-48.6	0.9	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2005	536828.41	4816432.33	340.42	0	D	A	58.4	0.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	9.2
2005	536828.41	4816432.33	340.42	0	N	A	-48.6	0.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2005	536828.41	4816432.33	340.42	0	E	A	-48.6	0.4	0.0	0.0	0.0	52.0	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-97.8
2007	536828.41	4816432.33	340.42	1	D	A	58.4	0.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-20.8
2007	536828.41	4816432.33	340.42	1	N	A	-48.6	0.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2007	536828.41	4816432.33	340.42	1	E	A	-48.6	0.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2050	536854.67	4816439.46	339.67	0	D	A	58.4	1.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	9.1
2050	536854.67	4816439.46	339.67	0	N	A	-48.6	1.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2050	536854.67	4816439.46	339.67	0	E	A	-48.6	1.4	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-97.9
2052	536854.67	4816439.46	339.67	1	D	A	58.4	1.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-20.8
2052	536854.67	4816439.46	339.67	1	N	A	-48.6	1.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-127.8
2052	536854.67	4816439.46	339.67	1	E	A	-48.6	1.4	0.0	0.0	0.0	53.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-127.8
2073	536896.37	4816465.47	339.10	0	D	A	58.4	3.9	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	9.0
2073	536896.37	4816465.47	339.10	0	N	A	-48.6	3.9	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.0
2073	536896.37	4816465.47	339.10	0	E	A	-48.6	3.9	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.0
2075	536896.27	4816465.64	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.7
2075	536896.27	4816465.64	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2075	536896.27	4816465.64	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.7
2077	536896.85	4816464.56	339.10	1	D	A	58.4	-4.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9
2077	536896.85	4816464.56	339.10	1	N	A	-48.6	-4.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
2077	536896.85	4816464.56	339.10	1	E	A	-48.6	-4.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.9
2080	536896.37	4816465.47	339.10	1	D	A	58.4	3.9	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-20.8
2080	536896.37	4816465.47	339.10	1	N	A	-48.6	3.9	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2080	536896.37	4816465.47	339.10	1	E	A	-48.6	3.9	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.8
2082	536896.71	4816464.83	339.10	1	D	A	58.4	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	3.9
2082	536896.71	4816464.83	339.10	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-103.1
2082	536896.71	4816464.83	339.10	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-103.1
2085	536896.71	4816464.83	339.10	1	D	A	58.4	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	4.0
2085	536896.71	4816464.83	339.10	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	-103.0
2085	536896.71	4816464.83	339.10	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	1.0	-103.0
2092	536903.93	4816462.84	339.00	0	D	A	58.4	4.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2092	536903.93	4816462.84	339.00	0	N	A	-48.6	4.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2092	536903.93	4816462.84	339.00	0	E	A	-48.6	4.0	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2095	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0
2095	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2095	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	60.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2098	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-20.9
2098	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2098	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2100	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.3
2100	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.7
2100	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.7
2103	536903.93	4816462.84	339.00	1	D	A	58.4	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.3
2103	536903.93	4816462.84	339.00	1	N	A	-48.6	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.7
2103	536903.93	4816462.84	339.00	1	E	A	-48.6	4.0	0.0	0.0	0.0	56.0	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.7
2113	536875.84	4816462.07	339.09	0	D	A	58.4	3.1	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2113	536875.84	4816462.07	339.09	0	N	A	-48.6	3.1	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2113	536875.84	4816462.07	339.09	0	E	A	-48.6	3.1	0.0	0.0	0.0	54.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
2115	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-20.9
2115	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2115	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-127.9
2117	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	7.6
2117	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.4
2117	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.4
2120	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	7.8
2120	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-99.2
2120	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.0	-99.2
2122	536875.84	4816462.07	339.09	1	D	A	58.4	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	7.6
2122	536875.84	4816462.07	339.09	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.4
2122	536875.84	4816462.07	339.09	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	0.0	0.0	1.1	-99.4
2143	536901.61	4816462.18	339.03	0	D	A	58.4	3.7	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2143	536901.61	4816462.18	339.03	0	N	A	-48.6	3.7	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2143	536901.61	4816462.18	339.03	0	E	A	-48.6	3.7	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.2
2144	536901.03	4816462.08	339.05	1	D	A	58.4	0.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
2144	536901.03	4816462.08	339.05	1	N	A	-48.6	0.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
2144	536901.03	4816462.08	339.05	1	E	A	-48.6	0.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
2146	536902.19	4816462.29	339.02	1	D	A	58.4	0.7	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
2146	536902.19	4816462.29	339.02	1	N	A	-48.6	0.7	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
2146	536902.19	4816462.29	339.02	1	E	A	-48.6	0.7	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.2
2147	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-21.0
2147	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0
2147	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.0
2149	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.2
2149	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2149	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2151	536901.61	4816462.18	339.03	1	D	A	58.4	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	7.2
2151	536901.61	4816462.18	339.03	1	N	A	-48.6	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2151	536901.61	4816462.18	339.03	1	E	A	-48.6	3.7	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-99.8
2219	536840.60	4816434.56	340.07	0	D	A	58.4	0.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
2219	536840.60	4816434.56	340.07	0	N	A	-48.6	0.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
2219	536840.60	4816434.56	340.07	0	E	A	-48.6	0.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-98.5
2221	536840.60	4816434.56	340.07	1	D	A	58.4	0.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-21.6
2221	536840.60	4816434.56	340.07	1	N	A	-48.6	0.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.6
2221	536840.60	4816434.56	340.07	1	E	A	-48.6	0.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.6
2241	536865.18	4816443.84	339.51	0	D	A	58.4	1.3	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	8.4
2241	536865.18	4816443.84	339.51	0	N	A	-48.6	1.3	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2241	536865.18	4816443.84	339.51	0	E	A	-48.6	1.3	0.0	0.0	0.0	53.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-98.6
2244	536865.18	4816443.84	339.51	1	D	A	58.4	1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-21.5
2244	536865.18	4816443.84	339.51	1	N	A	-48.6	1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.5
2244	536865.18	4816443.84	339.51	1	E	A	-48.6	1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.5
2251	536897.43	4816463.50	339.10	0	D	A	58.4	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	8.2
2251	536897.43	4816463.50	339.10	0	N	A	-48.6	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
2251	536897.43	4816463.50	339.10	0	E	A	-48.6	3.1	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-98.8
2254	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
2254	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
2254	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.8
2256	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-21.6
2256	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.6
2256	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.6
2259	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	6.7
2259	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-100.3
2259	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-100.3
2261	536897.43	4816463.50	339.10	1	D	A	58.4	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	6.9
2261	536897.43	4816463.50	339.10	1	N	A	-48.6	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-100.1
2261	536897.43	4816463.50	339.10	1	E	A	-48.6	3.1	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.1	-100.1
2353	536879.09	4816453.97	339.32	0	D	A	58.4	1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	7.9
2353	536879.09	4816453.97	339.32	0	N	A	-48.6	1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1
2353	536879.09	4816453.97	339.32	0	E	A	-48.6	1.8	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-99.1
2356	536879.12	4816453.91	339.32	1	D	A	58.4	1.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-26.8
2356	536879.12	4816453.91	339.32	1	N	A	-48.6	1.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
2356	536879.12	4816453.91	339.32	1	E	A	-48.6	1.4	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-133.8
2358	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-21.9
2358	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.9
2358	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-128.9
2361	536879.09	4816453.97	339.32	1	D	A	58.4	1.8	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	5.3
2361	536879.09	4816453.97	339.32	1	N	A	-48.6	1.8	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-101.7
2361	536879.09	4816453.97	339.32	1	E	A	-48.6	1.8	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-101.7
2363	536895.40	4816467.43	339.09	0	D	A	58.4	2.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2363	536895.40	4816467.43	339.09	0	N	A	-48.6	2.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2363	536895.40	4816467.43	339.09	0	E	A	-48.6	2.8	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2365	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
2365	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
2365	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-133.1
2368	536895.40	4816467.43	339.09	1	D	A	58.4	2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-21.9
2368	536895.40	4816467.43	339.09	1	N	A	-48.6	2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.9
2368	536895.40	4816467.43	339.09	1	E	A	-48.6	2.8	0.0	0.0	0.0	56.3	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-128.9
2376	536827.49	4816435.18	340.26	0	D	A	58.4	-0.8	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2376	536827.49	4816435.18	340.26	0	N	A	-48.6	-0.8	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2376	536827.49	4816435.18	340.26	0	E	A	-48.6	-0.8	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.2
2379	536827.49	4816435.18	340.26	1	D	A	58.4	-0.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.2
2379	536827.49	4816435.18	340.26	1	N	A	-48.6	-0.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
2379	536827.49	4816435.18	340.26	1	E	A	-48.6	-0.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.2
2434	536839.70	4816434.40	340.09	0	D	A	58.4	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
2434	536839.70	4816434.40	340.09	0	N	A	-48.6	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2434	536839.70	4816434.40	340.09	0	E	A	-48.6	-0.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2437	536839.70	4816434.40	340.09	1	D	A	58.4	-0.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.4
2437	536839.70	4816434.40	340.09	1	N	A	-48.6	-0.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
2437	536839.70	4816434.40	340.09	1	E	A	-48.6	-0.8	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
2440	536827.69	4816435.96	340.20	0	D	A	58.4	-0.9	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
2440	536827.69	4816435.96	340.20	0	N	A	-48.6	-0.9	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2440	536827.69	4816435.96	340.20	0	E	A	-48.6	-0.9	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.4
2442	536827.69	4816435.96	340.20	1	D	A	58.4	-0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.4
2442	536827.69	4816435.96	340.20	1	N	A	-48.6	-0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
2442	536827.69	4816435.96	340.20	1	E	A	-48.6	-0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
2492	536827.54	4816434.40	340.30	0	D	A	58.4	-1.3	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	7.4
2492	536827.54	4816434.40	340.30	0	N	A	-48.6	-1.3	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
2492	536827.54	4816434.40	340.30	0	E	A	-48.6	-1.3	0.0	0.0	0.0	52.2	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-99.6
2495	536827.54	4816434.40	340.30	1	D	A	58.4	-1.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-22.6
2495	536827.54	4816434.40	340.30	1	N	A	-48.6	-1.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2495	536827.54	4816434.40	340.30	1	E	A	-48.6	-1.3	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.6
2668	536828.55	4816436.86	340.14	0	D	A	58.4	-1.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.7
2668	536828.55	4816436.86	340.14	0	N	A	-48.6	-1.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
2668	536828.55	4816436.86	340.14	0	E	A	-48.6	-1.8	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.3
2671	536828.55	4816436.86	340.14	1	D	A	58.4	-1.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.3
2671	536828.55	4816436.86	340.14	1	N	A	-48.6	-1.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.3
2671	536828.55	4816436.86	340.14	1	E	A	-48.6	-1.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.3
2720	536879.47	4816452.74	339.36	0	D	A	58.4	0.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
2720	536879.47	4816452.74	339.36	0	N	A	-48.6	0.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.5
2720	536879.47	4816452.74	339.36	0	E	A	-48.6	0.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.5
2723	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
2723	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
2723	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-134.8
2725	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-23.3
2725	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.3
2725	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.3
2727	536879.47	4816452.74	339.36	1	D	A	58.4	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	3.8
2727	536879.47	4816452.74	339.36	1	N	A	-48.6	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.2
2727	536879.47	4816452.74	339.36	1	E	A	-48.6	0.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.2
2776	536838.98	4816434.42	340.10	0	D	A	58.4	-2.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2776	536838.98	4816434.42	340.10	0	N	A	-48.6	-2.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2776	536838.98	4816434.42	340.10	0	E	A	-48.6	-2.1	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2778	536838.98	4816434.42	340.10	1	D	A	58.4	-2.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.8
2778	536838.98	4816434.42	340.10	1	N	A	-48.6	-2.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.8
2778	536838.98	4816434.42	340.10	1	E	A	-48.6	-2.1	0.0	0.0	0.0	53.2	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.8
2788	536828.03	4816436.56	340.16	0	D	A	58.4	-2.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2788	536828.03	4816436.56	340.16	0	N	A	-48.6	-2.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2788	536828.03	4816436.56	340.16	0	E	A	-48.6	-2.2	0.0	0.0	0.0	52.3	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2790	536828.03	4816436.56	340.16	1	D	A	58.4	-2.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.7
2790	536828.03	4816436.56	340.16	1	N	A	-48.6	-2.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.7
2790	536828.03	4816436.56	340.16	1	E	A	-48.6	-2.2	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-130.7
2793	536879.51	4816451.71	339.38	0	D	A	58.4	0.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2793	536879.51	4816451.71	339.38	0	N	A	-48.6	0.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2793	536879.51	4816451.71	339.38	0	E	A	-48.6	0.0	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
2796	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
2796	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
2796	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	59.4	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.1
2798	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-23.6
2798	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.6
2798	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.2	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-130.6
2801	536879.51	4816451.71	339.38	1	D	A	58.4	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	3.5
2801	536879.51	4816451.71	339.38	1	N	A	-48.6	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.5
2801	536879.51	4816451.71	339.38	1	E	A	-48.6	0.0	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-103.5
3012	536879.03	4816450.14	339.41	0	D	A	58.4	-0.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.6
3012	536879.03	4816450.14	339.41	0	N	A	-48.6	-0.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3012	536879.03	4816450.14	339.41	0	E	A	-48.6	-0.7	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3014	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
3014	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
3014	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
3016	536879.03	4816450.14	339.41	1	D	A	58.4	-0.7	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.2
3016	536879.03	4816450.14	339.41	1	N	A	-48.6	-0.7	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.2
3016	536879.03	4816450.14	339.41	1	E	A	-48.6	-0.7	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.2
3027	536877.85	4816449.08	339.43	0	D	A	58.4	-0.9	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.6
3027	536877.85	4816449.08	339.43	0	N	A	-48.6	-0.9	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3027	536877.85	4816449.08	339.43	0	E	A	-48.6	-0.9	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.4
3030	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
3030	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
3030	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-135.9
3032	536877.85	4816449.08	339.43	1	D	A	58.4	-0.9	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.3
3032	536877.85	4816449.08	339.43	1	N	A	-48.6	-0.9	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.3
3032	536877.85	4816449.08	339.43	1	E	A	-48.6	-0.9	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.3
3097	536878.50	4816449.52	339.42	0	D	A	58.4	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
3097	536878.50	4816449.52	339.42	0	N	A	-48.6	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3097	536878.50	4816449.52	339.42	0	E	A	-48.6	-1.0	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.6
3100	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
3100	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
3100	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.0
3102	536878.50	4816449.52	339.42	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.5
3102	536878.50	4816449.52	339.42	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.5
3102	536878.50	4816449.52	339.42	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.5
3174	536829.11	4816436.92	340.12	0	D	A	58.4	-3.3	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	5.2
3174	536829.11	4816436.92	340.12	0	N	A	-48.6	-3.3	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3174	536829.11	4816436.92	340.12	0	E	A	-48.6	-3.3	0.0	0.0	0.0	52.4	0.5	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3177	536829.11	4816436.92	340.12	1	D	A	58.4	-3.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-24.8
3177	536829.11	4816436.92	340.12	1	N	A	-48.6	-3.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-131.8
3177	536829.11	4816436.92	340.12	1	E	A	-48.6	-3.3	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-131.8
3179	536899.03	4816462.04	339.09	0	D	A	58.4	-0.0	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.2
3179	536899.03	4816462.04	339.09	0	N	A	-48.6	-0.0	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3179	536899.03	4816462.04	339.09	0	E	A	-48.6	-0.0	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.8
3181	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
3181	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
3181	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-135.8
3184	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-24.7
3184	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-131.6
3184	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-131.6
3187	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.6
3187	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.4
3187	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.4
3189	536899.03	4816462.04	339.09	1	D	A	58.4	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.6
3189	536899.03	4816462.04	339.09	1	N	A	-48.6	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.4
3189	536899.03	4816462.04	339.09	1	E	A	-48.6	-0.0	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.4
3235	536879.36	4816450.85	339.40	0	D	A	58.4	-1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
3235	536879.36	4816450.85	339.40	0	N	A	-48.6	-1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.9
3235	536879.36	4816450.85	339.40	0	E	A	-48.6	-1.3	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-101.9
3238	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-29.3
3238	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
3238	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	59.3	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-136.3
3241	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-24.8
3241	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.8
3241	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	55.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.1	-131.8
3243	536879.36	4816450.85	339.40	1	D	A	58.4	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	2.2
3243	536879.36	4816450.85	339.40	1	N	A	-48.6	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-104.8
3243	536879.36	4816450.85	339.40	1	E	A	-48.6	-1.3	0.0	0.0	0.0	55.3	0.7	-3.0	0.0	0.0	0.0	0.0	1.9	-104.8
3291	536899.99	4816461.96	339.07	0	D	A	58.4	-0.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
3291	536899.99	4816461.96	339.07	0	N	A	-48.6	-0.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
3291	536899.99	4816461.96	339.07	0	E	A	-48.6	-0.4	0.0	0.0	0.0	55.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.2
3294	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.2
3294	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
3294	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	60.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.2
3297	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-25.0
3297	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.0
3297	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.0
3299	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.2
3299	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
3299	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
3302	536899.99	4816461.96	339.07	1	D	A	58.4	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	3.2
3302	536899.99	4816461.96	339.07	1	N	A	-48.6	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
3302	536899.99	4816461.96	339.07	1	E	A	-48.6	-0.4	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-103.8
3426	536898.23	4816462.37	339.10	0	D	A	58.4	-1.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	4.2
3426	536898.23	4816462.37	339.10	0	N	A	-48.6	-1.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
3426	536898.23	4816462.37	339.10	0	E	A	-48.6	-1.0	0.0	0.0	0.0	55.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-102.8
3428	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-29.8
3428	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.8
3428	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	60.0	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-136.8
3431	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-25.6
3431	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3431	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-132.6
3434	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	2.6
3434	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.4
3434	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.4
3436	536898.23	4816462.37	339.10	1	D	A	58.4	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	2.6
3436	536898.23	4816462.37	339.10	1	N	A	-48.6	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.4
3436	536898.23	4816462.37	339.10	1	E	A	-48.6	-1.0	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.3	-104.4
3534	536915.25	4816467.82	339.00	0	D	A	58.4	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
3534	536915.25	4816467.82	339.00	0	N	A	-48.6	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.3
3534	536915.25	4816467.82	339.00	0	E	A	-48.6	-0.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.3
3535	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.1
3535	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.1
3535	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.1
3536	536915.25	4816467.82	339.00	1	D	A	58.4	-0.8	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.1
3536	536915.25	4816467.82	339.00	1	N	A	-48.6	-0.8	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.1
3536	536915.25	4816467.82	339.00	1	E	A	-48.6	-0.8	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.1
3567	536914.47	4816467.62	339.00	0	D	A	58.4	-1.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	3.3
3567	536914.47	4816467.62	339.00	0	N	A	-48.6	-1.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
3567	536914.47	4816467.62	339.00	0	E	A	-48.6	-1.1	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-103.7
3569	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-30.5
3569	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.5
3569	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-137.5
3570	536914.47	4816467.62	339.00	1	D	A	58.4	-1.1	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-26.5
3570	536914.47	4816467.62	339.00	1	N	A	-48.6	-1.1	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
3570	536914.47	4816467.62	339.00	1	E	A	-48.6	-1.1	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-133.4
3608	536854.16	4816433.89	339.93	0	D	A	58.4	-5.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	2.8
3608	536854.16	4816433.89	339.93	0	N	A	-48.6	-5.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-104.2
3608	536854.16	4816433.89	339.93	0	E	A	-48.6	-5.3	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-104.2
3609	536854.16	4816433.89	339.93	1	D	A	58.4	-5.3	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-27.1
3609	536854.16	4816433.89	339.93	1	N	A	-48.6	-5.3	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-134.1
3609	536854.16	4816433.89	339.93	1	E	A	-48.6	-5.3	0.0	0.0	0.0	53.5	0.6	-3.0	0.0	0.0	28.0	0.0	1.1	-134.1
3621	536915.99	4816467.87	339.00	0	D	A	58.4	-1.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
3621	536915.99	4816467.87	339.00	0	N	A	-48.6	-1.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-104.3
3621	536915.99	4816467.87	339.00	0	E	A	-48.6	-1.7	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-104.3
3622	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.1
3622	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
3622	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-138.1
3623	536915.99	4816467.87	339.00	1	D	A	58.4	-1.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-27.1
3623	536915.99	4816467.87	339.00	1	N	A	-48.6	-1.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-134.1
3623	536915.99	4816467.87	339.00	1	E	A	-48.6	-1.7	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-134.1
3699	536917.00	4816466.90	339.00	0	D	A	58.4	-2.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.6
3699	536917.00	4816466.90	339.00	0	N	A	-48.6	-2.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.3
3699	536917.00	4816466.90	339.00	0	E	A	-48.6	-2.8	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.3
3700	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
3700	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.1
3700	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.1
3701	536917.00	4816466.90	339.00	1	D	A	58.4	-2.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.1
3701	536917.00	4816466.90	339.00	1	N	A	-48.6	-2.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.1
3701	536917.00	4816466.90	339.00	1	E	A	-48.6	-2.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.1
3729	536916.80	4816467.35	339.00	0	D	A	58.4	-3.2	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	1.2
3729	536916.80	4816467.35	339.00	0	N	A	-48.6	-3.2	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.8
3729	536916.80	4816467.35	339.00	0	E	A	-48.6	-3.2	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-105.8
3730	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.6
3730	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.6
3730	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-139.6
3732	536916.80	4816467.35	339.00	1	D	A	58.4	-3.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-28.6
3732	536916.80	4816467.35	339.00	1	N	A	-48.6	-3.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
3732	536916.80	4816467.35	339.00	1	E	A	-48.6	-3.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-135.6
3761	536916.49	4816467.69	339.00	0	D	A	58.4	-3.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	0.8
3761	536916.49	4816467.69	339.00	0	N	A	-48.6	-3.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-106.2
3761	536916.49	4816467.69	339.00	0	E	A	-48.6	-3.6	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-106.2
3763	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-33.0
3763	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Forklift Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3763	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-140.0
3764	536916.49	4816467.69	339.00	1	D	A	58.4	-3.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-29.0
3764	536916.49	4816467.69	339.00	1	N	A	-48.6	-3.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
3764	536916.49	4816467.69	339.00	1	E	A	-48.6	-3.6	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	28.0	0.0	1.1	-136.0
3805	536916.96	4816466.29	339.00	0	D	A	58.4	-5.3	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-0.9
3805	536916.96	4816466.29	339.00	0	N	A	-48.6	-5.3	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.8
3805	536916.96	4816466.29	339.00	0	E	A	-48.6	-5.3	0.0	0.0	0.0	56.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-107.8
3807	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-34.6
3807	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
3807	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-141.6
3809	536916.96	4816466.29	339.00	1	D	A	58.4	-5.3	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-30.6
3809	536916.96	4816466.29	339.00	1	N	A	-48.6	-5.3	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
3809	536916.96	4816466.29	339.00	1	E	A	-48.6	-5.3	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-137.6
3828	536917.05	4816466.53	339.00	0	D	A	58.4	-6.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-2.0
3828	536917.05	4816466.53	339.00	0	N	A	-48.6	-6.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-109.0
3828	536917.05	4816466.53	339.00	0	E	A	-48.6	-6.4	0.0	0.0	0.0	56.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-109.0
3830	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-35.8
3830	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
3830	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	60.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-142.8
3832	536917.05	4816466.53	339.00	1	D	A	58.4	-6.4	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-31.8
3832	536917.05	4816466.53	339.00	1	N	A	-48.6	-6.4	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8
3832	536917.05	4816466.53	339.00	1	E	A	-48.6	-6.4	0.0	0.0	0.0	56.8	0.8	-3.0	0.0	0.0	28.0	0.0	1.1	-138.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
766	536792.55	4816505.62	341.05	0	D	A	59.5	12.9	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	18.3
766	536792.55	4816505.62	341.05	0	N	A	-40.5	12.9	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.7
766	536792.55	4816505.62	341.05	0	E	A	-40.5	12.9	0.0	0.0	0.0	56.2	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-81.7
773	536892.28	4816454.14	340.71	0	D	A	59.5	10.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	17.3
773	536892.28	4816454.14	340.71	0	N	A	-40.5	10.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
773	536892.28	4816454.14	340.71	0	E	A	-40.5	10.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
776	536892.28	4816454.14	340.71	1	D	A	59.5	10.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-17.0
776	536892.28	4816454.14	340.71	1	N	A	-40.5	10.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
776	536892.28	4816454.14	340.71	1	E	A	-40.5	10.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.0
786	536892.28	4816454.14	340.71	1	D	A	59.5	10.5	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-12.5
786	536892.28	4816454.14	340.71	1	N	A	-40.5	10.5	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
786	536892.28	4816454.14	340.71	1	E	A	-40.5	10.5	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-112.5
788	536896.67	4816456.30	340.60	1	D	A	59.5	1.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	6.4
788	536896.67	4816456.30	340.60	1	N	A	-40.5	1.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-93.6
788	536896.67	4816456.30	340.60	1	E	A	-40.5	1.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-93.6
790	536818.68	4816440.93	341.55	0	D	A	59.5	8.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.5
790	536818.68	4816440.93	341.55	0	N	A	-40.5	8.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.5
790	536818.68	4816440.93	341.55	0	E	A	-40.5	8.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.5
792	536818.68	4816440.93	341.55	1	D	A	59.5	8.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-12.4
792	536818.68	4816440.93	341.55	1	N	A	-40.5	8.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.4
792	536818.68	4816440.93	341.55	1	E	A	-40.5	8.1	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.4
796	536910.45	4816463.44	340.40	0	D	A	59.5	11.3	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	17.1
796	536910.45	4816463.44	340.40	0	N	A	-40.5	11.3	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
796	536910.45	4816463.44	340.40	0	E	A	-40.5	11.3	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-82.9
797	536905.15	4816460.69	340.40	1	D	A	59.5	1.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
797	536905.15	4816460.69	340.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
797	536905.15	4816460.69	340.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
799	536910.92	4816463.69	340.40	1	D	A	59.5	10.6	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-17.6
799	536910.92	4816463.69	340.40	1	N	A	-40.5	10.6	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
799	536910.92	4816463.69	340.40	1	E	A	-40.5	10.6	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-117.6
803	536916.22	4816466.44	340.40	1	D	A	59.5	-3.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-32.1
803	536916.22	4816466.44	340.40	1	N	A	-40.5	-3.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
803	536916.22	4816466.44	340.40	1	E	A	-40.5	-3.7	0.0	0.0	0.0	60.5	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-132.1
805	536910.45	4816463.44	340.40	1	D	A	59.5	11.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-12.7
805	536910.45	4816463.44	340.40	1	N	A	-40.5	11.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
805	536910.45	4816463.44	340.40	1	E	A	-40.5	11.3	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-112.7
807	536907.12	4816461.71	340.40	1	D	A	59.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	11.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
807	536907.12	4816461.71	340.40	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.4
807	536907.12	4816461.71	340.40	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-88.4
811	536907.12	4816461.71	340.40	1	D	A	59.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	12.0
811	536907.12	4816461.71	340.40	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
811	536907.12	4816461.71	340.40	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-88.0
814	536843.01	4816432.19	341.54	0	D	A	59.5	7.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	17.3
814	536843.01	4816432.19	341.54	0	N	A	-40.5	7.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
814	536843.01	4816432.19	341.54	0	E	A	-40.5	7.7	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-82.7
815	536843.01	4816432.19	341.54	1	D	A	59.5	7.7	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-12.7
815	536843.01	4816432.19	341.54	1	N	A	-40.5	7.7	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.7
815	536843.01	4816432.19	341.54	1	E	A	-40.5	7.7	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-112.7
818	536806.73	4816467.88	341.19	0	D	A	59.5	9.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	17.0
818	536806.73	4816467.88	341.19	0	N	A	-40.5	9.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
818	536806.73	4816467.88	341.19	0	E	A	-40.5	9.4	0.0	0.0	0.0	54.2	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.0
821	536883.36	4816449.74	340.86	0	D	A	59.5	9.4	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.7
821	536883.36	4816449.74	340.86	0	N	A	-40.5	9.4	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.3
821	536883.36	4816449.74	340.86	0	E	A	-40.5	9.4	0.0	0.0	0.0	54.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.3
823	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-17.8
823	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
823	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-117.8
824	536883.36	4816449.74	340.86	1	D	A	59.5	9.4	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-13.1
824	536883.36	4816449.74	340.86	1	N	A	-40.5	9.4	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
824	536883.36	4816449.74	340.86	1	E	A	-40.5	9.4	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-113.1
827	536859.77	4816437.93	341.09	0	D	A	59.5	7.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	16.6
827	536859.77	4816437.93	341.09	0	N	A	-40.5	7.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.4
827	536859.77	4816437.93	341.09	0	E	A	-40.5	7.9	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-83.4
829	536859.77	4816437.93	341.09	1	D	A	59.5	7.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-13.3
829	536859.77	4816437.93	341.09	1	N	A	-40.5	7.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.3
829	536859.77	4816437.93	341.09	1	E	A	-40.5	7.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-113.3
839	536810.61	4816454.21	341.25	0	D	A	59.5	7.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	16.2
839	536810.61	4816454.21	341.25	0	N	A	-40.5	7.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.8
839	536810.61	4816454.21	341.25	0	E	A	-40.5	7.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-83.8
841	536810.61	4816454.21	341.25	1	D	A	59.5	7.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-14.0
841	536810.61	4816454.21	341.25	1	N	A	-40.5	7.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.0
841	536810.61	4816454.21	341.25	1	E	A	-40.5	7.7	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.0
864	536812.60	4816449.25	341.36	0	D	A	59.5	6.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
864	536812.60	4816449.25	341.36	0	N	A	-40.5	6.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.4
864	536812.60	4816449.25	341.36	0	E	A	-40.5	6.8	0.0	0.0	0.0	53.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.4
866	536812.60	4816449.25	341.36	1	D	A	59.5	6.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-14.5
866	536812.60	4816449.25	341.36	1	N	A	-40.5	6.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.5
866	536812.60	4816449.25	341.36	1	E	A	-40.5	6.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-114.5
869	536847.92	4816433.01	341.45	0	D	A	59.5	6.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	15.6
869	536847.92	4816433.01	341.45	0	N	A	-40.5	6.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.4
869	536847.92	4816433.01	341.45	0	E	A	-40.5	6.1	0.0	0.0	0.0	52.5	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-84.4
870	536847.92	4816433.01	341.45	1	D	A	59.5	6.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-14.4
870	536847.92	4816433.01	341.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
870	536847.92	4816433.01	341.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	53.3	0.6	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
881	536900.91	4816458.49	340.49	0	D	A	59.5	9.1	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	15.4
881	536900.91	4816458.49	340.49	0	N	A	-40.5	9.1	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
881	536900.91	4816458.49	340.49	0	E	A	-40.5	9.1	0.0	0.0	0.0	55.3	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-84.6
882	536900.32	4816458.18	340.51	1	D	A	59.5	8.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
882	536900.32	4816458.18	340.51	1	N	A	-40.5	8.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
882	536900.32	4816458.18	340.51	1	E	A	-40.5	8.3	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
886	536903.90	4816460.04	340.41	1	D	A	59.5	1.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7
886	536903.90	4816460.04	340.41	1	N	A	-40.5	1.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
886	536903.90	4816460.04	340.41	1	E	A	-40.5	1.2	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
888	536898.28	4816457.12	340.56	1	D	A	59.5	3.3	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-20.0
888	536898.28	4816457.12	340.56	1	N	A	-40.5	3.3	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
888	536898.28	4816457.12	340.56	1	E	A	-40.5	3.3	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-120.0
890	536901.86	4816458.98	340.47	1	D	A	59.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-15.8
890	536901.86	4816458.98	340.47	1	N	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
890	536901.86	4816458.98	340.47	1	E	A	-40.5	7.7	0.0	0.0	0.0	56.1	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-115.8
893	536903.00	4816459.57	340.44	1	D	A	59.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	9.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
893	536903.00	4816459.57	340.44	1	N	A	-40.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-90.7
893	536903.00	4816459.57	340.44	1	E	A	-40.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.6	-90.7
896	536898.26	4816457.11	340.56	1	D	A	59.5	3.2	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	7.9
896	536898.26	4816457.11	340.56	1	N	A	-40.5	3.2	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.1
896	536898.26	4816457.11	340.56	1	E	A	-40.5	3.2	0.0	0.0	0.0	55.8	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-92.1
902	536900.35	4816458.19	340.51	1	D	A	59.5	4.2	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	8.8
902	536900.35	4816458.19	340.51	1	N	A	-40.5	4.2	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.2
902	536900.35	4816458.19	340.51	1	E	A	-40.5	4.2	0.0	0.0	0.0	55.9	0.8	-3.0	0.0	0.0	0.0	0.0	1.2	-91.2
906	536903.00	4816459.57	340.44	1	D	A	59.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	9.7
906	536903.00	4816459.57	340.44	1	N	A	-40.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-90.3
906	536903.00	4816459.57	340.44	1	E	A	-40.5	5.3	0.0	0.0	0.0	56.0	0.9	-3.0	0.0	0.0	0.0	0.0	1.2	-90.3
909	536869.56	4816442.87	340.95	0	D	A	59.5	7.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.5
909	536869.56	4816442.87	340.95	0	N	A	-40.5	7.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
909	536869.56	4816442.87	340.95	0	E	A	-40.5	7.3	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.5
912	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
912	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
912	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
915	536869.56	4816442.87	340.95	1	D	A	59.5	7.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-14.4
915	536869.56	4816442.87	340.95	1	N	A	-40.5	7.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
915	536869.56	4816442.87	340.95	1	E	A	-40.5	7.3	0.0	0.0	0.0	54.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-114.4
917	536920.63	4816468.73	340.40	0	D	A	59.5	9.8	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
917	536920.63	4816468.73	340.40	0	N	A	-40.5	9.8	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
917	536920.63	4816468.73	340.40	0	E	A	-40.5	9.8	0.0	0.0	0.0	56.3	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
918	536920.63	4816468.73	340.40	1	D	A	59.5	9.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
918	536920.63	4816468.73	340.40	1	N	A	-40.5	9.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
918	536920.63	4816468.73	340.40	1	E	A	-40.5	9.8	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
920	536920.63	4816468.73	340.40	1	D	A	59.5	9.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-14.7
920	536920.63	4816468.73	340.40	1	N	A	-40.5	9.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
920	536920.63	4816468.73	340.40	1	E	A	-40.5	9.8	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	28.0	0.0	1.0	-114.7
923	536804.98	4816475.13	341.21	0	D	A	59.5	7.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.1
923	536804.98	4816475.13	341.21	0	N	A	-40.5	7.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
923	536804.98	4816475.13	341.21	0	E	A	-40.5	7.9	0.0	0.0	0.0	54.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-84.9
947	536808.33	4816461.22	341.17	0	D	A	59.5	7.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	15.0
947	536808.33	4816461.22	341.17	0	N	A	-40.5	7.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
947	536808.33	4816461.22	341.17	0	E	A	-40.5	7.0	0.0	0.0	0.0	53.8	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.0
950	536783.44	4816525.69	341.03	0	D	A	59.5	10.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	14.7
950	536783.44	4816525.69	341.03	0	N	A	-40.5	10.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
950	536783.44	4816525.69	341.03	0	E	A	-40.5	10.3	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-85.3
952	536824.47	4816435.94	341.66	0	D	A	59.5	5.2	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.9
952	536824.47	4816435.94	341.66	0	N	A	-40.5	5.2	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
952	536824.47	4816435.94	341.66	0	E	A	-40.5	5.2	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.1
954	536824.47	4816435.94	341.66	1	D	A	59.5	5.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.0
954	536824.47	4816435.94	341.66	1	N	A	-40.5	5.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.0
954	536824.47	4816435.94	341.66	1	E	A	-40.5	5.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.0
1015	536799.66	4816489.73	341.24	0	D	A	59.5	8.3	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	14.5
1015	536799.66	4816489.73	341.24	0	N	A	-40.5	8.3	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.5
1015	536799.66	4816489.73	341.24	0	E	A	-40.5	8.3	0.0	0.0	0.0	55.4	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-85.5
1021	536838.57	4816431.93	341.61	0	D	A	59.5	4.8	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.5
1021	536838.57	4816431.93	341.61	0	N	A	-40.5	4.8	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.5
1021	536838.57	4816431.93	341.61	0	E	A	-40.5	4.8	0.0	0.0	0.0	52.2	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-85.5
1023	536838.57	4816431.93	341.61	1	D	A	59.5	4.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-15.6
1023	536838.57	4816431.93	341.61	1	N	A	-40.5	4.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.6
1023	536838.57	4816431.93	341.61	1	E	A	-40.5	4.8	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-115.6
1041	536877.46	4816446.83	340.88	0	D	A	59.5	6.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	14.2
1041	536877.46	4816446.83	340.88	0	N	A	-40.5	6.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.8
1041	536877.46	4816446.83	340.88	0	E	A	-40.5	6.5	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-85.8
1044	536876.93	4816446.57	340.88	1	D	A	59.5	5.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.6
1044	536876.93	4816446.57	340.88	1	N	A	-40.5	5.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1044	536876.93	4816446.57	340.88	1	E	A	-40.5	5.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.6
1047	536878.96	4816447.57	340.88	1	D	A	59.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.2
1047	536878.96	4816447.57	340.88	1	N	A	-40.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1047	536878.96	4816447.57	340.88	1	E	A	-40.5	0.7	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.2
1050	536877.46	4816446.83	340.88	1	D	A	59.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-15.6

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1050	536877.46	4816446.83	340.88	1	N	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1050	536877.46	4816446.83	340.88	1	E	A	-40.5	6.5	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	28.0	0.0	1.0	-115.6
1054	536937.66	4816476.02	340.26	0	D	A	59.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	14.0
1054	536937.66	4816476.02	340.26	0	N	A	-40.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.0
1054	536937.66	4816476.02	340.26	0	E	A	-40.5	9.5	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.0
1056	536935.45	4816475.15	340.28	1	D	A	59.5	6.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1056	536935.45	4816475.15	340.28	1	N	A	-40.5	6.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1056	536935.45	4816475.15	340.28	1	E	A	-40.5	6.3	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1059	536939.63	4816476.79	340.23	1	D	A	59.5	6.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.4
1059	536939.63	4816476.79	340.23	1	N	A	-40.5	6.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1059	536939.63	4816476.79	340.23	1	E	A	-40.5	6.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.4
1061	536937.04	4816475.77	340.26	1	D	A	59.5	8.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-16.4
1061	536937.04	4816475.77	340.26	1	N	A	-40.5	8.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
1061	536937.04	4816475.77	340.26	1	E	A	-40.5	8.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-116.4
1064	536830.58	4816627.41	340.21	0	D	A	59.5	13.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1064	536830.58	4816627.41	340.21	0	N	A	-40.5	13.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1064	536830.58	4816627.41	340.21	0	E	A	-40.5	13.2	0.0	0.0	0.0	60.6	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1065	536835.30	4816629.59	340.17	1	D	A	59.5	10.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-19.3
1065	536835.30	4816629.59	340.17	1	N	A	-40.5	10.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-119.3
1065	536835.30	4816629.59	340.17	1	E	A	-40.5	10.2	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-119.3
1078	536821.99	4816437.72	341.61	0	D	A	59.5	4.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	14.0
1078	536821.99	4816437.72	341.61	0	N	A	-40.5	4.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.0
1078	536821.99	4816437.72	341.61	0	E	A	-40.5	4.4	0.0	0.0	0.0	52.3	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.0
1080	536821.39	4816438.22	341.60	1	D	A	59.5	0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.4
1080	536821.39	4816438.22	341.60	1	N	A	-40.5	0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-119.4
1080	536821.39	4816438.22	341.60	1	E	A	-40.5	0.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-119.4
1083	536822.47	4816437.33	341.62	1	D	A	59.5	1.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.4
1083	536822.47	4816437.33	341.62	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-118.4
1083	536822.47	4816437.33	341.62	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.0	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-118.4
1085	536776.99	4816539.88	341.05	0	D	A	59.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1085	536776.99	4816539.88	341.05	0	N	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1085	536776.99	4816539.88	341.05	0	E	A	-40.5	10.0	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1115	536803.31	4816480.48	341.24	0	D	A	59.5	7.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
1115	536803.31	4816480.48	341.24	0	N	A	-40.5	7.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1115	536803.31	4816480.48	341.24	0	E	A	-40.5	7.0	0.0	0.0	0.0	54.9	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1118	536852.70	4816434.60	341.31	0	D	A	59.5	4.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
1118	536852.70	4816434.60	341.31	0	N	A	-40.5	4.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1118	536852.70	4816434.60	341.31	0	E	A	-40.5	4.6	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1119	536852.70	4816434.60	341.31	1	D	A	59.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1119	536852.70	4816434.60	341.31	1	N	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1119	536852.70	4816434.60	341.31	1	E	A	-40.5	4.6	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1122	536873.70	4816444.96	340.88	0	D	A	59.5	5.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
1122	536873.70	4816444.96	340.88	0	N	A	-40.5	5.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1122	536873.70	4816444.96	340.88	0	E	A	-40.5	5.9	0.0	0.0	0.0	53.9	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1124	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1124	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1124	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1127	536873.70	4816444.96	340.88	1	D	A	59.5	5.9	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.1
1127	536873.70	4816444.96	340.88	1	N	A	-40.5	5.9	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1127	536873.70	4816444.96	340.88	1	E	A	-40.5	5.9	0.0	0.0	0.0	54.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.1
1128	536835.81	4816432.05	341.68	0	D	A	59.5	4.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.8
1128	536835.81	4816432.05	341.68	0	N	A	-40.5	4.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1128	536835.81	4816432.05	341.68	0	E	A	-40.5	4.0	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.2
1130	536835.81	4816432.05	341.68	1	D	A	59.5	4.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.2
1130	536835.81	4816432.05	341.68	1	N	A	-40.5	4.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.2
1130	536835.81	4816432.05	341.68	1	E	A	-40.5	4.0	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.2
1145	536833.33	4816432.35	341.74	0	D	A	59.5	3.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1145	536833.33	4816432.35	341.74	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1145	536833.33	4816432.35	341.74	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1147	536833.33	4816432.35	341.74	1	D	A	59.5	3.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.3
1147	536833.33	4816432.35	341.74	1	N	A	-40.5	3.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.3
1147	536833.33	4816432.35	341.74	1	E	A	-40.5	3.9	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.3
1158	536828.79	4816433.60	341.74	0	D	A	59.5	3.7	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1158	536828.79	4816433.60	341.74	0	N	A	-40.5	3.7	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1158	536828.79	4816433.60	341.74	0	E	A	-40.5	3.7	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1162	536828.46	4816433.74	341.73	1	D	A	59.5	2.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.1
1162	536828.46	4816433.74	341.73	1	N	A	-40.5	2.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-118.1
1162	536828.46	4816433.74	341.73	1	E	A	-40.5	2.1	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-118.1
1165	536829.54	4816433.28	341.75	1	D	A	59.5	-1.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-21.5
1165	536829.54	4816433.28	341.75	1	N	A	-40.5	-1.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.5
1165	536829.54	4816433.28	341.75	1	E	A	-40.5	-1.4	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.5
1172	536945.70	4816478.92	340.16	0	D	A	59.5	9.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.2
1172	536945.70	4816478.92	340.16	0	N	A	-40.5	9.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1172	536945.70	4816478.92	340.16	0	E	A	-40.5	9.1	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1176	536945.70	4816478.92	340.16	1	D	A	59.5	9.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-20.2
1176	536945.70	4816478.92	340.16	1	N	A	-40.5	9.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1176	536945.70	4816478.92	340.16	1	E	A	-40.5	9.1	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-120.2
1179	536787.11	4816517.60	340.98	0	D	A	59.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	13.3
1179	536787.11	4816517.60	340.98	0	N	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.7
1179	536787.11	4816517.60	340.98	0	E	A	-40.5	8.5	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-86.7
1182	536831.00	4816432.84	341.75	0	D	A	59.5	3.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1182	536831.00	4816432.84	341.75	0	N	A	-40.5	3.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1182	536831.00	4816432.84	341.75	0	E	A	-40.5	3.6	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1183	536831.00	4816432.84	341.75	1	D	A	59.5	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-16.5
1183	536831.00	4816432.84	341.75	1	N	A	-40.5	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.5
1183	536831.00	4816432.84	341.75	1	E	A	-40.5	3.6	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-116.5
1194	536855.80	4816436.00	341.22	0	D	A	59.5	4.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.4
1194	536855.80	4816436.00	341.22	0	N	A	-40.5	4.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.6
1194	536855.80	4816436.00	341.22	0	E	A	-40.5	4.4	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-86.6
1197	536855.80	4816436.00	341.22	1	D	A	59.5	4.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-16.5
1197	536855.80	4816436.00	341.22	1	N	A	-40.5	4.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1197	536855.80	4816436.00	341.22	1	E	A	-40.5	4.4	0.0	0.0	0.0	53.7	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-116.5
1199	536992.95	4816485.13	339.58	0	D	A	59.5	10.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	12.9
1199	536992.95	4816485.13	339.58	0	N	A	-40.5	10.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1199	536992.95	4816485.13	339.58	0	E	A	-40.5	10.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1200	536988.32	4816484.55	339.65	1	D	A	59.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.7
1200	536988.32	4816484.55	339.65	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
1200	536988.32	4816484.55	339.65	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.7
1202	536993.79	4816485.24	339.57	1	D	A	59.5	9.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-21.4
1202	536993.79	4816485.24	339.57	1	N	A	-40.5	9.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
1202	536993.79	4816485.24	339.57	1	E	A	-40.5	9.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-121.4
1261	536815.62	4816444.15	341.49	0	D	A	59.5	3.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	13.0
1261	536815.62	4816444.15	341.49	0	N	A	-40.5	3.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
1261	536815.62	4816444.15	341.49	0	E	A	-40.5	3.9	0.0	0.0	0.0	52.7	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.0
1263	536815.62	4816444.15	341.49	1	D	A	59.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-17.2
1263	536815.62	4816444.15	341.49	1	N	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.2
1263	536815.62	4816444.15	341.49	1	E	A	-40.5	3.9	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.2
1279	536826.80	4816434.55	341.70	0	D	A	59.5	3.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.9
1279	536826.80	4816434.55	341.70	0	N	A	-40.5	3.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1279	536826.80	4816434.55	341.70	0	E	A	-40.5	3.2	0.0	0.0	0.0	52.1	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.1
1281	536826.80	4816434.55	341.70	1	D	A	59.5	3.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.0
1281	536826.80	4816434.55	341.70	1	N	A	-40.5	3.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.0
1281	536826.80	4816434.55	341.70	1	E	A	-40.5	3.2	0.0	0.0	0.0	52.9	0.6	-3.0	0.0	0.0	28.0	0.0	1.2	-117.0
1304	536814.16	4816446.04	341.44	0	D	A	59.5	3.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
1304	536814.16	4816446.04	341.44	0	N	A	-40.5	3.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1304	536814.16	4816446.04	341.44	0	E	A	-40.5	3.7	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1306	536814.16	4816446.04	341.44	1	D	A	59.5	3.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-17.5
1306	536814.16	4816446.04	341.44	1	N	A	-40.5	3.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.5
1306	536814.16	4816446.04	341.44	1	E	A	-40.5	3.7	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-117.5
1310	536863.64	4816439.89	341.00	0	D	A	59.5	4.1	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.6
1310	536863.64	4816439.89	341.00	0	N	A	-40.5	4.1	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1310	536863.64	4816439.89	341.00	0	E	A	-40.5	4.1	0.0	0.0	0.0	53.3	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1312	536864.60	4816440.37	341.01	1	D	A	59.5	-3.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
1312	536864.60	4816440.37	341.01	1	N	A	-40.5	-3.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
1312	536864.60	4816440.37	341.01	1	E	A	-40.5	-3.6	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
1313	536863.64	4816439.89	341.00	1	D	A	59.5	4.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1313	536863.64	4816439.89	341.00	1	N	A	-40.5	4.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1313	536863.64	4816439.89	341.00	1	E	A	-40.5	4.1	0.0	0.0	0.0	54.1	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.2
1317	536865.97	4816441.06	341.02	0	D	A	59.5	4.2	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	12.6
1317	536865.97	4816441.06	341.02	0	N	A	-40.5	4.2	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1317	536865.97	4816441.06	341.02	0	E	A	-40.5	4.2	0.0	0.0	0.0	53.5	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-87.4
1318	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1318	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1318	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1321	536865.97	4816441.06	341.02	1	D	A	59.5	4.2	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-17.3
1321	536865.97	4816441.06	341.02	1	N	A	-40.5	4.2	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
1321	536865.97	4816441.06	341.02	1	E	A	-40.5	4.2	0.0	0.0	0.0	54.3	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-117.3
1358	536846.85	4816634.93	340.08	0	D	A	59.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1358	536846.85	4816634.93	340.08	0	N	A	-40.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1358	536846.85	4816634.93	340.08	0	E	A	-40.5	11.8	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1359	536846.85	4816634.93	340.08	1	D	A	59.5	11.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-18.0
1359	536846.85	4816634.93	340.08	1	N	A	-40.5	11.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-118.0
1359	536846.85	4816634.93	340.08	1	E	A	-40.5	11.8	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-118.0
1365	536955.13	4816481.72	340.05	0	D	A	59.5	8.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	12.1
1365	536955.13	4816481.72	340.05	0	N	A	-40.5	8.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.9
1365	536955.13	4816481.72	340.05	0	E	A	-40.5	8.4	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-87.9
1366	536957.22	4816482.29	340.03	1	D	A	59.5	4.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.2
1366	536957.22	4816482.29	340.03	1	N	A	-40.5	4.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.2
1366	536957.22	4816482.29	340.03	1	E	A	-40.5	4.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.2
1370	536954.61	4816481.57	340.05	1	D	A	59.5	7.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
1370	536954.61	4816481.57	340.05	1	N	A	-40.5	7.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1370	536954.61	4816481.57	340.05	1	E	A	-40.5	7.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
1373	536772.90	4816548.89	341.10	0	D	A	59.5	8.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1373	536772.90	4816548.89	341.10	0	N	A	-40.5	8.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1373	536772.90	4816548.89	341.10	0	E	A	-40.5	8.7	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1527	536789.64	4816608.89	340.50	0	D	A	59.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1527	536789.64	4816608.89	340.50	0	N	A	-40.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1527	536789.64	4816608.89	340.50	0	E	A	-40.5	9.8	0.0	0.0	0.0	60.1	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1548	536850.63	4816433.79	341.38	0	D	A	59.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	11.2
1548	536850.63	4816433.79	341.38	0	N	A	-40.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.8
1548	536850.63	4816433.79	341.38	0	E	A	-40.5	1.9	0.0	0.0	0.0	52.6	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-88.8
1551	536850.63	4816433.79	341.38	1	D	A	59.5	1.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1551	536850.63	4816433.79	341.38	1	N	A	-40.5	1.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1551	536850.63	4816433.79	341.38	1	E	A	-40.5	1.9	0.0	0.0	0.0	53.4	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1557	536780.20	4816532.81	341.05	0	D	A	59.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1557	536780.20	4816532.81	341.05	0	N	A	-40.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1557	536780.20	4816532.81	341.05	0	E	A	-40.5	6.9	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1558	536976.07	4816484.33	339.81	0	D	A	59.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.9
1558	536976.07	4816484.33	339.81	0	N	A	-40.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
1558	536976.07	4816484.33	339.81	0	E	A	-40.5	7.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.1
1559	536974.79	4816484.31	339.82	1	D	A	59.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.2
1559	536974.79	4816484.31	339.82	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
1559	536974.79	4816484.31	339.82	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
1562	536977.83	4816484.35	339.78	1	D	A	59.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.7
1562	536977.83	4816484.35	339.78	1	N	A	-40.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.7
1562	536977.83	4816484.35	339.78	1	E	A	-40.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.7
1578	536931.54	4816473.60	340.33	0	D	A	59.5	6.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1578	536931.54	4816473.60	340.33	0	N	A	-40.5	6.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1578	536931.54	4816473.60	340.33	0	E	A	-40.5	6.2	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1580	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1580	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1580	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1581	536931.54	4816473.60	340.33	1	D	A	59.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-18.7
1581	536931.54	4816473.60	340.33	1	N	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1581	536931.54	4816473.60	340.33	1	E	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-118.7
1598	536809.29	4816457.89	341.18	0	D	A	59.5	2.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1598	536809.29	4816457.89	341.18	0	N	A	-40.5	2.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1598	536809.29	4816457.89	341.18	0	E	A	-40.5	2.8	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1600	536809.51	4816457.10	341.19	1	D	A	59.5	-5.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-27.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1600	536809.51	4816457.10	341.19	1	N	A	-40.5	-5.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-127.3
1600	536809.51	4816457.10	341.19	1	E	A	-40.5	-5.5	0.0	0.0	0.0	54.0	0.7	-3.0	0.0	0.0	28.0	0.0	1.6	-127.3
1644	536770.42	4816555.03	341.15	0	D	A	59.5	7.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.7
1644	536770.42	4816555.03	341.15	0	N	A	-40.5	7.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1644	536770.42	4816555.03	341.15	0	E	A	-40.5	7.6	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.3
1699	536927.92	4816472.15	340.38	0	D	A	59.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	10.5
1699	536927.92	4816472.15	340.38	0	N	A	-40.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1699	536927.92	4816472.15	340.38	0	E	A	-40.5	5.6	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1701	536927.76	4816472.09	340.38	1	D	A	59.5	5.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
1701	536927.76	4816472.09	340.38	1	N	A	-40.5	5.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1701	536927.76	4816472.09	340.38	1	E	A	-40.5	5.1	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
1702	536929.44	4816472.76	340.36	1	D	A	59.5	-4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-33.5
1702	536929.44	4816472.76	340.36	1	N	A	-40.5	-4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
1702	536929.44	4816472.76	340.36	1	E	A	-40.5	-4.7	0.0	0.0	0.0	60.9	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
1705	536927.92	4816472.15	340.38	1	D	A	59.5	5.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1705	536927.92	4816472.15	340.38	1	N	A	-40.5	5.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1705	536927.92	4816472.15	340.38	1	E	A	-40.5	5.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1708	536984.64	4816484.42	339.70	0	D	A	59.5	7.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.3
1708	536984.64	4816484.42	339.70	0	N	A	-40.5	7.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7
1708	536984.64	4816484.42	339.70	0	E	A	-40.5	7.5	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7
1711	536984.64	4816484.42	339.70	1	D	A	59.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.4
1711	536984.64	4816484.42	339.70	1	N	A	-40.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.4
1711	536984.64	4816484.42	339.70	1	E	A	-40.5	7.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.4
1713	536768.85	4816560.46	341.14	0	D	A	59.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
1713	536768.85	4816560.46	341.14	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
1713	536768.85	4816560.46	341.14	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
1748	536970.55	4816484.18	339.88	0	D	A	59.5	7.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.2
1748	536970.55	4816484.18	339.88	0	N	A	-40.5	7.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
1748	536970.55	4816484.18	339.88	0	E	A	-40.5	7.0	0.0	0.0	0.0	58.2	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.8
1750	536970.34	4816484.18	339.89	1	D	A	59.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-24.0
1750	536970.34	4816484.18	339.89	1	N	A	-40.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.0
1750	536970.34	4816484.18	339.89	1	E	A	-40.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-124.0
1751	536972.83	4816484.29	339.85	1	D	A	59.5	-3.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-34.5
1751	536972.83	4816484.29	339.85	1	N	A	-40.5	-3.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-134.5
1751	536972.83	4816484.29	339.85	1	E	A	-40.5	-3.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-134.5
1886	536797.03	4816495.76	341.16	0	D	A	59.5	3.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	9.7
1886	536797.03	4816495.76	341.16	0	N	A	-40.5	3.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
1886	536797.03	4816495.76	341.16	0	E	A	-40.5	3.7	0.0	0.0	0.0	55.7	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.3
1933	536906.59	4816644.05	339.70	0	D	A	59.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	1.0
1933	536906.59	4816644.05	339.70	0	N	A	-40.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-99.0
1933	536906.59	4816644.05	339.70	0	E	A	-40.5	9.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.9	0.0	0.0	-99.0
1934	536906.59	4816644.05	339.70	1	D	A	59.5	9.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-20.7
1934	536906.59	4816644.05	339.70	1	N	A	-40.5	9.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-120.7
1934	536906.59	4816644.05	339.70	1	E	A	-40.5	9.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-120.7
1995	536818.13	4816621.69	340.33	0	D	A	59.5	8.2	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
1995	536818.13	4816621.69	340.33	0	N	A	-40.5	8.2	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
1995	536818.13	4816621.69	340.33	0	E	A	-40.5	8.2	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2001	536796.80	4816612.11	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.9
2001	536796.80	4816612.11	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2001	536796.80	4816612.11	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.1
2003	536797.94	4816493.74	341.19	0	D	A	59.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	9.2
2003	536797.94	4816493.74	341.19	0	N	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.8
2003	536797.94	4816493.74	341.19	0	E	A	-40.5	3.1	0.0	0.0	0.0	55.6	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-90.8
2010	536917.06	4816646.26	339.52	0	D	A	59.5	5.5	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-2.9
2010	536917.06	4816646.26	339.52	0	N	A	-40.5	5.5	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.9
2010	536917.06	4816646.26	339.52	0	E	A	-40.5	5.5	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.9
2012	536913.07	4816645.31	339.59	0	D	A	59.5	6.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-1.7
2012	536913.07	4816645.31	339.59	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2012	536913.07	4816645.31	339.59	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2014	536915.36	4816645.85	339.55	1	D	A	59.5	8.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-21.7
2014	536915.36	4816645.85	339.55	1	N	A	-40.5	8.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.7
2014	536915.36	4816645.85	339.55	1	E	A	-40.5	8.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-121.7
2016	536911.37	4816644.90	339.62	1	D	A	59.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2016	536911.37	4816644.90	339.62	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
2016	536911.37	4816644.90	339.62	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
2047	536807.30	4816616.82	340.40	0	D	A	59.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
2047	536807.30	4816616.82	340.40	0	N	A	-40.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2047	536807.30	4816616.82	340.40	0	E	A	-40.5	7.8	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2140	536961.71	4816483.28	339.98	0	D	A	59.5	5.1	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2140	536961.71	4816483.28	339.98	0	N	A	-40.5	5.1	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2140	536961.71	4816483.28	339.98	0	E	A	-40.5	5.1	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2142	536961.71	4816483.28	339.98	1	D	A	59.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.3
2142	536961.71	4816483.28	339.98	1	N	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
2142	536961.71	4816483.28	339.98	1	E	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
2158	536802.06	4816614.47	340.40	0	D	A	59.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
2158	536802.06	4816614.47	340.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2158	536802.06	4816614.47	340.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	60.2	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2174	536802.22	4816483.56	341.27	0	D	A	59.5	2.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2174	536802.22	4816483.56	341.27	0	N	A	-40.5	2.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2174	536802.22	4816483.56	341.27	0	E	A	-40.5	2.0	0.0	0.0	0.0	55.1	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2226	536966.52	4816484.01	339.93	0	D	A	59.5	4.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
2226	536966.52	4816484.01	339.93	0	N	A	-40.5	4.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2226	536966.52	4816484.01	339.93	0	E	A	-40.5	4.9	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2228	536966.52	4816484.01	339.93	1	D	A	59.5	4.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.6
2228	536966.52	4816484.01	339.93	1	N	A	-40.5	4.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.6
2228	536966.52	4816484.01	339.93	1	E	A	-40.5	4.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.6
2246	536767.41	4816568.32	341.10	0	D	A	59.5	5.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.1
2246	536767.41	4816568.32	341.10	0	N	A	-40.5	5.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
2246	536767.41	4816568.32	341.10	0	E	A	-40.5	5.6	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
2248	536767.92	4816564.84	341.12	0	D	A	59.5	5.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
2248	536767.92	4816564.84	341.12	0	N	A	-40.5	5.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
2248	536767.92	4816564.84	341.12	0	E	A	-40.5	5.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
2288	536801.68	4816484.96	341.28	0	D	A	59.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	8.1
2288	536801.68	4816484.96	341.28	0	N	A	-40.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
2288	536801.68	4816484.96	341.28	0	E	A	-40.5	1.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-91.9
2301	536899.35	4816642.94	339.82	0	D	A	59.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.5	0.0	0.0	-1.1
2301	536899.35	4816642.94	339.82	0	N	A	-40.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.5	0.0	0.0	-101.1
2301	536899.35	4816642.94	339.82	0	E	A	-40.5	7.8	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	8.5	0.0	0.0	-101.1
2303	536899.78	4816642.99	339.82	1	D	A	59.5	7.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-22.8
2303	536899.78	4816642.99	339.82	1	N	A	-40.5	7.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.8
2303	536899.78	4816642.99	339.82	1	E	A	-40.5	7.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-122.8
2306	536896.76	4816642.61	339.87	1	D	A	59.5	-0.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-30.5
2306	536896.76	4816642.61	339.87	1	N	A	-40.5	-0.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-130.5
2306	536896.76	4816642.61	339.87	1	E	A	-40.5	-0.6	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-130.5
2388	536872.81	4816641.92	339.96	0	D	A	59.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-0.5
2388	536872.81	4816641.92	339.96	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.5
2388	536872.81	4816641.92	339.96	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-100.5
2391	536874.24	4816642.02	339.95	1	D	A	59.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.5
2391	536874.24	4816642.02	339.95	1	N	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.5
2391	536874.24	4816642.02	339.95	1	E	A	-40.5	4.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.5
2394	536871.50	4816641.83	339.96	1	D	A	59.5	4.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.1
2394	536871.50	4816641.83	339.96	1	N	A	-40.5	4.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
2394	536871.50	4816641.83	339.96	1	E	A	-40.5	4.6	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
2397	536950.69	4816480.50	340.10	0	D	A	59.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
2397	536950.69	4816480.50	340.10	0	N	A	-40.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
2397	536950.69	4816480.50	340.10	0	E	A	-40.5	3.7	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
2398	536950.69	4816480.50	340.10	1	D	A	59.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-25.8
2398	536950.69	4816480.50	340.10	1	N	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2398	536950.69	4816480.50	340.10	1	E	A	-40.5	3.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-125.8
2463	536768.98	4816585.81	340.96	0	D	A	59.5	5.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	7.2
2463	536768.98	4816585.81	340.96	0	N	A	-40.5	5.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
2463	536768.98	4816585.81	340.96	0	E	A	-40.5	5.4	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
2486	536980.46	4816484.37	339.75	0	D	A	59.5	4.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.2
2486	536980.46	4816484.37	339.75	0	N	A	-40.5	4.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
2486	536980.46	4816484.37	339.75	0	E	A	-40.5	4.3	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.8
2489	536980.46	4816484.37	339.75	1	D	A	59.5	4.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.5

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2489	536980.46	4816484.37	339.75	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
2489	536980.46	4816484.37	339.75	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.5
2498	536868.00	4816641.46	339.97	0	D	A	59.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-1.7
2498	536868.00	4816641.46	339.97	0	N	A	-40.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2498	536868.00	4816641.46	339.97	0	E	A	-40.5	6.2	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2500	536865.53	4816641.13	339.98	0	D	A	59.5	-0.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-1.0
2500	536865.53	4816641.13	339.98	0	N	A	-40.5	-0.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-101.0
2500	536865.53	4816641.13	339.98	0	E	A	-40.5	-0.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-101.0
2503	536867.94	4816641.45	339.97	1	D	A	59.5	6.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.3
2503	536867.94	4816641.45	339.97	1	N	A	-40.5	6.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.3
2503	536867.94	4816641.45	339.97	1	E	A	-40.5	6.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.3
2505	536865.46	4816641.12	339.98	1	D	A	59.5	-1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-31.3
2505	536865.46	4816641.12	339.98	1	N	A	-40.5	-1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.3
2505	536865.46	4816641.12	339.98	1	E	A	-40.5	-1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-131.3
2508	536767.08	4816571.57	341.08	0	D	A	59.5	4.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.1
2508	536767.08	4816571.57	341.08	0	N	A	-40.5	4.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2508	536767.08	4816571.57	341.08	0	E	A	-40.5	4.7	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2526	536813.29	4816619.51	340.38	0	D	A	59.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
2526	536813.29	4816619.51	340.38	0	N	A	-40.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2526	536813.29	4816619.51	340.38	0	E	A	-40.5	6.1	0.0	0.0	0.0	60.4	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2595	536801.18	4816486.13	341.28	0	D	A	59.5	0.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
2595	536801.18	4816486.13	341.28	0	N	A	-40.5	0.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2595	536801.18	4816486.13	341.28	0	E	A	-40.5	0.5	0.0	0.0	0.0	55.2	0.8	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2598	536859.13	4816639.87	340.00	0	D	A	59.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
2598	536859.13	4816639.87	340.00	0	N	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
2598	536859.13	4816639.87	340.00	0	E	A	-40.5	6.5	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
2601	536859.13	4816639.87	340.00	1	D	A	59.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-23.5
2601	536859.13	4816639.87	340.00	1	N	A	-40.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.5
2601	536859.13	4816639.87	340.00	1	E	A	-40.5	6.5	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-123.5
2603	536890.49	4816641.99	339.91	0	D	A	59.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.9	0.0	0.0	-1.5
2603	536890.49	4816641.99	339.91	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.9	0.0	0.0	-101.5
2603	536890.49	4816641.99	339.91	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.9	0.0	0.0	-101.5
2606	536890.49	4816641.99	339.91	1	D	A	59.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.2
2606	536890.49	4816641.99	339.91	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.2
2606	536890.49	4816641.99	339.91	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.2
2615	536925.55	4816471.20	340.40	0	D	A	59.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
2615	536925.55	4816471.20	340.40	0	N	A	-40.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2615	536925.55	4816471.20	340.40	0	E	A	-40.5	1.8	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2617	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
2617	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2617	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	60.8	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2620	536925.55	4816471.20	340.40	1	D	A	59.5	1.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
2620	536925.55	4816471.20	340.40	1	N	A	-40.5	1.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2620	536925.55	4816471.20	340.40	1	E	A	-40.5	1.8	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
2622	536779.60	4816603.09	340.72	0	D	A	59.5	5.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	6.5
2622	536779.60	4816603.09	340.72	0	N	A	-40.5	5.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
2622	536779.60	4816603.09	340.72	0	E	A	-40.5	5.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-93.5
2631	536854.29	4816435.32	341.26	0	D	A	59.5	-2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
2631	536854.29	4816435.32	341.26	0	N	A	-40.5	-2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2631	536854.29	4816435.32	341.26	0	E	A	-40.5	-2.3	0.0	0.0	0.0	52.8	0.6	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2633	536854.29	4816435.32	341.26	1	D	A	59.5	-2.3	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
2633	536854.29	4816435.32	341.26	1	N	A	-40.5	-2.3	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2633	536854.29	4816435.32	341.26	1	E	A	-40.5	-2.3	0.0	0.0	0.0	53.6	0.7	-3.0	0.0	0.0	28.0	0.0	1.0	-123.1
2686	536767.60	4816580.49	341.01	0	D	A	59.5	4.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
2686	536767.60	4816580.49	341.01	0	N	A	-40.5	4.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2686	536767.60	4816580.49	341.01	0	E	A	-40.5	4.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
2695	536880.59	4816642.00	339.94	0	D	A	59.5	6.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-1.7
2695	536880.59	4816642.00	339.94	0	N	A	-40.5	6.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2695	536880.59	4816642.00	339.94	0	E	A	-40.5	6.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-101.7
2697	536880.59	4816642.00	339.94	1	D	A	59.5	6.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.5
2697	536880.59	4816642.00	339.94	1	N	A	-40.5	6.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
2697	536880.59	4816642.00	339.94	1	E	A	-40.5	6.2	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
2700	536767.16	4816577.93	341.04	0	D	A	59.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.2

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2700	536767.16	4816577.93	341.04	0	N	A	-40.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
2700	536767.16	4816577.93	341.04	0	E	A	-40.5	4.1	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.8
2703	536767.14	4816577.72	341.04	1	D	A	59.5	3.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	3.7
2703	536767.14	4816577.72	341.04	1	N	A	-40.5	3.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.3
2703	536767.14	4816577.72	341.04	1	E	A	-40.5	3.2	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.3
2730	536770.88	4816591.06	340.92	0	D	A	59.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
2730	536770.88	4816591.06	340.92	0	N	A	-40.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
2730	536770.88	4816591.06	340.92	0	E	A	-40.5	4.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
2764	536863.20	4816640.73	339.99	0	D	A	59.5	5.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
2764	536863.20	4816640.73	339.99	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2764	536863.20	4816640.73	339.99	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.1	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2767	536863.20	4816640.73	339.99	1	D	A	59.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-24.1
2767	536863.20	4816640.73	339.99	1	N	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
2767	536863.20	4816640.73	339.99	1	E	A	-40.5	5.9	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-124.1
2804	536773.65	4816596.21	340.86	0	D	A	59.5	1.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
2804	536773.65	4816596.21	340.86	0	N	A	-40.5	1.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2804	536773.65	4816596.21	340.86	0	E	A	-40.5	1.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
2806	536772.90	4816595.07	340.87	0	D	A	59.5	1.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
2806	536772.90	4816595.07	340.87	0	N	A	-40.5	1.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
2806	536772.90	4816595.07	340.87	0	E	A	-40.5	1.7	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
2824	536920.89	4816647.16	339.44	0	D	A	59.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-2.1
2824	536920.89	4816647.16	339.44	0	N	A	-40.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.1
2824	536920.89	4816647.16	339.44	0	E	A	-40.5	6.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	7.8	0.0	0.0	-102.1
2825	536920.89	4816647.17	339.44	1	D	A	59.5	6.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.9
2825	536920.89	4816647.17	339.44	1	N	A	-40.5	6.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.9
2825	536920.89	4816647.17	339.44	1	E	A	-40.5	6.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.9
2827	536918.80	4816646.67	339.49	1	D	A	59.5	-18.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-48.3
2827	536918.80	4816646.67	339.49	1	N	A	-40.5	-18.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-148.3
2827	536918.80	4816646.67	339.49	1	E	A	-40.5	-18.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-148.3
2846	536768.20	4816582.96	340.99	0	D	A	59.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
2846	536768.20	4816582.96	340.99	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2846	536768.20	4816582.96	340.99	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2898	536783.99	4816606.22	340.63	0	D	A	59.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	5.8
2898	536783.99	4816606.22	340.63	0	N	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
2898	536783.99	4816606.22	340.63	0	E	A	-40.5	4.6	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-94.2
2906	536959.28	4816482.79	340.01	0	D	A	59.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
2906	536959.28	4816482.79	340.01	0	N	A	-40.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2906	536959.28	4816482.79	340.01	0	E	A	-40.5	2.3	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2908	536959.28	4816482.79	340.01	1	D	A	59.5	2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.0
2908	536959.28	4816482.79	340.01	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2908	536959.28	4816482.79	340.01	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.0
2928	536855.32	4816638.72	340.02	0	D	A	59.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	5.6
2928	536855.32	4816638.72	340.02	0	N	A	-40.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
2928	536855.32	4816638.72	340.02	0	E	A	-40.5	5.5	0.0	0.0	0.0	61.0	1.4	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
2931	536855.32	4816638.72	340.02	1	D	A	59.5	5.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-24.4
2931	536855.32	4816638.72	340.02	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-124.4
2931	536855.32	4816638.72	340.02	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.7	-124.4
2940	536769.88	4816588.62	340.94	0	D	A	59.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.7
2940	536769.88	4816588.62	340.94	0	N	A	-40.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
2940	536769.88	4816588.62	340.94	0	E	A	-40.5	3.9	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
2955	536964.13	4816483.77	339.95	0	D	A	59.5	2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	5.7
2955	536964.13	4816483.77	339.95	0	N	A	-40.5	2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
2955	536964.13	4816483.77	339.95	0	E	A	-40.5	2.3	0.0	0.0	0.0	58.0	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.3
2958	536964.13	4816483.77	339.95	1	D	A	59.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.1
2958	536964.13	4816483.77	339.95	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.1
2958	536964.13	4816483.77	339.95	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.1
3005	536771.97	4816593.40	340.89	0	D	A	59.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.4
3005	536771.97	4816593.40	340.89	0	N	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
3005	536771.97	4816593.40	340.89	0	E	A	-40.5	3.7	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.6
3047	536774.65	4816597.69	340.83	0	D	A	59.5	3.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.1
3047	536774.65	4816597.69	340.83	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
3047	536774.65	4816597.69	340.83	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.9
3114	536776.07	4816599.48	340.80	0	D	A	59.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	5.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3114	536776.07	4816599.48	340.80	0	N	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3114	536776.07	4816599.48	340.80	0	E	A	-40.5	3.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3117	536767.00	4816575.72	341.05	0	D	A	59.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
3117	536767.00	4816575.72	341.05	0	N	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3117	536767.00	4816575.72	341.05	0	E	A	-40.5	2.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3120	536767.00	4816575.72	341.05	1	D	A	59.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	3.3
3120	536767.00	4816575.72	341.05	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.7
3120	536767.00	4816575.72	341.05	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-96.7
3128	536781.78	4816604.85	340.67	0	D	A	59.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
3128	536781.78	4816604.85	340.67	0	N	A	-40.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3128	536781.78	4816604.85	340.67	0	E	A	-40.5	3.7	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3131	536777.60	4816601.15	340.77	0	D	A	59.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
3131	536777.60	4816601.15	340.77	0	N	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3131	536777.60	4816601.15	340.77	0	E	A	-40.5	3.5	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3146	536885.32	4816641.86	339.92	0	D	A	59.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-3.1
3146	536885.32	4816641.86	339.92	0	N	A	-40.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.1
3146	536885.32	4816641.86	339.92	0	E	A	-40.5	4.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.1
3149	536885.32	4816641.86	339.92	1	D	A	59.5	4.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.8
3149	536885.32	4816641.86	339.92	1	N	A	-40.5	4.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
3149	536885.32	4816641.86	339.92	1	E	A	-40.5	4.9	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.8
3226	536877.02	4816642.10	339.95	0	D	A	59.5	4.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-3.2
3226	536877.02	4816642.10	339.95	0	N	A	-40.5	4.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.2
3226	536877.02	4816642.10	339.95	0	E	A	-40.5	4.7	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-103.2
3228	536877.02	4816642.10	339.95	1	D	A	59.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.0
3228	536877.02	4816642.10	339.95	1	N	A	-40.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
3228	536877.02	4816642.10	339.95	1	E	A	-40.5	4.7	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.0
3338	536774.69	4816544.95	341.05	0	D	A	59.5	0.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	4.3
3338	536774.69	4816544.95	341.05	0	N	A	-40.5	0.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
3338	536774.69	4816544.95	341.05	0	E	A	-40.5	0.8	0.0	0.0	0.0	57.9	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-95.7
3500	536766.98	4816573.72	341.06	0	D	A	59.5	1.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.7
3500	536766.98	4816573.72	341.06	0	N	A	-40.5	1.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3500	536766.98	4816573.72	341.06	0	E	A	-40.5	1.3	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3585	536810.75	4816618.37	340.40	0	D	A	59.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
3585	536810.75	4816618.37	340.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3585	536810.75	4816618.37	340.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	60.3	1.3	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3590	536893.75	4816642.26	339.91	0	D	A	59.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-5.6
3590	536893.75	4816642.26	339.91	0	N	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-105.6
3590	536893.75	4816642.26	339.91	0	E	A	-40.5	2.8	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.1	0.0	0.0	-105.6
3591	536893.75	4816642.26	339.91	1	D	A	59.5	2.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.1
3591	536893.75	4816642.26	339.91	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
3591	536893.75	4816642.26	339.91	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.1
3654	536895.52	4816642.44	339.88	0	D	A	59.5	2.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-6.3
3654	536895.52	4816642.44	339.88	0	N	A	-40.5	2.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-106.3
3654	536895.52	4816642.44	339.88	0	E	A	-40.5	2.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	8.2	0.0	0.0	-106.3
3655	536895.52	4816642.44	339.88	1	D	A	59.5	2.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.7
3655	536895.52	4816642.44	339.88	1	N	A	-40.5	2.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.7
3655	536895.52	4816642.44	339.88	1	E	A	-40.5	2.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.7
3706	536887.53	4816641.81	339.90	0	D	A	59.5	1.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-6.9
3706	536887.53	4816641.81	339.90	0	N	A	-40.5	1.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-106.9
3706	536887.53	4816641.81	339.90	0	E	A	-40.5	1.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-106.9
3707	536887.53	4816641.81	339.90	1	D	A	59.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.6
3707	536887.53	4816641.81	339.90	1	N	A	-40.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.6
3707	536887.53	4816641.81	339.90	1	E	A	-40.5	1.2	0.0	0.0	0.0	61.6	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.6
3771	536883.22	4816641.91	339.94	0	D	A	59.5	0.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-7.7
3771	536883.22	4816641.91	339.94	0	N	A	-40.5	0.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-107.7
3771	536883.22	4816641.91	339.94	0	E	A	-40.5	0.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	7.8	0.0	0.0	-107.7
3772	536883.22	4816641.91	339.94	1	D	A	59.5	0.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.4
3772	536883.22	4816641.91	339.94	1	N	A	-40.5	0.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
3772	536883.22	4816641.91	339.94	1	E	A	-40.5	0.3	0.0	0.0	0.0	61.5	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.4
3800	536779.12	4816535.20	341.05	0	D	A	59.5	-4.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-0.7
3800	536779.12	4816535.20	341.05	0	N	A	-40.5	-4.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
3800	536779.12	4816535.20	341.05	0	E	A	-40.5	-4.7	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-100.7
3819	536766.99	4816574.58	341.06	0	D	A	59.5	-4.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-2.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3819	536766.99	4816574.58	341.06	0	N	A	-40.5	-4.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
3819	536766.99	4816574.58	341.06	0	E	A	-40.5	-4.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-102.1
3821	536766.99	4816574.58	341.06	1	D	A	59.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-3.9
3821	536766.99	4816574.58	341.06	1	N	A	-40.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-103.9
3821	536766.99	4816574.58	341.06	1	E	A	-40.5	-4.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	1.6	-103.9

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
794	537014.55	4816421.48	338.77	0	D	A	59.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	16.8
794	537014.55	4816421.48	338.77	0	N	A	-40.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
794	537014.55	4816421.48	338.77	0	E	A	-40.5	13.7	0.0	0.0	0.0	58.3	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-83.2
1075	537009.05	4816421.12	338.76	0	D	A	59.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	13.7
1075	537009.05	4816421.12	338.76	0	N	A	-40.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1075	537009.05	4816421.12	338.76	0	E	A	-40.5	10.4	0.0	0.0	0.0	58.1	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.3
1089	537019.34	4816425.64	338.89	0	D	A	59.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	13.5
1089	537019.34	4816425.64	338.89	0	N	A	-40.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1089	537019.34	4816425.64	338.89	0	E	A	-40.5	10.6	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-86.5
1167	536995.92	4816415.15	338.66	0	D	A	59.5	9.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	13.2
1167	536995.92	4816415.15	338.66	0	N	A	-40.5	9.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1167	536995.92	4816415.15	338.66	0	E	A	-40.5	9.2	0.0	0.0	0.0	57.5	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-86.8
1169	536999.39	4816417.00	338.71	1	D	A	59.5	-3.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-33.3
1169	536999.39	4816417.00	338.71	1	N	A	-40.5	-3.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-133.3
1169	536999.39	4816417.00	338.71	1	E	A	-40.5	-3.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-133.3
1273	536979.10	4816407.30	338.44	0	D	A	59.5	7.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.8
1273	536979.10	4816407.30	338.44	0	N	A	-40.5	7.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1273	536979.10	4816407.30	338.44	0	E	A	-40.5	7.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.2
1276	536977.47	4816406.68	338.42	1	D	A	59.5	4.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.3
1276	536977.47	4816406.68	338.42	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
1276	536977.47	4816406.68	338.42	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.3
1283	536984.93	4816409.78	338.54	0	D	A	59.5	8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.7
1283	536984.93	4816409.78	338.54	0	N	A	-40.5	8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1283	536984.93	4816409.78	338.54	0	E	A	-40.5	8.1	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-87.3
1431	536990.42	4816396.62	338.40	0	D	A	59.5	7.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	12.0
1431	536990.42	4816396.62	338.40	0	N	A	-40.5	7.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1431	536990.42	4816396.62	338.40	0	E	A	-40.5	7.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-88.0
1433	536990.42	4816396.62	338.40	1	D	A	59.5	7.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-21.7
1433	536990.42	4816396.62	338.40	1	N	A	-40.5	7.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
1433	536990.42	4816396.62	338.40	1	E	A	-40.5	7.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-121.7
1506	536998.27	4816413.19	338.58	0	D	A	59.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	11.4
1506	536998.27	4816413.19	338.58	0	N	A	-40.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.6
1506	536998.27	4816413.19	338.58	0	E	A	-40.5	7.5	0.0	0.0	0.0	57.6	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-88.6
1585	536990.94	4816396.24	338.40	0	D	A	59.5	6.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	11.0
1585	536990.94	4816396.24	338.40	0	N	A	-40.5	6.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1585	536990.94	4816396.24	338.40	0	E	A	-40.5	6.5	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-89.0
1588	536990.94	4816396.24	338.40	1	D	A	59.5	6.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-22.7
1588	536990.94	4816396.24	338.40	1	N	A	-40.5	6.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1588	536990.94	4816396.24	338.40	1	E	A	-40.5	6.5	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-122.7
1672	537001.82	4816418.05	338.70	0	D	A	59.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.5
1672	537001.82	4816418.05	338.70	0	N	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1672	537001.82	4816418.05	338.70	0	E	A	-40.5	6.8	0.0	0.0	0.0	57.8	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.5
1674	536999.85	4816417.22	338.71	1	D	A	59.5	-2.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-33.1
1674	536999.85	4816417.22	338.71	1	N	A	-40.5	-2.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.1
1674	536999.85	4816417.22	338.71	1	E	A	-40.5	-2.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-133.1
1747	536994.44	4816410.17	338.49	0	D	A	59.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	10.3
1747	536994.44	4816410.17	338.49	0	N	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7
1747	536994.44	4816410.17	338.49	0	E	A	-40.5	6.2	0.0	0.0	0.0	57.4	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-89.7
1852	536988.29	4816400.52	338.40	0	D	A	59.5	5.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	9.8
1852	536988.29	4816400.52	338.40	0	N	A	-40.5	5.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
1852	536988.29	4816400.52	338.40	0	E	A	-40.5	5.2	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-90.2
1855	536987.91	4816401.13	338.40	1	D	A	59.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
1855	536987.91	4816401.13	338.40	1	N	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
1855	536987.91	4816401.13	338.40	1	E	A	-40.5	2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1858	536988.79	4816399.72	338.40	1	D	A	59.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
1858	536988.79	4816399.72	338.40	1	N	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1858	536988.79	4816399.72	338.40	1	E	A	-40.5	1.6	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
1874	537002.30	4816415.64	338.63	0	D	A	59.5	5.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.5
1874	537002.30	4816415.64	338.63	0	N	A	-40.5	5.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
1874	537002.30	4816415.64	338.63	0	E	A	-40.5	5.8	0.0	0.0	0.0	57.7	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
1901	536989.37	4816411.85	338.59	0	D	A	59.5	5.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	9.5
1901	536989.37	4816411.85	338.59	0	N	A	-40.5	5.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
1901	536989.37	4816411.85	338.59	0	E	A	-40.5	5.2	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-90.5
2026	536975.05	4816405.76	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	9.0
2026	536975.05	4816405.76	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.0
2026	536975.05	4816405.76	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.0
2028	536975.05	4816405.76	338.40	1	D	A	59.5	3.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.6
2028	536975.05	4816405.76	338.40	1	N	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.6
2028	536975.05	4816405.76	338.40	1	E	A	-40.5	3.9	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.6
2124	536980.54	4816405.26	338.40	0	D	A	59.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
2124	536980.54	4816405.26	338.40	0	N	A	-40.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2124	536980.54	4816405.26	338.40	0	E	A	-40.5	3.9	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2152	536975.96	4816405.40	338.40	0	D	A	59.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.7
2152	536975.96	4816405.40	338.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2152	536975.96	4816405.40	338.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	56.6	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.3
2155	536974.86	4816405.34	338.40	1	D	A	59.5	-9.6	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-39.1
2155	536974.86	4816405.34	338.40	1	N	A	-40.5	-9.6	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-139.1
2155	536974.86	4816405.34	338.40	1	E	A	-40.5	-9.6	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-139.1
2159	536982.93	4816404.80	338.40	0	D	A	59.5	3.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
2159	536982.93	4816404.80	338.40	0	N	A	-40.5	3.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2159	536982.93	4816404.80	338.40	0	E	A	-40.5	3.8	0.0	0.0	0.0	56.8	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2189	536972.46	4816404.76	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.5
2189	536972.46	4816404.76	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2189	536972.46	4816404.76	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.5
2191	536972.46	4816404.76	338.40	1	D	A	59.5	3.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-26.1
2191	536972.46	4816404.76	338.40	1	N	A	-40.5	3.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
2191	536972.46	4816404.76	338.40	1	E	A	-40.5	3.3	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-126.1
2224	536978.21	4816405.45	338.40	0	D	A	59.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.3
2224	536978.21	4816405.45	338.40	0	N	A	-40.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2224	536978.21	4816405.45	338.40	0	E	A	-40.5	3.4	0.0	0.0	0.0	56.7	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-91.7
2264	536972.38	4816404.65	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	8.0
2264	536972.38	4816404.65	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
2264	536972.38	4816404.65	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	56.4	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.0
2266	536972.38	4816404.65	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-26.6
2266	536972.38	4816404.65	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
2266	536972.38	4816404.65	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
2294	536986.64	4816402.68	338.40	0	D	A	59.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.9
2294	536986.64	4816402.68	338.40	0	N	A	-40.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
2294	536986.64	4816402.68	338.40	0	E	A	-40.5	3.3	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.1
2296	536986.45	4816402.86	338.40	1	D	A	59.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0
2296	536986.45	4816402.86	338.40	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2296	536986.45	4816402.86	338.40	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
2298	536987.22	4816402.11	338.40	1	D	A	59.5	-2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-32.0
2298	536987.22	4816402.11	338.40	1	N	A	-40.5	-2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2298	536987.22	4816402.11	338.40	1	E	A	-40.5	-2.8	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-132.0
2338	536984.99	4816403.97	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2338	536984.99	4816403.97	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2338	536984.99	4816403.97	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	56.9	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2341	536984.99	4816403.97	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2341	536984.99	4816403.97	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2341	536984.99	4816403.97	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.2	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2371	536989.92	4816401.32	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
2371	536989.92	4816401.32	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
2371	536989.92	4816401.32	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
2373	536989.92	4816401.32	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.0
2373	536989.92	4816401.32	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0
2373	536989.92	4816401.32	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.0

Line Source, ISO 9613, Name: "Teledyne DALSA - Truck Movements", ID: "Teledyne_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2400	536990.71	4816405.03	338.40	0	D	A	59.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	7.6
2400	536990.71	4816405.03	338.40	0	N	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
2400	536990.71	4816405.03	338.40	0	E	A	-40.5	3.2	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-92.4
2402	536990.71	4816405.03	338.40	1	D	A	59.5	3.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
2402	536990.71	4816405.03	338.40	1	N	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2402	536990.71	4816405.03	338.40	1	E	A	-40.5	3.2	0.0	0.0	0.0	61.3	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
2471	536990.04	4816399.31	338.40	0	D	A	59.5	2.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.4
2471	536990.04	4816399.31	338.40	0	N	A	-40.5	2.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
2471	536990.04	4816399.31	338.40	0	E	A	-40.5	2.9	0.0	0.0	0.0	57.0	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-92.6
2474	536990.04	4816399.31	338.40	1	D	A	59.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
2474	536990.04	4816399.31	338.40	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2474	536990.04	4816399.31	338.40	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2563	536974.06	4816405.12	338.40	0	D	A	59.5	1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
2563	536974.06	4816405.12	338.40	0	N	A	-40.5	1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2563	536974.06	4816405.12	338.40	0	E	A	-40.5	1.9	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2566	536974.06	4816405.12	338.40	1	D	A	59.5	1.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-27.6
2566	536974.06	4816405.12	338.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
2566	536974.06	4816405.12	338.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-127.6
2592	536992.41	4816408.02	338.42	0	D	A	59.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.9
2592	536992.41	4816408.02	338.42	0	N	A	-40.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
2592	536992.41	4816408.02	338.42	0	E	A	-40.5	2.6	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.1
2608	536990.16	4816403.21	338.40	0	D	A	59.5	2.4	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.8
2608	536990.16	4816403.21	338.40	0	N	A	-40.5	2.4	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2608	536990.16	4816403.21	338.40	0	E	A	-40.5	2.4	0.0	0.0	0.0	57.1	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.2
2611	536990.15	4816403.15	338.40	1	D	A	59.5	2.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
2611	536990.15	4816403.15	338.40	1	N	A	-40.5	2.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2611	536990.15	4816403.15	338.40	1	E	A	-40.5	2.1	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2613	536990.32	4816404.00	338.40	1	D	A	59.5	-9.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-38.6
2613	536990.32	4816404.00	338.40	1	N	A	-40.5	-9.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
2613	536990.32	4816404.00	338.40	1	E	A	-40.5	-9.4	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.0	-138.6
2855	536991.50	4816406.63	338.40	0	D	A	59.5	1.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.1
2855	536991.50	4816406.63	338.40	0	N	A	-40.5	1.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
2855	536991.50	4816406.63	338.40	0	E	A	-40.5	1.7	0.0	0.0	0.0	57.2	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-93.9
2858	536991.50	4816406.63	338.40	1	D	A	59.5	1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-27.6
2858	536991.50	4816406.63	338.40	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2858	536991.50	4816406.63	338.40	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.4	1.5	-3.0	0.0	0.0	28.0	0.0	1.0	-127.6
2876	536991.55	4816412.87	338.60	0	D	A	59.5	1.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
2876	536991.55	4816412.87	338.60	0	N	A	-40.5	1.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2876	536991.55	4816412.87	338.60	0	E	A	-40.5	1.8	0.0	0.0	0.0	57.3	1.0	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
3674	536973.68	4816405.23	338.40	0	D	A	59.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	1.9
3674	536973.68	4816405.23	338.40	0	N	A	-40.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
3674	536973.68	4816405.23	338.40	0	E	A	-40.5	-3.2	0.0	0.0	0.0	56.5	0.9	-3.0	0.0	0.0	0.0	0.0	0.0	-98.1
3675	536973.68	4816405.23	338.40	1	D	A	59.5	-3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-32.7
3675	536973.68	4816405.23	338.40	1	N	A	-40.5	-3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-132.7
3675	536973.68	4816405.23	338.40	1	E	A	-40.5	-3.2	0.0	0.0	0.0	61.3	1.4	-3.0	0.0	0.0	28.0	0.0	1.2	-132.7

Point Source, ISO 9613, Name: "Firehall Number 3 - Condenser Unit", ID: "Firehall_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
836	536845.26	4816228.12	344.03	0	D	A	60.0	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	23.0	0.0	0.0	-12.6
836	536845.26	4816228.12	344.03	0	N	A	60.0	0.0	-3.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	23.0	0.0	0.0	-15.6
836	536845.26	4816228.12	344.03	0	E	A	60.0	0.0	0.0	0.0	0.0	51.9	0.6	-3.0	0.0	0.0	23.0	0.0	0.0	-12.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
934	536422.07	4816241.32	352.69	0	D	A	62.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-14.2
934	536422.07	4816241.32	352.69	0	N	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-117.2
934	536422.07	4816241.32	352.69	0	E	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-117.2
939	536411.93	4816236.48	353.04	0	D	A	62.5	11.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-12.0
939	536411.93	4816236.48	353.04	0	N	A	-40.5	11.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-115.0
939	536411.93	4816236.48	353.04	0	E	A	-40.5	11.6	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-115.0
941	536415.57	4816238.21	352.92	1	D	A	62.5	13.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-15.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
941	536415.57	4816238.21	352.92	1	N	A	-40.5	13.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-118.6
941	536415.57	4816238.21	352.92	1	E	A	-40.5	13.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-118.6
1095	536369.74	4816216.31	354.56	0	D	A	62.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-21.3
1095	536369.74	4816216.31	354.56	0	N	A	-40.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.3
1095	536369.74	4816216.31	354.56	0	E	A	-40.5	3.4	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-124.3
1101	536360.24	4816211.77	354.73	0	D	A	62.5	12.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-12.1
1101	536360.24	4816211.77	354.73	0	N	A	-40.5	12.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-115.1
1101	536360.24	4816211.77	354.73	0	E	A	-40.5	12.8	0.0	0.0	0.0	64.3	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-115.1
1106	536351.13	4816207.42	354.88	0	D	A	62.5	1.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-23.9
1106	536351.13	4816207.42	354.88	0	N	A	-40.5	1.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.9
1106	536351.13	4816207.42	354.88	0	E	A	-40.5	1.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-126.9
1151	536368.60	4816210.12	354.57	0	D	A	62.5	13.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-13.6
1151	536368.60	4816210.12	354.57	0	N	A	-40.5	13.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-116.6
1151	536368.60	4816210.12	354.57	0	E	A	-40.5	13.1	0.0	0.0	0.0	64.2	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-116.6
1154	536377.88	4816214.60	354.41	0	D	A	62.5	-16.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-41.2
1154	536377.88	4816214.60	354.41	0	N	A	-40.5	-16.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-144.2
1154	536377.88	4816214.60	354.41	0	E	A	-40.5	-16.7	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-144.2
1221	536437.18	4816248.54	352.23	0	D	A	62.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-12.5
1221	536437.18	4816248.54	352.23	0	N	A	-40.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.6
1221	536437.18	4816248.54	352.23	0	E	A	-40.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.6
1229	536431.40	4816245.78	352.38	0	D	A	62.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-19.8
1229	536431.40	4816245.78	352.38	0	N	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-122.9
1229	536431.40	4816245.78	352.38	0	E	A	-40.5	3.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-122.9
1230	536441.28	4816250.50	352.13	1	D	A	62.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-26.3
1230	536441.28	4816250.50	352.13	1	N	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-129.3
1230	536441.28	4816250.50	352.13	1	E	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-129.3
1233	536435.50	4816247.74	352.27	1	D	A	62.5	10.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-18.1
1233	536435.50	4816247.74	352.27	1	N	A	-40.5	10.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-121.1
1233	536435.50	4816247.74	352.27	1	E	A	-40.5	10.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-121.1
1235	536436.24	4816248.09	352.25	1	D	A	62.5	11.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-18.0
1235	536436.24	4816248.09	352.25	1	N	A	-40.5	11.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.0
1235	536436.24	4816248.09	352.25	1	E	A	-40.5	11.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.0
1296	536456.21	4816257.37	351.66	0	D	A	62.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-12.0
1296	536456.21	4816257.37	351.66	0	N	A	-40.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.0
1296	536456.21	4816257.37	351.66	0	E	A	-40.5	10.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-115.0
1298	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-17.7
1298	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-120.7
1298	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-120.7
1300	536456.21	4816257.37	351.66	1	D	A	62.5	10.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-18.2
1300	536456.21	4816257.37	351.66	1	N	A	-40.5	10.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.2
1300	536456.21	4816257.37	351.66	1	E	A	-40.5	10.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.2
1348	536386.76	4816219.00	354.02	0	D	A	62.5	11.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-13.2
1348	536386.76	4816219.00	354.02	0	N	A	-40.5	11.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-116.2
1348	536386.76	4816219.00	354.02	0	E	A	-40.5	11.2	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-116.2
1352	536393.27	4816222.27	353.71	0	D	A	62.5	1.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-22.3
1352	536393.27	4816222.27	353.71	0	N	A	-40.5	1.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-125.3
1352	536393.27	4816222.27	353.71	0	E	A	-40.5	1.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-125.3
1381	536454.51	4816301.33	351.39	0	D	A	62.5	4.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-20.6
1381	536454.51	4816301.33	351.39	0	N	A	-40.5	4.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
1381	536454.51	4816301.33	351.39	0	E	A	-40.5	4.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.6
1387	536456.67	4816297.16	351.39	0	D	A	62.5	8.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-13.7
1387	536456.67	4816297.16	351.39	0	N	A	-40.5	8.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-116.7
1387	536456.67	4816297.16	351.39	0	E	A	-40.5	8.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-116.7
1390	536454.43	4816301.48	351.39	1	D	A	62.5	4.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-24.0
1390	536454.43	4816301.48	351.39	1	N	A	-40.5	4.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.0
1390	536454.43	4816301.48	351.39	1	E	A	-40.5	4.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.0
1392	536456.59	4816297.31	351.39	1	D	A	62.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-19.8
1392	536456.59	4816297.31	351.39	1	N	A	-40.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-122.8
1392	536456.59	4816297.31	351.39	1	E	A	-40.5	8.3	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-122.8
1394	536455.81	4816298.81	351.39	1	D	A	62.5	9.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-17.9
1394	536455.81	4816298.81	351.39	1	N	A	-40.5	9.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1394	536455.81	4816298.81	351.39	1	E	A	-40.5	9.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
1404	536438.39	4816270.45	352.55	0	D	A	62.5	10.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-12.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1404	536438.39	4816270.45	352.55	0	N	A	-40.5	10.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-115.4
1404	536438.39	4816270.45	352.55	0	E	A	-40.5	10.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-115.4
1406	536438.39	4816270.45	352.55	1	D	A	62.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-18.9
1406	536438.39	4816270.45	352.55	1	N	A	-40.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.9
1406	536438.39	4816270.45	352.55	1	E	A	-40.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.9
1418	536409.96	4816255.13	353.59	0	D	A	62.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-12.6
1418	536409.96	4816255.13	353.59	0	N	A	-40.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-115.6
1418	536409.96	4816255.13	353.59	0	E	A	-40.5	10.8	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-115.6
1421	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-18.4
1421	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-121.4
1421	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-121.4
1424	536409.96	4816255.13	353.59	1	D	A	62.5	10.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-19.0
1424	536409.96	4816255.13	353.59	1	N	A	-40.5	10.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-122.0
1424	536409.96	4816255.13	353.59	1	E	A	-40.5	10.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-122.0
1439	536387.50	4816224.80	354.12	0	D	A	62.5	11.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-13.2
1439	536387.50	4816224.80	354.12	0	N	A	-40.5	11.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-116.2
1439	536387.50	4816224.80	354.12	0	E	A	-40.5	11.1	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-116.2
1449	536428.31	4816265.09	352.94	0	D	A	62.5	10.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-12.9
1449	536428.31	4816265.09	352.94	0	N	A	-40.5	10.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-115.9
1449	536428.31	4816265.09	352.94	0	E	A	-40.5	10.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-115.9
1453	536426.00	4816263.87	353.02	1	D	A	62.5	6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-22.6
1453	536426.00	4816263.87	353.02	1	N	A	-40.5	6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
1453	536426.00	4816263.87	353.02	1	E	A	-40.5	6.8	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
1454	536430.41	4816266.19	352.86	1	D	A	62.5	7.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-22.0
1454	536430.41	4816266.19	352.86	1	N	A	-40.5	7.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.0
1454	536430.41	4816266.19	352.86	1	E	A	-40.5	7.2	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.0
1461	536460.76	4816288.21	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-12.7
1461	536460.76	4816288.21	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-115.7
1461	536460.76	4816288.21	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-115.7
1462	536458.73	4816291.44	351.40	1	D	A	62.5	-2.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.4
1462	536458.73	4816291.44	351.40	1	N	A	-40.5	-2.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
1462	536458.73	4816291.44	351.40	1	E	A	-40.5	-2.7	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.5
1464	536460.76	4816288.21	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-18.9
1464	536460.76	4816288.21	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.9
1464	536460.76	4816288.21	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-121.9
1475	536460.19	4816290.84	351.39	0	D	A	62.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-12.7
1475	536460.19	4816290.84	351.39	0	N	A	-40.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-115.7
1475	536460.19	4816290.84	351.39	0	E	A	-40.5	9.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-115.7
1478	536459.07	4816292.75	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-22.1
1478	536459.07	4816292.75	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1478	536459.07	4816292.75	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1480	536461.12	4816289.28	351.38	1	D	A	62.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
1480	536461.12	4816289.28	351.38	1	N	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1480	536461.12	4816289.28	351.38	1	E	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
1484	536460.19	4816290.84	351.39	1	D	A	62.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-19.0
1484	536460.19	4816290.84	351.39	1	N	A	-40.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.0
1484	536460.19	4816290.84	351.39	1	E	A	-40.5	9.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-122.0
1514	536445.72	4816252.62	352.02	0	D	A	62.5	9.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-13.5
1514	536445.72	4816252.62	352.02	0	N	A	-40.5	9.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-116.5
1514	536445.72	4816252.62	352.02	0	E	A	-40.5	9.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-116.5
1518	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-19.2
1518	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-122.2
1518	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-122.2
1519	536445.72	4816252.62	352.02	1	D	A	62.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-19.7
1519	536445.72	4816252.62	352.02	1	N	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-122.7
1519	536445.72	4816252.62	352.02	1	E	A	-40.5	9.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-122.7
1569	536464.98	4816282.01	351.38	0	D	A	62.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-13.4
1569	536464.98	4816282.01	351.38	0	N	A	-40.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-116.4
1569	536464.98	4816282.01	351.38	0	E	A	-40.5	8.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-116.4
1573	536464.98	4816282.01	351.38	1	D	A	62.5	8.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-20.0
1573	536464.98	4816282.01	351.38	1	N	A	-40.5	8.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.0
1573	536464.98	4816282.01	351.38	1	E	A	-40.5	8.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.0
1630	536399.12	4816230.35	353.55	0	D	A	62.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-15.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1630	536399.12	4816230.35	353.55	0	N	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-118.6
1630	536399.12	4816230.35	353.55	0	E	A	-40.5	8.3	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-118.6
1635	536394.67	4816228.23	353.77	0	D	A	62.5	4.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-19.2
1635	536394.67	4816228.23	353.77	0	N	A	-40.5	4.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.2
1635	536394.67	4816228.23	353.77	0	E	A	-40.5	4.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-122.2
1649	536452.68	4816276.71	351.90	0	D	A	62.5	8.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-14.1
1649	536452.68	4816276.71	351.90	0	N	A	-40.5	8.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-117.1
1649	536452.68	4816276.71	351.90	0	E	A	-40.5	8.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-117.1
1652	536456.03	4816277.74	351.72	0	D	A	62.5	-2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-24.3
1652	536456.03	4816277.74	351.72	0	N	A	-40.5	-2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-127.3
1652	536456.03	4816277.74	351.72	0	E	A	-40.5	-2.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-127.3
1657	536452.96	4816276.80	351.88	1	D	A	62.5	8.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-20.2
1657	536452.96	4816276.80	351.88	1	N	A	-40.5	8.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-123.2
1657	536452.96	4816276.80	351.88	1	E	A	-40.5	8.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-123.2
1759	536463.54	4816284.75	351.38	0	D	A	62.5	7.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-14.1
1759	536463.54	4816284.75	351.38	0	N	A	-40.5	7.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.1
1759	536463.54	4816284.75	351.38	0	E	A	-40.5	7.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	23.9	0.0	0.0	-117.1
1763	536463.54	4816284.75	351.38	1	D	A	62.5	7.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-20.7
1763	536463.54	4816284.75	351.38	1	N	A	-40.5	7.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.7
1763	536463.54	4816284.75	351.38	1	E	A	-40.5	7.7	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.7
1783	536420.79	4816261.06	353.20	0	D	A	62.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-14.6
1783	536420.79	4816261.06	353.20	0	N	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-117.6
1783	536420.79	4816261.06	353.20	0	E	A	-40.5	8.5	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-117.6
1786	536420.79	4816261.06	353.20	1	D	A	62.5	8.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-20.9
1786	536420.79	4816261.06	353.20	1	N	A	-40.5	8.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-124.0
1786	536420.79	4816261.06	353.20	1	E	A	-40.5	8.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-124.0
1814	536457.34	4816294.14	351.40	0	D	A	62.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-14.4
1814	536457.34	4816294.14	351.40	0	N	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-117.4
1814	536457.34	4816294.14	351.40	0	E	A	-40.5	7.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-117.4
1816	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.3
1816	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1816	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1819	536457.34	4816294.14	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-20.7
1819	536457.34	4816294.14	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
1819	536457.34	4816294.14	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.7
1821	536456.66	4816295.48	351.40	1	D	A	62.5	4.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.1
1821	536456.66	4816295.48	351.40	1	N	A	-40.5	4.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1821	536456.66	4816295.48	351.40	1	E	A	-40.5	4.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
1836	536455.21	4816298.28	351.40	0	D	A	62.5	5.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-16.1
1836	536455.21	4816298.28	351.40	0	N	A	-40.5	5.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-119.1
1836	536455.21	4816298.28	351.40	0	E	A	-40.5	5.7	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	23.8	0.0	0.0	-119.1
1840	536453.93	4816300.72	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-22.9
1840	536453.93	4816300.72	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
1840	536453.93	4816300.72	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-125.9
1843	536455.09	4816298.51	351.40	1	D	A	62.5	6.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-21.9
1843	536455.09	4816298.51	351.40	1	N	A	-40.5	6.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-124.9
1843	536455.09	4816298.51	351.40	1	E	A	-40.5	6.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-124.9
1846	536453.81	4816300.95	351.40	1	D	A	62.5	0.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-27.3
1846	536453.81	4816300.95	351.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-130.3
1846	536453.81	4816300.95	351.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-130.3
1849	536454.80	4816299.06	351.40	1	D	A	62.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-19.8
1849	536454.80	4816299.06	351.40	1	N	A	-40.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1849	536454.80	4816299.06	351.40	1	E	A	-40.5	7.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.8
1905	536343.48	4816203.77	354.95	0	D	A	62.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-15.5
1905	536343.48	4816203.77	354.95	0	N	A	-40.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-118.6
1905	536343.48	4816203.77	354.95	0	E	A	-40.5	9.7	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-118.6
1963	536451.43	4816305.82	351.43	0	D	A	62.5	6.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-18.9
1963	536451.43	4816305.82	351.43	0	N	A	-40.5	6.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-121.9
1963	536451.43	4816305.82	351.43	0	E	A	-40.5	6.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-121.9
1966	536452.10	4816304.32	351.42	1	D	A	62.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-26.1
1966	536452.10	4816304.32	351.42	1	N	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-129.1
1966	536452.10	4816304.32	351.42	1	E	A	-40.5	2.2	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-129.1
1968	536451.65	4816305.33	351.43	1	D	A	62.5	-2.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-30.8

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1968	536451.65	4816305.33	351.43	1	N	A	-40.5	-2.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-133.8
1968	536451.65	4816305.33	351.43	1	E	A	-40.5	-2.5	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-133.8
1979	536451.43	4816305.82	351.43	1	D	A	62.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.4
1979	536451.43	4816305.82	351.43	1	N	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
1979	536451.43	4816305.82	351.43	1	E	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2063	536404.82	4816239.58	353.45	0	D	A	62.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-22.4
2063	536404.82	4816239.58	353.45	0	N	A	-40.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-125.5
2063	536404.82	4816239.58	353.45	0	E	A	-40.5	1.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-125.5
2066	536403.58	4816242.33	353.61	0	D	A	62.5	6.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-16.9
2066	536403.58	4816242.33	353.61	0	N	A	-40.5	6.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-119.9
2066	536403.58	4816242.33	353.61	0	E	A	-40.5	6.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-119.9
2068	536403.85	4816241.73	353.57	1	D	A	62.5	7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-21.5
2068	536403.85	4816241.73	353.57	1	N	A	-40.5	7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-124.5
2068	536403.85	4816241.73	353.57	1	E	A	-40.5	7.8	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-124.5
2070	536402.70	4816244.29	353.72	1	D	A	62.5	-3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-33.8
2070	536402.70	4816244.29	353.72	1	N	A	-40.5	-3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-136.8
2070	536402.70	4816244.29	353.72	1	E	A	-40.5	-3.9	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-136.8
2110	536348.69	4816200.62	354.86	0	D	A	62.5	8.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-18.2
2110	536348.69	4816200.62	354.86	0	N	A	-40.5	8.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-121.3
2110	536348.69	4816200.62	354.86	0	E	A	-40.5	8.9	0.0	0.0	0.0	64.6	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-121.3
2166	536449.82	4816309.56	351.46	0	D	A	62.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-20.8
2166	536449.82	4816309.56	351.46	0	N	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-123.8
2166	536449.82	4816309.56	351.46	0	E	A	-40.5	5.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-123.8
2168	536449.03	4816311.50	351.47	0	D	A	62.5	-0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-26.0
2168	536449.03	4816311.50	351.47	0	N	A	-40.5	-0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.0
2168	536449.03	4816311.50	351.47	0	E	A	-40.5	-0.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-129.0
2171	536449.63	4816310.01	351.46	1	D	A	62.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.2
2171	536449.63	4816310.01	351.46	1	N	A	-40.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2171	536449.63	4816310.01	351.46	1	E	A	-40.5	6.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.2
2194	536465.37	4816280.61	351.38	0	D	A	62.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-16.7
2194	536465.37	4816280.61	351.38	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.7
2194	536465.37	4816280.61	351.38	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.7
2197	536466.02	4816278.81	351.38	0	D	A	62.5	-2.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-23.9
2197	536466.02	4816278.81	351.38	0	N	A	-40.5	-2.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-126.9
2197	536466.02	4816278.81	351.38	0	E	A	-40.5	-2.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-126.9
2200	536465.48	4816280.33	351.38	1	D	A	62.5	5.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-22.5
2200	536465.48	4816280.33	351.38	1	N	A	-40.5	5.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-125.5
2200	536465.48	4816280.33	351.38	1	E	A	-40.5	5.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-125.5
2204	536449.12	4816311.50	351.47	0	D	A	62.5	0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-25.7
2204	536449.12	4816311.50	351.47	0	N	A	-40.5	0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-128.7
2204	536449.12	4816311.50	351.47	0	E	A	-40.5	0.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-128.7
2207	536450.17	4816309.75	351.44	0	D	A	62.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-21.1
2207	536450.17	4816309.75	351.44	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-124.1
2207	536450.17	4816309.75	351.44	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-124.1
2209	536449.90	4816310.20	351.45	1	D	A	62.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-21.3
2209	536449.90	4816310.20	351.45	1	N	A	-40.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
2209	536449.90	4816310.20	351.45	1	E	A	-40.5	6.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
2236	536466.72	4816276.79	351.39	0	D	A	62.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-16.1
2236	536466.72	4816276.79	351.39	0	N	A	-40.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.1
2236	536466.72	4816276.79	351.39	0	E	A	-40.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.1
2238	536466.72	4816276.79	351.39	1	D	A	62.5	5.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-22.6
2238	536466.72	4816276.79	351.39	1	N	A	-40.5	5.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
2238	536466.72	4816276.79	351.39	1	E	A	-40.5	5.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-125.6
2350	536396.16	4816223.72	353.57	0	D	A	62.5	6.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-17.2
2350	536396.16	4816223.72	353.57	0	N	A	-40.5	6.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-120.2
2350	536396.16	4816223.72	353.57	0	E	A	-40.5	6.9	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-120.2
2426	536468.00	4816278.10	351.37	0	D	A	62.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-16.9
2426	536468.00	4816278.10	351.37	0	N	A	-40.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.9
2426	536468.00	4816278.10	351.37	0	E	A	-40.5	4.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-119.9
2429	536467.04	4816279.27	351.37	0	D	A	62.5	-19.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-41.3
2429	536467.04	4816279.27	351.37	0	N	A	-40.5	-19.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-144.3
2429	536467.04	4816279.27	351.37	0	E	A	-40.5	-19.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-144.3
2432	536468.00	4816278.10	351.37	1	D	A	62.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.4

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2432	536468.00	4816278.10	351.37	1	N	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
2432	536468.00	4816278.10	351.37	1	E	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
2452	536374.13	4816218.41	354.55	0	D	A	62.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-17.5
2452	536374.13	4816218.41	354.55	0	N	A	-40.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-120.5
2452	536374.13	4816218.41	354.55	0	E	A	-40.5	7.1	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-120.5
2466	536448.09	4816275.11	352.14	0	D	A	62.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-17.0
2466	536448.09	4816275.11	352.14	0	N	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-120.1
2466	536448.09	4816275.11	352.14	0	E	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-120.1
2468	536448.09	4816275.11	352.14	1	D	A	62.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-23.6
2468	536448.09	4816275.11	352.14	1	N	A	-40.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.6
2468	536448.09	4816275.11	352.14	1	E	A	-40.5	5.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.6
2477	536467.91	4816272.95	351.39	0	D	A	62.5	3.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-18.6
2477	536467.91	4816272.95	351.39	0	N	A	-40.5	3.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-121.6
2477	536467.91	4816272.95	351.39	0	E	A	-40.5	3.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-121.6
2479	536468.31	4816271.53	351.38	0	D	A	62.5	-0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-22.3
2479	536468.31	4816271.53	351.38	0	N	A	-40.5	-0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.3
2479	536468.31	4816271.53	351.38	0	E	A	-40.5	-0.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.3
2483	536468.03	4816272.53	351.38	1	D	A	62.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.5
2483	536468.03	4816272.53	351.38	1	N	A	-40.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.5
2483	536468.03	4816272.53	351.38	1	E	A	-40.5	4.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.5
2511	536356.96	4816204.53	354.77	0	D	A	62.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-19.8
2511	536356.96	4816204.53	354.77	0	N	A	-40.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-122.8
2511	536356.96	4816204.53	354.77	0	E	A	-40.5	7.2	0.0	0.0	0.0	64.4	1.9	-3.0	0.0	0.0	26.2	0.0	0.0	-122.8
2521	536467.48	4816277.39	351.38	0	D	A	62.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-17.3
2521	536467.48	4816277.39	351.38	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.3
2521	536467.48	4816277.39	351.38	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.3
2523	536467.48	4816277.39	351.38	1	D	A	62.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.8
2523	536467.48	4816277.39	351.38	1	N	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.8
2523	536467.48	4816277.39	351.38	1	E	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-126.8
2548	536444.37	4816273.51	352.32	0	D	A	62.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-17.4
2548	536444.37	4816273.51	352.32	0	N	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-120.4
2548	536444.37	4816273.51	352.32	0	E	A	-40.5	5.0	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-120.4
2551	536444.37	4816273.51	352.32	1	D	A	62.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-23.9
2551	536444.37	4816273.51	352.32	1	N	A	-40.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.9
2551	536444.37	4816273.51	352.32	1	E	A	-40.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.9
2559	536379.69	4816221.07	354.50	0	D	A	62.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-17.9
2559	536379.69	4816221.07	354.50	0	N	A	-40.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-120.9
2559	536379.69	4816221.07	354.50	0	E	A	-40.5	6.5	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-120.9
2588	536457.69	4816278.11	351.64	0	D	A	62.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-17.5
2588	536457.69	4816278.11	351.64	0	N	A	-40.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.5
2588	536457.69	4816278.11	351.64	0	E	A	-40.5	4.5	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.5
2590	536457.69	4816278.11	351.64	1	D	A	62.5	4.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-24.0
2590	536457.69	4816278.11	351.64	1	N	A	-40.5	4.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
2590	536457.69	4816278.11	351.64	1	E	A	-40.5	4.5	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.0
2626	536465.08	4816278.38	351.39	0	D	A	62.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-17.7
2626	536465.08	4816278.38	351.39	0	N	A	-40.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.7
2626	536465.08	4816278.38	351.39	0	E	A	-40.5	4.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-120.7
2628	536465.08	4816278.38	351.39	1	D	A	62.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.2
2628	536465.08	4816278.38	351.39	1	N	A	-40.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.2
2628	536465.08	4816278.38	351.39	1	E	A	-40.5	4.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.2
2649	536403.80	4816232.59	353.33	0	D	A	62.5	5.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-18.2
2649	536403.80	4816232.59	353.33	0	N	A	-40.5	5.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-121.2
2649	536403.80	4816232.59	353.33	0	E	A	-40.5	5.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-121.2
2663	536427.11	4816243.73	352.52	0	D	A	62.5	4.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-18.2
2663	536427.11	4816243.73	352.52	0	N	A	-40.5	4.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-121.2
2663	536427.11	4816243.73	352.52	0	E	A	-40.5	4.9	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-121.2
2665	536427.11	4816243.73	352.52	1	D	A	62.5	4.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-23.8
2665	536427.11	4816243.73	352.52	1	N	A	-40.5	4.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.8
2665	536427.11	4816243.73	352.52	1	E	A	-40.5	4.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-126.8
2689	536460.30	4816278.45	351.51	0	D	A	62.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-18.0
2689	536460.30	4816278.45	351.51	0	N	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-121.0
2689	536460.30	4816278.45	351.51	0	E	A	-40.5	3.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-121.0
2692	536460.30	4816278.45	351.51	1	D	A	62.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.5

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2692	536460.30	4816278.45	351.51	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.5
2692	536460.30	4816278.45	351.51	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.5
2881	536452.98	4816302.53	351.41	0	D	A	62.5	3.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-21.7
2881	536452.98	4816302.53	351.41	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
2881	536452.98	4816302.53	351.41	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-124.7
2883	536452.98	4816302.53	351.41	1	D	A	62.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-24.6
2883	536452.98	4816302.53	351.41	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.6
2883	536452.98	4816302.53	351.41	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.6
2886	536453.20	4816302.10	351.40	1	D	A	62.5	1.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2886	536453.20	4816302.10	351.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2886	536453.20	4816302.10	351.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2888	536452.66	4816303.14	351.41	1	D	A	62.5	-0.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
2888	536452.66	4816303.14	351.41	1	N	A	-40.5	-0.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2888	536452.66	4816303.14	351.41	1	E	A	-40.5	-0.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.4
2912	536468.54	4816270.03	351.38	0	D	A	62.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-18.5
2912	536468.54	4816270.03	351.38	0	N	A	-40.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-121.5
2912	536468.54	4816270.03	351.38	0	E	A	-40.5	3.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-121.5
2915	536468.54	4816270.03	351.38	1	D	A	62.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.9
2915	536468.54	4816270.03	351.38	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.9
2915	536468.54	4816270.03	351.38	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.9
2920	536452.33	4816305.68	351.40	0	D	A	62.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-22.2
2920	536452.33	4816305.68	351.40	0	N	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.2
2920	536452.33	4816305.68	351.40	0	E	A	-40.5	3.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.2
2923	536452.63	4816305.07	351.40	1	D	A	62.5	-0.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-28.6
2923	536452.63	4816305.07	351.40	1	N	A	-40.5	-0.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
2923	536452.63	4816305.07	351.40	1	E	A	-40.5	-0.3	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
2925	536452.33	4816305.68	351.40	1	D	A	62.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.8
2925	536452.33	4816305.68	351.40	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2925	536452.33	4816305.68	351.40	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.8
2945	536453.34	4816303.64	351.39	0	D	A	62.5	3.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-21.9
2945	536453.34	4816303.64	351.39	0	N	A	-40.5	3.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-124.9
2945	536453.34	4816303.64	351.39	0	E	A	-40.5	3.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-124.9
2947	536453.34	4816303.64	351.39	1	D	A	62.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-24.8
2947	536453.34	4816303.64	351.39	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.8
2947	536453.34	4816303.64	351.39	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-127.8
2950	536453.16	4816304.01	351.39	1	D	A	62.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2950	536453.16	4816304.01	351.39	1	N	A	-40.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2950	536453.16	4816304.01	351.39	1	E	A	-40.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2953	536453.65	4816303.02	351.39	1	D	A	62.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
2953	536453.65	4816303.02	351.39	1	N	A	-40.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
2953	536453.65	4816303.02	351.39	1	E	A	-40.5	-0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-131.2
2963	536402.19	4816245.89	353.78	0	D	A	62.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-18.9
2963	536402.19	4816245.89	353.78	0	N	A	-40.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-121.9
2963	536402.19	4816245.89	353.78	0	E	A	-40.5	4.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-121.9
2965	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-24.7
2965	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
2965	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-127.7
2968	536402.19	4816245.89	353.78	1	D	A	62.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-25.2
2968	536402.19	4816245.89	353.78	1	N	A	-40.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
2968	536402.19	4816245.89	353.78	1	E	A	-40.5	4.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
2981	536404.33	4816229.46	353.24	0	D	A	62.5	4.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-19.1
2981	536404.33	4816229.46	353.24	0	N	A	-40.5	4.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-122.2
2981	536404.33	4816229.46	353.24	0	E	A	-40.5	4.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-122.2
2997	536462.05	4816259.96	351.43	0	D	A	62.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-19.0
2997	536462.05	4816259.96	351.43	0	N	A	-40.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.0
2997	536462.05	4816259.96	351.43	0	E	A	-40.5	3.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.0
2999	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-24.8
2999	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
2999	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-127.8
3002	536462.05	4816259.96	351.43	1	D	A	62.5	3.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-25.3
3002	536462.05	4816259.96	351.43	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3
3002	536462.05	4816259.96	351.43	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3
3066	536450.34	4816254.83	351.90	0	D	A	62.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-19.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3066	536450.34	4816254.83	351.90	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
3066	536450.34	4816254.83	351.90	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
3068	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-25.1
3068	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-128.1
3068	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-128.1
3071	536450.34	4816254.83	351.90	1	D	A	62.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.6
3071	536450.34	4816254.83	351.90	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.6
3071	536450.34	4816254.83	351.90	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.6
3075	536451.39	4816307.58	351.41	0	D	A	62.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-22.9
3075	536451.39	4816307.58	351.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
3075	536451.39	4816307.58	351.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-125.9
3078	536451.39	4816307.58	351.41	1	D	A	62.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.4
3078	536451.39	4816307.58	351.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3078	536451.39	4816307.58	351.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
3112	536343.73	4816197.95	354.92	0	D	A	62.5	5.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-21.8
3112	536343.73	4816197.95	354.92	0	N	A	-40.5	5.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.8
3112	536343.73	4816197.95	354.92	0	E	A	-40.5	5.5	0.0	0.0	0.0	64.7	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-124.8
3123	536466.00	4816262.46	351.39	0	D	A	62.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-19.4
3123	536466.00	4816262.46	351.39	0	N	A	-40.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
3123	536466.00	4816262.46	351.39	0	E	A	-40.5	2.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.4
3126	536466.00	4816262.46	351.39	1	D	A	62.5	2.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-25.7
3126	536466.00	4816262.46	351.39	1	N	A	-40.5	2.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
3126	536466.00	4816262.46	351.39	1	E	A	-40.5	2.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
3192	536464.58	4816261.40	351.40	0	D	A	62.5	2.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-19.6
3192	536464.58	4816261.40	351.40	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.6
3192	536464.58	4816261.40	351.40	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-122.6
3194	536464.58	4816261.40	351.40	1	D	A	62.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-25.9
3194	536464.58	4816261.40	351.40	1	N	A	-40.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.9
3194	536464.58	4816261.40	351.40	1	E	A	-40.5	2.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.9
3233	536400.70	4816226.18	353.36	0	D	A	62.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-19.9
3233	536400.70	4816226.18	353.36	0	N	A	-40.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.0
3233	536400.70	4816226.18	353.36	0	E	A	-40.5	3.9	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.0
3252	536349.11	4816206.46	354.90	0	D	A	62.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-20.1
3252	536349.11	4816206.46	354.90	0	N	A	-40.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-123.2
3252	536349.11	4816206.46	354.90	0	E	A	-40.5	5.0	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	24.1	0.0	0.0	-123.2
3274	536401.86	4816248.46	353.86	0	D	A	62.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-20.0
3274	536401.86	4816248.46	353.86	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.0
3274	536401.86	4816248.46	353.86	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.0
3277	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.8
3277	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.8
3277	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.8
3280	536401.86	4816248.46	353.86	1	D	A	62.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-26.3
3280	536401.86	4816248.46	353.86	1	N	A	-40.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
3280	536401.86	4816248.46	353.86	1	E	A	-40.5	3.6	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
3305	536402.65	4816227.52	353.28	0	D	A	62.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-20.3
3305	536402.65	4816227.52	353.28	0	N	A	-40.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.3
3305	536402.65	4816227.52	353.28	0	E	A	-40.5	3.6	0.0	0.0	0.0	63.4	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-123.3
3318	536405.61	4816237.62	353.36	0	D	A	62.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-22.0
3318	536405.61	4816237.62	353.36	0	N	A	-40.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-125.0
3318	536405.61	4816237.62	353.36	0	E	A	-40.5	1.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-125.0
3321	536405.22	4816238.65	353.40	0	D	A	62.5	-1.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-25.1
3321	536405.22	4816238.65	353.40	0	N	A	-40.5	-1.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-128.1
3321	536405.22	4816238.65	353.40	0	E	A	-40.5	-1.5	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-128.1
3324	536405.48	4816237.96	353.37	1	D	A	62.5	3.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-25.9
3324	536405.48	4816237.96	353.37	1	N	A	-40.5	3.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.9
3324	536405.48	4816237.96	353.37	1	E	A	-40.5	3.4	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-128.9
3330	536403.79	4816251.75	353.82	0	D	A	62.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-20.3
3330	536403.79	4816251.75	353.82	0	N	A	-40.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.3
3330	536403.79	4816251.75	353.82	0	E	A	-40.5	3.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.3
3333	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-26.0
3333	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.0
3333	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.0
3335	536403.79	4816251.75	353.82	1	D	A	62.5	3.3	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-26.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3335	536403.79	4816251.75	353.82	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
3335	536403.79	4816251.75	353.82	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
3343	536468.63	4816268.23	351.37	0	D	A	62.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-20.1
3343	536468.63	4816268.23	351.37	0	N	A	-40.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.2
3343	536468.63	4816268.23	351.37	0	E	A	-40.5	1.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-123.2
3346	536468.63	4816268.23	351.37	1	D	A	62.5	1.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-26.5
3346	536468.63	4816268.23	351.37	1	N	A	-40.5	1.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.5
3346	536468.63	4816268.23	351.37	1	E	A	-40.5	1.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.5
3382	536353.40	4816202.85	354.82	0	D	A	62.5	4.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-22.9
3382	536353.40	4816202.85	354.82	0	N	A	-40.5	4.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-125.9
3382	536353.40	4816202.85	354.82	0	E	A	-40.5	4.2	0.0	0.0	0.0	64.5	2.0	-3.0	0.0	0.0	26.1	0.0	0.0	-125.9
3388	536379.89	4816215.57	354.35	0	D	A	62.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-20.8
3388	536379.89	4816215.57	354.35	0	N	A	-40.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-123.9
3388	536379.89	4816215.57	354.35	0	E	A	-40.5	3.7	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-123.9
3448	536405.48	4816231.60	353.22	0	D	A	62.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-20.8
3448	536405.48	4816231.60	353.22	0	N	A	-40.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-123.8
3448	536405.48	4816231.60	353.22	0	E	A	-40.5	2.9	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-123.8
3503	536402.40	4816250.42	353.86	0	D	A	62.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-20.9
3503	536402.40	4816250.42	353.86	0	N	A	-40.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.9
3503	536402.40	4816250.42	353.86	0	E	A	-40.5	2.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.0	0.0	0.0	-123.9
3504	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-26.7
3504	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.7
3504	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-129.7
3506	536402.40	4816250.42	353.86	1	D	A	62.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-27.2
3506	536402.40	4816250.42	353.86	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-130.2
3506	536402.40	4816250.42	353.86	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.8	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-130.2
3513	536406.36	4816234.93	353.26	0	D	A	62.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-21.1
3513	536406.36	4816234.93	353.26	0	N	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.1
3513	536406.36	4816234.93	353.26	0	E	A	-40.5	2.6	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.1
3517	536463.17	4816278.53	351.40	0	D	A	62.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-20.8
3517	536463.17	4816278.53	351.40	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-123.8
3517	536463.17	4816278.53	351.40	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-123.8
3519	536463.17	4816278.53	351.40	1	D	A	62.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.3
3519	536463.17	4816278.53	351.40	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.3
3519	536463.17	4816278.53	351.40	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.3
3521	536469.66	4816275.82	351.37	0	D	A	62.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-20.8
3521	536469.66	4816275.82	351.37	0	N	A	-40.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-123.8
3521	536469.66	4816275.82	351.37	0	E	A	-40.5	0.9	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-123.8
3523	536469.66	4816275.82	351.37	1	D	A	62.5	0.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.3
3523	536469.66	4816275.82	351.37	1	N	A	-40.5	0.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.3
3523	536469.66	4816275.82	351.37	1	E	A	-40.5	0.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.3
3542	536469.79	4816275.91	351.36	0	D	A	62.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-21.1
3542	536469.79	4816275.91	351.36	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.1
3542	536469.79	4816275.91	351.36	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.1
3545	536469.79	4816275.91	351.36	1	D	A	62.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.6
3545	536469.79	4816275.91	351.36	1	N	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3545	536469.79	4816275.91	351.36	1	E	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3564	536467.47	4816274.50	351.39	0	D	A	62.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-21.2
3564	536467.47	4816274.50	351.39	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.2
3564	536467.47	4816274.50	351.39	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.2
3565	536467.47	4816274.50	351.39	1	D	A	62.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3565	536467.47	4816274.50	351.39	1	N	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3565	536467.47	4816274.50	351.39	1	E	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3573	536467.04	4816263.51	351.38	0	D	A	62.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.4
3573	536467.04	4816263.51	351.38	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.4
3573	536467.04	4816263.51	351.38	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.4
3574	536467.04	4816263.51	351.38	1	D	A	62.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3574	536467.04	4816263.51	351.38	1	N	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3574	536467.04	4816263.51	351.38	1	E	A	-40.5	0.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3577	536406.13	4816233.27	353.23	0	D	A	62.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-21.6
3577	536406.13	4816233.27	353.23	0	N	A	-40.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.6
3577	536406.13	4816233.27	353.23	0	E	A	-40.5	2.1	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-124.6
3578	536468.48	4816266.94	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.3

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3578	536468.48	4816266.94	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.3
3578	536468.48	4816266.94	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.3
3580	536468.48	4816266.94	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3580	536468.48	4816266.94	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3580	536468.48	4816266.94	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3581	536468.21	4816265.85	351.37	0	D	A	62.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-21.4
3581	536468.21	4816265.85	351.37	0	N	A	-40.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.4
3581	536468.21	4816265.85	351.37	0	E	A	-40.5	0.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-124.4
3583	536468.21	4816265.85	351.37	1	D	A	62.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3583	536468.21	4816265.85	351.37	1	N	A	-40.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3583	536468.21	4816265.85	351.37	1	E	A	-40.5	0.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-130.7
3587	536433.30	4816267.71	352.75	0	D	A	62.5	1.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-21.6
3587	536433.30	4816267.71	352.75	0	N	A	-40.5	1.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-124.6
3587	536433.30	4816267.71	352.75	0	E	A	-40.5	1.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-124.6
3589	536433.30	4816267.71	352.75	1	D	A	62.5	1.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.0
3589	536433.30	4816267.71	352.75	1	N	A	-40.5	1.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.0
3589	536433.30	4816267.71	352.75	1	E	A	-40.5	1.1	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.0
3612	536398.99	4816225.19	353.43	0	D	A	62.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-22.3
3612	536398.99	4816225.19	353.43	0	N	A	-40.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-125.3
3612	536398.99	4816225.19	353.43	0	E	A	-40.5	1.7	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	24.2	0.0	0.0	-125.3
3614	536462.03	4816278.51	351.42	0	D	A	62.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-21.9
3614	536462.03	4816278.51	351.42	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.9
3614	536462.03	4816278.51	351.42	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-124.9
3616	536462.03	4816278.51	351.42	1	D	A	62.5	0.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-28.4
3616	536462.03	4816278.51	351.42	1	N	A	-40.5	0.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3616	536462.03	4816278.51	351.42	1	E	A	-40.5	0.0	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3617	536463.38	4816260.70	351.40	0	D	A	62.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-22.0
3617	536463.38	4816260.70	351.40	0	N	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.0
3617	536463.38	4816260.70	351.40	0	E	A	-40.5	0.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.0
3619	536463.38	4816260.70	351.40	1	D	A	62.5	0.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-28.3
3619	536463.38	4816260.70	351.40	1	N	A	-40.5	0.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.3
3619	536463.38	4816260.70	351.40	1	E	A	-40.5	0.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.3
3626	536417.12	4816259.05	353.33	0	D	A	62.5	1.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-22.1
3626	536417.12	4816259.05	353.33	0	N	A	-40.5	1.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-125.1
3626	536417.12	4816259.05	353.33	0	E	A	-40.5	1.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-125.1
3627	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-27.9
3627	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.9
3627	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-130.9
3628	536417.12	4816259.05	353.33	1	D	A	62.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-28.5
3628	536417.12	4816259.05	353.33	1	N	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-131.5
3628	536417.12	4816259.05	353.33	1	E	A	-40.5	1.1	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-131.5
3644	536429.04	4816244.65	352.45	0	D	A	62.5	0.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-22.4
3644	536429.04	4816244.65	352.45	0	N	A	-40.5	0.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.4
3644	536429.04	4816244.65	352.45	0	E	A	-40.5	0.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-125.4
3645	536429.04	4816244.65	352.45	1	D	A	62.5	0.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-28.1
3645	536429.04	4816244.65	352.45	1	N	A	-40.5	0.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.1
3645	536429.04	4816244.65	352.45	1	E	A	-40.5	0.7	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.1
3669	536415.68	4816258.26	353.38	0	D	A	62.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-22.8
3669	536415.68	4816258.26	353.38	0	N	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-125.8
3669	536415.68	4816258.26	353.38	0	E	A	-40.5	0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-125.8
3671	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-28.6
3671	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
3671	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
3673	536415.68	4816258.26	353.38	1	D	A	62.5	0.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-29.1
3673	536415.68	4816258.26	353.38	1	N	A	-40.5	0.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-132.1
3673	536415.68	4816258.26	353.38	1	E	A	-40.5	0.4	0.0	0.0	0.0	63.6	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-132.1
3677	536377.04	4816219.80	354.59	0	D	A	62.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-23.1
3677	536377.04	4816219.80	354.59	0	N	A	-40.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-126.1
3677	536377.04	4816219.80	354.59	0	E	A	-40.5	1.4	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-126.1
3680	536406.09	4816236.39	353.31	0	D	A	62.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-23.0
3680	536406.09	4816236.39	353.31	0	N	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-126.0
3680	536406.09	4816236.39	353.31	0	E	A	-40.5	0.7	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	24.1	0.0	0.0	-126.0
3681	536406.09	4816236.39	353.31	1	D	A	62.5	0.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-28.6

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3681	536406.09	4816236.39	353.31	1	N	A	-40.5	0.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
3681	536406.09	4816236.39	353.31	1	E	A	-40.5	0.7	0.0	0.0	0.0	63.7	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-131.6
3691	536467.91	4816264.94	351.37	0	D	A	62.5	-1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-22.9
3691	536467.91	4816264.94	351.37	0	N	A	-40.5	-1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.9
3691	536467.91	4816264.94	351.37	0	E	A	-40.5	-1.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-125.9
3692	536467.91	4816264.94	351.37	1	D	A	62.5	-1.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-29.2
3692	536467.91	4816264.94	351.37	1	N	A	-40.5	-1.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-132.2
3692	536467.91	4816264.94	351.37	1	E	A	-40.5	-1.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-132.2
3694	536430.02	4816245.12	352.42	0	D	A	62.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-23.1
3694	536430.02	4816245.12	352.42	0	N	A	-40.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-126.1
3694	536430.02	4816245.12	352.42	0	E	A	-40.5	-0.0	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	24.1	0.0	0.0	-126.1
3695	536430.02	4816245.12	352.42	1	D	A	62.5	-0.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-28.7
3695	536430.02	4816245.12	352.42	1	N	A	-40.5	-0.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.7
3695	536430.02	4816245.12	352.42	1	E	A	-40.5	-0.0	0.0	0.0	0.0	63.2	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-131.7
3696	536430.37	4816245.29	352.40	1	D	A	62.5	-6.9	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-36.1
3696	536430.37	4816245.29	352.40	1	N	A	-40.5	-6.9	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-139.1
3696	536430.37	4816245.29	352.40	1	E	A	-40.5	-6.9	0.0	0.0	0.0	63.3	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-139.1
3714	536446.19	4816274.29	352.25	0	D	A	62.5	-0.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-23.2
3714	536446.19	4816274.29	352.25	0	N	A	-40.5	-0.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-126.2
3714	536446.19	4816274.29	352.25	0	E	A	-40.5	-0.9	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	24.0	0.0	0.0	-126.2
3715	536446.19	4816274.29	352.25	1	D	A	62.5	-0.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.7
3715	536446.19	4816274.29	352.25	1	N	A	-40.5	-0.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.7
3715	536446.19	4816274.29	352.25	1	E	A	-40.5	-0.9	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.7
3716	536371.28	4816217.05	354.54	0	D	A	62.5	0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-23.8
3716	536371.28	4816217.05	354.54	0	N	A	-40.5	0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-126.8
3716	536371.28	4816217.05	354.54	0	E	A	-40.5	0.9	0.0	0.0	0.0	64.1	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-126.8
3723	536467.58	4816264.26	351.38	0	D	A	62.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-23.4
3723	536467.58	4816264.26	351.38	0	N	A	-40.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-126.4
3723	536467.58	4816264.26	351.38	0	E	A	-40.5	-1.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	24.1	0.0	0.0	-126.4
3724	536467.58	4816264.26	351.38	1	D	A	62.5	-1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-29.7
3724	536467.58	4816264.26	351.38	1	N	A	-40.5	-1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-132.8
3724	536467.58	4816264.26	351.38	1	E	A	-40.5	-1.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-132.8
3823	536416.36	4816258.63	353.36	0	D	A	62.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-26.7
3823	536416.36	4816258.63	353.36	0	N	A	-40.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-129.7
3823	536416.36	4816258.63	353.36	0	E	A	-40.5	-3.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	24.0	0.0	0.0	-129.7
3825	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-32.5
3825	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-135.5
3825	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.3	-135.5
3827	536416.36	4816258.63	353.36	1	D	A	62.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-33.1
3827	536416.36	4816258.63	353.36	1	N	A	-40.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-136.1
3827	536416.36	4816258.63	353.36	1	E	A	-40.5	-3.5	0.0	0.0	0.0	63.5	1.8	-3.0	0.0	0.0	28.0	0.0	1.7	-136.1
3840	536378.19	4816214.75	354.41	0	D	A	62.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-28.1
3840	536378.19	4816214.75	354.41	0	N	A	-40.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-131.1
3840	536378.19	4816214.75	354.41	0	E	A	-40.5	-3.6	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-131.1
3844	536378.67	4816214.98	354.41	0	D	A	62.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-28.6
3844	536378.67	4816214.98	354.41	0	N	A	-40.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-131.6
3844	536378.67	4816214.98	354.41	0	E	A	-40.5	-4.1	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-131.6
3847	536469.01	4816276.86	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.4
3847	536469.01	4816276.86	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.4
3847	536469.01	4816276.86	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.4
3850	536469.01	4816276.86	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-35.9
3850	536469.01	4816276.86	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.9
3850	536469.01	4816276.86	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.9
3853	536469.12	4816276.73	351.36	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.4
3853	536469.12	4816276.73	351.36	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3853	536469.12	4816276.73	351.36	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3854	536469.12	4816276.73	351.36	1	D	A	62.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-35.9
3854	536469.12	4816276.73	351.36	1	N	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.9
3854	536469.12	4816276.73	351.36	1	E	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.9
3857	536469.23	4816276.60	351.37	0	D	A	62.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.5
3857	536469.23	4816276.60	351.37	0	N	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3857	536469.23	4816276.60	351.37	0	E	A	-40.5	-7.7	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3860	536469.23	4816276.60	351.37	1	D	A	62.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-35.9

Line Source, ISO 9613, Name: "Sobeys - Delivery Truck Movement", ID: "Sobeys_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3860	536469.23	4816276.60	351.37	1	N	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.0
3860	536469.23	4816276.60	351.37	1	E	A	-40.5	-7.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.0
3863	536469.33	4816276.47	351.37	0	D	A	62.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.5
3863	536469.33	4816276.47	351.37	0	N	A	-40.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3863	536469.33	4816276.47	351.37	0	E	A	-40.5	-7.8	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.5
3864	536469.33	4816276.47	351.37	1	D	A	62.5	-7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-36.0
3864	536469.33	4816276.47	351.37	1	N	A	-40.5	-7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.0
3864	536469.33	4816276.47	351.37	1	E	A	-40.5	-7.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.0
3867	536469.05	4816276.26	351.37	0	D	A	62.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.7
3867	536469.05	4816276.26	351.37	0	N	A	-40.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.7
3867	536469.05	4816276.26	351.37	0	E	A	-40.5	-8.0	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.7
3868	536469.05	4816276.26	351.37	1	D	A	62.5	-8.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-36.2
3868	536469.05	4816276.26	351.37	1	N	A	-40.5	-8.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.2
3868	536469.05	4816276.26	351.37	1	E	A	-40.5	-8.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.2
3872	536468.92	4816276.35	351.37	0	D	A	62.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.8
3872	536468.92	4816276.35	351.37	0	N	A	-40.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.8
3872	536468.92	4816276.35	351.37	0	E	A	-40.5	-8.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.8
3874	536468.92	4816276.35	351.37	1	D	A	62.5	-8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-36.3
3874	536468.92	4816276.35	351.37	1	N	A	-40.5	-8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.3
3874	536468.92	4816276.35	351.37	1	E	A	-40.5	-8.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.3
3877	536468.80	4816276.44	351.37	0	D	A	62.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-29.9
3877	536468.80	4816276.44	351.37	0	N	A	-40.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.9
3877	536468.80	4816276.44	351.37	0	E	A	-40.5	-8.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-132.9
3879	536468.80	4816276.44	351.37	1	D	A	62.5	-8.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-36.4
3879	536468.80	4816276.44	351.37	1	N	A	-40.5	-8.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.4
3879	536468.80	4816276.44	351.37	1	E	A	-40.5	-8.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.4
3881	536468.68	4816276.53	351.37	0	D	A	62.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-30.0
3881	536468.68	4816276.53	351.37	0	N	A	-40.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-133.0
3881	536468.68	4816276.53	351.37	0	E	A	-40.5	-8.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-133.0
3882	536468.68	4816276.53	351.37	1	D	A	62.5	-8.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-36.5
3882	536468.68	4816276.53	351.37	1	N	A	-40.5	-8.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.5
3882	536468.68	4816276.53	351.37	1	E	A	-40.5	-8.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-139.5
3885	536378.44	4816214.87	354.42	0	D	A	62.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-33.8
3885	536378.44	4816214.87	354.42	0	N	A	-40.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-136.8
3885	536378.44	4816214.87	354.42	0	E	A	-40.5	-9.2	0.0	0.0	0.0	63.9	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-136.8
3888	536377.94	4816214.63	354.41	0	D	A	62.5	-9.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-34.3
3888	536377.94	4816214.63	354.41	0	N	A	-40.5	-9.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-137.3
3888	536377.94	4816214.63	354.41	0	E	A	-40.5	-9.8	0.0	0.0	0.0	64.0	1.9	-3.0	0.0	0.0	24.2	0.0	0.0	-137.3
3891	536469.40	4816276.38	351.37	0	D	A	62.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-33.8
3891	536469.40	4816276.38	351.37	0	N	A	-40.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-136.8
3891	536469.40	4816276.38	351.37	0	E	A	-40.5	-12.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-136.8
3893	536469.40	4816276.38	351.37	1	D	A	62.5	-12.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-40.3
3893	536469.40	4816276.38	351.37	1	N	A	-40.5	-12.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-143.3
3893	536469.40	4816276.38	351.37	1	E	A	-40.5	-12.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-143.3
3896	536469.14	4816276.20	351.37	0	D	A	62.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-34.0
3896	536469.14	4816276.20	351.37	0	N	A	-40.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-137.0
3896	536469.14	4816276.20	351.37	0	E	A	-40.5	-12.2	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	24.0	0.0	0.0	-137.0
3897	536469.14	4816276.20	351.37	1	D	A	62.5	-12.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-40.4
3897	536469.14	4816276.20	351.37	1	N	A	-40.5	-12.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-143.5
3897	536469.14	4816276.20	351.37	1	E	A	-40.5	-12.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-143.5
3900	536452.84	4816304.64	351.39	0	D	A	62.5	-15.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-41.5
3900	536452.84	4816304.64	351.39	0	N	A	-40.5	-15.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-144.5
3900	536452.84	4816304.64	351.39	0	E	A	-40.5	-15.7	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.7	0.0	0.0	-144.5
3902	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-43.9
3902	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-146.9
3902	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-146.9
3904	536452.84	4816304.64	351.39	1	D	A	62.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-43.0
3904	536452.84	4816304.64	351.39	1	N	A	-40.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-146.0
3904	536452.84	4816304.64	351.39	1	E	A	-40.5	-15.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-146.0

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1206	536754.93	4815959.62	343.87	0	D	A	62.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-13.5
1206	536754.93	4815959.62	343.87	0	N	A	-40.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-116.5
1206	536754.93	4815959.62	343.87	0	E	A	-40.5	11.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-116.5
1244	536732.49	4815965.57	344.20	0	D	A	62.5	7.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-17.8
1244	536732.49	4815965.57	344.20	0	N	A	-40.5	7.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
1244	536732.49	4815965.57	344.20	0	E	A	-40.5	7.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-120.8
1249	536728.54	4815966.67	344.27	0	D	A	62.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-20.3
1249	536728.54	4815966.67	344.27	0	N	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-123.4
1249	536728.54	4815966.67	344.27	0	E	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-123.4
1254	536725.04	4815967.65	344.34	0	D	A	62.5	6.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-18.9
1254	536725.04	4815967.65	344.34	0	N	A	-40.5	6.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-121.9
1254	536725.04	4815967.65	344.34	0	E	A	-40.5	6.3	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-121.9
1534	536752.74	4815977.37	343.95	0	D	A	62.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-16.2
1534	536752.74	4815977.37	343.95	0	N	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-119.2
1534	536752.74	4815977.37	343.95	0	E	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-119.2
1540	536749.47	4815975.62	344.01	0	D	A	62.5	0.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-24.0
1540	536749.47	4815975.62	344.01	0	N	A	-40.5	0.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-127.0
1540	536749.47	4815975.62	344.01	0	E	A	-40.5	0.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-127.0
1544	536753.28	4815977.66	343.94	1	D	A	62.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.9	0.0	2.3	-21.5
1544	536753.28	4815977.66	343.94	1	N	A	-40.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.9	0.0	2.3	-124.5
1544	536753.28	4815977.66	343.94	1	E	A	-40.5	7.1	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	27.9	0.0	2.3	-124.5
1662	536757.21	4815958.18	343.83	0	D	A	62.5	8.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-15.7
1662	536757.21	4815958.18	343.83	0	N	A	-40.5	8.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-118.7
1662	536757.21	4815958.18	343.83	0	E	A	-40.5	8.9	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-118.7
1777	536727.37	4815967.96	344.29	0	D	A	62.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-21.3
1777	536727.37	4815967.96	344.29	0	N	A	-40.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-124.3
1777	536727.37	4815967.96	344.29	0	E	A	-40.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-124.3
1779	536730.61	4815967.66	344.23	0	D	A	62.5	6.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-18.9
1779	536730.61	4815967.66	344.23	0	N	A	-40.5	6.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-121.9
1779	536730.61	4815967.66	344.23	0	E	A	-40.5	6.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.6	0.0	0.0	-121.9
1919	536742.70	4815962.67	344.03	0	D	A	62.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-20.2
1919	536742.70	4815962.67	344.03	0	N	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-123.3
1919	536742.70	4815962.67	344.03	0	E	A	-40.5	4.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-123.3
1923	536740.03	4815963.43	344.07	0	D	A	62.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-20.4
1923	536740.03	4815963.43	344.07	0	N	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-123.4
1923	536740.03	4815963.43	344.07	0	E	A	-40.5	4.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-123.4
1938	536748.39	4815960.97	343.96	0	D	A	62.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-22.3
1938	536748.39	4815960.97	343.96	0	N	A	-40.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.4
1938	536748.39	4815960.97	343.96	0	E	A	-40.5	2.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.4
1942	536745.80	4815961.75	343.99	0	D	A	62.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-19.1
1942	536745.80	4815961.75	343.99	0	N	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-122.1
1942	536745.80	4815961.75	343.99	0	E	A	-40.5	5.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-122.1
2106	536738.33	4815966.96	344.13	0	D	A	62.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-18.1
2106	536738.33	4815966.96	344.13	0	N	A	-40.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-121.1
2106	536738.33	4815966.96	344.13	0	E	A	-40.5	6.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-121.1
2162	536751.39	4815960.06	343.91	0	D	A	62.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-18.1
2162	536751.39	4815960.06	343.91	0	N	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.1
2162	536751.39	4815960.06	343.91	0	E	A	-40.5	6.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.1
2232	536757.37	4815979.48	343.87	0	D	A	62.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-18.2
2232	536757.37	4815979.48	343.87	0	N	A	-40.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-121.2
2232	536757.37	4815979.48	343.87	0	E	A	-40.5	5.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	26.1	0.0	0.0	-121.2
2285	536753.36	4815968.24	343.97	0	D	A	62.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-18.6
2285	536753.36	4815968.24	343.97	0	N	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.6
2285	536753.36	4815968.24	343.97	0	E	A	-40.5	5.8	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.6
2292	536749.67	4815967.29	344.00	0	D	A	62.5	5.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-18.7
2292	536749.67	4815967.29	344.00	0	N	A	-40.5	5.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.7
2292	536749.67	4815967.29	344.00	0	E	A	-40.5	5.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-121.7
2319	536736.86	4815964.34	344.12	0	D	A	62.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-19.0
2319	536736.86	4815964.34	344.12	0	N	A	-40.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-122.0
2319	536736.86	4815964.34	344.12	0	E	A	-40.5	5.9	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-122.0
2345	536745.94	4815966.80	344.05	0	D	A	62.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-18.9
2345	536745.94	4815966.80	344.05	0	N	A	-40.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-121.9
2345	536745.94	4815966.80	344.05	0	E	A	-40.5	5.7	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-121.9

Line Source, ISO 9613, Name: "Heffner - Delivery Truck Movement", ID: "Heffner_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2446	536756.66	4815969.66	343.94	0	D	A	62.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-19.1
2446	536756.66	4815969.66	343.94	0	N	A	-40.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-122.1
2446	536756.66	4815969.66	343.94	0	E	A	-40.5	5.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-122.1
2554	536724.58	4815968.14	344.34	0	D	A	62.5	5.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-20.2
2554	536724.58	4815968.14	344.34	0	N	A	-40.5	5.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-123.2
2554	536724.58	4815968.14	344.34	0	E	A	-40.5	5.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.7	0.0	0.0	-123.2
2675	536761.02	4815971.79	343.88	0	D	A	62.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-20.0
2675	536761.02	4815971.79	343.88	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-123.0
2675	536761.02	4815971.79	343.88	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-123.0
2682	536746.21	4815973.03	344.07	0	D	A	62.5	4.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-20.3
2682	536746.21	4815973.03	344.07	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-123.3
2682	536746.21	4815973.03	344.07	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-123.3
2762	536745.14	4815967.56	344.06	0	D	A	62.5	4.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-20.5
2762	536745.14	4815967.56	344.06	0	N	A	-40.5	4.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-123.6
2762	536745.14	4815967.56	344.06	0	E	A	-40.5	4.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-123.6
2903	536748.03	4815974.71	344.03	0	D	A	62.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-20.6
2903	536748.03	4815974.71	344.03	0	N	A	-40.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.6
2903	536748.03	4815974.71	344.03	0	E	A	-40.5	3.7	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.1	0.0	0.0	-123.6
3009	536748.11	4815962.95	343.98	0	D	A	62.5	3.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-21.2
3009	536748.11	4815962.95	343.98	0	N	A	-40.5	3.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-124.2
3009	536748.11	4815962.95	343.98	0	E	A	-40.5	3.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-124.2
3205	536743.14	4815966.63	344.08	0	D	A	62.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-21.8
3205	536743.14	4815966.63	344.08	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-124.8
3205	536743.14	4815966.63	344.08	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-124.8
3211	536758.98	4815970.84	343.92	0	D	A	62.5	2.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-21.6
3211	536758.98	4815970.84	343.92	0	N	A	-40.5	2.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-124.6
3211	536758.98	4815970.84	343.92	0	E	A	-40.5	2.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.0	0.0	0.0	-124.6
3257	536733.59	4815967.39	344.19	0	D	A	62.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-22.1
3257	536733.59	4815967.39	344.19	0	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-125.1
3257	536733.59	4815967.39	344.19	0	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.5	0.0	0.0	-125.1
3262	536745.07	4815971.17	344.09	0	D	A	62.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-22.1
3262	536745.07	4815971.17	344.09	0	N	A	-40.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-125.1
3262	536745.07	4815971.17	344.09	0	E	A	-40.5	2.5	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-125.1
3352	536745.83	4815965.58	344.04	0	D	A	62.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-22.4
3352	536745.83	4815965.58	344.04	0	N	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.5
3352	536745.83	4815965.58	344.04	0	E	A	-40.5	2.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.5
3442	536746.74	4815964.25	344.01	0	D	A	62.5	2.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-22.7
3442	536746.74	4815964.25	344.01	0	N	A	-40.5	2.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.7
3442	536746.74	4815964.25	344.01	0	E	A	-40.5	2.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-125.7
3475	536744.84	4815969.57	344.08	0	D	A	62.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-22.9
3475	536744.84	4815969.57	344.08	0	N	A	-40.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-125.9
3475	536744.84	4815969.57	344.08	0	E	A	-40.5	1.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-125.9
3487	536741.34	4815966.71	344.10	0	D	A	62.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-23.5
3487	536741.34	4815966.71	344.10	0	N	A	-40.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-126.5
3487	536741.34	4815966.71	344.10	0	E	A	-40.5	1.2	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.3	0.0	0.0	-126.5
3489	536742.09	4815966.68	344.09	0	D	A	62.5	-7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-32.1
3489	536742.09	4815966.68	344.09	0	N	A	-40.5	-7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-135.2
3489	536742.09	4815966.68	344.09	0	E	A	-40.5	-7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.2	0.0	0.0	-135.2
3515	536735.27	4815967.24	344.17	0	D	A	62.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-23.3
3515	536735.27	4815967.24	344.17	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-126.3
3515	536735.27	4815967.24	344.17	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	26.4	0.0	0.0	-126.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1489	536515.27	4816098.69	350.56	0	D	A	59.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-7.4
1489	536515.27	4816098.69	350.56	0	N	A	-40.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-107.4
1489	536515.27	4816098.69	350.56	0	E	A	-40.5	12.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-107.4
1490	536522.35	4816101.97	350.51	1	D	A	59.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-28.3
1490	536522.35	4816101.97	350.51	1	N	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3
1490	536522.35	4816101.97	350.51	1	E	A	-40.5	2.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3
1491	536516.75	4816099.38	350.55	1	D	A	59.5	10.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-21.0
1491	536516.75	4816099.38	350.55	1	N	A	-40.5	10.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-121.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1491	536516.75	4816099.38	350.55	1	E	A	-40.5	10.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-121.0
1494	536509.67	4816096.09	350.60	1	D	A	59.5	7.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.3
1494	536509.67	4816096.09	350.60	1	N	A	-40.5	7.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
1494	536509.67	4816096.09	350.60	1	E	A	-40.5	7.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
1609	536518.36	4816098.85	350.53	0	D	A	59.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-8.0
1609	536518.36	4816098.85	350.53	0	N	A	-40.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-108.0
1609	536518.36	4816098.85	350.53	0	E	A	-40.5	11.8	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-108.0
1611	536514.71	4816097.30	350.56	1	D	A	59.5	8.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-22.8
1611	536514.71	4816097.30	350.56	1	N	A	-40.5	8.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-122.8
1611	536514.71	4816097.30	350.56	1	E	A	-40.5	8.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-122.8
1612	536520.52	4816099.76	350.51	1	D	A	59.5	7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.7
1612	536520.52	4816099.76	350.51	1	N	A	-40.5	7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.7
1612	536520.52	4816099.76	350.51	1	E	A	-40.5	7.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.7
1615	536524.17	4816101.31	350.48	1	D	A	59.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.3
1615	536524.17	4816101.31	350.48	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.3
1615	536524.17	4816101.31	350.48	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.3
1724	536557.24	4816079.39	348.84	0	D	A	59.5	10.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-18.1
1724	536557.24	4816079.39	348.84	0	N	A	-40.5	10.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-118.1
1724	536557.24	4816079.39	348.84	0	E	A	-40.5	10.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-118.1
1727	536554.84	4816084.34	349.06	0	D	A	59.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-28.0
1727	536554.84	4816084.34	349.06	0	N	A	-40.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-128.0
1727	536554.84	4816084.34	349.06	0	E	A	-40.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.1	0.0	0.0	-128.0
1733	536554.32	4816085.41	349.11	0	D	A	59.5	1.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-26.8
1733	536554.32	4816085.41	349.11	0	N	A	-40.5	1.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-126.8
1733	536554.32	4816085.41	349.11	0	E	A	-40.5	1.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-126.8
1735	536557.56	4816078.74	348.81	1	D	A	59.5	9.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-20.8
1735	536557.56	4816078.74	348.81	1	N	A	-40.5	9.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1735	536557.56	4816078.74	348.81	1	E	A	-40.5	9.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-120.8
1737	536554.98	4816084.05	349.05	1	D	A	59.5	5.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.1
1737	536554.98	4816084.05	349.05	1	N	A	-40.5	5.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
1737	536554.98	4816084.05	349.05	1	E	A	-40.5	5.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
1739	536554.14	4816085.77	349.13	1	D	A	59.5	-2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-32.9
1739	536554.14	4816085.77	349.13	1	N	A	-40.5	-2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-132.9
1739	536554.14	4816085.77	349.13	1	E	A	-40.5	-2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-132.9
1791	536550.62	4816085.08	349.24	0	D	A	59.5	8.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-20.2
1791	536550.62	4816085.08	349.24	0	N	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-120.2
1791	536550.62	4816085.08	349.24	0	E	A	-40.5	8.0	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-120.2
1795	536552.15	4816081.75	349.04	0	D	A	59.5	0.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-28.0
1795	536552.15	4816081.75	349.04	0	N	A	-40.5	0.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-128.0
1795	536552.15	4816081.75	349.04	0	E	A	-40.5	0.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-128.0
1799	536553.19	4816079.46	348.91	0	D	A	59.5	6.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-22.2
1799	536553.19	4816079.46	348.91	0	N	A	-40.5	6.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-122.2
1799	536553.19	4816079.46	348.91	0	E	A	-40.5	6.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.1	0.0	0.0	-122.2
1801	536549.78	4816086.92	349.34	1	D	A	59.5	3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.8
1801	536549.78	4816086.92	349.34	1	N	A	-40.5	3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
1801	536549.78	4816086.92	349.34	1	E	A	-40.5	3.5	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
1803	536550.93	4816084.40	349.20	1	D	A	59.5	5.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.2
1803	536550.93	4816084.40	349.20	1	N	A	-40.5	5.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
1803	536550.93	4816084.40	349.20	1	E	A	-40.5	5.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.2
1805	536552.31	4816081.38	349.02	1	D	A	59.5	5.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.1
1805	536552.31	4816081.38	349.02	1	N	A	-40.5	5.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
1805	536552.31	4816081.38	349.02	1	E	A	-40.5	5.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.1
1808	536553.51	4816078.76	348.87	1	D	A	59.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
1808	536553.51	4816078.76	348.87	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1808	536553.51	4816078.76	348.87	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
1890	536527.81	4816104.69	350.47	0	D	A	59.5	10.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-9.3
1890	536527.81	4816104.69	350.47	0	N	A	-40.5	10.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-109.3
1890	536527.81	4816104.69	350.47	0	E	A	-40.5	10.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-109.3
1892	536530.02	4816105.80	350.45	1	D	A	59.5	7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-23.5
1892	536530.02	4816105.80	350.45	1	N	A	-40.5	7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.5
1892	536530.02	4816105.80	350.45	1	E	A	-40.5	7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-123.5
1895	536525.42	4816103.48	350.49	1	D	A	59.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.0
1895	536525.42	4816103.48	350.49	1	N	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1895	536525.42	4816103.48	350.49	1	E	A	-40.5	6.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.0
1898	536528.23	4816104.90	350.47	1	D	A	59.5	9.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.7	-45.3
1898	536528.23	4816104.90	350.47	1	N	A	-40.5	9.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.7	-145.3
1898	536528.23	4816104.90	350.47	1	E	A	-40.5	9.7	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	25.7	-145.3
1945	536555.27	4816074.91	348.68	0	D	A	59.5	7.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-20.4
1945	536555.27	4816074.91	348.68	0	N	A	-40.5	7.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-120.4
1945	536555.27	4816074.91	348.68	0	E	A	-40.5	7.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	27.0	0.0	0.0	-120.4
1949	536557.25	4816070.61	348.49	0	D	A	59.5	5.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-22.7
1949	536557.25	4816070.61	348.49	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-122.7
1949	536557.25	4816070.61	348.49	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-122.7
1952	536558.06	4816068.82	348.41	0	D	A	59.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-31.6
1952	536558.06	4816068.82	348.41	0	N	A	-40.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.6
1952	536558.06	4816068.82	348.41	0	E	A	-40.5	-3.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-131.6
1954	536555.40	4816074.64	348.67	1	D	A	59.5	8.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-22.0
1954	536555.40	4816074.64	348.67	1	N	A	-40.5	8.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
1954	536555.40	4816074.64	348.67	1	E	A	-40.5	8.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.0
1957	536557.47	4816070.13	348.47	1	D	A	59.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
1957	536557.47	4816070.13	348.47	1	N	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
1957	536557.47	4816070.13	348.47	1	E	A	-40.5	5.2	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
2020	536503.76	4816091.81	350.60	0	D	A	59.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-10.0
2020	536503.76	4816091.81	350.60	0	N	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-110.0
2020	536503.76	4816091.81	350.60	0	E	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-110.0
2023	536503.76	4816091.81	350.60	1	D	A	59.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-21.4
2023	536503.76	4816091.81	350.60	1	N	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.4
2023	536503.76	4816091.81	350.60	1	E	A	-40.5	10.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-121.4
2033	536482.32	4816092.86	350.75	0	D	A	59.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.6	0.0	0.0	-14.8
2033	536482.32	4816092.86	350.75	0	N	A	-40.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.6	0.0	0.0	-114.8
2033	536482.32	4816092.86	350.75	0	E	A	-40.5	10.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.6	0.0	0.0	-114.8
2035	536477.77	4816096.46	350.82	0	D	A	59.5	1.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-24.1
2035	536477.77	4816096.46	350.82	0	N	A	-40.5	1.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-124.1
2035	536477.77	4816096.46	350.82	0	E	A	-40.5	1.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-124.1
2037	536484.59	4816091.07	350.71	1	D	A	59.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-27.3
2037	536484.59	4816091.07	350.71	1	N	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-127.3
2037	536484.59	4816091.07	350.71	1	E	A	-40.5	6.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-127.3
2039	536481.42	4816093.58	350.76	1	D	A	59.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.2
2039	536481.42	4816093.58	350.76	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
2039	536481.42	4816093.58	350.76	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.2
2041	536478.61	4816095.79	350.81	1	D	A	59.5	5.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.4
2041	536478.61	4816095.79	350.81	1	N	A	-40.5	5.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.4
2041	536478.61	4816095.79	350.81	1	E	A	-40.5	5.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.4
2044	536478.56	4816095.84	350.81	1	D	A	59.5	5.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-95.4
2044	536478.56	4816095.84	350.81	1	N	A	-40.5	5.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-195.4
2044	536478.56	4816095.84	350.81	1	E	A	-40.5	5.3	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-195.4
2178	536485.30	4816090.16	350.69	0	D	A	59.5	3.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-21.1
2178	536485.30	4816090.16	350.69	0	N	A	-40.5	3.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-121.1
2178	536485.30	4816090.16	350.69	0	E	A	-40.5	3.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.3	0.0	0.0	-121.1
2181	536489.37	4816087.00	350.62	0	D	A	59.5	9.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-15.2
2181	536489.37	4816087.00	350.62	0	N	A	-40.5	9.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-115.2
2181	536489.37	4816087.00	350.62	0	E	A	-40.5	9.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-115.2
2183	536485.30	4816090.16	350.69	1	D	A	59.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.3
2183	536485.30	4816090.16	350.69	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.3
2183	536485.30	4816090.16	350.69	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.3
2185	536487.06	4816088.79	350.66	1	D	A	59.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.3
2185	536487.06	4816088.79	350.66	1	N	A	-40.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.3
2185	536487.06	4816088.79	350.66	1	E	A	-40.5	3.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.3
2187	536490.26	4816086.31	350.61	1	D	A	59.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-24.3
2187	536490.26	4816086.31	350.61	1	N	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
2187	536490.26	4816086.31	350.61	1	E	A	-40.5	7.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
2268	536477.75	4816096.44	350.82	0	D	A	59.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-24.1
2268	536477.75	4816096.44	350.82	0	N	A	-40.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-124.1
2268	536477.75	4816096.44	350.82	0	E	A	-40.5	1.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	23.1	0.0	0.0	-124.1
2272	536481.35	4816093.42	350.76	0	D	A	59.5	9.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.7	0.0	0.0	-16.0
2272	536481.35	4816093.42	350.76	0	N	A	-40.5	9.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.7	0.0	0.0	-116.0

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2272	536481.35	4816093.42	350.76	0	E	A	-40.5	9.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	22.7	0.0	0.0	-116.0
2275	536478.57	4816095.76	350.81	1	D	A	59.5	5.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.4
2275	536478.57	4816095.76	350.81	1	N	A	-40.5	5.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.4
2275	536478.57	4816095.76	350.81	1	E	A	-40.5	5.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.4
2277	536481.29	4816093.48	350.76	1	D	A	59.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-28.3
2277	536481.29	4816093.48	350.76	1	N	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.3
2277	536481.29	4816093.48	350.76	1	E	A	-40.5	5.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-128.3
2279	536483.55	4816091.58	350.72	1	D	A	59.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.2
2279	536483.55	4816091.58	350.72	1	N	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.2
2279	536483.55	4816091.58	350.72	1	E	A	-40.5	3.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.2
2282	536478.49	4816095.82	350.81	1	D	A	59.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-95.6
2282	536478.49	4816095.82	350.81	1	N	A	-40.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-195.6
2282	536478.49	4816095.82	350.81	1	E	A	-40.5	5.2	0.0	0.0	0.0	63.3	1.8	-3.0	0.0	0.0	28.0	0.0	70.1	-195.6
2406	536544.79	4816097.31	349.89	0	D	A	59.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.2
2406	536544.79	4816097.31	349.89	0	N	A	-40.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
2406	536544.79	4816097.31	349.89	0	E	A	-40.5	5.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
2409	536546.27	4816094.73	349.78	0	D	A	59.5	4.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.8
2409	536546.27	4816094.73	349.78	0	N	A	-40.5	4.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
2409	536546.27	4816094.73	349.78	0	E	A	-40.5	4.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
2414	536547.04	4816093.38	349.72	0	D	A	59.5	-4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-32.8
2414	536547.04	4816093.38	349.72	0	N	A	-40.5	-4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-132.8
2414	536547.04	4816093.38	349.72	0	E	A	-40.5	-4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-132.8
2416	536544.89	4816097.15	349.88	1	D	A	59.5	5.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.7
2416	536544.89	4816097.15	349.88	1	N	A	-40.5	5.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.7
2416	536544.89	4816097.15	349.88	1	E	A	-40.5	5.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.7
2419	536546.45	4816094.41	349.77	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
2419	536546.45	4816094.41	349.77	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2419	536546.45	4816094.41	349.77	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2458	536500.08	4816091.63	350.62	0	D	A	59.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-15.2
2458	536500.08	4816091.63	350.62	0	N	A	-40.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-115.2
2458	536500.08	4816091.63	350.62	0	E	A	-40.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-115.2
2460	536500.08	4816091.63	350.62	1	D	A	59.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-22.9
2460	536500.08	4816091.63	350.62	1	N	A	-40.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-122.9
2460	536500.08	4816091.63	350.62	1	E	A	-40.5	8.8	0.0	0.0	0.0	62.8	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-122.9
2572	536561.73	4816071.09	348.45	0	D	A	59.5	4.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-23.8
2572	536561.73	4816071.09	348.45	0	N	A	-40.5	4.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-123.8
2572	536561.73	4816071.09	348.45	0	E	A	-40.5	4.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-123.8
2578	536560.24	4816073.56	348.57	0	D	A	59.5	5.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-23.1
2578	536560.24	4816073.56	348.57	0	N	A	-40.5	5.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
2578	536560.24	4816073.56	348.57	0	E	A	-40.5	5.0	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-123.1
2581	536560.83	4816072.58	348.52	1	D	A	59.5	6.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.4
2581	536560.83	4816072.58	348.52	1	N	A	-40.5	6.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2581	536560.83	4816072.58	348.52	1	E	A	-40.5	6.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.4
2584	536559.51	4816074.76	348.63	1	D	A	59.5	-4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-34.9
2584	536559.51	4816074.76	348.63	1	N	A	-40.5	-4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
2584	536559.51	4816074.76	348.63	1	E	A	-40.5	-4.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-134.9
2708	536496.43	4816079.37	350.47	0	D	A	59.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-12.4
2708	536496.43	4816079.37	350.47	0	N	A	-40.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-112.4
2708	536496.43	4816079.37	350.47	0	E	A	-40.5	8.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-112.4
2710	536495.23	4816081.26	350.51	1	D	A	59.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.3
2710	536495.23	4816081.26	350.51	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
2710	536495.23	4816081.26	350.51	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.3
2713	536496.20	4816079.74	350.48	1	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.6
2713	536496.20	4816079.74	350.48	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
2713	536496.20	4816079.74	350.48	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
2716	536497.39	4816077.86	350.45	1	D	A	59.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-27.6
2716	536497.39	4816077.86	350.45	1	N	A	-40.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.6
2716	536497.39	4816077.86	350.45	1	E	A	-40.5	4.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.6
2735	536545.05	4816104.38	350.02	0	D	A	59.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-21.4
2735	536545.05	4816104.38	350.02	0	N	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-121.4
2735	536545.05	4816104.38	350.02	0	E	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-121.4
2737	536545.05	4816104.38	350.02	1	D	A	59.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-23.4
2737	536545.05	4816104.38	350.02	1	N	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2737	536545.05	4816104.38	350.02	1	E	A	-40.5	6.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-123.4
2740	536544.00	4816106.44	350.11	1	D	A	59.5	-11.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-49.5
2740	536544.00	4816106.44	350.11	1	N	A	-40.5	-11.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-149.5
2740	536544.00	4816106.44	350.11	1	E	A	-40.5	-11.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-149.5
2746	536548.47	4816097.58	349.73	0	D	A	59.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.8
2746	536548.47	4816097.58	349.73	0	N	A	-40.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.8
2746	536548.47	4816097.58	349.73	0	E	A	-40.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.8
2749	536547.42	4816099.67	349.81	0	D	A	59.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.0
2749	536547.42	4816099.67	349.81	0	N	A	-40.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2749	536547.42	4816099.67	349.81	0	E	A	-40.5	5.2	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2752	536548.54	4816097.44	349.72	1	D	A	59.5	0.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.9
2752	536548.54	4816097.44	349.72	1	N	A	-40.5	0.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.9
2752	536548.54	4816097.44	349.72	1	E	A	-40.5	0.2	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.9
2755	536547.49	4816099.53	349.80	1	D	A	59.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-24.5
2755	536547.49	4816099.53	349.80	1	N	A	-40.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.5
2755	536547.49	4816099.53	349.80	1	E	A	-40.5	5.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-124.5
2811	536550.05	4816094.30	349.60	0	D	A	59.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.2
2811	536550.05	4816094.30	349.60	0	N	A	-40.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
2811	536550.05	4816094.30	349.60	0	E	A	-40.5	5.0	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.2
2816	536549.07	4816096.34	349.68	0	D	A	59.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.7
2816	536549.07	4816096.34	349.68	0	N	A	-40.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.7
2816	536549.07	4816096.34	349.68	0	E	A	-40.5	1.4	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.7
2818	536550.32	4816093.72	349.58	1	D	A	59.5	2.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.5
2818	536550.32	4816093.72	349.58	1	N	A	-40.5	2.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.5
2818	536550.32	4816093.72	349.58	1	E	A	-40.5	2.7	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.5
2821	536549.35	4816095.76	349.66	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
2821	536549.35	4816095.76	349.66	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2821	536549.35	4816095.76	349.66	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2831	536501.29	4816070.30	350.13	0	D	A	59.5	1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.5
2831	536501.29	4816070.30	350.13	0	N	A	-40.5	1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.5
2831	536501.29	4816070.30	350.13	0	E	A	-40.5	1.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.5
2835	536502.51	4816067.62	350.01	0	D	A	59.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-23.0
2835	536502.51	4816067.62	350.01	0	N	A	-40.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2835	536502.51	4816067.62	350.01	0	E	A	-40.5	6.6	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-123.0
2838	536503.48	4816065.48	349.92	0	D	A	59.5	-10.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-39.9
2838	536503.48	4816065.48	349.92	0	N	A	-40.5	-10.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.9
2838	536503.48	4816065.48	349.92	0	E	A	-40.5	-10.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.9
2840	536501.38	4816070.10	350.12	1	D	A	59.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.6
2840	536501.38	4816070.10	350.12	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
2840	536501.38	4816070.10	350.12	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
2843	536502.62	4816067.38	350.00	1	D	A	59.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-25.3
2843	536502.62	4816067.38	350.00	1	N	A	-40.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-125.3
2843	536502.62	4816067.38	350.00	1	E	A	-40.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-125.3
2863	536502.54	4816067.58	350.01	0	D	A	59.5	6.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-22.9
2863	536502.54	4816067.58	350.01	0	N	A	-40.5	6.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.9
2863	536502.54	4816067.58	350.01	0	E	A	-40.5	6.7	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-122.9
2868	536501.33	4816070.30	350.13	0	D	A	59.5	1.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-28.6
2868	536501.33	4816070.30	350.13	0	N	A	-40.5	1.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.6
2868	536501.33	4816070.30	350.13	0	E	A	-40.5	1.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-128.6
2871	536502.63	4816067.39	350.00	1	D	A	59.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-25.3
2871	536502.63	4816067.39	350.00	1	N	A	-40.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-125.3
2871	536502.63	4816067.39	350.00	1	E	A	-40.5	6.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.3	-125.3
2873	536501.42	4816070.10	350.12	1	D	A	59.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.7
2873	536501.42	4816070.10	350.12	1	N	A	-40.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7
2873	536501.42	4816070.10	350.12	1	E	A	-40.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7
2934	536527.51	4816102.24	350.46	0	D	A	59.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-12.8
2934	536527.51	4816102.24	350.46	0	N	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-112.8
2934	536527.51	4816102.24	350.46	0	E	A	-40.5	6.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-112.8
2937	536527.51	4816102.24	350.46	1	D	A	59.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-24.3
2937	536527.51	4816102.24	350.46	1	N	A	-40.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
2937	536527.51	4816102.24	350.46	1	E	A	-40.5	6.6	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-124.3
3037	536547.86	4816091.43	349.61	0	D	A	59.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-22.3
3037	536547.86	4816091.43	349.61	0	N	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-122.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3037	536547.86	4816091.43	349.61	0	E	A	-40.5	5.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-122.3
3039	536547.32	4816092.76	349.69	1	D	A	59.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-30.2
3039	536547.32	4816092.76	349.69	1	N	A	-40.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-130.2
3039	536547.32	4816092.76	349.69	1	E	A	-40.5	0.1	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-130.2
3041	536548.05	4816090.96	349.58	1	D	A	59.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.7
3041	536548.05	4816090.96	349.58	1	N	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
3041	536548.05	4816090.96	349.58	1	E	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.7
3052	536498.85	4816075.84	350.41	0	D	A	59.5	0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-29.0
3052	536498.85	4816075.84	350.41	0	N	A	-40.5	0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-129.0
3052	536498.85	4816075.84	350.41	0	E	A	-40.5	0.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-129.0
3056	536497.85	4816078.09	350.45	0	D	A	59.5	5.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-14.6
3056	536497.85	4816078.09	350.45	0	N	A	-40.5	5.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-114.6
3056	536497.85	4816078.09	350.45	0	E	A	-40.5	5.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-114.6
3059	536498.16	4816077.40	350.43	1	D	A	59.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-25.4
3059	536498.16	4816077.40	350.43	1	N	A	-40.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.4
3059	536498.16	4816077.40	350.43	1	E	A	-40.5	6.6	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-125.4
3061	536497.15	4816079.65	350.47	1	D	A	59.5	-4.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-36.3
3061	536497.15	4816079.65	350.47	1	N	A	-40.5	-4.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.3
3061	536497.15	4816079.65	350.47	1	E	A	-40.5	-4.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.3
3081	536500.73	4816071.63	350.20	0	D	A	59.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.4
3081	536500.73	4816071.63	350.20	0	N	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
3081	536500.73	4816071.63	350.20	0	E	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
3085	536499.74	4816073.85	350.32	0	D	A	59.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.5
3085	536499.74	4816073.85	350.32	0	N	A	-40.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.5
3085	536499.74	4816073.85	350.32	0	E	A	-40.5	5.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.5
3088	536500.63	4816071.85	350.21	1	D	A	59.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.7
3088	536500.63	4816071.85	350.21	1	N	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
3088	536500.63	4816071.85	350.21	1	E	A	-40.5	3.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.7
3091	536499.65	4816074.06	350.33	1	D	A	59.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3091	536499.65	4816074.06	350.33	1	N	A	-40.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3091	536499.65	4816074.06	350.33	1	E	A	-40.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3094	536499.09	4816075.30	350.40	1	D	A	59.5	-13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-45.1
3094	536499.09	4816075.30	350.40	1	N	A	-40.5	-13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-145.1
3094	536499.09	4816075.30	350.40	1	E	A	-40.5	-13.1	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-145.1
3134	536499.59	4816073.71	350.31	0	D	A	59.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-24.6
3134	536499.59	4816073.71	350.31	0	N	A	-40.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
3134	536499.59	4816073.71	350.31	0	E	A	-40.5	5.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-124.6
3136	536500.67	4816071.60	350.20	0	D	A	59.5	2.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.6
3136	536500.67	4816071.60	350.20	0	N	A	-40.5	2.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
3136	536500.67	4816071.60	350.20	0	E	A	-40.5	2.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.6
3138	536499.48	4816073.92	350.33	1	D	A	59.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3138	536499.48	4816073.92	350.33	1	N	A	-40.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3138	536499.48	4816073.92	350.33	1	E	A	-40.5	4.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3141	536500.48	4816071.97	350.22	1	D	A	59.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.7
3141	536500.48	4816071.97	350.22	1	N	A	-40.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7
3141	536500.48	4816071.97	350.22	1	E	A	-40.5	2.4	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7
3144	536500.95	4816071.05	350.16	1	D	A	59.5	-4.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-36.6
3144	536500.95	4816071.05	350.16	1	N	A	-40.5	-4.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.6
3144	536500.95	4816071.05	350.16	1	E	A	-40.5	-4.5	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.6
3159	536506.21	4816094.49	350.62	0	D	A	59.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-16.2
3159	536506.21	4816094.49	350.62	0	N	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-116.2
3159	536506.21	4816094.49	350.62	0	E	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-116.2
3161	536504.30	4816093.60	350.62	0	D	A	59.5	2.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-17.7
3161	536504.30	4816093.60	350.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-117.7
3161	536504.30	4816093.60	350.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-117.7
3164	536505.77	4816094.29	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-26.2
3164	536505.77	4816094.29	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3164	536505.77	4816094.29	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3171	536503.86	4816093.40	350.62	1	D	A	59.5	-1.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-32.7
3171	536503.86	4816093.40	350.62	1	N	A	-40.5	-1.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.7
3171	536503.86	4816093.40	350.62	1	E	A	-40.5	-1.1	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.7
3359	536509.87	4816095.21	350.59	0	D	A	59.5	5.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-14.6
3359	536509.87	4816095.21	350.59	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-114.6

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3359	536509.87	4816095.21	350.59	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	18.3	0.0	0.0	-114.6
3361	536508.75	4816094.71	350.60	1	D	A	59.5	0.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-31.4
3361	536508.75	4816094.71	350.60	1	N	A	-40.5	0.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3361	536508.75	4816094.71	350.60	1	E	A	-40.5	0.1	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-131.4
3364	536510.33	4816095.42	350.59	1	D	A	59.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.5
3364	536510.33	4816095.42	350.59	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.5
3364	536510.33	4816095.42	350.59	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.5
3418	536533.71	4816107.62	350.43	0	D	A	59.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-14.7
3418	536533.71	4816107.62	350.43	0	N	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-114.7
3418	536533.71	4816107.62	350.43	0	E	A	-40.5	4.6	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-114.7
3420	536533.71	4816107.62	350.43	1	D	A	59.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-26.1
3420	536533.71	4816107.62	350.43	1	N	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.1
3420	536533.71	4816107.62	350.43	1	E	A	-40.5	4.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.1
3423	536532.75	4816107.17	350.43	1	D	A	59.5	-1.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-56.1
3423	536532.75	4816107.17	350.43	1	N	A	-40.5	-1.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-156.1
3423	536532.75	4816107.17	350.43	1	E	A	-40.5	-1.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	25.6	-156.1
3454	536553.42	4816087.27	349.21	0	D	A	59.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-23.7
3454	536553.42	4816087.27	349.21	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.7
3454	536553.42	4816087.27	349.21	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.7
3457	536553.44	4816087.22	349.21	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
3457	536553.44	4816087.22	349.21	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
3457	536553.44	4816087.22	349.21	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
3460	536552.83	4816088.48	349.28	1	D	A	59.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-40.1
3460	536552.83	4816088.48	349.28	1	N	A	-40.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-140.1
3460	536552.83	4816088.48	349.28	1	E	A	-40.5	-9.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-140.1
3466	536538.89	4816102.52	350.23	0	D	A	59.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-23.8
3466	536538.89	4816102.52	350.23	0	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
3466	536538.89	4816102.52	350.23	0	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-123.8
3468	536538.89	4816102.52	350.23	1	D	A	59.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-26.2
3468	536538.89	4816102.52	350.23	1	N	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3468	536538.89	4816102.52	350.23	1	E	A	-40.5	4.5	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.2
3480	536495.01	4816089.45	350.62	0	D	A	59.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-18.7
3480	536495.01	4816089.45	350.62	0	N	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-118.7
3480	536495.01	4816089.45	350.62	0	E	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-118.7
3482	536495.01	4816089.45	350.62	1	D	A	59.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-26.4
3482	536495.01	4816089.45	350.62	1	N	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
3482	536495.01	4816089.45	350.62	1	E	A	-40.5	5.4	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
3497	536551.30	4816091.68	349.48	0	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-23.9
3497	536551.30	4816091.68	349.48	0	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.9
3497	536551.30	4816091.68	349.48	0	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-123.9
3498	536551.30	4816091.68	349.48	1	D	A	59.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
3498	536551.30	4816091.68	349.48	1	N	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
3498	536551.30	4816091.68	349.48	1	E	A	-40.5	4.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
3508	536536.13	4816103.20	350.36	0	D	A	59.5	3.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-24.5
3508	536536.13	4816103.20	350.36	0	N	A	-40.5	3.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.5
3508	536536.13	4816103.20	350.36	0	E	A	-40.5	3.8	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-124.5
3510	536537.48	4816103.12	350.31	0	D	A	59.5	-5.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-33.6
3510	536537.48	4816103.12	350.31	0	N	A	-40.5	-5.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-133.6
3510	536537.48	4816103.12	350.31	0	E	A	-40.5	-5.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-133.6
3512	536536.28	4816103.19	350.35	1	D	A	59.5	4.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-26.4
3512	536536.28	4816103.19	350.35	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
3512	536536.28	4816103.19	350.35	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-126.4
3529	536493.65	4816083.28	350.54	0	D	A	59.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-15.3
3529	536493.65	4816083.28	350.54	0	N	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-115.3
3529	536493.65	4816083.28	350.54	0	E	A	-40.5	5.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-115.3
3530	536493.35	4816083.63	350.55	1	D	A	59.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.2
3530	536493.35	4816083.63	350.55	1	N	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
3530	536493.35	4816083.63	350.55	1	E	A	-40.5	3.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.2
3531	536494.43	4816082.39	350.53	1	D	A	59.5	-0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-32.3
3531	536494.43	4816082.39	350.53	1	N	A	-40.5	-0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.3
3531	536494.43	4816082.39	350.53	1	E	A	-40.5	-0.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.3
3552	536530.52	4816102.84	350.43	0	D	A	59.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-17.5
3552	536530.52	4816102.84	350.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-117.5

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3552	536530.52	4816102.84	350.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	18.2	0.0	0.0	-117.5
3554	536531.74	4816103.04	350.42	0	D	A	59.5	-0.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-29.0
3554	536531.74	4816103.04	350.42	0	N	A	-40.5	-0.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-129.0
3554	536531.74	4816103.04	350.42	0	E	A	-40.5	-0.3	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.5	0.0	0.0	-129.0
3556	536530.89	4816102.90	350.43	1	D	A	59.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-27.3
3556	536530.89	4816102.90	350.43	1	N	A	-40.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.3
3556	536530.89	4816102.90	350.43	1	E	A	-40.5	3.6	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-127.3
3558	536532.10	4816103.11	350.42	1	D	A	59.5	-7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-38.2
3558	536532.10	4816103.11	350.42	1	N	A	-40.5	-7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.2
3558	536532.10	4816103.11	350.42	1	E	A	-40.5	-7.3	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-138.2
3594	536552.38	4816089.41	349.34	0	D	A	59.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-25.2
3594	536552.38	4816089.41	349.34	0	N	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
3594	536552.38	4816089.41	349.34	0	E	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.2
3596	536551.91	4816090.39	349.39	0	D	A	59.5	-7.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-35.3
3596	536551.91	4816090.39	349.39	0	N	A	-40.5	-7.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-135.3
3596	536551.91	4816090.39	349.39	0	E	A	-40.5	-7.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-135.3
3597	536552.34	4816089.50	349.34	1	D	A	59.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-26.8
3597	536552.34	4816089.50	349.34	1	N	A	-40.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
3597	536552.34	4816089.50	349.34	1	E	A	-40.5	3.4	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-126.8
3631	536540.96	4816101.35	350.12	0	D	A	59.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-25.3
3631	536540.96	4816101.35	350.12	0	N	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-125.3
3631	536540.96	4816101.35	350.12	0	E	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-125.3
3632	536540.96	4816101.35	350.12	1	D	A	59.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.2
3632	536540.96	4816101.35	350.12	1	N	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
3632	536540.96	4816101.35	350.12	1	E	A	-40.5	3.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.2
3635	536535.93	4816108.51	350.41	0	D	A	59.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-16.3
3635	536535.93	4816108.51	350.41	0	N	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-116.3
3635	536535.93	4816108.51	350.41	0	E	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-116.3
3636	536535.93	4816108.51	350.41	1	D	A	59.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-27.7
3636	536535.93	4816108.51	350.41	1	N	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3636	536535.93	4816108.51	350.41	1	E	A	-40.5	2.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-127.7
3639	536558.58	4816067.70	348.40	0	D	A	59.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-25.1
3639	536558.58	4816067.70	348.40	0	N	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-125.1
3639	536558.58	4816067.70	348.40	0	E	A	-40.5	3.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-125.1
3640	536558.41	4816068.06	348.40	1	D	A	59.5	0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
3640	536558.41	4816068.06	348.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3640	536558.41	4816068.06	348.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3641	536558.77	4816067.29	348.40	1	D	A	59.5	-3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-33.7
3641	536558.77	4816067.29	348.40	1	N	A	-40.5	-3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3641	536558.77	4816067.29	348.40	1	E	A	-40.5	-3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-133.7
3648	536539.52	4816108.88	350.32	0	D	A	59.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-25.7
3648	536539.52	4816108.88	350.32	0	N	A	-40.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-125.7
3648	536539.52	4816108.88	350.32	0	E	A	-40.5	2.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-125.7
3649	536538.60	4816108.96	350.35	0	D	A	59.5	-11.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-40.1
3649	536538.60	4816108.96	350.35	0	N	A	-40.5	-11.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-140.1
3649	536538.60	4816108.96	350.35	0	E	A	-40.5	-11.9	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-140.1
3651	536539.66	4816108.86	350.31	1	D	A	59.5	1.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-28.8
3651	536539.66	4816108.86	350.31	1	N	A	-40.5	1.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.8
3651	536539.66	4816108.86	350.31	1	E	A	-40.5	1.7	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.8
3653	536538.75	4816108.95	350.35	1	D	A	59.5	-4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-35.0
3653	536538.75	4816108.95	350.35	1	N	A	-40.5	-4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-135.0
3653	536538.75	4816108.95	350.35	1	E	A	-40.5	-4.5	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-135.0
3658	536548.95	4816088.79	349.45	0	D	A	59.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-25.6
3658	536548.95	4816088.79	349.45	0	N	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.6
3658	536548.95	4816088.79	349.45	0	E	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.2	0.0	0.0	-125.6
3659	536548.95	4816088.79	349.45	1	D	A	59.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-27.7
3659	536548.95	4816088.79	349.45	1	N	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.7
3659	536548.95	4816088.79	349.45	1	E	A	-40.5	2.6	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-127.7
3662	536537.72	4816108.88	350.38	0	D	A	59.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-16.8
3662	536537.72	4816108.88	350.38	0	N	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-116.8
3662	536537.72	4816108.88	350.38	0	E	A	-40.5	2.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	18.3	0.0	0.0	-116.8
3663	536537.72	4816108.88	350.38	1	D	A	59.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-28.3
3663	536537.72	4816108.88	350.38	1	N	A	-40.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3663	536537.72	4816108.88	350.38	1	E	A	-40.5	2.3	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-128.3
3666	536498.37	4816088.48	350.58	0	D	A	59.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-17.0
3666	536498.37	4816088.48	350.58	0	N	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-117.0
3666	536498.37	4816088.48	350.58	0	E	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-117.0
3668	536498.37	4816088.48	350.58	1	D	A	59.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-28.5
3668	536498.37	4816088.48	350.58	1	N	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.5
3668	536498.37	4816088.48	350.58	1	E	A	-40.5	3.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-128.5
3684	536487.34	4816089.21	350.66	0	D	A	59.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-21.3
3684	536487.34	4816089.21	350.66	0	N	A	-40.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-121.3
3684	536487.34	4816089.21	350.66	0	E	A	-40.5	3.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-121.3
3686	536486.37	4816089.68	350.68	0	D	A	59.5	-11.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-36.0
3686	536486.37	4816089.68	350.68	0	N	A	-40.5	-11.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-136.0
3686	536486.37	4816089.68	350.68	0	E	A	-40.5	-11.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.2	0.0	0.0	-136.0
3687	536487.34	4816089.21	350.66	1	D	A	59.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-30.6
3687	536487.34	4816089.21	350.66	1	N	A	-40.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.6
3687	536487.34	4816089.21	350.66	1	E	A	-40.5	3.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-130.6
3689	536486.37	4816089.68	350.68	1	D	A	59.5	-11.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-45.0
3689	536486.37	4816089.68	350.68	1	N	A	-40.5	-11.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-145.0
3689	536486.37	4816089.68	350.68	1	E	A	-40.5	-11.2	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-145.0
3703	536542.39	4816100.30	350.04	0	D	A	59.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.4
3703	536542.39	4816100.30	350.04	0	N	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.4
3703	536542.39	4816100.30	350.04	0	E	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.4
3704	536542.39	4816100.30	350.04	1	D	A	59.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.3
3704	536542.39	4816100.30	350.04	1	N	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
3704	536542.39	4816100.30	350.04	1	E	A	-40.5	1.9	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
3710	536543.49	4816099.26	349.98	0	D	A	59.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-26.5
3710	536543.49	4816099.26	349.98	0	N	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
3710	536543.49	4816099.26	349.98	0	E	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-126.5
3711	536543.49	4816099.26	349.98	1	D	A	59.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-28.4
3711	536543.49	4816099.26	349.98	1	N	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.4
3711	536543.49	4816099.26	349.98	1	E	A	-40.5	1.8	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-128.4
3719	536532.95	4816103.16	350.41	0	D	A	59.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-26.6
3719	536532.95	4816103.16	350.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3719	536532.95	4816103.16	350.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	27.3	0.0	0.0	-126.6
3720	536532.95	4816103.16	350.41	1	D	A	59.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-29.0
3720	536532.95	4816103.16	350.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.0
3720	536532.95	4816103.16	350.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.0
3726	536490.81	4816088.42	350.63	0	D	A	59.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-21.6
3726	536490.81	4816088.42	350.63	0	N	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-121.6
3726	536490.81	4816088.42	350.63	0	E	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-121.6
3728	536490.81	4816088.42	350.63	1	D	A	59.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-31.0
3728	536490.81	4816088.42	350.63	1	N	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.0
3728	536490.81	4816088.42	350.63	1	E	A	-40.5	2.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-131.0
3734	536543.01	4816107.77	350.17	0	D	A	59.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-26.9
3734	536543.01	4816107.77	350.17	0	N	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-126.9
3734	536543.01	4816107.77	350.17	0	E	A	-40.5	1.3	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-126.9
3735	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.2
3735	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.2
3735	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.2
3737	536543.01	4816107.77	350.17	1	D	A	59.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-52.9
3737	536543.01	4816107.77	350.17	1	N	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-152.9
3737	536543.01	4816107.77	350.17	1	E	A	-40.5	1.3	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-152.9
3739	536562.78	4816069.35	348.40	0	D	A	59.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-26.5
3739	536562.78	4816069.35	348.40	0	N	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-126.5
3739	536562.78	4816069.35	348.40	0	E	A	-40.5	1.6	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	26.9	0.0	0.0	-126.5
3742	536498.48	4816075.95	350.41	0	D	A	59.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-27.4
3742	536498.48	4816075.95	350.41	0	N	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
3742	536498.48	4816075.95	350.41	0	E	A	-40.5	2.2	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-127.4
3744	536498.86	4816075.15	350.40	0	D	A	59.5	-10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-39.6
3744	536498.86	4816075.15	350.40	0	N	A	-40.5	-10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.6
3744	536498.86	4816075.15	350.40	0	E	A	-40.5	-10.0	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	27.3	0.0	0.0	-139.6
3745	536498.50	4816075.93	350.41	1	D	A	59.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.7
3745	536498.50	4816075.93	350.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3745	536498.50	4816075.93	350.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.7
3746	536498.87	4816075.13	350.39	1	D	A	59.5	-13.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-45.0
3746	536498.87	4816075.13	350.39	1	N	A	-40.5	-13.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-145.0
3746	536498.87	4816075.13	350.39	1	E	A	-40.5	-13.0	0.0	0.0	0.0	63.1	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-145.0
3747	536498.19	4816076.57	350.42	1	D	A	59.5	-5.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-36.7
3747	536498.19	4816076.57	350.42	1	N	A	-40.5	-5.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
3747	536498.19	4816076.57	350.42	1	E	A	-40.5	-5.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-136.7
3750	536496.74	4816080.62	350.49	0	D	A	59.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-18.0
3750	536496.74	4816080.62	350.49	0	N	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-118.0
3750	536496.74	4816080.62	350.49	0	E	A	-40.5	2.4	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-118.0
3751	536496.80	4816080.47	350.48	1	D	A	59.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-30.4
3751	536496.80	4816080.47	350.48	1	N	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4
3751	536496.80	4816080.47	350.48	1	E	A	-40.5	1.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4
3752	536496.47	4816081.27	350.50	1	D	A	59.5	-4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-36.9
3752	536496.47	4816081.27	350.50	1	N	A	-40.5	-4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.9
3752	536496.47	4816081.27	350.50	1	E	A	-40.5	-4.9	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-136.9
3755	536492.56	4816088.63	350.62	0	D	A	59.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-21.9
3755	536492.56	4816088.63	350.62	0	N	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-121.9
3755	536492.56	4816088.63	350.62	0	E	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.0	0.0	0.0	-121.9
3757	536492.56	4816088.63	350.62	1	D	A	59.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-29.6
3757	536492.56	4816088.63	350.62	1	N	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
3757	536492.56	4816088.63	350.62	1	E	A	-40.5	2.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-129.6
3759	536546.40	4816101.72	349.89	0	D	A	59.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-27.1
3759	536546.40	4816101.72	349.89	0	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
3759	536546.40	4816101.72	349.89	0	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.1
3760	536546.40	4816101.72	349.89	1	D	A	59.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-29.0
3760	536546.40	4816101.72	349.89	1	N	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.0
3760	536546.40	4816101.72	349.89	1	E	A	-40.5	1.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.2	-129.0
3767	536489.08	4816088.61	350.64	0	D	A	59.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-22.2
3767	536489.08	4816088.61	350.64	0	N	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-122.2
3767	536489.08	4816088.61	350.64	0	E	A	-40.5	2.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	22.1	0.0	0.0	-122.2
3768	536489.36	4816088.55	350.64	1	D	A	59.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-33.4
3768	536489.36	4816088.55	350.64	1	N	A	-40.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.4
3768	536489.36	4816088.55	350.64	1	E	A	-40.5	0.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-133.4
3769	536488.56	4816088.71	350.65	1	D	A	59.5	-2.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-36.2
3769	536488.56	4816088.71	350.65	1	N	A	-40.5	-2.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-136.2
3769	536488.56	4816088.71	350.65	1	E	A	-40.5	-2.5	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	3.5	-136.2
3774	536534.32	4816103.24	350.40	0	D	A	59.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-27.5
3774	536534.32	4816103.24	350.40	0	N	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3774	536534.32	4816103.24	350.40	0	E	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.5	-3.0	0.0	0.0	27.3	0.0	0.0	-127.5
3775	536534.32	4816103.24	350.40	1	D	A	59.5	0.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-29.9
3775	536534.32	4816103.24	350.40	1	N	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.9
3775	536534.32	4816103.24	350.40	1	E	A	-40.5	0.9	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.7	-129.9
3777	536540.97	4816108.67	350.26	0	D	A	59.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-27.5
3777	536540.97	4816108.67	350.26	0	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
3777	536540.97	4816108.67	350.26	0	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-127.5
3778	536540.97	4816108.67	350.26	1	D	A	59.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-29.9
3778	536540.97	4816108.67	350.26	1	N	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.9
3778	536540.97	4816108.67	350.26	1	E	A	-40.5	0.6	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-129.9
3780	536541.23	4816108.61	350.25	1	D	A	59.5	-2.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-56.3
3780	536541.23	4816108.61	350.25	1	N	A	-40.5	-2.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-156.3
3780	536541.23	4816108.61	350.25	1	E	A	-40.5	-2.0	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-156.3
3782	536496.21	4816084.31	350.54	0	D	A	59.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-18.6
3782	536496.21	4816084.31	350.54	0	N	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-118.6
3782	536496.21	4816084.31	350.54	0	E	A	-40.5	1.8	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-118.6
3783	536496.21	4816084.31	350.54	1	D	A	59.5	1.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-30.1
3783	536496.21	4816084.31	350.54	1	N	A	-40.5	1.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.1
3783	536496.21	4816084.31	350.54	1	E	A	-40.5	1.8	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.1
3786	536542.02	4816108.38	350.22	0	D	A	59.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-28.0
3786	536542.02	4816108.38	350.22	0	N	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.0
3786	536542.02	4816108.38	350.22	0	E	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.0
3787	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.4
3787	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4

Line Source, ISO 9613, Name: "Shoppers - Delivery Truck Movement", ID: "Shoppers_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3787	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.4
3789	536542.02	4816108.38	350.22	1	D	A	59.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-54.1
3789	536542.02	4816108.38	350.22	1	N	A	-40.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-154.1
3789	536542.02	4816108.38	350.22	1	E	A	-40.5	0.1	0.0	0.0	0.0	61.9	1.5	-3.0	0.0	0.0	28.0	0.0	25.3	-154.1
3792	536496.48	4816085.71	350.56	0	D	A	59.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-19.1
3792	536496.48	4816085.71	350.56	0	N	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-119.1
3792	536496.48	4816085.71	350.56	0	E	A	-40.5	1.3	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-119.1
3793	536496.48	4816085.71	350.56	1	D	A	59.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-30.6
3793	536496.48	4816085.71	350.56	1	N	A	-40.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3793	536496.48	4816085.71	350.56	1	E	A	-40.5	1.3	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3795	536543.75	4816106.90	350.13	0	D	A	59.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-28.3
3795	536543.75	4816106.90	350.13	0	N	A	-40.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.3
3795	536543.75	4816106.90	350.13	0	E	A	-40.5	-0.1	0.0	0.0	0.0	61.7	1.5	-3.0	0.0	0.0	27.4	0.0	0.0	-128.3
3796	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-30.6
3796	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3796	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	1.7	-130.6
3798	536543.75	4816106.90	350.13	1	D	A	59.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-38.5
3798	536543.75	4816106.90	350.13	1	N	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-138.5
3798	536543.75	4816106.90	350.13	1	E	A	-40.5	-0.1	0.0	0.0	0.0	61.8	1.5	-3.0	0.0	0.0	28.0	0.0	9.5	-138.5
3802	536496.29	4816082.00	350.51	0	D	A	59.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-19.7
3802	536496.29	4816082.00	350.51	0	N	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-119.7
3802	536496.29	4816082.00	350.51	0	E	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-119.7
3804	536496.29	4816082.00	350.51	1	D	A	59.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-31.2
3804	536496.29	4816082.00	350.51	1	N	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.2
3804	536496.29	4816082.00	350.51	1	E	A	-40.5	0.7	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-131.2
3811	536496.14	4816083.07	350.52	0	D	A	59.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-20.5
3811	536496.14	4816083.07	350.52	0	N	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-120.5
3811	536496.14	4816083.07	350.52	0	E	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	18.2	0.0	0.0	-120.5
3813	536496.14	4816083.07	350.52	1	D	A	59.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-32.0
3813	536496.14	4816083.07	350.52	1	N	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.0
3813	536496.14	4816083.07	350.52	1	E	A	-40.5	-0.1	0.0	0.0	0.0	63.0	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.0
3816	536497.24	4816087.44	350.58	0	D	A	59.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-20.5
3816	536497.24	4816087.44	350.58	0	N	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-120.5
3816	536497.24	4816087.44	350.58	0	E	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-120.5
3817	536497.24	4816087.44	350.58	1	D	A	59.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-32.0
3817	536497.24	4816087.44	350.58	1	N	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.0
3817	536497.24	4816087.44	350.58	1	E	A	-40.5	-0.1	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-132.0
3835	536496.81	4816086.70	350.57	0	D	A	59.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-21.6
3835	536496.81	4816086.70	350.57	0	N	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-121.6
3835	536496.81	4816086.70	350.57	0	E	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	18.3	0.0	0.0	-121.6
3836	536496.81	4816086.70	350.57	1	D	A	59.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-33.1
3836	536496.81	4816086.70	350.57	1	N	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-133.1
3836	536496.81	4816086.70	350.57	1	E	A	-40.5	-1.2	0.0	0.0	0.0	62.9	1.7	-3.0	0.0	0.0	28.0	0.0	1.7	-133.1

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1496	536993.65	4816487.02	339.53	0	D	A	59.5	8.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	11.3
1496	536993.65	4816487.02	339.53	0	N	A	-40.5	8.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1496	536993.65	4816487.02	339.53	0	E	A	-40.5	8.9	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-88.7
1499	536994.57	4816487.27	339.52	1	D	A	59.5	7.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-23.5
1499	536994.57	4816487.27	339.52	1	N	A	-40.5	7.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
1499	536994.57	4816487.27	339.52	1	E	A	-40.5	7.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-123.5
1501	536990.83	4816486.24	339.58	1	D	A	59.5	2.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-28.3
1501	536990.83	4816486.24	339.58	1	N	A	-40.5	2.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
1501	536990.83	4816486.24	339.58	1	E	A	-40.5	2.8	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.2	-128.3
1592	536957.48	4816510.17	339.53	0	D	A	59.5	8.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.8
1592	536957.48	4816510.17	339.53	0	N	A	-40.5	8.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
1592	536957.48	4816510.17	339.53	0	E	A	-40.5	8.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.2
1594	536957.48	4816510.17	339.53	1	D	A	59.5	8.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-22.2
1594	536957.48	4816510.17	339.53	1	N	A	-40.5	8.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1594	536957.48	4816510.17	339.53	1	E	A	-40.5	8.0	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.2
1595	536957.48	4816510.17	339.53	1	D	A	59.5	8.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-18.8

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
1595	536957.48	4816510.17	339.53	1	N	A	-40.5	8.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1595	536957.48	4816510.17	339.53	1	E	A	-40.5	8.0	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-118.8
1678	536959.78	4816522.71	339.50	0	D	A	59.5	5.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	0.5
1678	536959.78	4816522.71	339.50	0	N	A	-40.5	5.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-99.5
1678	536959.78	4816522.71	339.50	0	E	A	-40.5	5.9	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	7.8	0.0	0.0	-99.5
1679	536960.49	4816525.85	339.50	0	D	A	59.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.3
1679	536960.49	4816525.85	339.50	0	N	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
1679	536960.49	4816525.85	339.50	0	E	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.7
1681	536959.85	4816522.99	339.50	1	D	A	59.5	6.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
1681	536959.85	4816522.99	339.50	1	N	A	-40.5	6.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1681	536959.85	4816522.99	339.50	1	E	A	-40.5	6.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
1683	536960.55	4816526.13	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.5
1683	536960.55	4816526.13	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1683	536960.55	4816526.13	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.5
1686	536960.06	4816523.96	339.50	1	D	A	59.5	8.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.2
1686	536960.06	4816523.96	339.50	1	N	A	-40.5	8.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1686	536960.06	4816523.96	339.50	1	E	A	-40.5	8.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.2
1764	536963.72	4816507.19	339.51	0	D	A	59.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.1
1764	536963.72	4816507.19	339.51	0	N	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1764	536963.72	4816507.19	339.51	0	E	A	-40.5	7.4	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-89.9
1767	536963.72	4816507.19	339.51	1	D	A	59.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-22.9
1767	536963.72	4816507.19	339.51	1	N	A	-40.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1767	536963.72	4816507.19	339.51	1	E	A	-40.5	7.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-122.9
1770	536963.72	4816507.19	339.51	1	D	A	59.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-19.5
1770	536963.72	4816507.19	339.51	1	N	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
1770	536963.72	4816507.19	339.51	1	E	A	-40.5	7.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-119.5
1771	536987.19	4816486.05	339.63	0	D	A	59.5	7.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	10.0
1771	536987.19	4816486.05	339.63	0	N	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
1771	536987.19	4816486.05	339.63	0	E	A	-40.5	7.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-90.0
1773	536987.19	4816486.05	339.63	1	D	A	59.5	7.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-23.6
1773	536987.19	4816486.05	339.63	1	N	A	-40.5	7.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
1773	536987.19	4816486.05	339.63	1	E	A	-40.5	7.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-123.6
1983	536955.31	4816509.59	339.57	0	D	A	59.5	3.7	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.6
1983	536955.31	4816509.59	339.57	0	N	A	-40.5	3.7	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
1983	536955.31	4816509.59	339.57	0	E	A	-40.5	3.7	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
1986	536956.19	4816511.49	339.55	0	D	A	59.5	2.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	2.1
1986	536956.19	4816511.49	339.55	0	N	A	-40.5	2.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	-97.9
1986	536956.19	4816511.49	339.55	0	E	A	-40.5	2.6	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	3.3	0.0	0.0	-97.9
1989	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
1989	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1989	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
1992	536955.69	4816510.42	339.56	1	D	A	59.5	6.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.5
1992	536955.69	4816510.42	339.56	1	N	A	-40.5	6.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
1992	536955.69	4816510.42	339.56	1	E	A	-40.5	6.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.5
2054	536965.11	4816502.71	339.57	0	D	A	59.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	8.8
2054	536965.11	4816502.71	339.57	0	N	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2054	536965.11	4816502.71	339.57	0	E	A	-40.5	5.9	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-91.2
2056	536965.33	4816501.99	339.58	1	D	A	59.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.3
2056	536965.33	4816501.99	339.58	1	N	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2056	536965.33	4816501.99	339.58	1	E	A	-40.5	3.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.3
2057	536964.75	4816503.87	339.55	1	D	A	59.5	1.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.4
2057	536964.75	4816503.87	339.55	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2057	536964.75	4816503.87	339.55	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.4
2059	536964.77	4816503.79	339.55	1	D	A	59.5	2.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.6
2059	536964.77	4816503.79	339.55	1	N	A	-40.5	2.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2059	536964.77	4816503.79	339.55	1	E	A	-40.5	2.2	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.6
2086	536964.80	4816526.02	339.44	0	D	A	59.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	8.6
2086	536964.80	4816526.02	339.44	0	N	A	-40.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2086	536964.80	4816526.02	339.44	0	E	A	-40.5	6.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-91.4
2088	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2088	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2088	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2090	536964.80	4816526.02	339.44	1	D	A	59.5	6.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-20.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2090	536964.80	4816526.02	339.44	1	N	A	-40.5	6.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
2090	536964.80	4816526.02	339.44	1	E	A	-40.5	6.5	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-120.9
2127	536958.06	4816516.36	339.51	0	D	A	59.5	1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	-0.5
2127	536958.06	4816516.36	339.51	0	N	A	-40.5	1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	-100.5
2127	536958.06	4816516.36	339.51	0	E	A	-40.5	1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	4.7	0.0	0.0	-100.5
2129	536958.61	4816518.27	339.50	0	D	A	59.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	1.2
2129	536958.61	4816518.27	339.50	0	N	A	-40.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	-98.8
2129	536958.61	4816518.27	339.50	0	E	A	-40.5	4.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	5.3	0.0	0.0	-98.8
2130	536958.13	4816516.61	339.51	1	D	A	59.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.3
2130	536958.13	4816516.61	339.51	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2130	536958.13	4816516.61	339.51	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.3
2133	536958.69	4816518.52	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
2133	536958.69	4816518.52	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2133	536958.69	4816518.52	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2135	536958.06	4816516.38	339.51	1	D	A	59.5	1.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
2135	536958.06	4816516.38	339.51	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2135	536958.06	4816516.38	339.51	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
2137	536958.62	4816518.29	339.50	1	D	A	59.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.2
2137	536958.62	4816518.29	339.50	1	N	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
2137	536958.62	4816518.29	339.50	1	E	A	-40.5	3.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.2
2212	536957.21	4816513.99	339.53	0	D	A	59.5	5.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	4.3
2212	536957.21	4816513.99	339.53	0	N	A	-40.5	5.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-95.7
2212	536957.21	4816513.99	339.53	0	E	A	-40.5	5.5	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	3.9	0.0	0.0	-95.7
2214	536957.21	4816513.99	339.53	1	D	A	59.5	5.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-24.7
2214	536957.21	4816513.99	339.53	1	N	A	-40.5	5.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2214	536957.21	4816513.99	339.53	1	E	A	-40.5	5.5	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-124.7
2216	536957.21	4816513.99	339.53	1	D	A	59.5	5.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-21.4
2216	536957.21	4816513.99	339.53	1	N	A	-40.5	5.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2216	536957.21	4816513.99	339.53	1	E	A	-40.5	5.5	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-121.4
2309	536971.30	4816535.80	339.40	0	D	A	59.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	7.7
2309	536971.30	4816535.80	339.40	0	N	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
2309	536971.30	4816535.80	339.40	0	E	A	-40.5	5.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-92.3
2311	536970.56	4816535.54	339.40	1	D	A	59.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
2311	536970.56	4816535.54	339.40	1	N	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2311	536970.56	4816535.54	339.40	1	E	A	-40.5	3.7	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2313	536972.41	4816536.20	339.40	1	D	A	59.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.0
2313	536972.41	4816536.20	339.40	1	N	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2313	536972.41	4816536.20	339.40	1	E	A	-40.5	1.9	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.0
2316	536971.30	4816535.80	339.40	1	D	A	59.5	5.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-21.9
2316	536971.30	4816535.80	339.40	1	N	A	-40.5	5.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2316	536971.30	4816535.80	339.40	1	E	A	-40.5	5.9	0.0	0.0	0.0	60.0	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-121.9
2322	536978.53	4816487.38	339.72	0	D	A	59.5	4.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2322	536978.53	4816487.38	339.72	0	N	A	-40.5	4.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2322	536978.53	4816487.38	339.72	0	E	A	-40.5	4.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2325	536978.62	4816487.35	339.72	1	D	A	59.5	4.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.2
2325	536978.62	4816487.35	339.72	1	N	A	-40.5	4.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.2
2325	536978.62	4816487.35	339.72	1	E	A	-40.5	4.6	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.2
2327	536977.15	4816487.77	339.73	1	D	A	59.5	-7.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-37.9
2327	536977.15	4816487.77	339.73	1	N	A	-40.5	-7.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-137.9
2327	536977.15	4816487.77	339.73	1	E	A	-40.5	-7.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-137.9
2330	536971.19	4816491.72	339.73	0	D	A	59.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.8
2330	536971.19	4816491.72	339.73	0	N	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2330	536971.19	4816491.72	339.73	0	E	A	-40.5	4.8	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.2
2332	536971.19	4816491.72	339.73	1	D	A	59.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-25.9
2332	536971.19	4816491.72	339.73	1	N	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2332	536971.19	4816491.72	339.73	1	E	A	-40.5	4.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-125.9
2335	536970.30	4816492.79	339.72	1	D	A	59.5	-6.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-36.5
2335	536970.30	4816492.79	339.72	1	N	A	-40.5	-6.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
2335	536970.30	4816492.79	339.72	1	E	A	-40.5	-6.4	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-136.5
2382	536981.46	4816486.68	339.69	0	D	A	59.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.5
2382	536981.46	4816486.68	339.69	0	N	A	-40.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2382	536981.46	4816486.68	339.69	0	E	A	-40.5	4.7	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.5
2384	536981.50	4816486.67	339.69	1	D	A	59.5	4.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.3

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2384	536981.50	4816486.67	339.69	1	N	A	-40.5	4.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
2384	536981.50	4816486.67	339.69	1	E	A	-40.5	4.6	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.3
2385	536980.04	4816486.95	339.70	1	D	A	59.5	-11.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-42.2
2385	536980.04	4816486.95	339.70	1	N	A	-40.5	-11.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-142.2
2385	536980.04	4816486.95	339.70	1	E	A	-40.5	-11.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-142.2
2514	536975.81	4816488.20	339.74	0	D	A	59.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.1
2514	536975.81	4816488.20	339.74	0	N	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2514	536975.81	4816488.20	339.74	0	E	A	-40.5	4.2	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-92.9
2516	536975.81	4816488.20	339.74	1	D	A	59.5	4.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-26.6
2516	536975.81	4816488.20	339.74	1	N	A	-40.5	4.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
2516	536975.81	4816488.20	339.74	1	E	A	-40.5	4.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-126.6
2529	536962.05	4816516.74	339.44	0	D	A	59.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
2529	536962.05	4816516.74	339.44	0	N	A	-40.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2529	536962.05	4816516.74	339.44	0	E	A	-40.5	4.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2532	536962.05	4816516.74	339.44	1	D	A	59.5	4.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2532	536962.05	4816516.74	339.44	1	N	A	-40.5	4.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2532	536962.05	4816516.74	339.44	1	E	A	-40.5	4.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2534	536962.08	4816516.18	339.44	1	D	A	59.5	2.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
2534	536962.08	4816516.18	339.44	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
2534	536962.08	4816516.18	339.44	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
2536	536962.00	4816517.59	339.44	1	D	A	59.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.6
2536	536962.00	4816517.59	339.44	1	N	A	-40.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2536	536962.00	4816517.59	339.44	1	E	A	-40.5	0.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.6
2538	536962.64	4816511.11	339.46	0	D	A	59.5	4.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	7.0
2538	536962.64	4816511.11	339.46	0	N	A	-40.5	4.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2538	536962.64	4816511.11	339.46	0	E	A	-40.5	4.3	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.0
2541	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-25.9
2541	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2541	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-125.9
2543	536962.64	4816511.11	339.46	1	D	A	59.5	4.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-22.6
2543	536962.64	4816511.11	339.46	1	N	A	-40.5	4.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2543	536962.64	4816511.11	339.46	1	E	A	-40.5	4.3	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-122.6
2635	536969.49	4816493.76	339.71	0	D	A	59.5	3.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.6
2635	536969.49	4816493.76	339.71	0	N	A	-40.5	3.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
2635	536969.49	4816493.76	339.71	0	E	A	-40.5	3.6	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-93.4
2638	536970.15	4816492.96	339.72	1	D	A	59.5	-6.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-37.4
2638	536970.15	4816492.96	339.72	1	N	A	-40.5	-6.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-137.4
2638	536970.15	4816492.96	339.72	1	E	A	-40.5	-6.7	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-137.4
2640	536969.80	4816493.38	339.71	1	D	A	59.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
2640	536969.80	4816493.38	339.71	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2640	536969.80	4816493.38	339.71	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
2643	536969.07	4816494.27	339.70	1	D	A	59.5	-0.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
2643	536969.07	4816494.27	339.70	1	N	A	-40.5	-0.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
2643	536969.07	4816494.27	339.70	1	E	A	-40.5	-0.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
2645	536968.97	4816494.39	339.70	1	D	A	59.5	-1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-0.8
2645	536968.97	4816494.39	339.70	1	N	A	-40.5	-1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-100.8
2645	536968.97	4816494.39	339.70	1	E	A	-40.5	-1.7	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-100.8
2652	536963.11	4816522.94	339.45	0	D	A	59.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.4
2652	536963.11	4816522.94	339.45	0	N	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
2652	536963.11	4816522.94	339.45	0	E	A	-40.5	4.1	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-93.6
2654	536963.11	4816522.94	339.45	1	D	A	59.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
2654	536963.11	4816522.94	339.45	1	N	A	-40.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2654	536963.11	4816522.94	339.45	1	E	A	-40.5	4.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
2657	536963.03	4816522.75	339.45	1	D	A	59.5	3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.9
2657	536963.03	4816522.75	339.45	1	N	A	-40.5	3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2657	536963.03	4816522.75	339.45	1	E	A	-40.5	3.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.9
2660	536963.52	4816523.95	339.45	1	D	A	59.5	-3.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-31.3
2660	536963.52	4816523.95	339.45	1	N	A	-40.5	-3.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
2660	536963.52	4816523.95	339.45	1	E	A	-40.5	-3.9	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-131.3
2769	536961.18	4816528.23	339.50	0	D	A	59.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
2769	536961.18	4816528.23	339.50	0	N	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2769	536961.18	4816528.23	339.50	0	E	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2771	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.7


Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
2771	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2771	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.7
2773	536961.18	4816528.23	339.50	1	D	A	59.5	3.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2773	536961.18	4816528.23	339.50	1	N	A	-40.5	3.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2773	536961.18	4816528.23	339.50	1	E	A	-40.5	3.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2780	536960.94	4816512.57	339.46	0	D	A	59.5	3.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
2780	536960.94	4816512.57	339.46	0	N	A	-40.5	3.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2780	536960.94	4816512.57	339.46	0	E	A	-40.5	3.4	0.0	0.0	0.0	58.7	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2782	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
2782	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2782	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2785	536960.94	4816512.57	339.46	1	D	A	59.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.6
2785	536960.94	4816512.57	339.46	1	N	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2785	536960.94	4816512.57	339.46	1	E	A	-40.5	3.4	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.6
2848	536968.23	4816495.51	339.68	0	D	A	59.5	3.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	6.0
2848	536968.23	4816495.51	339.68	0	N	A	-40.5	3.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2848	536968.23	4816495.51	339.68	0	E	A	-40.5	3.1	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.0
2850	536968.23	4816495.51	339.68	1	D	A	59.5	3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
2850	536968.23	4816495.51	339.68	1	N	A	-40.5	3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2850	536968.23	4816495.51	339.68	1	E	A	-40.5	3.1	0.0	0.0	0.0	62.0	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
2852	536968.44	4816495.18	339.69	1	D	A	59.5	0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	1.9
2852	536968.44	4816495.18	339.69	1	N	A	-40.5	0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-98.1
2852	536968.44	4816495.18	339.69	1	E	A	-40.5	0.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	1.6	-98.1
2890	536965.90	4816526.71	339.42	0	D	A	59.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.9
2890	536965.90	4816526.71	339.42	0	N	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2890	536965.90	4816526.71	339.42	0	E	A	-40.5	3.8	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.1
2892	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
2892	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2892	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
2895	536965.90	4816526.71	339.42	1	D	A	59.5	3.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-23.7
2895	536965.90	4816526.71	339.42	1	N	A	-40.5	3.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2895	536965.90	4816526.71	339.42	1	E	A	-40.5	3.8	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-123.7
2971	536965.72	4816524.43	339.41	0	D	A	59.5	3.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.6
2971	536965.72	4816524.43	339.41	0	N	A	-40.5	3.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
2971	536965.72	4816524.43	339.41	0	E	A	-40.5	3.4	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-94.4
2974	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.2
2974	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2974	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.2
2976	536965.72	4816524.43	339.41	1	D	A	59.5	3.4	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.0
2976	536965.72	4816524.43	339.41	1	N	A	-40.5	3.4	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2976	536965.72	4816524.43	339.41	1	E	A	-40.5	3.4	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.0
2983	536962.36	4816514.07	339.43	0	D	A	59.5	3.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
2983	536962.36	4816514.07	339.43	0	N	A	-40.5	3.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2983	536962.36	4816514.07	339.43	0	E	A	-40.5	3.0	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2985	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.4
2985	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2985	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.4
2988	536962.36	4816514.07	339.43	1	D	A	59.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.1
2988	536962.36	4816514.07	339.43	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2988	536962.36	4816514.07	339.43	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.1
2991	536973.85	4816489.14	339.74	0	D	A	59.5	2.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.5
2991	536973.85	4816489.14	339.74	0	N	A	-40.5	2.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2991	536973.85	4816489.14	339.74	0	E	A	-40.5	2.5	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.5
2993	536973.85	4816489.14	339.74	1	D	A	59.5	2.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.2
2993	536973.85	4816489.14	339.74	1	N	A	-40.5	2.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.2
2993	536973.85	4816489.14	339.74	1	E	A	-40.5	2.5	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.2
3018	536962.06	4816519.10	339.45	0	D	A	59.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	3.2	0.0	0.0	2.1
3018	536962.06	4816519.10	339.45	0	N	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	3.2	0.0	0.0	-97.9
3018	536962.06	4816519.10	339.45	0	E	A	-40.5	2.8	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	3.2	0.0	0.0	-97.9
3021	536962.03	4816518.82	339.45	1	D	A	59.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
3021	536962.03	4816518.82	339.45	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3021	536962.03	4816518.82	339.45	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3024	536962.12	4816519.77	339.45	1	D	A	59.5	-2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-32.9

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3024	536962.12	4816519.77	339.45	1	N	A	-40.5	-2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3024	536962.12	4816519.77	339.45	1	E	A	-40.5	-2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-132.9
3025	536962.06	4816519.10	339.45	1	D	A	59.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.3
3025	536962.06	4816519.10	339.45	1	N	A	-40.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3025	536962.06	4816519.10	339.45	1	E	A	-40.5	2.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.3
3044	536965.98	4816500.02	339.62	0	D	A	59.5	2.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.3
3044	536965.98	4816500.02	339.62	0	N	A	-40.5	2.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3044	536965.98	4816500.02	339.62	0	E	A	-40.5	2.4	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-94.7
3046	536965.98	4816500.02	339.62	1	D	A	59.5	2.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.8
3046	536965.98	4816500.02	339.62	1	N	A	-40.5	2.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3046	536965.98	4816500.02	339.62	1	E	A	-40.5	2.4	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.8
3105	536962.07	4816530.23	339.50	0	D	A	59.5	3.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
3105	536962.07	4816530.23	339.50	0	N	A	-40.5	3.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3105	536962.07	4816530.23	339.50	0	E	A	-40.5	3.0	0.0	0.0	0.0	59.2	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3107	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-27.7
3107	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3107	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-127.7
3109	536962.07	4816530.23	339.50	1	D	A	59.5	3.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.5
3109	536962.07	4816530.23	339.50	1	N	A	-40.5	3.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3109	536962.07	4816530.23	339.50	1	E	A	-40.5	3.0	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.5
3152	536967.35	4816497.09	339.66	0	D	A	59.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	5.0
3152	536967.35	4816497.09	339.66	0	N	A	-40.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3152	536967.35	4816497.09	339.66	0	E	A	-40.5	2.1	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.0
3155	536967.35	4816497.09	339.66	1	D	A	59.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
3155	536967.35	4816497.09	339.66	1	N	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3155	536967.35	4816497.09	339.66	1	E	A	-40.5	2.1	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3197	536966.63	4816498.51	339.64	0	D	A	59.5	1.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.9
3197	536966.63	4816498.51	339.64	0	N	A	-40.5	1.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3197	536966.63	4816498.51	339.64	0	E	A	-40.5	1.9	0.0	0.0	0.0	58.5	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.1
3200	536966.63	4816498.51	339.64	1	D	A	59.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.2
3200	536966.63	4816498.51	339.64	1	N	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3200	536966.63	4816498.51	339.64	1	E	A	-40.5	1.9	0.0	0.0	0.0	62.1	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.2
3214	536962.38	4816520.90	339.45	0	D	A	59.5	2.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
3214	536962.38	4816520.90	339.45	0	N	A	-40.5	2.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3214	536962.38	4816520.90	339.45	0	E	A	-40.5	2.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3217	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.0
3217	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3217	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.0
3218	536962.38	4816520.90	339.45	1	D	A	59.5	2.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3218	536962.38	4816520.90	339.45	1	N	A	-40.5	2.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3218	536962.38	4816520.90	339.45	1	E	A	-40.5	2.4	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3219	536963.34	4816515.61	339.41	0	D	A	59.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
3219	536963.34	4816515.61	339.41	0	N	A	-40.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3219	536963.34	4816515.61	339.41	0	E	A	-40.5	2.3	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3221	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
3221	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3221	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3223	536963.34	4816515.61	339.41	1	D	A	59.5	2.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-24.8
3223	536963.34	4816515.61	339.41	1	N	A	-40.5	2.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3223	536963.34	4816515.61	339.41	1	E	A	-40.5	2.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-124.8
3245	536983.70	4816486.25	339.67	0	D	A	59.5	2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.8
3245	536983.70	4816486.25	339.67	0	N	A	-40.5	2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3245	536983.70	4816486.25	339.67	0	E	A	-40.5	2.0	0.0	0.0	0.0	58.6	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.2
3248	536983.70	4816486.25	339.67	1	D	A	59.5	2.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-28.9
3248	536983.70	4816486.25	339.67	1	N	A	-40.5	2.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.9
3248	536983.70	4816486.25	339.67	1	E	A	-40.5	2.0	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-128.9
3265	536965.06	4816533.24	339.44	0	D	A	59.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.5
3265	536965.06	4816533.24	339.44	0	N	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
3265	536965.06	4816533.24	339.44	0	E	A	-40.5	2.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
3268	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.1
3268	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3268	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.1
3271	536965.06	4816533.24	339.44	1	D	A	59.5	2.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-25.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3271	536965.06	4816533.24	339.44	1	N	A	-40.5	2.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3271	536965.06	4816533.24	339.44	1	E	A	-40.5	2.6	0.0	0.0	0.0	59.8	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-125.0
3283	536964.51	4816518.46	339.41	0	D	A	59.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.5
3283	536964.51	4816518.46	339.41	0	N	A	-40.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
3283	536964.51	4816518.46	339.41	0	E	A	-40.5	2.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.5
3286	536964.51	4816518.46	339.41	1	D	A	59.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.3
3286	536964.51	4816518.46	339.41	1	N	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3286	536964.51	4816518.46	339.41	1	E	A	-40.5	2.1	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.3
3288	536964.51	4816518.46	339.41	1	D	A	59.5	2.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.1
3288	536964.51	4816518.46	339.41	1	N	A	-40.5	2.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3288	536964.51	4816518.46	339.41	1	E	A	-40.5	2.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.1
3309	536962.15	4816514.57	339.43	0	D	A	59.5	1.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.4
3309	536962.15	4816514.57	339.43	0	N	A	-40.5	1.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.6
3309	536962.15	4816514.57	339.43	0	E	A	-40.5	1.9	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.6
3311	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.5
3311	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3311	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.5
3314	536962.15	4816514.57	339.43	1	D	A	59.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.2
3314	536962.15	4816514.57	339.43	1	N	A	-40.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3314	536962.15	4816514.57	339.43	1	E	A	-40.5	1.9	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.2
3367	536972.64	4816490.12	339.74	0	D	A	59.5	1.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.2
3367	536972.64	4816490.12	339.74	0	N	A	-40.5	1.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3367	536972.64	4816490.12	339.74	0	E	A	-40.5	1.2	0.0	0.0	0.0	58.4	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-95.8
3369	536972.64	4816490.12	339.74	1	D	A	59.5	1.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-29.5
3369	536972.64	4816490.12	339.74	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
3369	536972.64	4816490.12	339.74	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.2	-129.5
3372	536965.48	4816522.59	339.41	0	D	A	59.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	4.1
3372	536965.48	4816522.59	339.41	0	N	A	-40.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.9
3372	536965.48	4816522.59	339.41	0	E	A	-40.5	1.8	0.0	0.0	0.0	59.1	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-95.9
3374	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.7
3374	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3374	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.7
3377	536965.48	4816522.59	339.41	1	D	A	59.5	1.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.5
3377	536965.48	4816522.59	339.41	1	N	A	-40.5	1.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3377	536965.48	4816522.59	339.41	1	E	A	-40.5	1.8	0.0	0.0	0.0	59.6	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.5
3392	536964.01	4816517.02	339.41	0	D	A	59.5	1.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.0
3392	536964.01	4816517.02	339.41	0	N	A	-40.5	1.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
3392	536964.01	4816517.02	339.41	0	E	A	-40.5	1.6	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
3394	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.8
3394	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3394	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.8
3397	536964.01	4816517.02	339.41	1	D	A	59.5	1.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
3397	536964.01	4816517.02	339.41	1	N	A	-40.5	1.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3397	536964.01	4816517.02	339.41	1	E	A	-40.5	1.6	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3399	536962.26	4816513.12	339.44	0	D	A	59.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	4.0
3399	536962.26	4816513.12	339.44	0	N	A	-40.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
3399	536962.26	4816513.12	339.44	0	E	A	-40.5	1.4	0.0	0.0	0.0	58.8	1.1	-3.0	0.0	0.0	0.0	0.0	0.0	-96.0
3402	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
3402	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3402	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	62.2	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3405	536962.26	4816513.12	339.44	1	D	A	59.5	1.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
3405	536962.26	4816513.12	339.44	1	N	A	-40.5	1.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3405	536962.26	4816513.12	339.44	1	E	A	-40.5	1.4	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3407	536959.16	4816520.15	339.50	0	D	A	59.5	1.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.7	0.0	0.0	-1.8
3407	536959.16	4816520.15	339.50	0	N	A	-40.5	1.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.7	0.0	0.0	-101.8
3407	536959.16	4816520.15	339.50	0	E	A	-40.5	1.5	0.0	0.0	0.0	58.9	1.1	-3.0	0.0	0.0	5.7	0.0	0.0	-101.8
3410	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-28.9
3410	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3410	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	62.3	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-128.9
3413	536959.16	4816520.15	339.50	1	D	A	59.5	1.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-25.6
3413	536959.16	4816520.15	339.50	1	N	A	-40.5	1.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3413	536959.16	4816520.15	339.50	1	E	A	-40.5	1.5	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-125.6
3491	536965.18	4816521.17	339.41	0	D	A	59.5	1.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.7

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																				
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3491	536965.18	4816521.17	339.41	0	N	A	-40.5	1.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3491	536965.18	4816521.17	339.41	0	E	A	-40.5	1.4	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.3
3492	536965.18	4816521.17	339.41	1	D	A	59.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.1
3492	536965.18	4816521.17	339.41	1	N	A	-40.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3492	536965.18	4816521.17	339.41	1	E	A	-40.5	1.4	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.1
3493	536965.22	4816521.32	339.41	1	D	A	59.5	0.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.1
3493	536965.22	4816521.32	339.41	1	N	A	-40.5	0.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
3493	536965.22	4816521.32	339.41	1	E	A	-40.5	0.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.1
3495	536965.07	4816520.65	339.41	1	D	A	59.5	-5.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-32.3
3495	536965.07	4816520.65	339.41	1	N	A	-40.5	-5.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3495	536965.07	4816520.65	339.41	1	E	A	-40.5	-5.0	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-132.3
3524	536964.87	4816519.87	339.41	0	D	A	59.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.4
3524	536964.87	4816519.87	339.41	0	N	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3524	536964.87	4816519.87	339.41	0	E	A	-40.5	1.1	0.0	0.0	0.0	59.0	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.6
3525	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.4
3525	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3525	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	62.4	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.4
3526	536964.87	4816519.87	339.41	1	D	A	59.5	1.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.1
3526	536964.87	4816519.87	339.41	1	N	A	-40.5	1.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3526	536964.87	4816519.87	339.41	1	E	A	-40.5	1.1	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.1
3538	536963.73	4816532.40	339.47	0	D	A	59.5	1.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.2
3538	536963.73	4816532.40	339.47	0	N	A	-40.5	1.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
3538	536963.73	4816532.40	339.47	0	E	A	-40.5	1.2	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.8
3540	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
3540	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3540	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3541	536963.73	4816532.40	339.47	1	D	A	59.5	1.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3541	536963.73	4816532.40	339.47	1	N	A	-40.5	1.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3541	536963.73	4816532.40	339.47	1	E	A	-40.5	1.2	0.0	0.0	0.0	59.8	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3546	536967.57	4816534.42	339.40	0	D	A	59.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.1
3546	536967.57	4816534.42	339.40	0	N	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3546	536967.57	4816534.42	339.40	0	E	A	-40.5	1.3	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-96.9
3548	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-29.5
3548	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3548	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-129.5
3550	536967.57	4816534.42	339.40	1	D	A	59.5	1.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.4
3550	536967.57	4816534.42	339.40	1	N	A	-40.5	1.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3550	536967.57	4816534.42	339.40	1	E	A	-40.5	1.3	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.4
3559	536968.82	4816534.91	339.40	0	D	A	59.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	3.0
3559	536968.82	4816534.91	339.40	0	N	A	-40.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
3559	536968.82	4816534.91	339.40	0	E	A	-40.5	1.2	0.0	0.0	0.0	59.5	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.0
3560	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-29.6
3560	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3560	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	62.7	1.7	-3.0	0.0	0.0	28.0	0.0	1.0	-129.6
3562	536968.82	4816534.91	339.40	1	D	A	59.5	1.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.5
3562	536968.82	4816534.91	339.40	1	N	A	-40.5	1.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3562	536968.82	4816534.91	339.40	1	E	A	-40.5	1.2	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.5
3600	536966.40	4816533.91	339.41	0	D	A	59.5	0.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.7
3600	536966.40	4816533.91	339.41	0	N	A	-40.5	0.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3600	536966.40	4816533.91	339.41	0	E	A	-40.5	0.8	0.0	0.0	0.0	59.4	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.3
3601	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.0
3601	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
3601	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	62.6	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.0
3603	536966.40	4816533.91	339.41	1	D	A	59.5	0.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-26.9
3603	536966.40	4816533.91	339.41	1	N	A	-40.5	0.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3603	536966.40	4816533.91	339.41	1	E	A	-40.5	0.8	0.0	0.0	0.0	59.9	1.3	-3.0	0.0	0.0	28.0	0.0	1.0	-126.9
3604	536962.88	4816531.54	339.49	0	D	A	59.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	2.5
3604	536962.88	4816531.54	339.49	0	N	A	-40.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
3604	536962.88	4816531.54	339.49	0	E	A	-40.5	0.5	0.0	0.0	0.0	59.3	1.2	-3.0	0.0	0.0	0.0	0.0	0.0	-97.5
3606	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-30.2
3606	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
3606	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	62.5	1.6	-3.0	0.0	0.0	28.0	0.0	1.0	-130.2
3607	536962.88	4816531.54	339.49	1	D	A	59.5	0.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-27.0

Line Source, ISO 9613, Name: "Onward Manufacturing - Truck Movements", ID: "Onward_stationary"																			
Nr.	X	Y	Z	Refl.	DEN	Freq.	Lw	l/a	Optime	K0	Di	Adiv	Aatm	Agr	Afol	Ahous	Abar	Cmet	RL	Lr
	(m)	(m)	(m)			(Hz)	dB(A)	dB	dB	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	dB(A)
3607	536962.88	4816531.54	339.49	1	N	A	-40.5	0.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0
3607	536962.88	4816531.54	339.49	1	E	A	-40.5	0.5	0.0	0.0	0.0	59.7	1.2	-3.0	0.0	0.0	28.0	0.0	1.0	-127.0

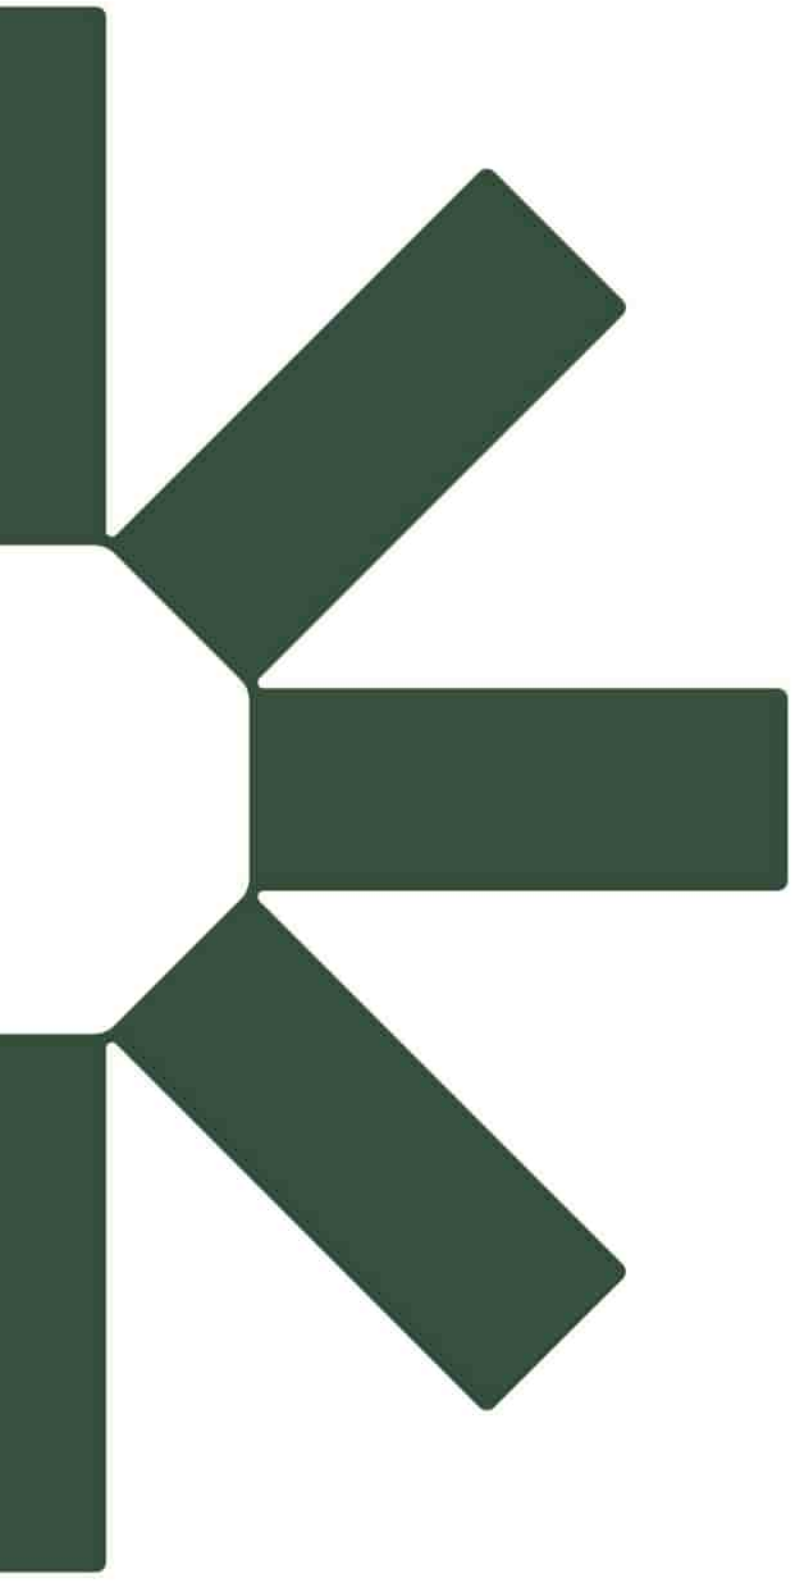

Making Sustainability Happen